

Virtual TA

Introduction

The term **Virtual TA** means the local Ethernet-connected hosts or PCs use popular CAPI-based software such as RVS-COM or BVRP etc. to access the router as a local ISDN TA for FAX sending or receiving via the ISDN line. Basically, it is a client/server network model. The Virtual TA server built into the router handles the connection establishment and release. The Virtual TA client, installed in the Ethernet-connected host, creates a CAPI-based driver to relay all CAPI messages between applications and the router CAPI module.

Note:


1. The Virtual TA client is only supported on Microsoft™ Windows 95 OSR2.1/98/98SE/Me/2000/XP platforms.
2. The Virtual TA client only supports the CAPI 2.0 protocol and has no built-in FAX engine.
3. One ISDN BRI interface only has two B channels.

The maximum number of active clients is also 2.

4. Before you set up the Virtual TA, you must set the correct country code. Click **ISDN Setup** in the **Basic Setup** group.


As the following application chart shows, the Virtual TA client can make an outgoing call or accept an incoming call to/from a peer FAX machine or ISDN TA etc.

Virtual TA Application

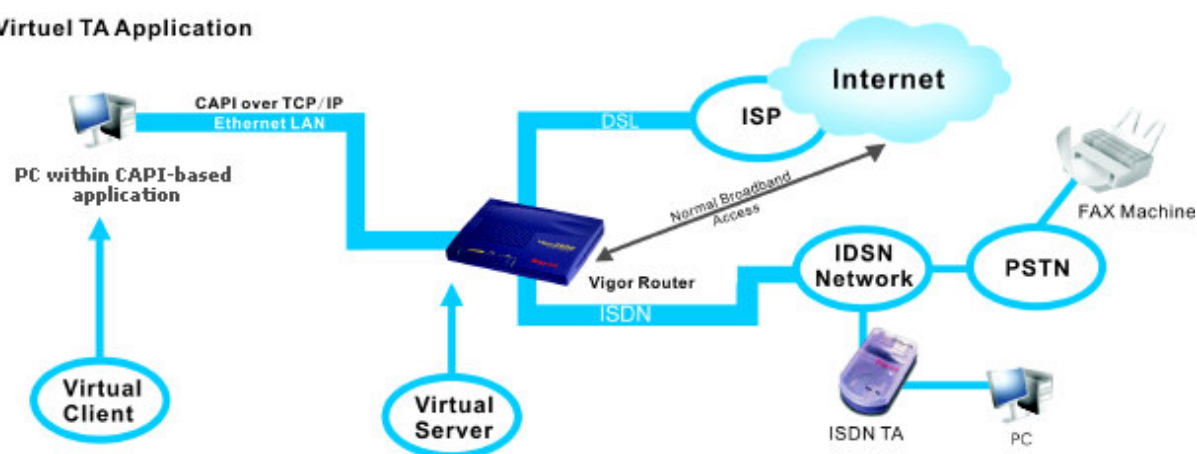

Setup a Virtual TA

Note: supported on the VigorX/i and VigorW/Gi model only.

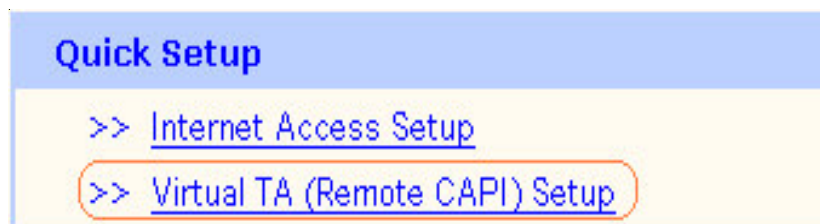

Quick Setup

> Virtual TA (Remote CAPI) Setup

Installing a Virtual TA Client

1. Insert the CD-ROM supplied with your Vigor router, or directly double-click the installer file. Vsetup95.exe is for Windows 95 OSR2.1 or higher, Vsetup98.exe is for Windows 98, 98SE and Me, and Vsetup2k.exe is for Windows 2000/XP.
2. Follow on-screen instructions of the installer. The last step requires you to restart your computer. Click **OK** to restart.
3. After the computer restarts, you will see a VT icon on the taskbar.

Configuring a Virtual TA Client/ Server

The Virtual TA application is a client/server model. You must set it up on both ends to operate your Virtual TA application.

By default, the Virtual TA server is enabled and the username and password fields are blank. Any Virtual TA client may login to the server. Once a single Username and Password field has been filled, the Virtual TA server will only allow clients with a valid username and password to login.

> Quick Setup> Virtual TA Setup
<<Main Menu

Virtual TA Setup

Virtual TA Server : ☒ Enable ☐ Disable

Virtual TA Users Profiles

	Username	Password	MSN1	MSN2	MSN3	Active
1.	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
2.	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
3.	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
4.	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
5.	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>

Virtual TA Server:

Enable: Check to activate the server.

Disable: Check to deactivate the server. All Virtual TA applications will be stopped.

Virtual TA User Profiles:

Username: Specifies the username for a specific client.

Password: Specifies the password for a specific client.

MSN1, MSN2, MSN3: MSN stands for Multiple Subscriber Number. It means you can subscribe to more than one ISDN line number on a single subscribed line. Note that the service must be subscribed to with your telecom. Specifies the MSN numbers for a specific client. If you have no MSN services, leave this field blank.

Active: Check to enable the client to access the server.

Creating a User Profile

Note that creating a single user access account limits access to the Virtual TA server to only the specified account holders.

In the following, we assume you have no MSN service from your ISDN network provider.

1. On the server: Click **Virtual TA (Remote CAPI) Setup**, and fill in the Username and Password fields. Check the **Active** checkbox to enable the account.

Virtual TA Users Profiles						
	Username	Password	MSN1	MSN2	MSN3	Active
1.	alan	<input type="password"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input checked="" type="checkbox"/>

2. On the client: Right-click the mouse on the VT icon. The following pop-up menu will be shown.

3. Click **Virtual TA Login** to open the login box.



4. Enter the Username and Password and click **OK**. After a short time the VT icon text will become green.

Configuring the MSN Number

If you have subscribed to an MSN number service, the Virtual TA server can specify which client has the specified MSN number. When an incoming call arrives, the server will alert the Username-Password-matched and MSN-matched client.

1. As an example, you could assign the MSN number **123** to the “alan” client.

Virtual TA Users Profiles					
Username	Password	MSN1	MSN2	MSN3	Active
1 alan	alan	123			<input checked="" type="checkbox"/>

2. Set the specified MSN number in the CAPI-based software. When the Virtual TA server sends an alert signal to the specified Virtual TA client, the CAPI-based software will also receive the alert signal. If the MSN number is incorrect, the software will not accept the incoming call.