

VigorACS 3

Unified Management System User's Guide

Manual Version: V2.5

Date: 13th August 2026

Software Version: 3.8.2

© All rights reserved.

This publication contains information that is protected by copyright. No part may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language without written permission from the copyright holders. The scope of delivery and other details are subject to change without prior notice.

Microsoft is a registered trademark of Microsoft Corp.

Windows 8, 10, 11 and Explorer are trademarks of Microsoft Corp.

Apple and Mac OS are registered trademarks of Apple Inc.

DrayTek is a registered trademark of DrayTek Corp.

Other products may be trademarks or registered trademarks of their respective manufacturers.

VigorACS 3 License

© All rights reserved.

No part of this distribution may be reproduced, transmitted, transcribed, stored in a system, or translated into any language without written permission from the copyright holders.

Limited Warranty

DrayTek warrants that (a) the VigorACS 3 (henceforth called the SOFTWARE) will perform substantially in accordance with the accompanying written materials for a period of ninety (90) days from the date of receipt, and (b) any support service provided by DrayTek shall be substantially as described in applicable written materials provided to you by DrayTek, and DrayTek support engineers will make commercially reasonable efforts to solve any problems. To the extent allowed by applicable law, implied warranties on the SOFTWARE, if any, are limited to ninety (90) days.

Customer Remedies

DrayTek's and its suppliers entire liability and your exclusive remedy shall be, at DrayTek's option, either (a) return of the price paid, if any, or (b) repair or replacement of the SOFTWARE that does not meet DrayTek's Limited Warranty and which is returned to DrayTek with a copy of your receipt. This Limited Warranty is void if failure of the SOFTWARE has resulted from accident, abuse, or misapplication. Any replacement SOFTWARE will be warranted for the remainder of the original warranty period of thirty (30) days, whichever is longer. Outside Taiwan, neither these remedies nor any product support services offered by DrayTek are available without proof of purchase from an authorized international source.

No Other Warranties

To the maximum extent permitted by applicable law, DrayTek and its suppliers disclaim all other warranties and conditions, either express or implied, including, but not limited to, implied warranties of merchantability, fitness for a particular purpose, title, and non-infringement, with regard to the SOFTWARE, and the provision of or failure to provide support services. This limited warranty gives you specific legal rights. You may have others, which vary from state/jurisdiction to state/jurisdiction.

Please read the license screen in the installation wizard. You must accept the terms of the license in order to install VigorACS 3.

Table of Contents

Part I	1
Chapter 1 Introduction	2
1.1 Main Features and Benefit	2
1.2 System Architecture	2
1.3 Web Service	3
Chapter 2 Install & Startup	5
2.1 Platform for Windows 10, 11	5
2.1.1 Installation for Java	5
2.1.2 Installation for MariaDB	8
2.1.3 Installation for VigorACS 3	13
2.1.4 StartMySQL/MariaDB Database	25
2.1.5 Start VigorACS	25
2.2 Platform for Linux	27
2.2.1 Installation for MariaDB, Java and VigorACS	27
2.2.2 StartMySQL/MariaDB Database	34
2.2.3 Start InfluxDB	34
2.2.4 Start VigorACS	35
2.2.5 Start VigorACS Chatbot	37
2.2.6 Edit VigorACS IP	38
2.3 Registering VigorACS	39
2.3.1 Registration for VigorACS via Windows Platform	39
2.3.2 Troubleshooting for Unstable CPE Status	44
Chapter 3 Getting Started	48
3.1 Accessing Web Page of VigorACS	48
3.2 Dashboard	49
3.2.1 Dashboard for Root Network	49
3.2.2 Dashboard for a Network Group	50
3.2.3 Dashboard for a Device	51
3.2.4 Menu Bar	52
3.2.5 Root Network, Group Network, and Selected CPE	53
3.2.6 Capture Packets	54
3.2.7 Set Password, Two-factor Authentication, Manage Notification, Change and Log Out	57
3.2.8 Auto Refresh, Manual Refresh, and Widget	63
3.2.9 Overviews	64
3.2.10 Icons Used in VigorACS 3	70
3.3 Operation Procedure	70
Applications	71
A.1 How to Register a CPE onto VigorACS 3?	71
A.2 How to Create a New Network?	73
A.3 How to Assign a New Added CPE to a Network?	75
A.4 How to Create a New User Group?	76
Part II	79
Chapter 4 SD-WAN Solution	80
4.1 Topology of SD-WAN, Edge Router and ACS Server	80
4.1.1 Enabling SD-WAN on VigorACS	81
4.1.2 Auto VPN	82
4.1.3 VoIP WAN	83
4.1.4 Full Traffic Control with the Route Policy	84
4.2 Dashboard for SD-WAN Network Group	85
4.3 Statistics for SD-WAN Network Group	87
4.4 Monitoring for SD-WAN Network Group	87
4.4.1 WAN (SD-WAN)	88
4.4.2 VPN (SD-WAN)	89
4.4.3 VoIP (SD-WAN)	96
4.4.4 Data Usage (SD-WAN)	97

Chapter 5 SD-WAN CPE	100
5.1 Dashboard for SD-WAN CPE	100
5.2 Statistics for SD-WAN CPE	102
5.3 Monitoring for SD-WAN CPE	102
5.3.1 Alarm.....	103
5.3.2 Logs.....	104
5.3.3 Flow	105
5.3.4 Diagnostics.....	111
5.3.5 GPS.....	115
5.3.6 WAN (SD-WAN).....	115
5.3.7 VPN (SD-WAN).....	116
5.3.8 VoIP (SD-WAN).....	117
5.3.9 Data Usage (SD-WAN).....	119
5.4 Configuration Menu for SD-WAN CPE	120
Part III	121
Chapter 6 System Menu.....	122
6.1 Maintenance.....	122
6.1.1 Scheduled Backup.....	123
6.1.2 Configuration Restore	127
6.1.3 Device Reboot.....	131
6.1.4 Firmware Upgrade.....	135
6.1.5 System Password Reset	140
6.1.6 Schedule Profile	142
6.1.7 File Manager	143
6.1.8 Batch Activation.....	146
6.2 Reports.....	150
6.2.1 Report Tasks	150
6.2.2 Legacy Report Tasks (Deprecated)	156
6.3 Provisioning.....	157
6.3.1 Global Parameters.....	157
6.3.2 CPE Set Parameters	163
6.3.3 CPE Keep Parameters.....	167
6.3.4 Firmware Upgrade	168
6.3.5 eSIM & Cellular WAN	172
6.4 Network & Service Management.....	182
6.4.1 Network Management	183
6.4.2 Service Management.....	193
6.4.3 Certificate Management	198
6.5 System.....	205
6.5.1 System Parameter	206
6.5.2 Language.....	217
6.5.3 External Monitoring Server.....	218
6.5.4 Access Control	219
6.5.5 Storage Management.....	224
6.5.6 Upload Serial Number.....	225
6.5.7 API Key.....	227
6.5.8 Certificate	228
6.5.9 Backup Database	235
6.5.10 Login Bulletin.....	240
6.5.11 Adverts Carousel.....	244
6.5.12 Logs.....	250
6.5.13 XMPP Profile	252
6.5.14 Server Support Settings	253
6.5.15 Delete Logs Actions	256
6.5.16 App Server	257
6.5.17 License Key Pools.....	258
6.6 User.....	265
6.6.1 User Management	265
6.6.2 Group Management	273
6.6.3 Network Group.....	279
6.6.4 External Authentication Server	279
6.6.5 Mail Server	283

6.6.6 Function Management	287
6.6.7 Wholesale Wizard	289
6.6.8 SMS Server	293
6.6.9 SNMP Server	294
6.6.10 Notifications & Events	295
6.6.11 Syslog Server	296
6.6.12 Group Parameter	297
6.6.13 Link with Router App	297
6.7 About VigorACS	304
6.7.1 Software Information	305
6.7.2 License Information	305
6.7.3 License Mail Notify	306
6.7.4 License Agreements	309
6.7.5 System Resource Notify	310
Applications	312
A.1 How to Create a Provision Profile with Global Parameters?	312
A.2 How to Modify Provision Profile with Global Parameters?	313
A.3 How to Create a Network for Managing Devices?	315
A.4 How to Change the Network of a Device?	316
A.5 How to Add a User?	319
A.6 How to Add a Group?	320

Part IV 323

Chapter 7 Root Network Menu	324
7.1 Dashboard for the Root Network	324
7.2 Monitoring	325
7.2.1 Alarm	325
7.2.2 Logs	326
7.2.3 Devices	327
7.2.4 Cellular Data Usage	328
7.2.5 Floor Plan	329
7.3 Configuration	335
7.3.1 VPN Wizard	335
7.3.2 AP Profile	336
Chapter 8 Network Group Menu	341
8.1 Dashboard for the Network Group	341
8.2 Statistics for Network Group	343
8.3 Monitoring for Network Group	344
8.3.1 Alarm	345
8.3.2 Logs	346
8.3.3 Devices	347
8.3.4 Clients	348
8.3.5 Cellular Data Usage	349
8.3.6 Floor Plan	351
8.3.7 Rouge AP Detection	355
8.3.8 WAN (SD-WAN), VPN (SD-WAN), VoIP (SD-WAN), Data Usage (SD-WAN)	357
8.4 Configuration Menu for Network Group	358
8.4.1 VPN Wizard	358
8.4.2 AP Profile	359
8.4.3 Load Balance	363
8.4.4 Route Policy	364
8.4.5 Link Health Check	369
8.4.6 Interface Settings	370
8.5 Hotspot Web Portal for SD-WAN Network Group	372
8.5.1 Profile	372
8.5.2 Quota Management	382
8.5.3 Network & Devices	384
8.5.4 PIN Generator	385
8.5.5 Analytics	389
Applications	390
A.1 How to apply an AP profile to AP device(s)?	390

Part V	391
Chapter 9 Device Menu	392
9.1 Dashboard for CPE	392
9.2 Statistics for CPE	393
9.3 Monitoring	394
9.3.1 Alarm.....	394
9.3.2 Logs	395
9.4 Configuration.....	396
9.4.1 WAN	398
9.4.2 LAN	418
9.4.3 Hotspot Web Portal	431
9.4.4 Routing	447
9.4.5 NAT.....	455
9.4.6 Hardware Acceleration.....	462
9.4.7 Firewall	463
9.4.8 User Management	480
9.4.9 Object Setting	485
9.4.10 QoS.....	502
9.4.11 Applications	509
9.4.12 VPN	532
9.4.13 Mesh	553
9.4.14 Wireless LAN.....	556
9.4.15 Bandwidth Management	571
9.4.16 USB Applications	576
9.4.17 System	581
9.4.18 Switch	601
9.5 Advanced	614
9.5.1 Parameter Tree	614
9.5.2 Exclude Parameter.....	615
9.5.3 Test Inform.....	616

Part I

Introduction



Chapter 1 Introduction

VigorACS 3 is a software which provides centralized device management for TR-069 based CPEs such as broadband gateway, XDSL router, VoIP gateway, wireless AP **and switch**. VigorACS 3 has device status, monitor status of devices, or perform scheduling tasks such as firmware upgrade, configuration backup/restore and parameter profile for mass deployment of CPE devices. It is easy to use through intuitive Web-based GUI with security management. VigorACS 3 can be installed on different kinds of platform e.g., **Windows, Linux** and so on.

1.1 Main Features and Benefit

- Manage all kinds of Vigor devices complied with TR-069 specification.
- VigorACS 3 server can be installed in Windows and Linux.
- Intuitive Web-based GUI can be executed on all browsers like Edge, Firefox, Chrome and so on.
- Support scheduling firmware upgrade, configuration backup/restore and parameter profile deployment.
- Support auto-discovery to survey all TR-069 devices.
- Provide device inform management.
- Support security management.

1.2 System Architecture

The following figure shows an overview for the application between VigorACS 3 and CPE devices. With TR-069 protocol, VigorACS 3 can communicate and manage devices with ease.



1.3 Web Service

Web service is a software system identified by a URI, whose public interfaces and bindings are defined and described using XML. Its definition can be discovered by other software systems. These systems may then interact with the Web service in a manner prescribed by its definition, using XML based messages conveyed by internet protocols.

The basis for Web Services contains: XML, WSDL (Web Services Description Language), SOAP (Simple Object Access Protocol), UDDI (Universal Description, Discovery and Integration). The procedure for the structure of bottom layer: transform Web Service information into XML file format, use WSDL statement to describe the objects for service. The remote end can get required information through such description. It carries out transformation job to search or register from UDDI by means of SOAP communication bottom layer.

- For the designers of Java program: you can write java program to control VigorACS. Also, VigorACS will offer some API for you to write and call it. For example, you can get all the connected CPE devices controlled VigorACS through web service.

Corresponding files are placed in -

WebServices_TR069API.zip

The documentation for web services api is placed in -

WebServices_TR069API/doc/

Sample program is placed in -

WebServices_TR069API/example/src/tw/com/draytek/acs/test/TestMain.java

- For the designers with other program language: you can define WSDL to control VigorACS through SOAP (Simple Object Access Protocol)

This page is left blank.

Chapter 2 Install & Startup

Please follow the procedure listed below to install VigorACS completely. The installation for different platforms might be different.

 VigorACS 3 can be operated only by a host with 64-bit operation system.


2.1 Platform for Windows 10, 11

To start up the VigorACS, the normal procedure is listed as follows:


- (I) Installation for Java,
- (II) Installation for MariaDB
- (III) Installation for VigorACS 3
- (IV) Start MySQL/MariaDB Database.
- (V) Edit VigorACS ip.
- (VI) Start VigorACS.

2.1.1 Installation for Java


1. Install Java by clicking “zulu-17.38.21-ca-jdk-17.0.12-.win_x64” (or later) to execute the installation.

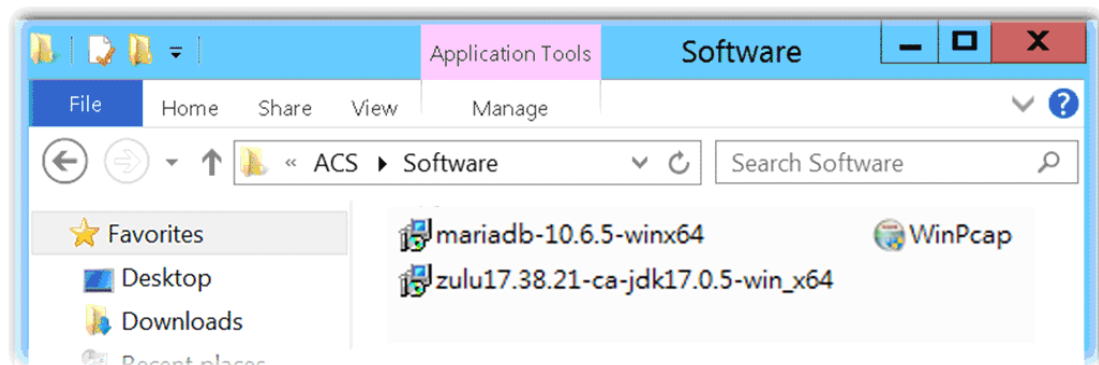


2. The first page will be shown as follows. Click **Next** to get into next page.

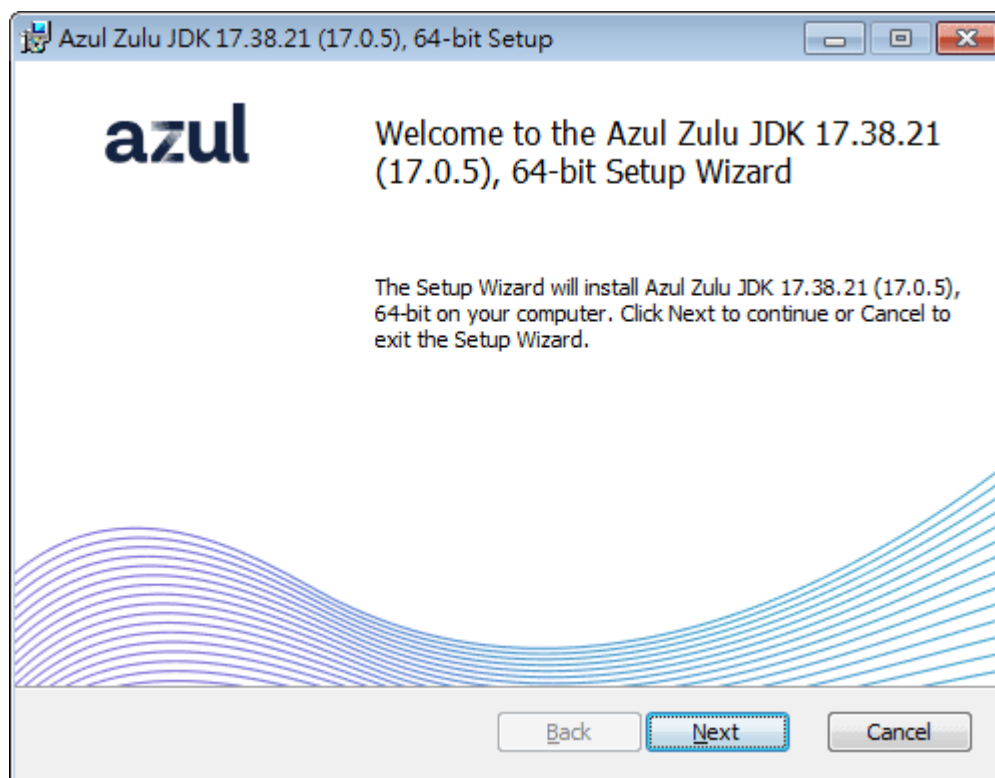


3. In this page, optional features will be listed for you to specify the destination folder for JAVA driver installation. Choose the one you need and click **Next**.

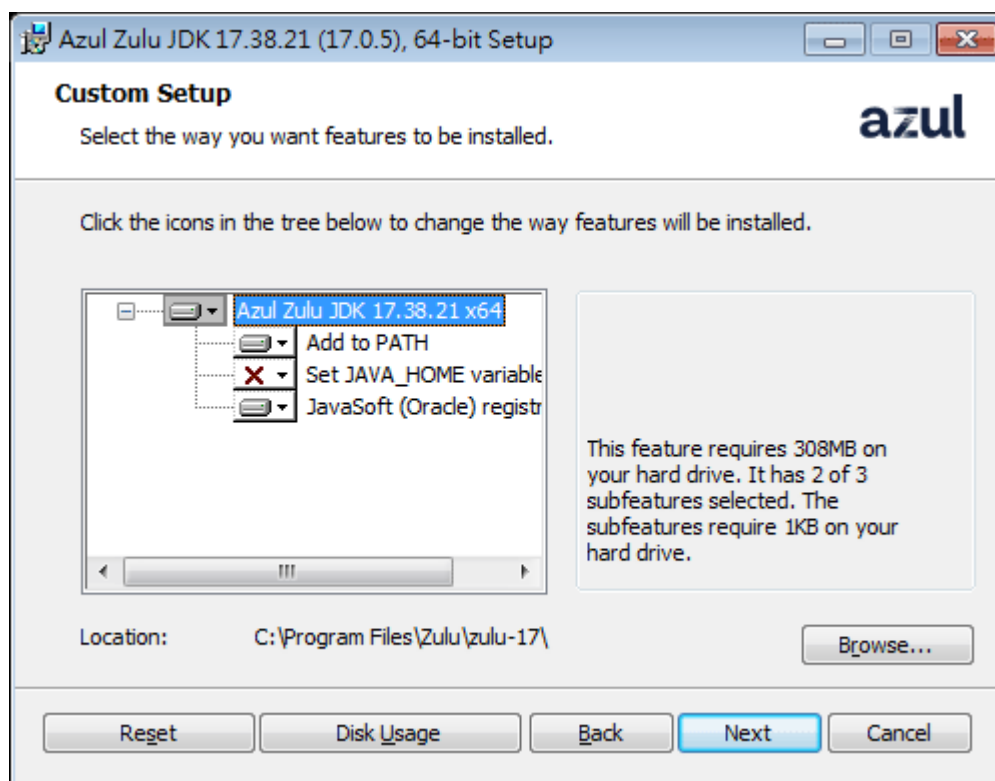


4. In the following page, just click **Install**.

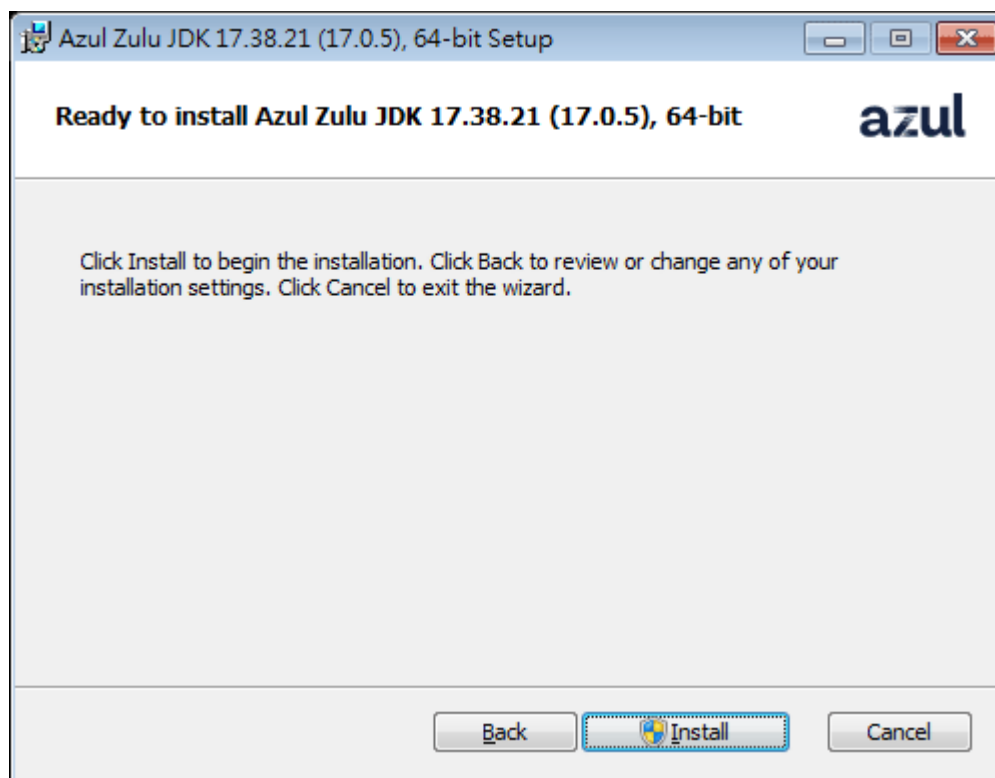

5. Wait for a while to install the required features.

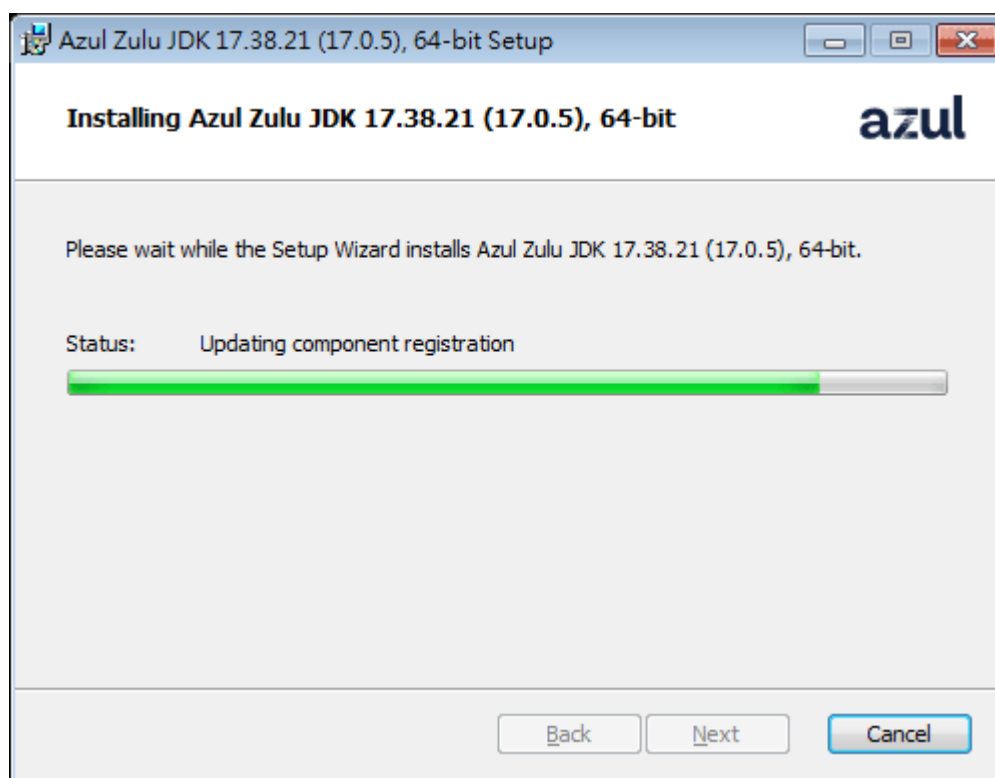


- When the following page appears, the installation is completed. Click **Finish** to exit the installing program.

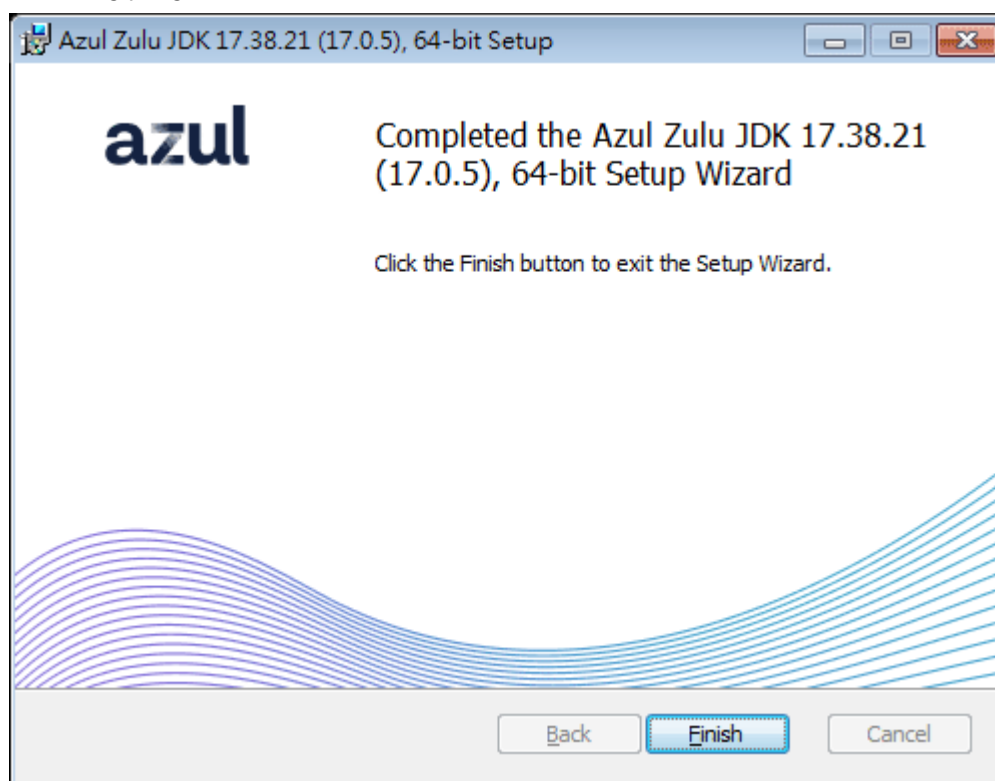


2.1.2 Installation for MariaDB


- Install MariaDB by clicking "mariadb-10.6.5-winx64" (based on your PC condition) it to execute the installation.

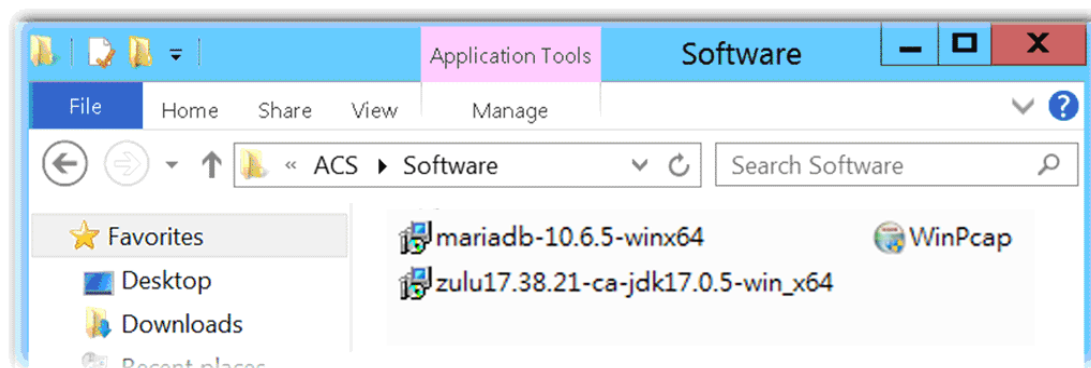


2. When the welcome screen appears, please click **Next** for next step.

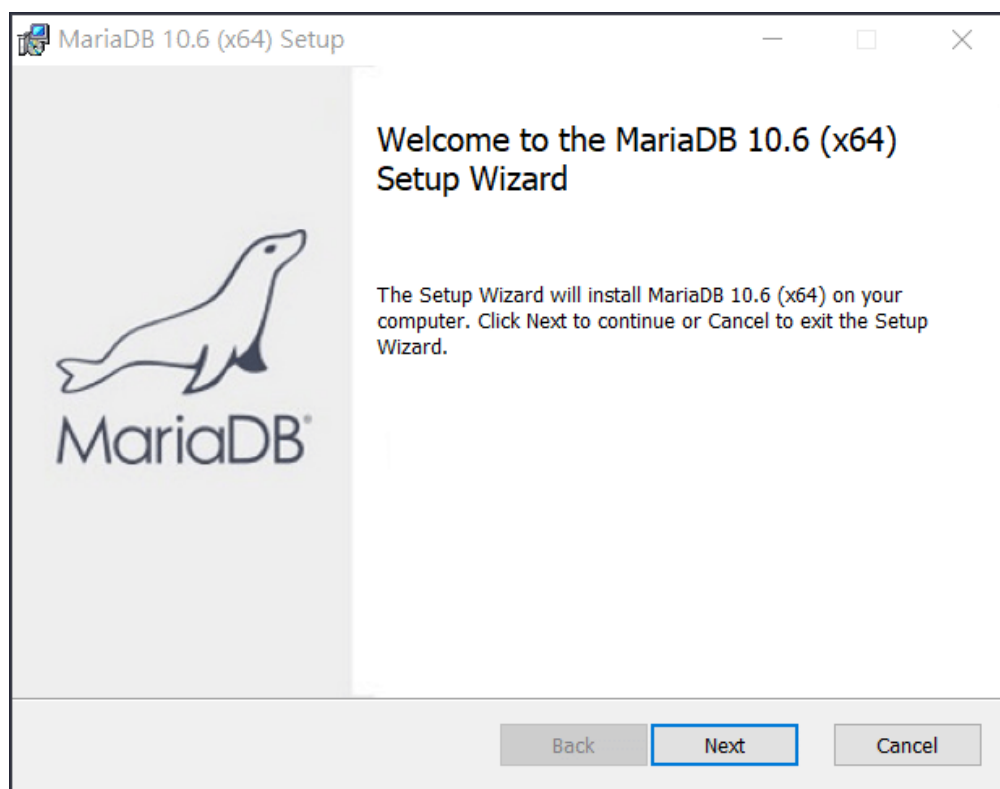


3. On this dialog box, check the box of "I accept the terms...." and click **Next**.

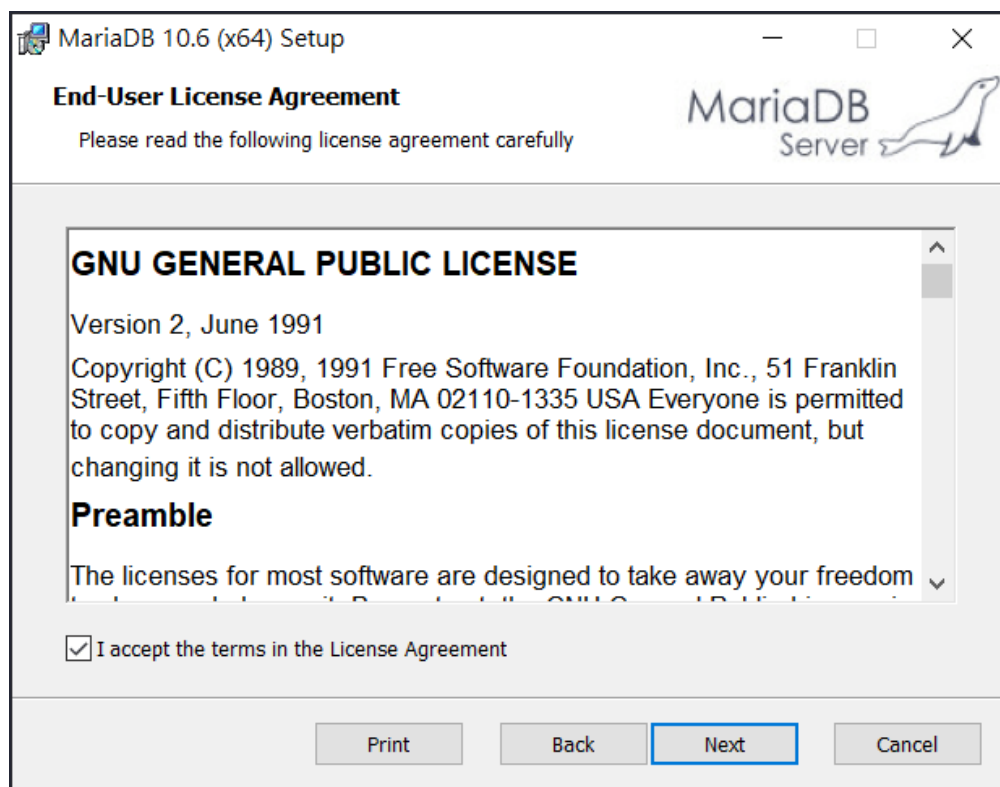


4. Select the way for the features to be installed. Then click **Next**.

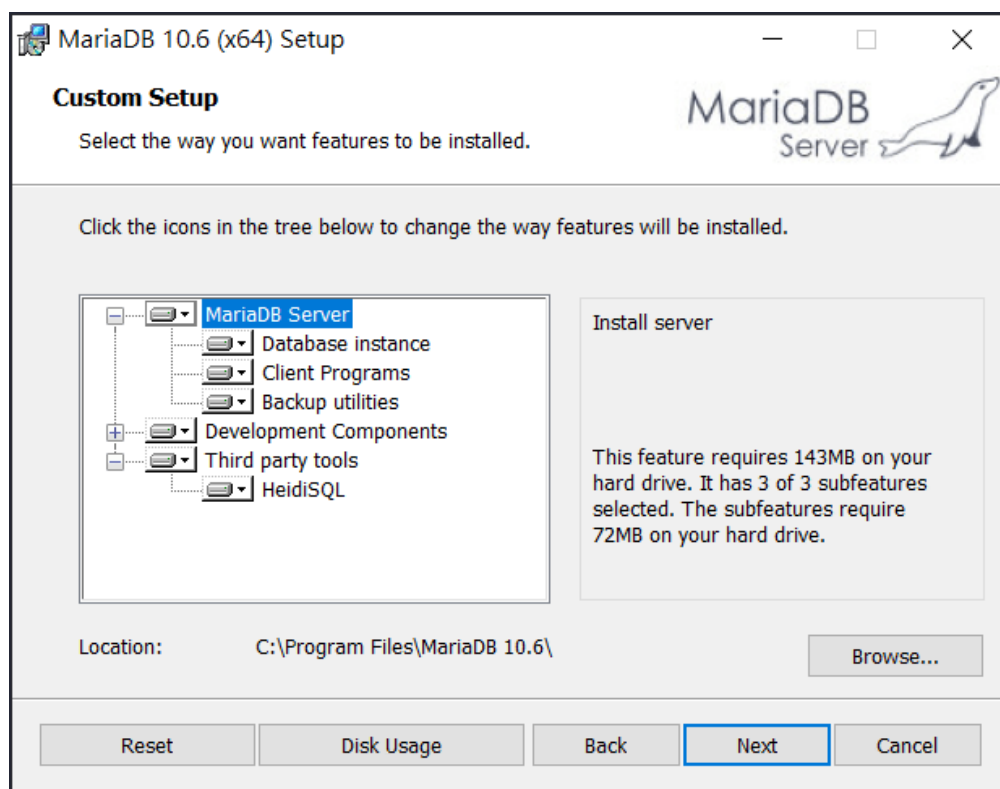

5. If you want to configure password for MariaDB server, please check **Modify password...** and enter the password. It depends on your request. Otherwise, simply click **Next**.

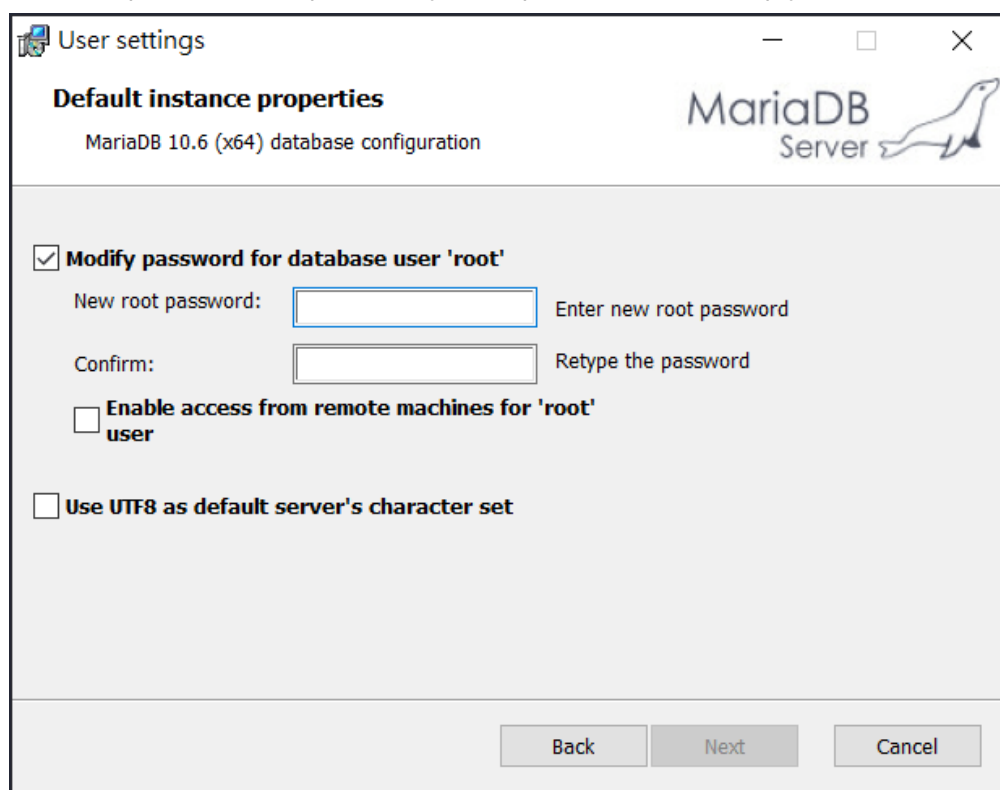

6. Modify the default instance properties if required. Then click **Next**.

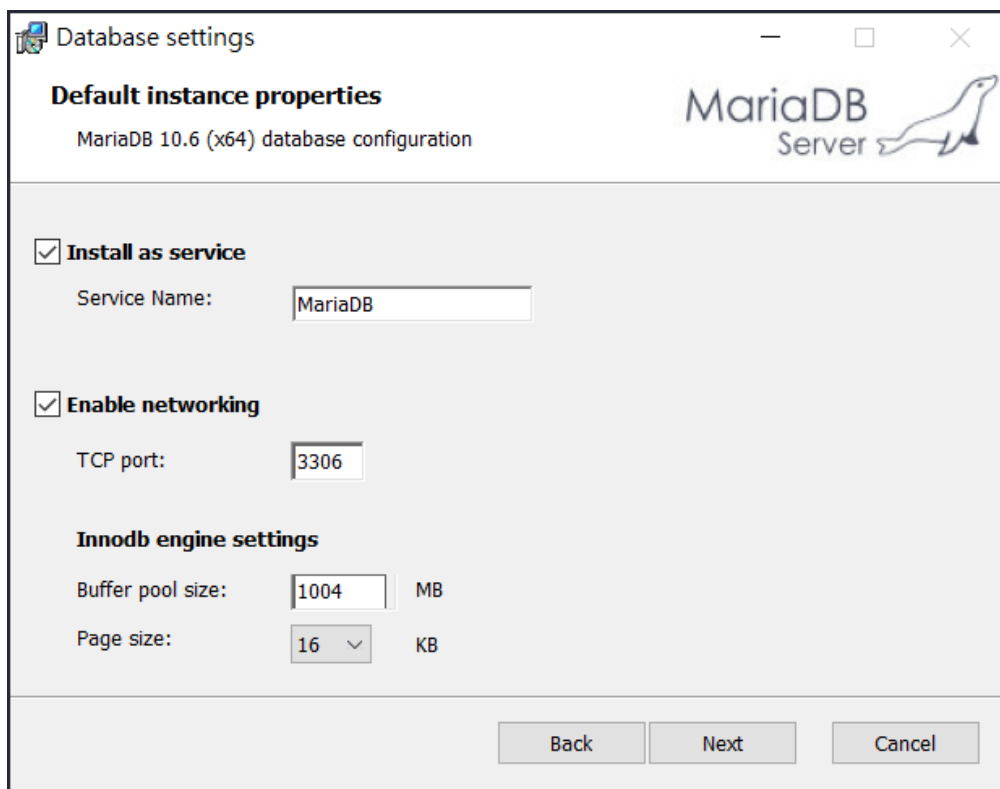

The screenshot shows the 'Database settings' window for MariaDB 10.6 (x64). The window has a title bar with standard Windows controls. The main content area is titled 'Default instance properties' and includes the MariaDB logo. It contains three sections: 'Install as service' with a checked checkbox and a 'Service Name' field set to 'MariaDB'; 'Enable networking' with a checked checkbox and a 'TCP port' field set to '3306'; and 'InnoDB engine settings' with a 'Buffer pool size' field set to '1004' MB and a 'Page size' dropdown set to '16' KB. At the bottom right are 'Back', 'Next', and 'Cancel' buttons.

Database settings

Default instance properties

MariaDB 10.6 (x64) database configuration

MariaDB Server

☒ **Install as service**

Service Name:

☒ **Enable networking**

TCP port:


InnoDB engine settings

Buffer pool size: MB

Page size: KB

Back Next Cancel

7. On this dialog box, click **Install**.

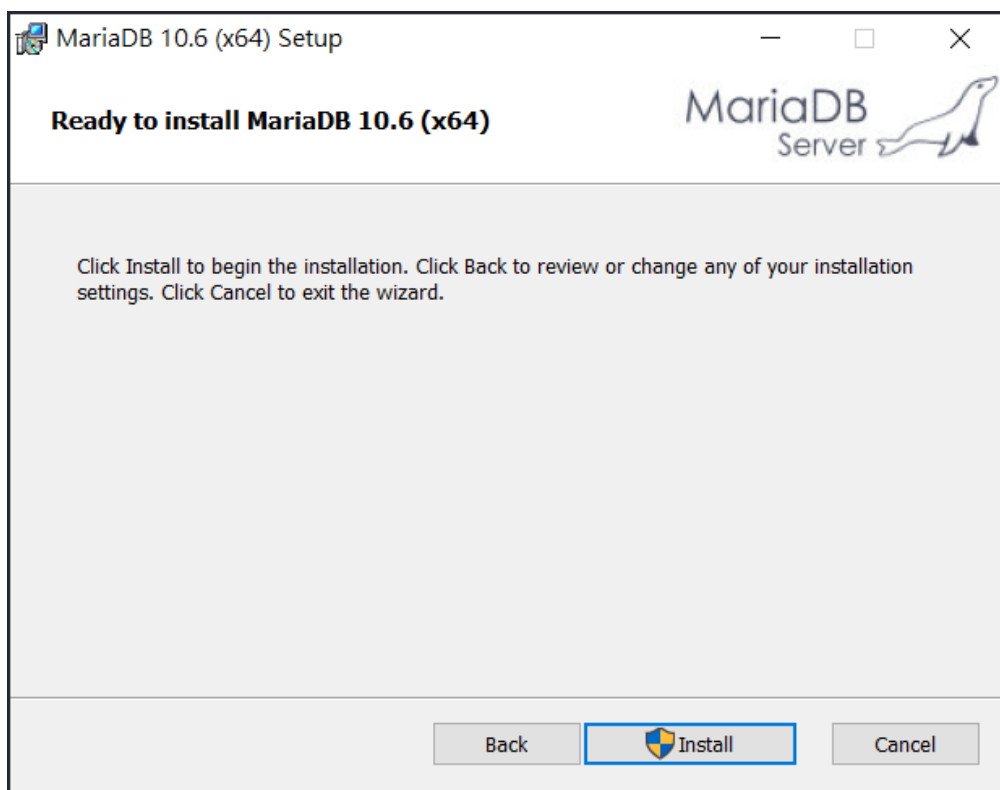

The screenshot shows the 'MariaDB 10.6 (x64) Setup' window. The title bar includes the window icon and standard controls. The main content area is titled 'Ready to install MariaDB 10.6 (x64)' and features the MariaDB logo. Below the title, there is a message: 'Click Install to begin the installation. Click Back to review or change any of your installation settings. Click Cancel to exit the wizard.' At the bottom right are 'Back', 'Install' (highlighted with a blue border), and 'Cancel' buttons.

MariaDB 10.6 (x64) Setup


Ready to install MariaDB 10.6 (x64)

MariaDB Server


Click Install to begin the installation. Click Back to review or change any of your installation settings. Click Cancel to exit the wizard.

Back Install Cancel

8. The installation program starts to install required files for MariaDB to your computer. Wait for several seconds.

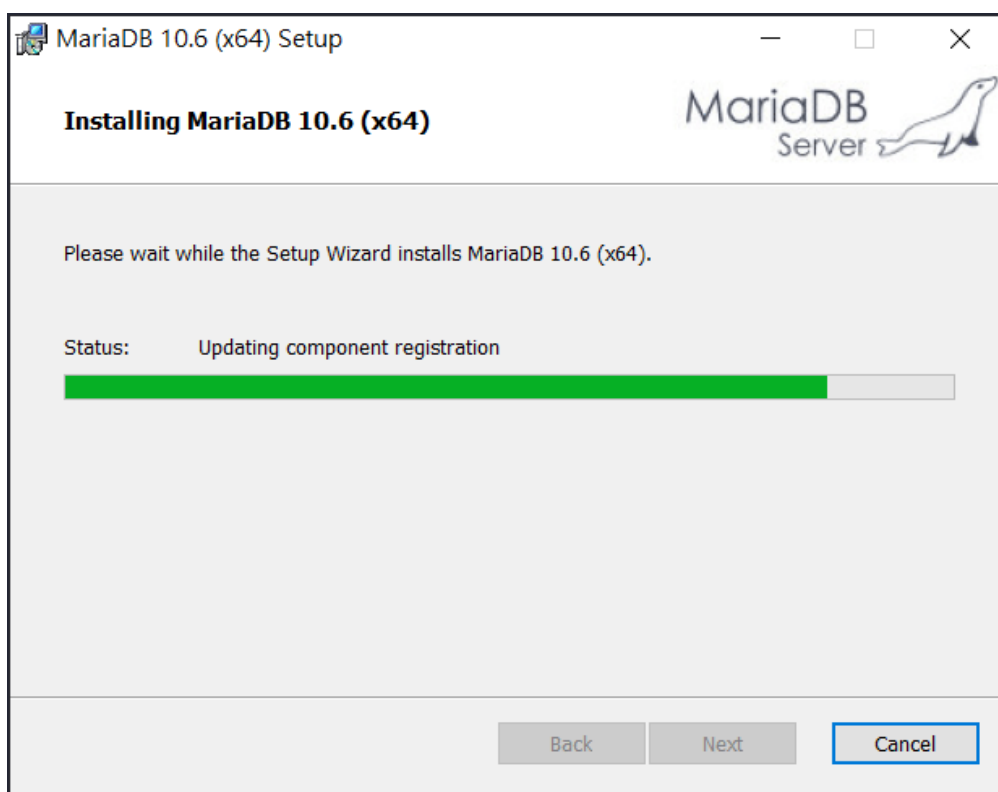


9. After finishing the configuration, please click **Finish** to exit the wizard.

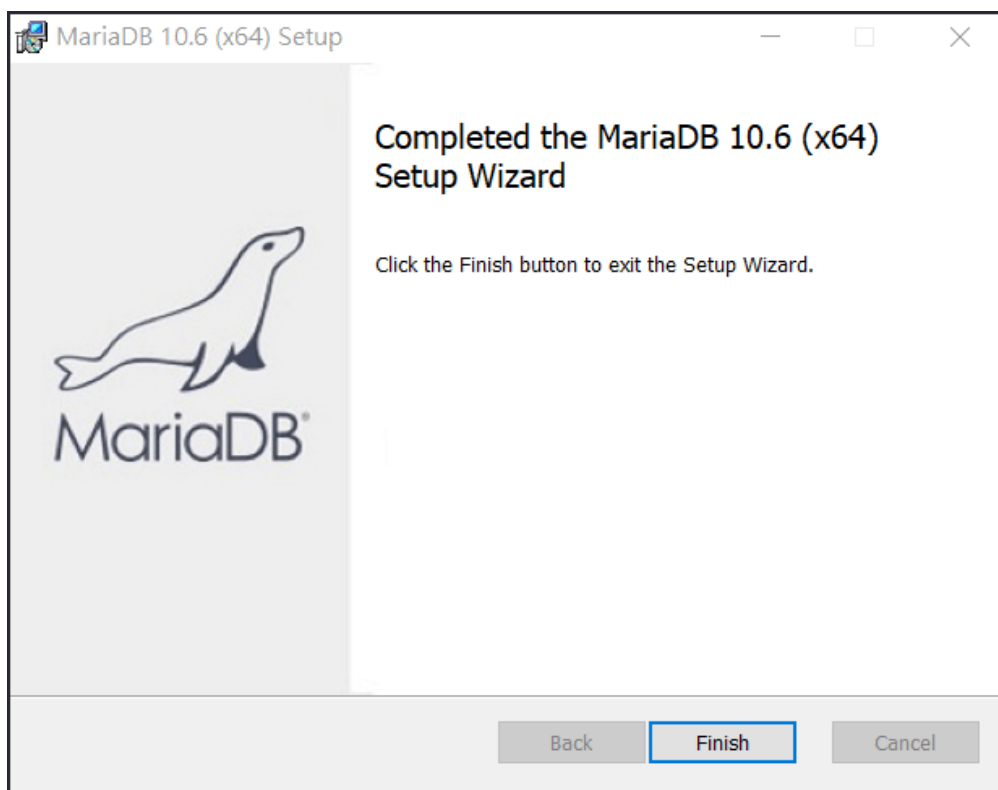


2.1.3 Installation for VigorACS 3

It is time to install VigorACS main program. Follow the steps below.


1. Click **Setup** to run VigorACS 3 setup wizard.

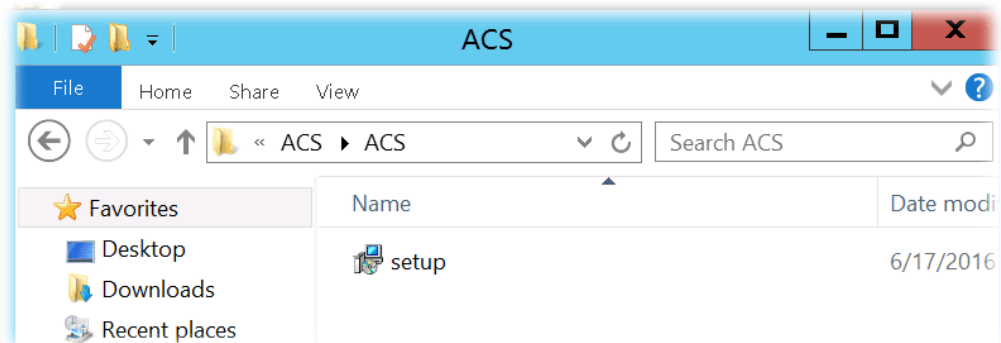


2. When the following dialog appears, choose **Local Database / Remote Database** and click **Next**.

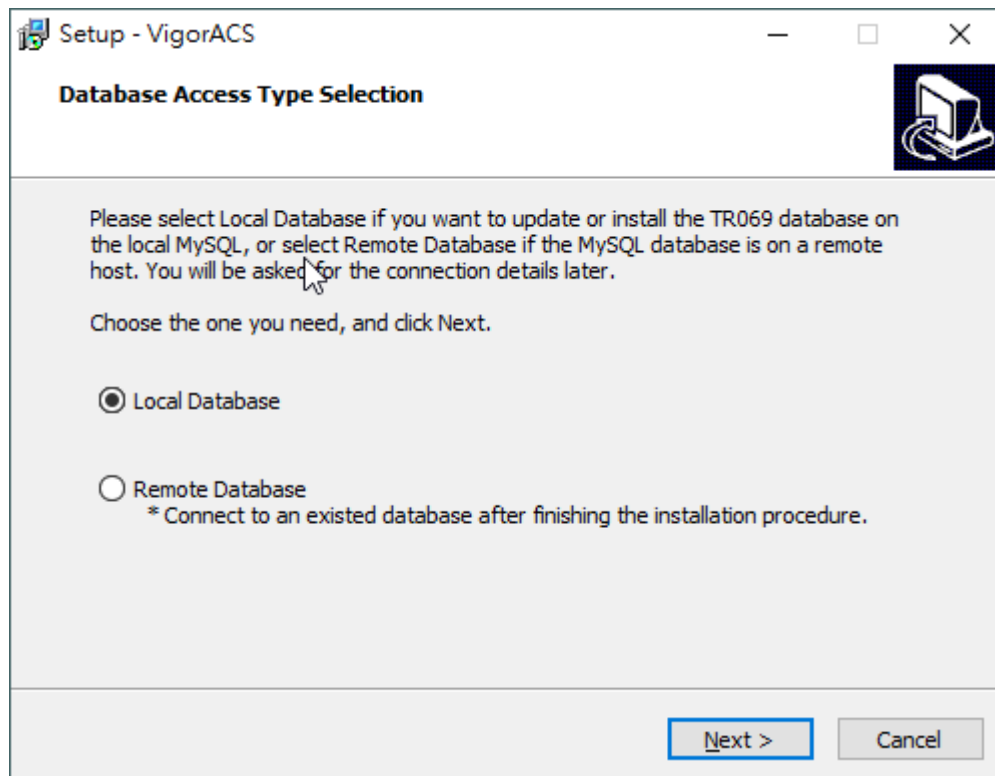


3. Select the directory that MariaDB being installed (done in 2.1.2) and click **Next**.

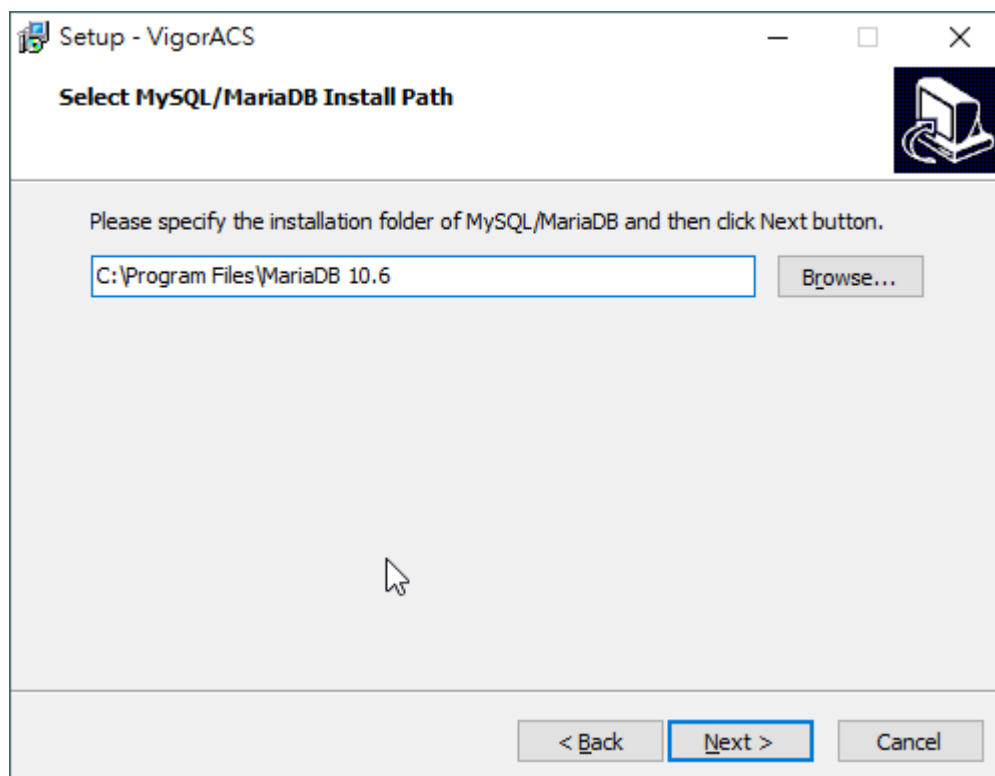

4. In this dialog box, choose **Rebuild Database** (for rebuilding the VigorACS database) or **Upgrade Database** (for upgrading the database). For the first time using, please choose **Rebuild Database**. Then click **Next**.

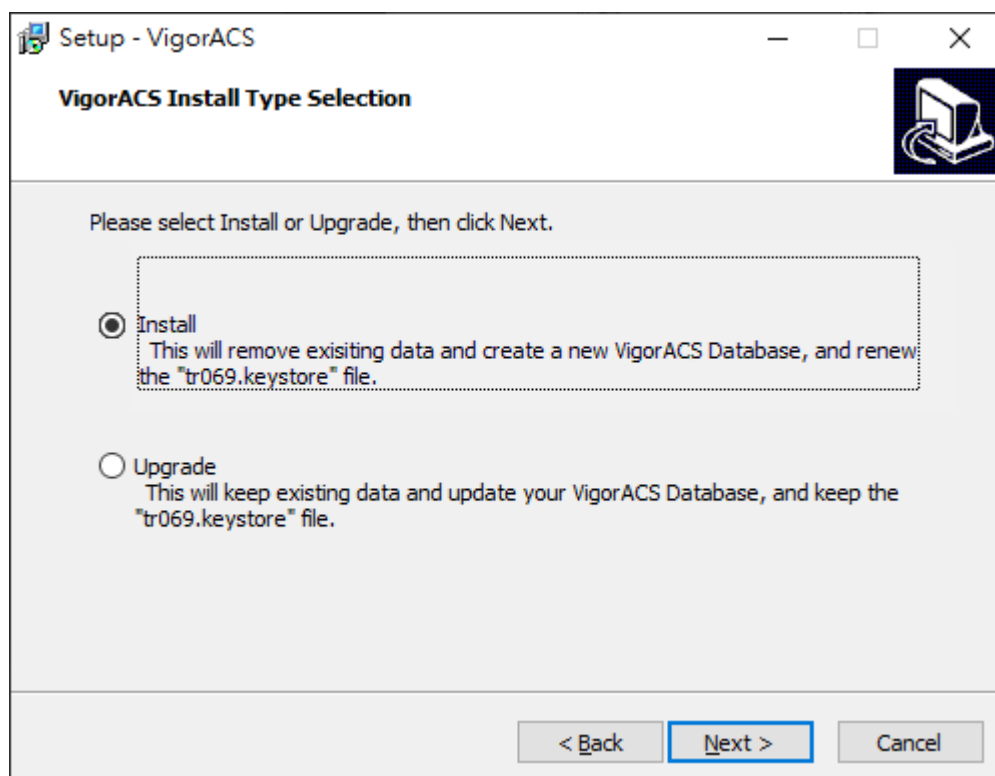

5. Click **Next**. If you have configured MySQL/MariaDB previously and specified password for it, you have to enter the password in this page and then click **Next**.

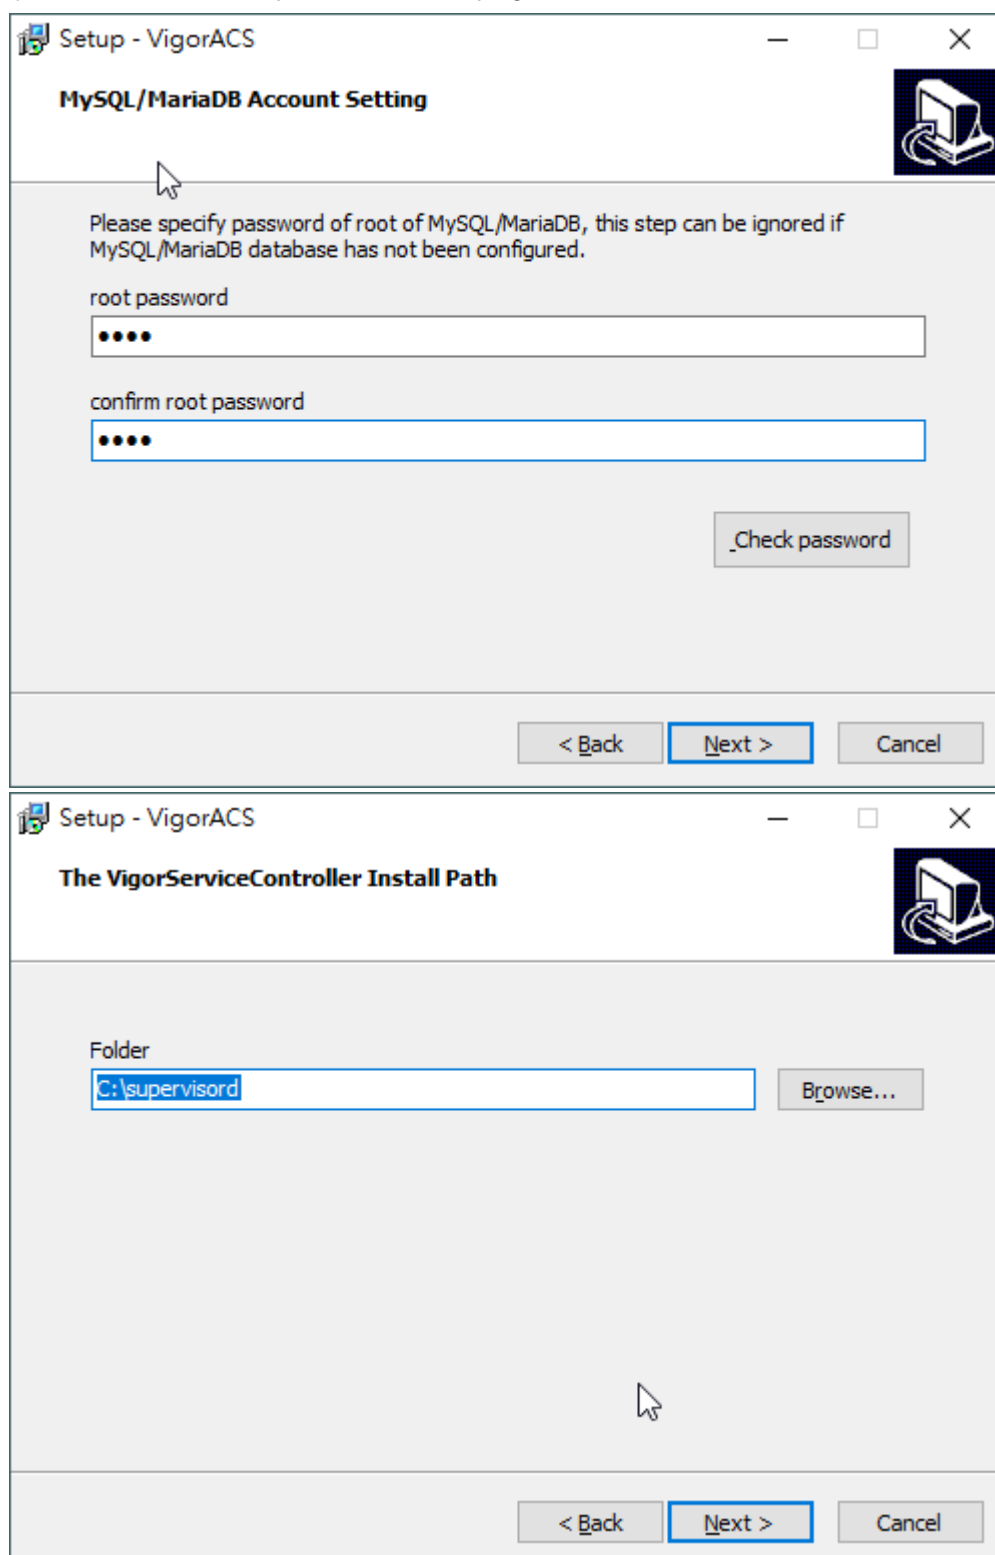

Setup - VigorACS

MySQL/MariaDB Account Setting

Please specify password of root of MySQL/MariaDB, this step can be ignored if MySQL/MariaDB database has not been configured.

root password
.....



confirm root password
.....


Setup - VigorACS

The VigorServiceController Install Path

Folder
C:\supervisord

6. Then select InfluxDB v1 or v2 and click **Next**.

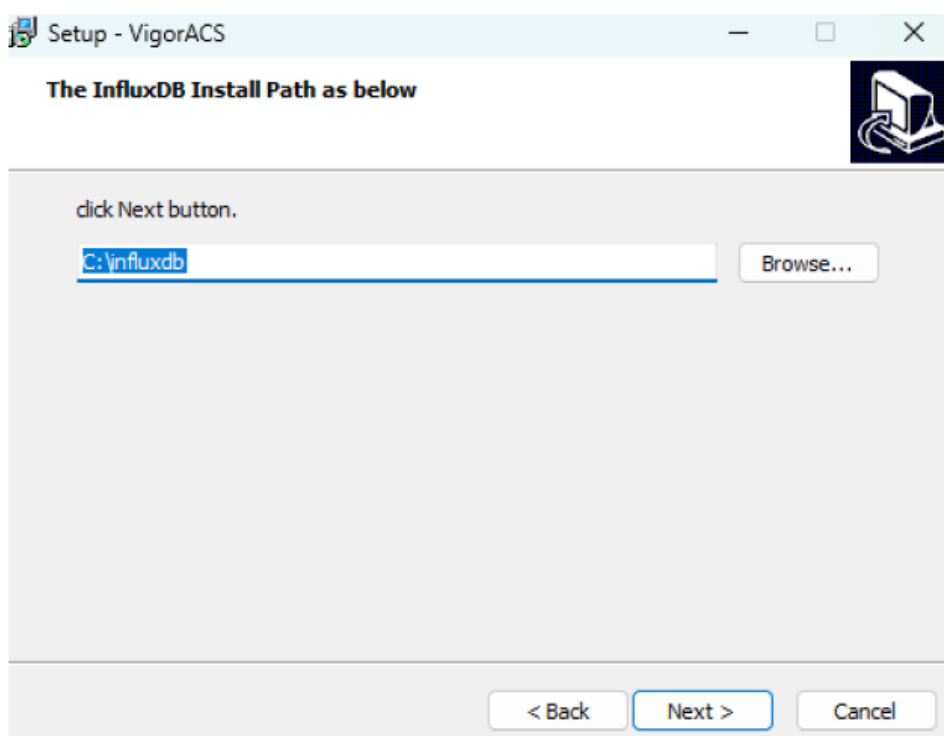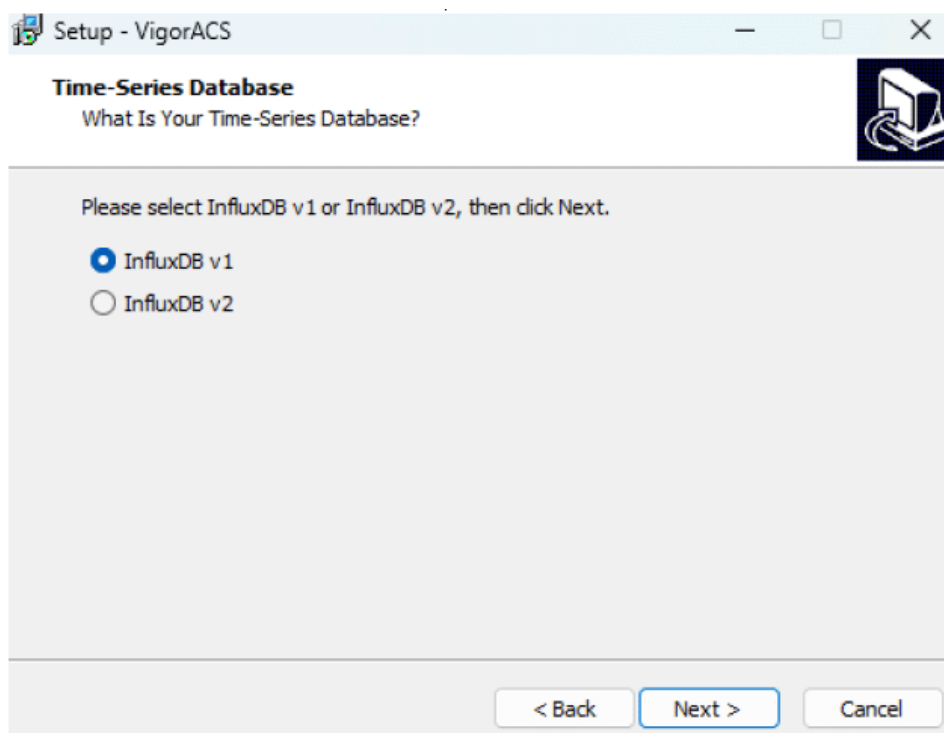

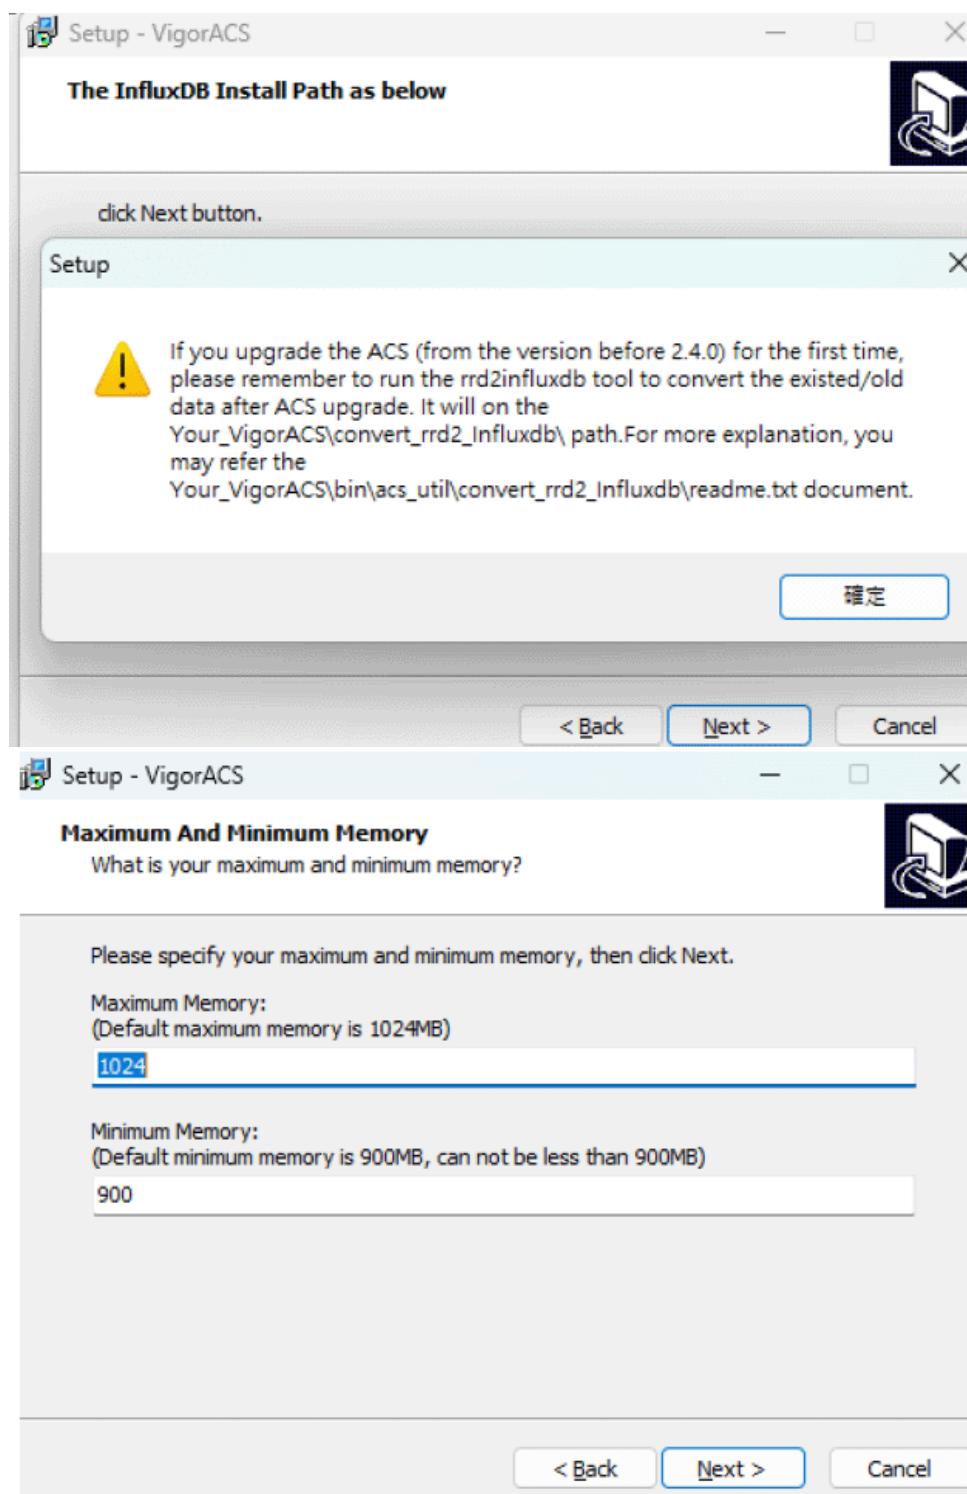

7. Setup the system settings by clicking one of the options. Here, click "Use same port number..." and click **Next**.

Setup - VigorACS

System Settings

By default, the port number is same for the VigorACS portal and CPE communication.

☒ Use same port number for the VigorACS portal and CPE communication.

☐ Use different port for the VigorACS portal and CPE communication.

< Back **Next >** Cancel

8. Setup ACS HTTP and HTTPS port. It is suggested using other port instead of default 80 and 443 port to prevent conflict.

Setup - VigorACS

HTTP And HTTPS Port

What is your HTTP and HTTPS port?

Please specify your HTTP and HTTPS port, then click Next.


HTTP Port:
80

HTTPS Port:
443

HTTPS Chatbot Port:
18443

< Back **Next >** Cancel


9. Click **Next** to enter the STUN Port, Syslog Port and the Netflow Port. Default values are 3478, 514 and 20314.

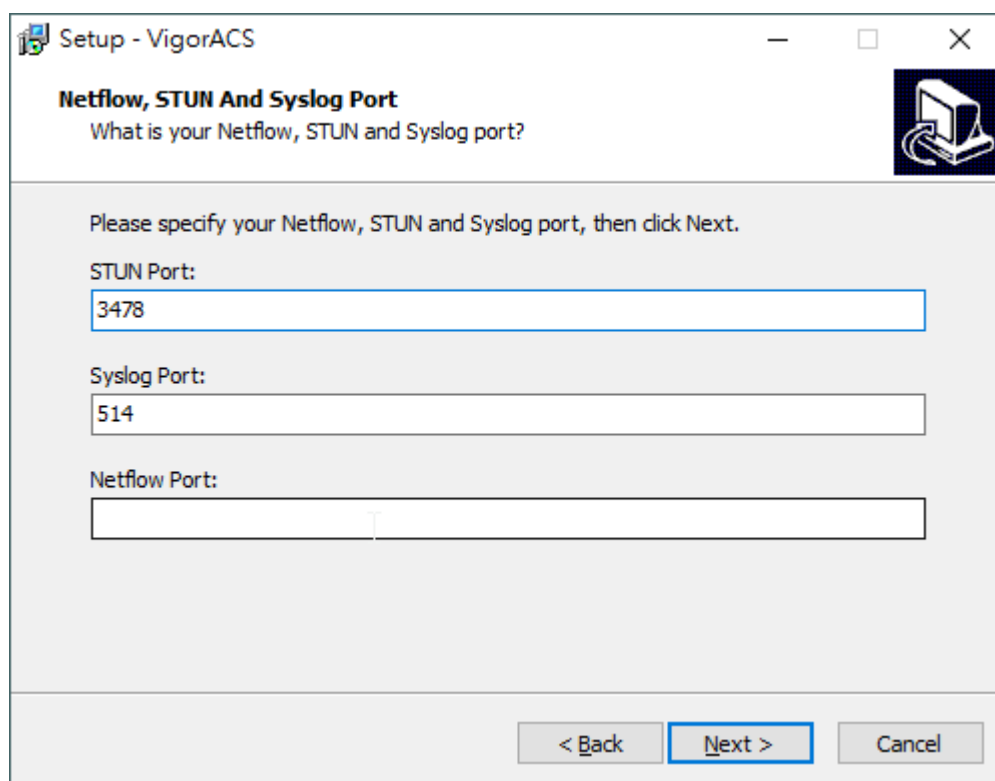


The screenshot shows a Windows-style window titled "Setup - VigorACS". The main heading is "Netflow, STUN And Syslog Port" with a sub-question "What is your Netflow, STUN and Syslog port?". Below this, a message says "Please specify your Netflow, STUN and Syslog port, then click Next." There are three input fields: "STUN Port:" with the value "3478", "Syslog Port:" with the value "514", and "Netflow Port:" which is empty. At the bottom right, there are three buttons: "< Back", "Next >" (which is highlighted with a blue border), and "Cancel".

 The port number defined here will be used for opening VigorACS later.


10. Specify the server domain.

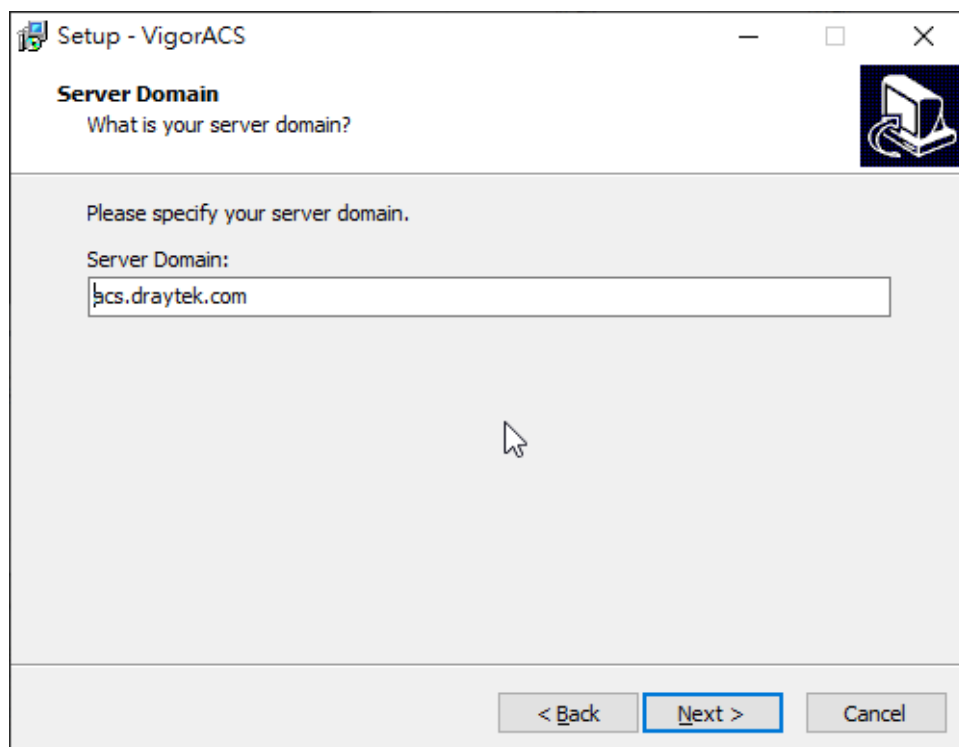


The screenshot shows a Windows-style window titled "Setup - VigorACS". The main heading is "Server Domain" with a sub-question "What is your server domain?". Below this, a message says "Please specify your server domain." There is one input field labeled "Server Domain:" containing the text "acs.draytek.com". At the bottom right, there are three buttons: "< Back", "Next >" (which is highlighted with a blue border), and "Cancel".

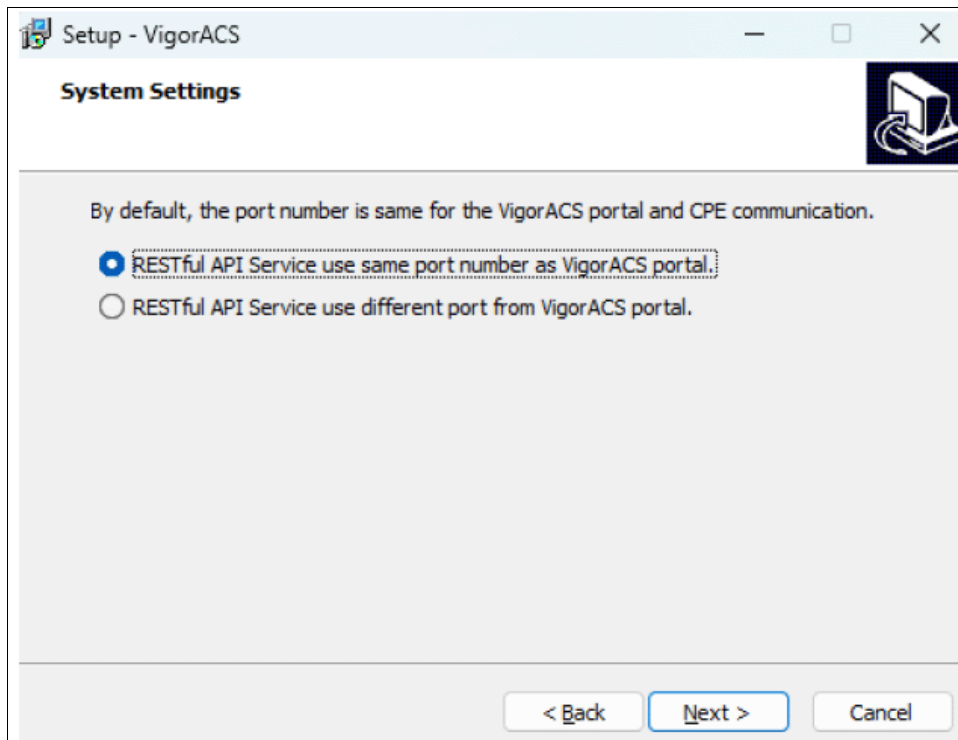


11. Use the default item (standalone.xml) and click **Next**.

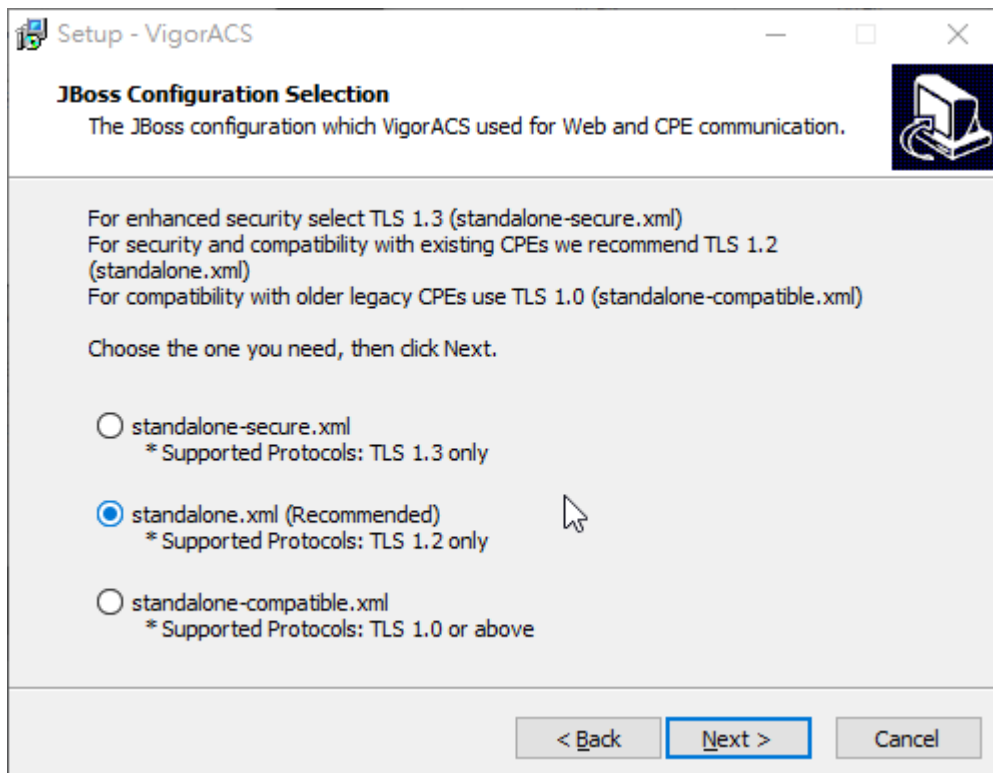


12. Determine the home path and click **Next**. The default directory used by this program is C:\Users. You can modify it if you want and please make sure the length of directory is not over 100 characters, otherwise you might encounter problem of VigorACS in installation.

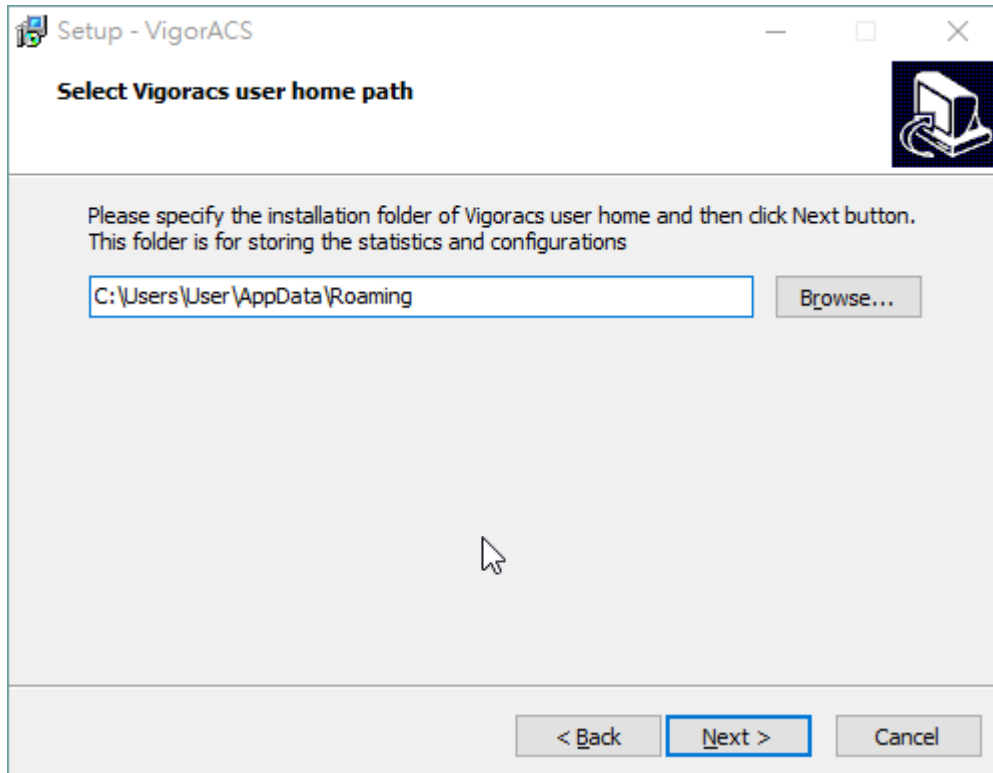


13. Determine the destination folder and click **Next**. The default directory used by this program is C:\Program Files\VigorACS. You can modify it if you want and please make sure the length of directory is not over 100 characters, otherwise you might encounter problem of VigorACS in installation.

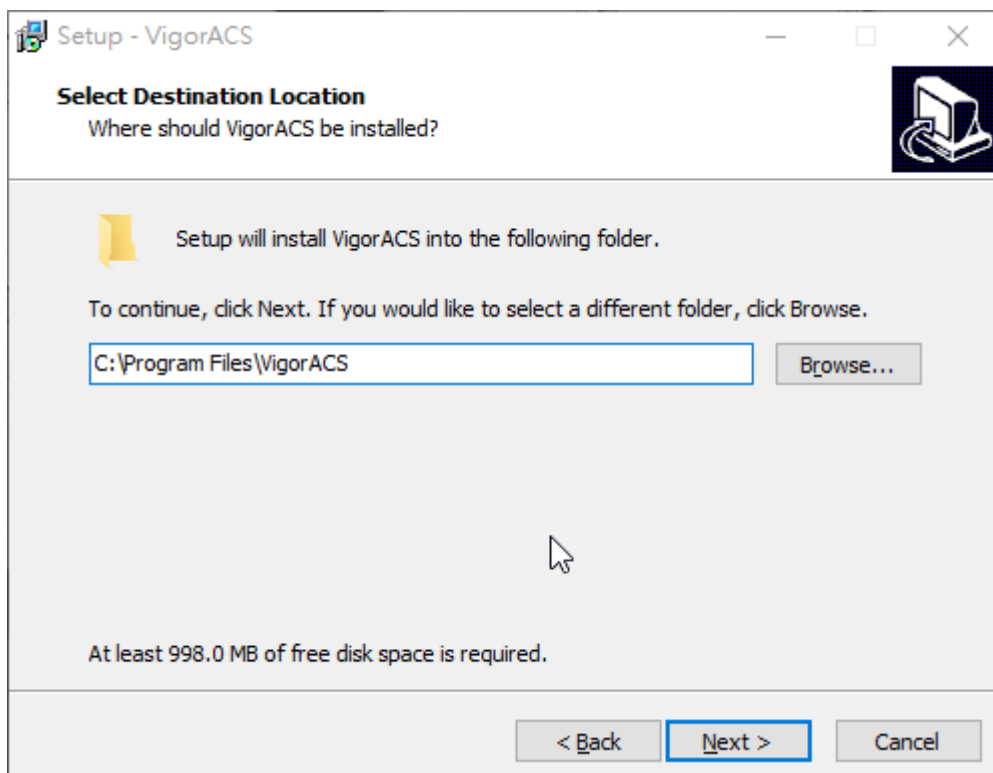


14. Determine the start menu folder and click **Next**. The default directory used by this program is *VigorACS*. You can modify it if you want and please make sure the length of directory is not over 100 characters, otherwise you might encounter problem of VigorACS in installation.

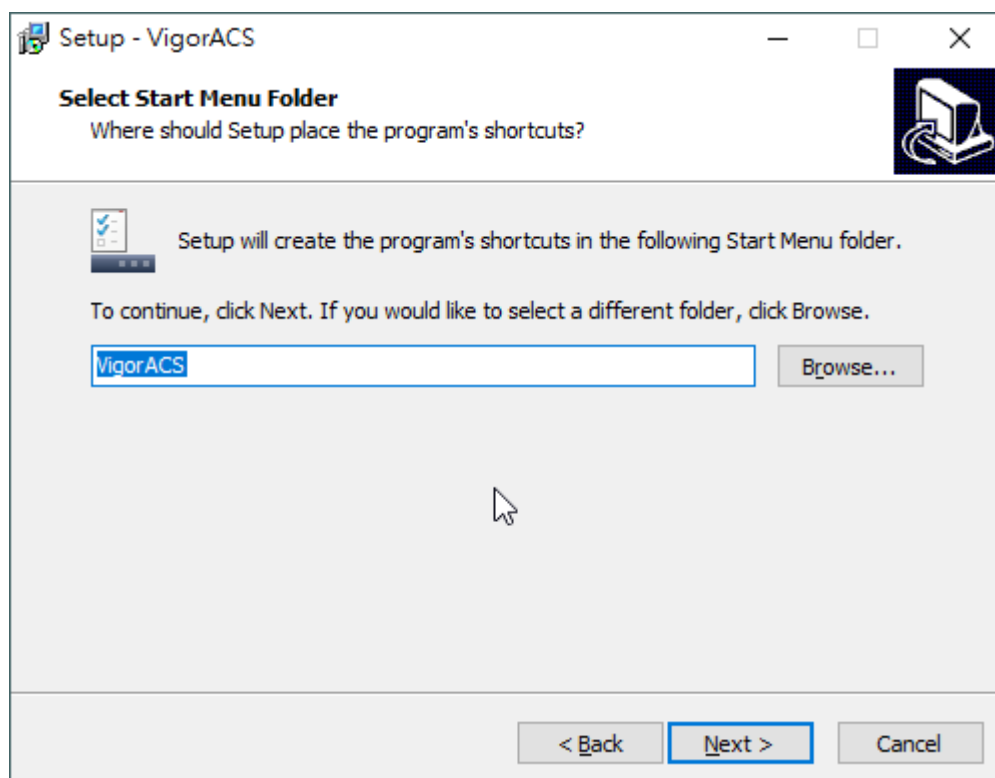


15. In this dialog, check the box of "**Create a desktop shortcut**" for your necessity. Click **Next**.

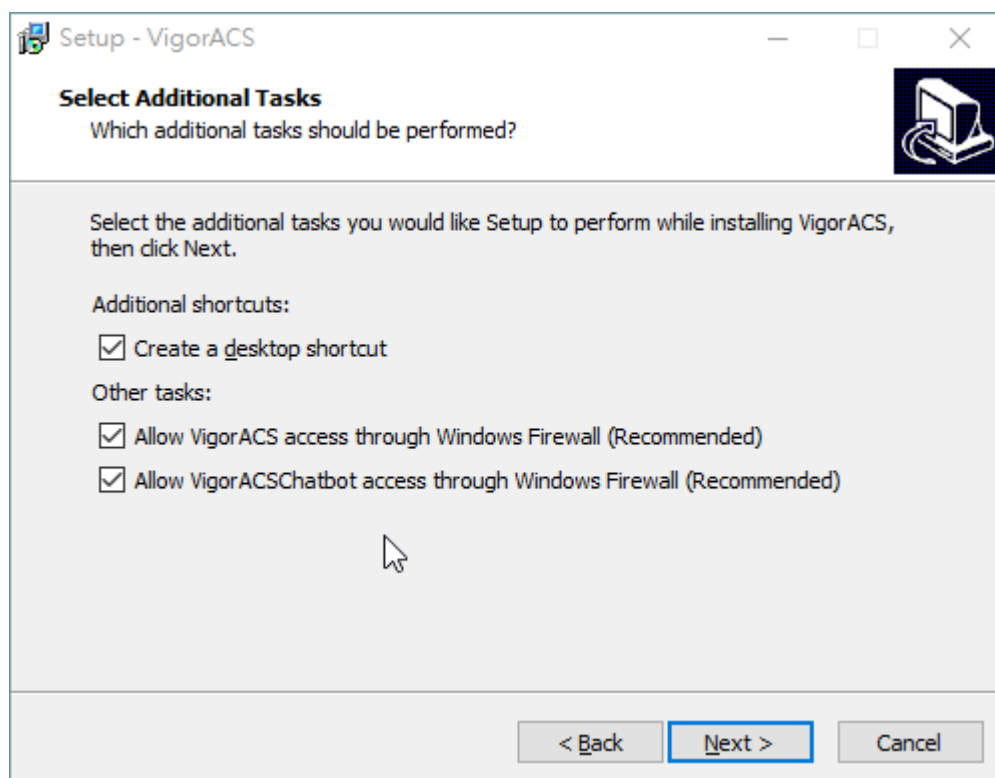


16. Now, the program is ready to install necessary features and files to your computer. Please click **Install** to start.

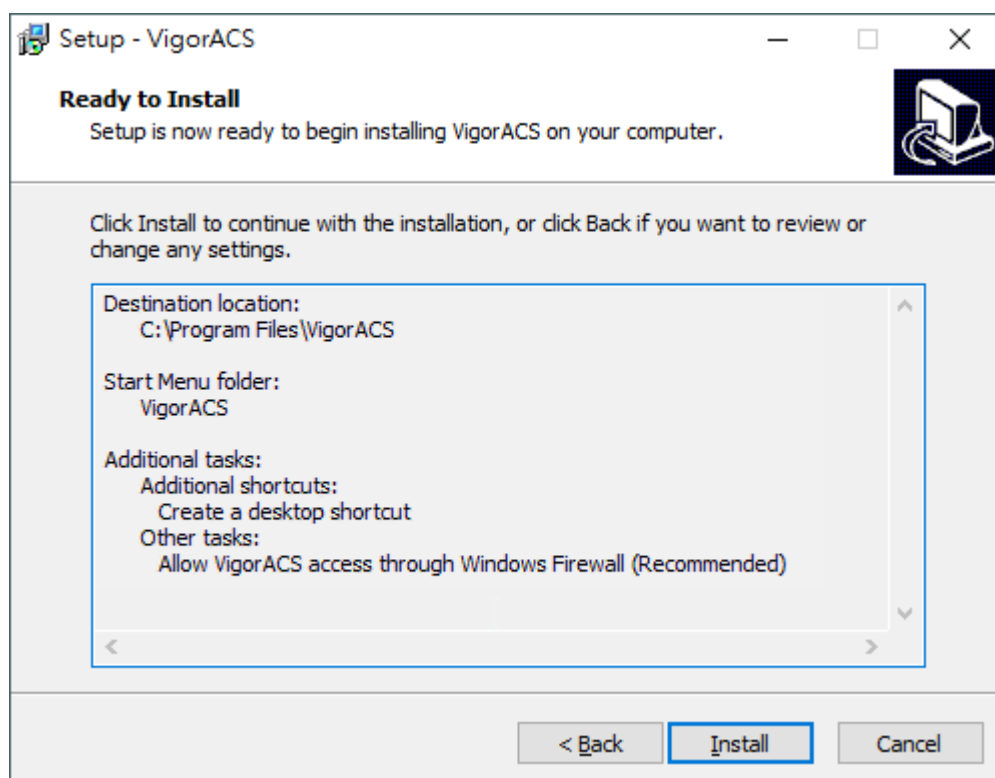

17. Please wait for a while to complete the installation.

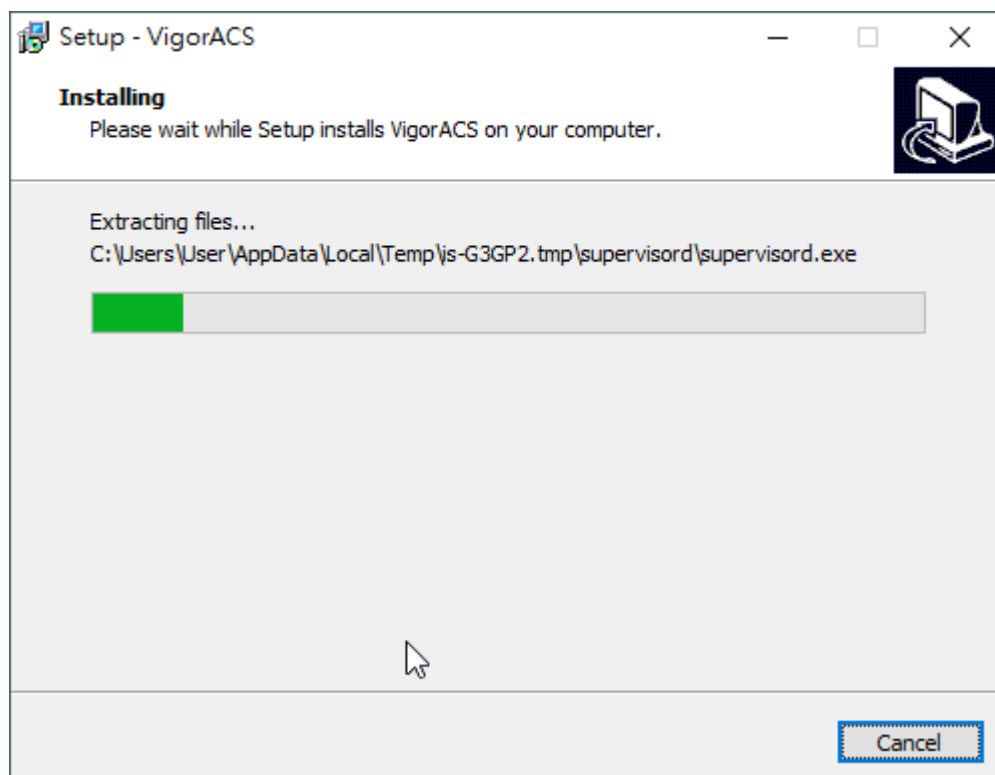


18. While installing, the following screen will appear to show the procedure of database generation.

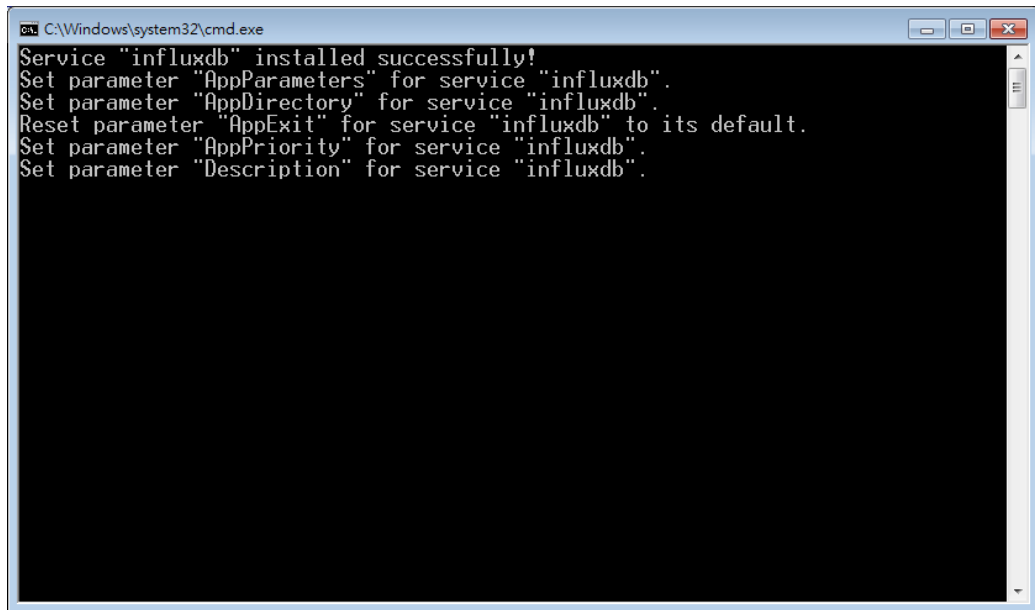

```
C:\Windows\system32\cmd.exe
Service "influxdb" installed successfully!
Set parameter "AppParameters" for service "influxdb".
Set parameter "AppDirectory" for service "influxdb".
Reset parameter "AppExit" for service "influxdb" to its default.
Set parameter "AppPriority" for service "influxdb".
Set parameter "Description" for service "influxdb".
```

19. When the following screen appears, it means the program has completed the installation. Click **Finish** to exit it.

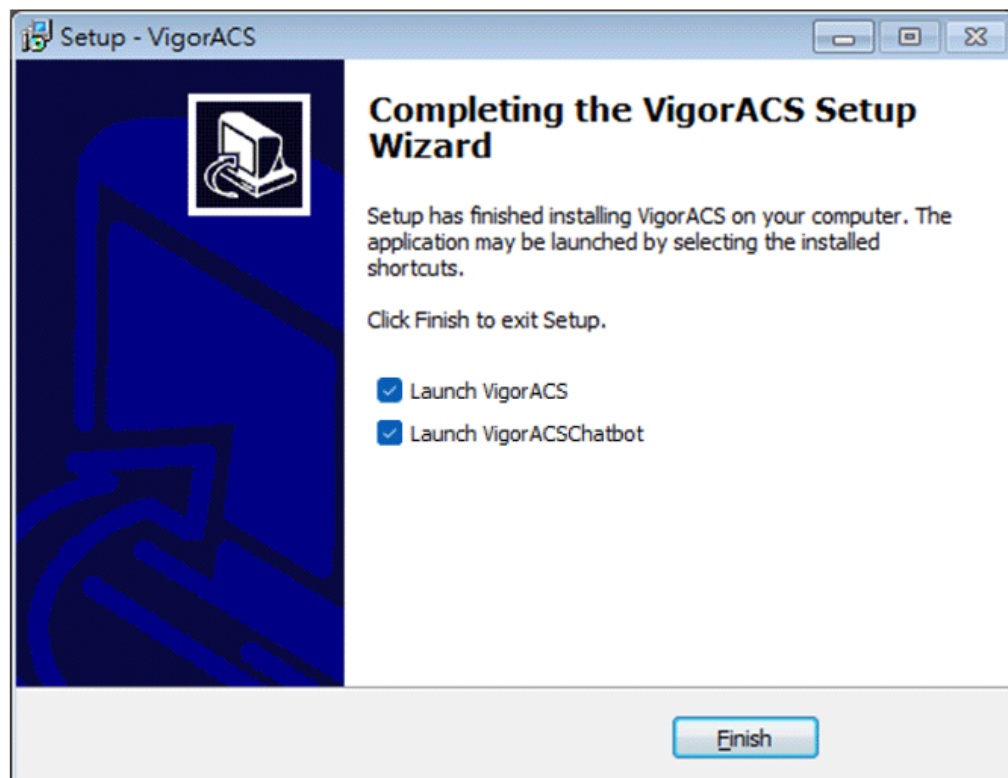


2.1.4 StartMySQL/MariaDB Database

After installing VigorACS, install program will register MySQL/MariaDB to Windows Service. MySQL /MariaDB will startup automatically after installing VigorACS or rebooting system.


Normally, you don't need to worry about this step on Windows. But if you find any problems on VigorACS, you should check mysql/mariadb first. Please go to Windows Service check the MySQL/MariaDB Service starts or not.

2.1.5 Start VigorACS


1. Login VigorACS. Use a web browser and enter "localhost:portnumber". Note that the port number must be the one defined for HTTP and HTTPS port while installing VigorACS. For example, if HTTPS is defined as 8011, then the URL will be "localhost:8011".
2. The login page of VigorACS will be shown as the following. Please type "root" as user name and "admin123" as password and type the authentication code. Then click Login.

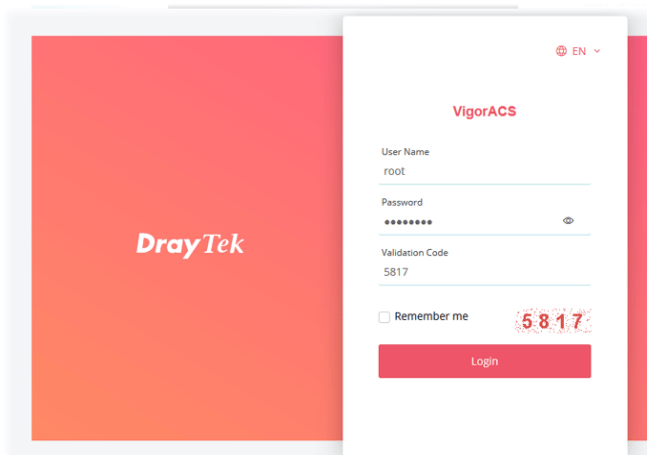

3. For the first time to access into the web user interface, a warning message appears first. Please click the Change password button to change the default password for network security. If not, click Cancel to access into the web user interface of VigorACS and change the password later.

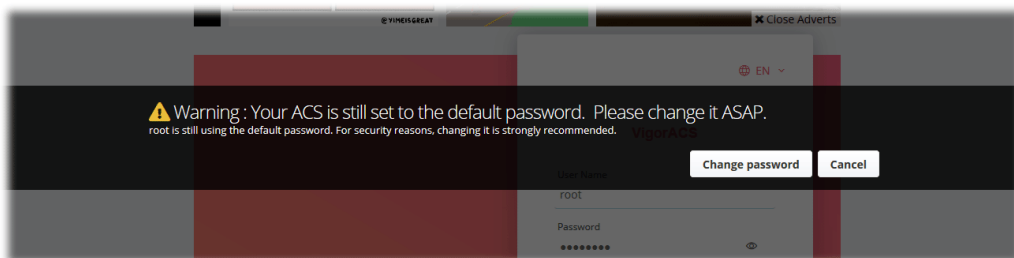

4. After clicking Login, main screen of VigorACS 3 will be shown as below.

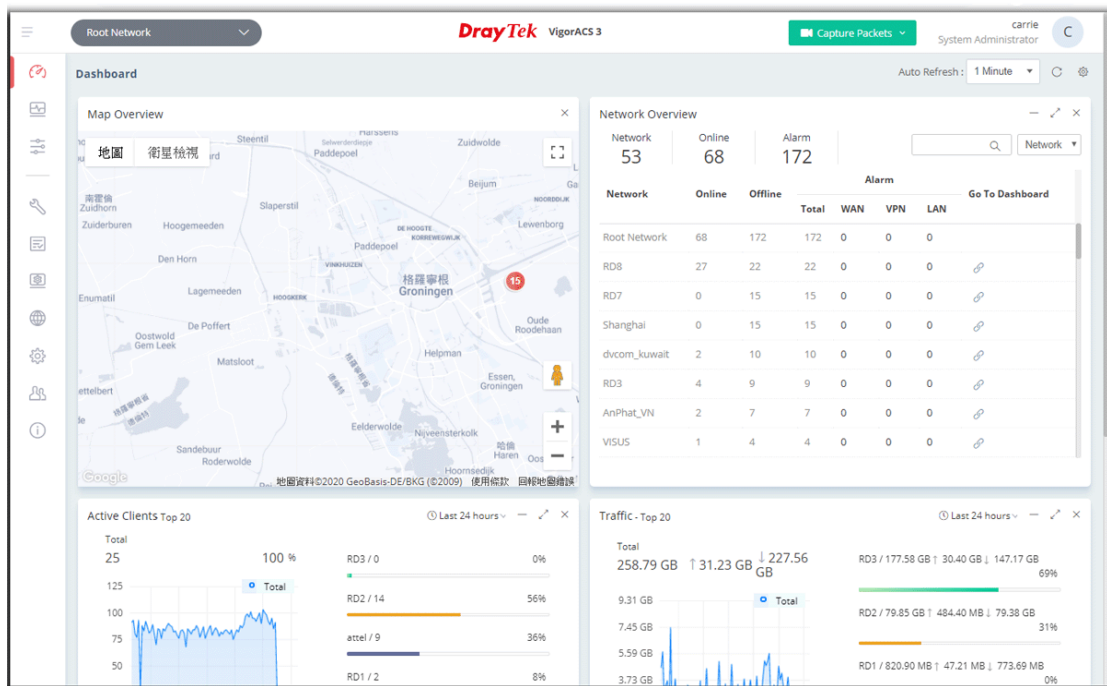

i If you start it first time, VigorACS will ask you to input the server bind IP. Refer to 2.1.5.

2.2 Platform for Linux

VigorACS is compatible with all of the Linux distribution, including Ubuntu, OpenSUSE, CentOS, Debian and RedHat.

To start up the VigorACS, please execute `"/usr/local/vigoracs/VigorACS/bin/vigoracs.sh"` instruction. A list of menu items will be shown as follows.

1. Start Mysql/MariaDB.
2. Shutdown Mysql/MariaDB.
3. Start InfluxDB.
4. Shutdown InfluxDB.
5. Start VigorACS.
6. Shutdown VigorACS.
7. Start VigorACS Chatbot
8. Shutdown VigorACS Chatbox
9. Edit bind IP of VigorACS Server (please keyin IP or servername).
10. Memory Configuration.
11. Port/Domain Configuration.
0. Exit.

2.2.1 Installation for MariaDB, Java and VigorACS

Follow the steps listed below to install VigorACS under Linux:


1. Login Linux with root or the root privilege.
2. Download the ACS installation tar.bz2 package and extract it via below command:

```
#bzip2 -cd VigorACS_Unix_Like_XXXXXX_XXXXX.tar.bz2 | tar xvf -
```

or


```
#tar -jxv -f VigorACS_Unix_Like_XXXXXX_XXXXX.tar.bz2
```
3. Decompress the setup packages

```
bzip2 -cd VigorACS_Unix_Like_XXXXXX_XXXXX.tar.bz2 |tar xvf -
```

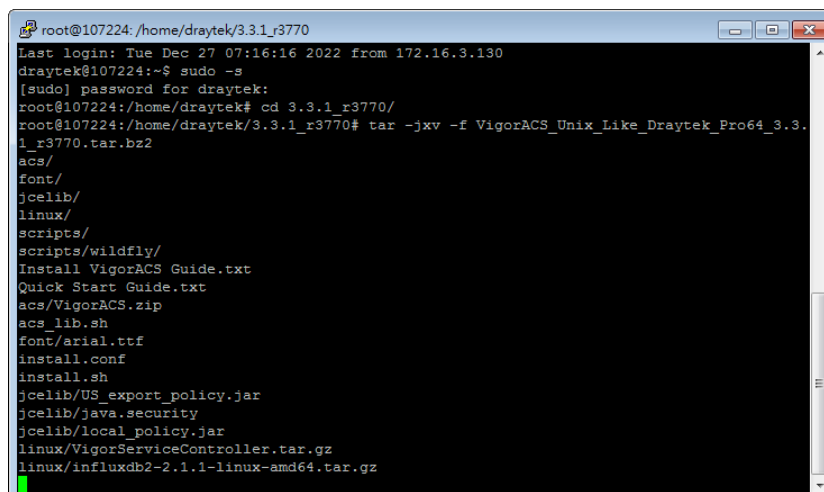

```
root@107224: /home/draytek/3.3.1_r3770
Last login: Tue Dec 27 07:16:16 2022 from 172.16.3.130
draytek@107224:~$ sudo -s
[sudo] password for draytek:
root@107224:/home/draytek# cd 3.3.1_r3770/
root@107224:/home/draytek/3.3.1_r3770# tar -jxv -f VigorACS_Unix_Like_Draytek_Pro64_3.3.1_r3770.tar.bz2
acs/
font/
jcelib/
linux/
scripts/
scripts/wildfly/
Install VigorACS Guide.txt
Quick Start Guide.txt
acs/VigorACS.zip
acs_lib.sh
font/arial.ttf
install.conf
install.sh
jcelib/US_export_policy.jar
jcelib/java.security
jcelib/local_policy.jar
linux/VigorServiceController.tar.gz
linux/influxdb2-2.1.1-linux-amd64.tar.gz
```

4. Change the permissions mode of install.sh and uninstall.sh.
`chmod 755 ./install.sh`
`chmod 755 ./uninstall.sh`
5. Enter "y" to execute ./install.sh installation file.
6. Later, the system will ask to create vigoracs, enter "y" to proceed.

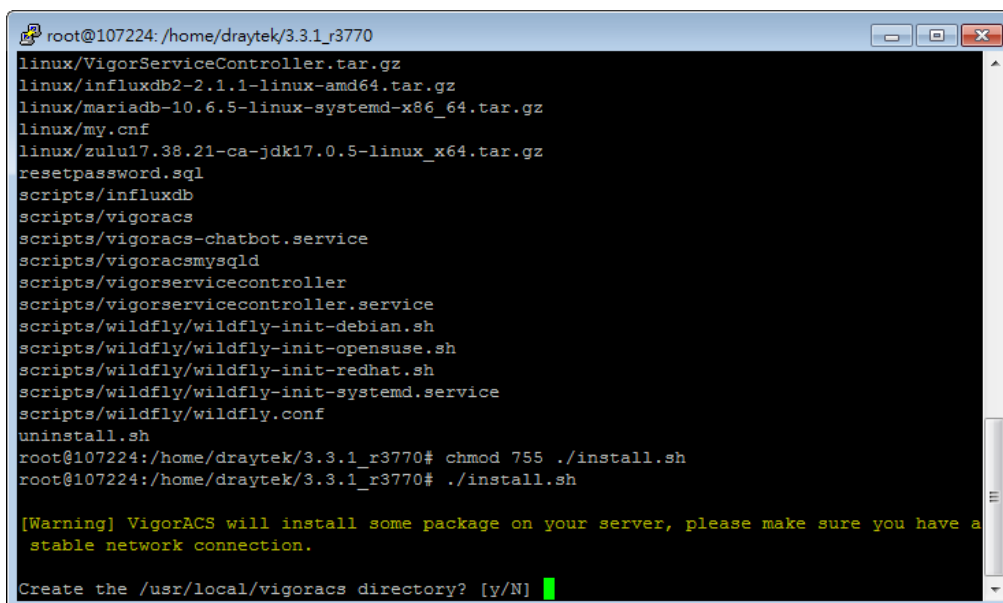

```


root@107224:/home/draytek/3.3.1_r3770
linux/VigorServiceController.tar.gz
linux/influxdb2-2.1.1-linux-amd64.tar.gz
linux/mariadb-10.6.5-linux-systemd-x86_64.tar.gz
linux/my.cnf
linux/zulu17.38.21-ca-jdk17.0.5-linux_x64.tar.gz
resetpassword.sql
scripts/influxdb
scripts/vigoracs
scripts/vigoracs-chatbot.service
scripts/vigoracsmysqld
scripts/vigorservicecontroller
scripts/vigorservicecontroller.service
scripts/wildfly/wildfly-init-debian.sh
scripts/wildfly/wildfly-init-opensuse.sh
scripts/wildfly/wildfly-init-redhat.sh
scripts/wildfly/wildfly-init-systemd.service
scripts/wildfly/wildfly.conf
uninstall.sh
root@107224:/home/draytek/3.3.1_r3770# chmod 755 ./install.sh
root@107224:/home/draytek/3.3.1_r3770# ./install.sh

[Warning] VigorACS will install some package on your server, please make sure you have a
stable network connection.

Create the /usr/local/vigoracs directory? [y/N]

```

7. Next, the system will ask you to install xfonts-base, fontconfig and libncurses5, just enter "y" to proceed.

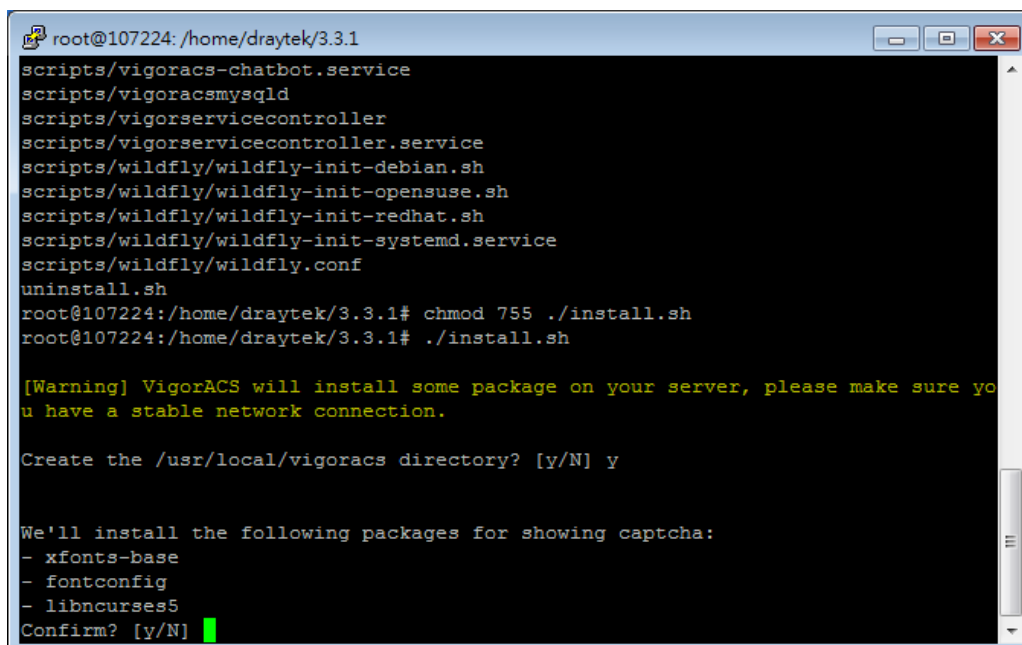

```

root@107224:/home/draytek/3.3.1
scripts/vigoracs-chatbot.service
scripts/vigoracsmysqld
scripts/vigorservicecontroller
scripts/vigorservicecontroller.service
scripts/wildfly/wildfly-init-debian.sh
scripts/wildfly/wildfly-init-opensuse.sh
scripts/wildfly/wildfly-init-redhat.sh
scripts/wildfly/wildfly-init-systemd.service
scripts/wildfly/wildfly.conf
uninstall.sh
root@107224:/home/draytek/3.3.1# chmod 755 ./install.sh
root@107224:/home/draytek/3.3.1# ./install.sh


[Warning] VigorACS will install some package on your server, please make sure yo
u have a stable network connection.

Create the /usr/local/vigoracs directory? [y/N] y

We'll install the following packages for showing captcha:
- xfonts-base
- fontconfig
- libncurses5
Confirm? [y/N]

```

8. Next, please select the item number which you want to execute. Note that VigorACS supports Linux OS. The program will detect the system you have in your computer.

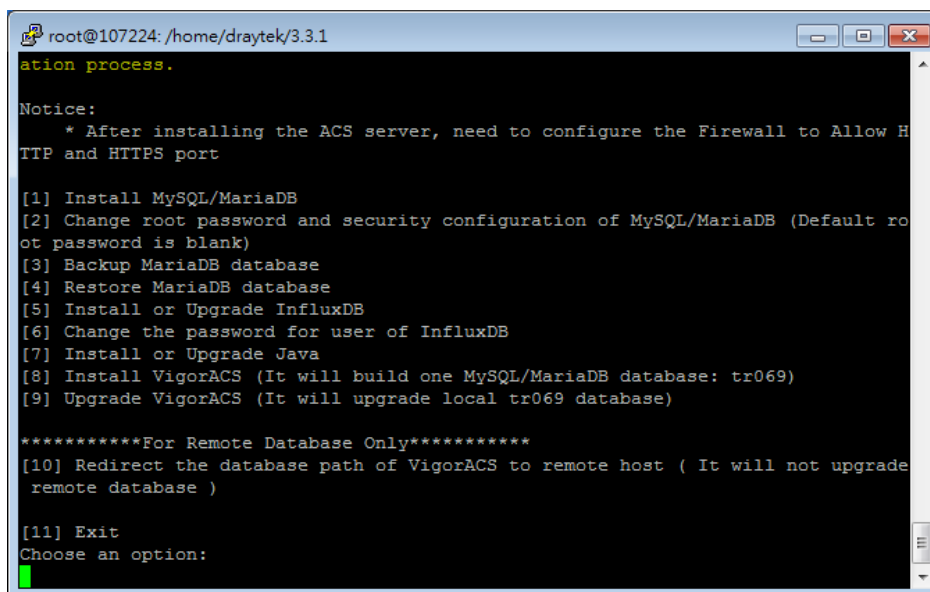A screenshot of a terminal window titled 'root@107224: /home/draytek/3.3.1'. The terminal displays a menu for the VigorACS installation process. The menu items are numbered 1 through 11. Item 1 is 'Install MySQL/MariaDB'. Item 2 is 'Change root password and security configuration of MySQL/MariaDB (Default root password is blank)'. Item 3 is 'Backup MariaDB database'. Item 4 is 'Restore MariaDB database'. Item 5 is 'Install or Upgrade InfluxDB'. Item 6 is 'Change the password for user of InfluxDB'. Item 7 is 'Install or Upgrade Java'. Item 8 is 'Install VigorACS (It will build one MySQL/MariaDB database: tr069)'. Item 9 is 'Upgrade VigorACS (It will upgrade local tr069 database)'. There is a separator line '*****For Remote Database Only*****'. Item 10 is 'Redirect the database path of VigorACS to remote host (It will not upgrade remote database)'. Item 11 is 'Exit'. The prompt 'Choose an option:' is at the bottom, with a green cursor on the first line.

```
root@107224: /home/draytek/3.3.1
ation process.

Notice:
* After installing the ACS server, need to configure the Firewall to Allow HTTP and HTTPS port

[1] Install MySQL/MariaDB
[2] Change root password and security configuration of MySQL/MariaDB (Default root password is blank)
[3] Backup MariaDB database
[4] Restore MariaDB database
[5] Install or Upgrade InfluxDB
[6] Change the password for user of InfluxDB
[7] Install or Upgrade Java
[8] Install VigorACS (It will build one MySQL/MariaDB database: tr069)
[9] Upgrade VigorACS (It will upgrade local tr069 database)

*****For Remote Database Only*****
[10] Redirect the database path of VigorACS to remote host ( It will not upgrade remote database )
[11] Exit
Choose an option:
```

- (1) Install MySQL/MariaDB
 - (2) Change root password and security configuration of MySQL/MariaDB
 - (3) Backup MariaDB database
 - (4) Restore MariaDB database
 - (5) Install or Upgrade InfluxDB
 - (6) Change the password for user of InfluxDB
 - (7) Install or Upgrade Java
 - (8) Install VigorACS
 - (9) Upgrade VigorACS
 - (10) Redirect the database path of VigorACS to remote host
 - (11) Exit
- Choose an option :

 If your computer has installed MariaDB and java previously, ignore the installation of them. Otherwise, install all the required items (MariaDB, Java and VigorACS) for your system. Item number 6 is used to upgrade VigorACS, so it is not necessary for you to execute for the first time of installation.

9. Input 1 to install MariaDB first. Notice that it will setup blank as default password. You can change the password by using the following command.

```
#/usr/local/mysql/bin/mysqladmin --defaults-file=/usr/local/mysql/my.cnf -u root
password 'new password'
```

 The password set in this step is used for VigorACS 3 to login database.

```
root@107224: /home/draytek/3.3.1
* After installing the ACS server, need to configure the Firewall to Allow HTTP and HTTPS port

[1] Install MySQL/MariaDB
[2] Change root password and security configuration of MySQL/MariaDB (Default root password is blank)
[3] Backup MariaDB database
[4] Restore MariaDB database
[5] Install or Upgrade InfluxDB
[6] Change the password for user of InfluxDB
[7] Install or Upgrade Java
[8] Install VigorACS (It will build one MySQL/MariaDB database: tr069)
[9] Upgrade VigorACS (It will upgrade local tr069 database)

*****For Remote Database Only*****
[10] Redirect the database path of VigorACS to remote host ( It will not upgrade remote database )

[11] Exit
Choose an option:
1
[Install MariaDB]
Do you want to install mariadb ()? [y/N]
```

Follow the instructions on the screen to finish the MariaDB installation.

10. Input 5 to install InfluxDB.

```
root@107224: /home/draytek/3.3.1
Notice:
* After installing the ACS server, need to configure the Firewall to Allow HTTP and HTTPS port


[1] Install MySQL/MariaDB
[2] Change root password and security configuration of MySQL/MariaDB (Default root password is blank)
[3] Backup MariaDB database
[4] Restore MariaDB database
[5] Install or Upgrade InfluxDB
[6] Change the password for user of InfluxDB
[7] Install or Upgrade Java
[8] Install VigorACS (It will build one MySQL/MariaDB database: tr069)
[9] Upgrade VigorACS (It will upgrade local tr069 database)

*****For Remote Database Only*****
[10] Redirect the database path of VigorACS to remote host ( It will not upgrade remote database )

[11] Exit
Choose an option:
5
[Install/Upgrade InfluxDB]
Do you want to install influxdb2 (influxdb2-2.1.1)? [y/N]
```

Follow the instructions on the screen to finish the InfluxDB installation.

11. Input 7 to install Java.

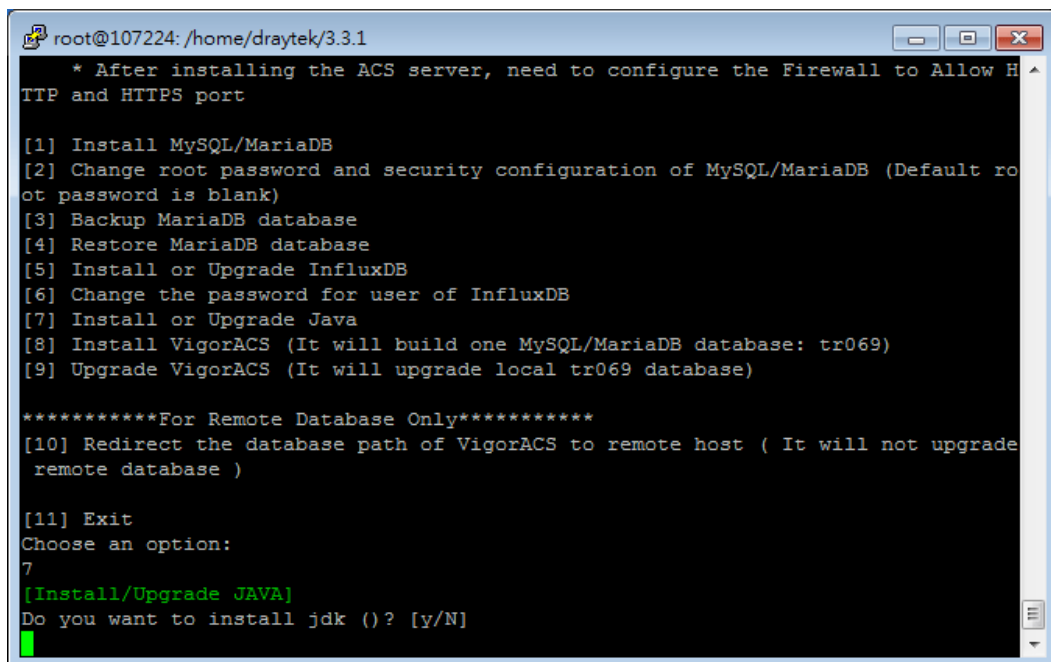

```
root@107224: /home/draytek/3.3.1
* After installing the ACS server, need to configure the Firewall to Allow HTTP and HTTPS port


[1] Install MySQL/MariaDB
[2] Change root password and security configuration of MySQL/MariaDB (Default root password is blank)
[3] Backup MariaDB database
[4] Restore MariaDB database
[5] Install or Upgrade InfluxDB
[6] Change the password for user of InfluxDB
[7] Install or Upgrade Java
[8] Install VigorACS (It will build one MySQL/MariaDB database: tr069)
[9] Upgrade VigorACS (It will upgrade local tr069 database)

*****For Remote Database Only*****
[10] Redirect the database path of VigorACS to remote host ( It will not upgrade remote database )

[11] Exit
Choose an option:
7
[Install/Upgrade JAVA]
Do you want to install jdk ()? [Y/N]
█
```

Follow the instructions on the screen to finish the Java installation.

12. Input 8 to install VigorACS. It is suggested to use ACS customized MariaDB database. When asked to enter MariaDB password, press "Enter" if you haven't changed the password via the command. Then, confirm that TR-069 database has been installed successfully.

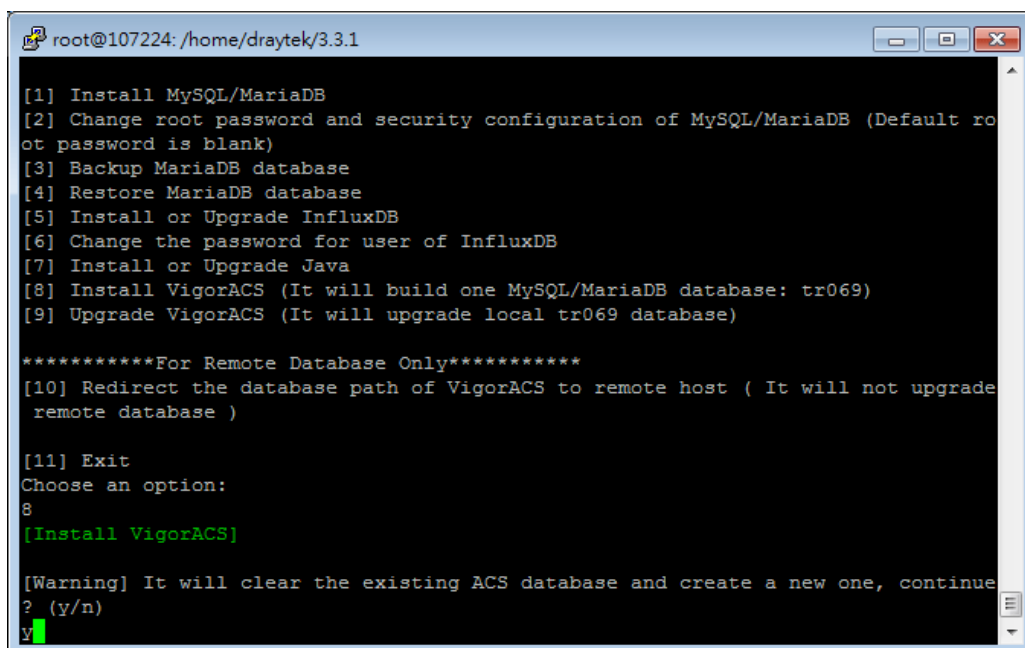

```
root@107224: /home/draytek/3.3.1

[1] Install MySQL/MariaDB
[2] Change root password and security configuration of MySQL/MariaDB (Default root password is blank)
[3] Backup MariaDB database
[4] Restore MariaDB database
[5] Install or Upgrade InfluxDB
[6] Change the password for user of InfluxDB
[7] Install or Upgrade Java
[8] Install VigorACS (It will build one MySQL/MariaDB database: tr069)
[9] Upgrade VigorACS (It will upgrade local tr069 database)

*****For Remote Database Only*****
[10] Redirect the database path of VigorACS to remote host ( It will not upgrade remote database )

[11] Exit
Choose an option:
8
[Install VigorACS]

[Warning] It will clear the existing ACS database and create a new one, continue? (y/n)
y
█
```

Wait and follow the instructions on the screen to finish the installation.

```
root@107224: /home/draytek/3.3.1_r3770
[4] Restore MariaDB database
[5] Install or Upgrade InfluxDB
[6] Change the password for user of InfluxDB
[7] Install or Upgrade Java
[8] Install VigorACS (It will build one MySQL/MariaDB database: tr069)
[9] Upgrade VigorACS (It will upgrade local tr069 database)

*****For Remote Database Only*****
[10] Redirect the database path of VigorACS to remote host ( It will not upgrade remote
database )

[11] Exit
Choose an option:
8
[Install VigorACS]

[Warning] It will clear the existing ACS database and create a new one, continue? (y/n)
y
Do you want to use remote/local database? (1: Local side database, 2: Remote side databa
se, Enter for Local side database)

Which Mysql do you want to use ? (1: ACS, 2: OS default, Enter for ACS mysql)

MySQL is running!!

remote database )

[11] Exit
Choose an option:
8
[Install VigorACS]

[Warning] It will clear the existing ACS database and create a new one, continue
? (y/n)
y
Do you want to use remote/local database? (1: Local side database, 2: Remote sid
e database, Enter for Local side database)

Which Mysql do you want to use ? (1: ACS, 2: OS default, Enter for ACS mysql)

MySQL is running!!
Enter the password of root of MySQL/MariaDB:
Do you want to test password now? [y/N] y


Access Database ... success

Start to install VigorACS ...
Start to install VigorACS Chatbot ...

root@107224: /home/draytek/3.3.1_r3770
- JAVA 11 will be a mandatory requirement to run the configuration in standalone
-secure.xml.
Choose an option:
Current JBoss Configuration: standalone.xml

Generate default tr069.keystore...
Generate default chatbot server.p12...
./supervisord/
./supervisord/Release.md
./supervisord/conf/
./supervisord/conf/vigorfrps.ini
./supervisord/log/
./supervisord/supervisor.conf
./supervisord/supervisord
./supervisord/vigor-service/
./supervisord/vigor-service/VigorFrps
./supervisord/vigor-service/vigorfrps.ini
After installing VigorACS, tr069 will be created automatically.

Create chatbot database ... success
Create tr069 database ...success
Start to upgrade tr069 table ...
upgrade db by /usr/local/vigoracs/VigorACS/version/vigoracs.6
```

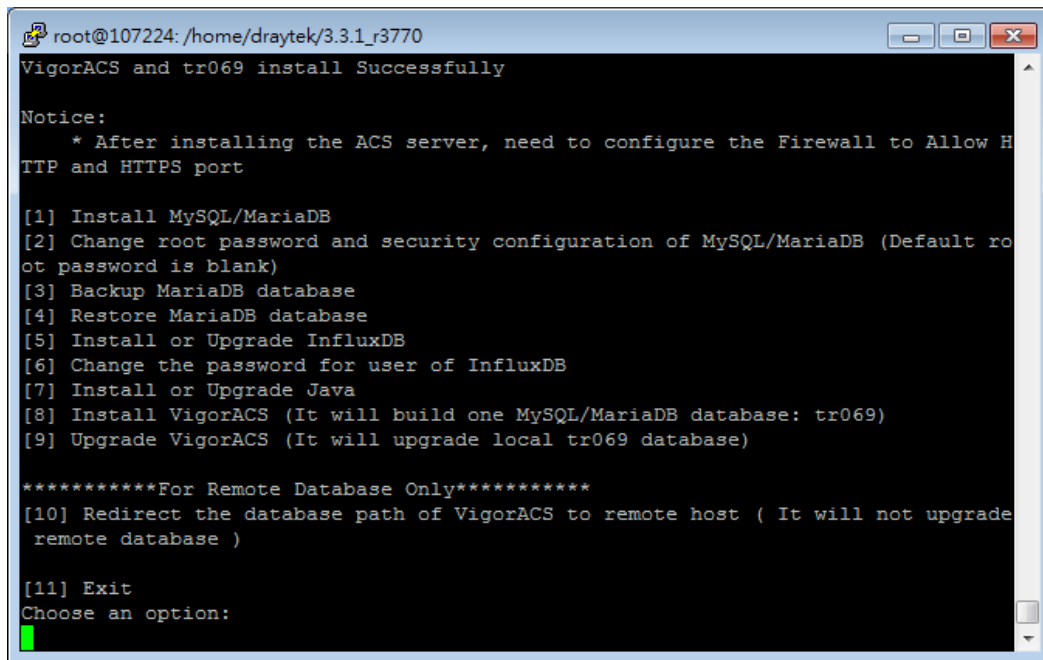

```
root@107224: /home/draytek/3.3.1_r3770
VigorACS and tr069 install Successfully

Notice:
  * After installing the ACS server, need to configure the Firewall to Allow HTTP and HTTPS port

[1] Install MySQL/MariaDB
[2] Change root password and security configuration of MySQL/MariaDB (Default root password is blank)
[3] Backup MariaDB database
[4] Restore MariaDB database
[5] Install or Upgrade InfluxDB
[6] Change the password for user of InfluxDB
[7] Install or Upgrade Java
[8] Install VigorACS (It will build one MySQL/MariaDB database: tr069)
[9] Upgrade VigorACS (It will upgrade local tr069 database)

*****For Remote Database Only*****
[10] Redirect the database path of VigorACS to remote host ( It will not upgrade remote database )

[11] Exit
Choose an option:
█
```


13. Input 11 to finish and exit the installation.

 Step 14 is required for establishing remote database only. You can ignore it while building local database.

To prevent port conflicts, we'll suggest that using other ports for HTTP and HTTPS instead of default 80 and 443.

2.2.2 StartMySQL/MariaDB Database

After installing VigorACS, mysql/mariadb daemon has started. You can check it using "`/usr/local/vigoracs//VigorACS/bin/vigoracs.sh`" instruction. Use the menu item 1/2 to start / shutdown mysql/mariadb.

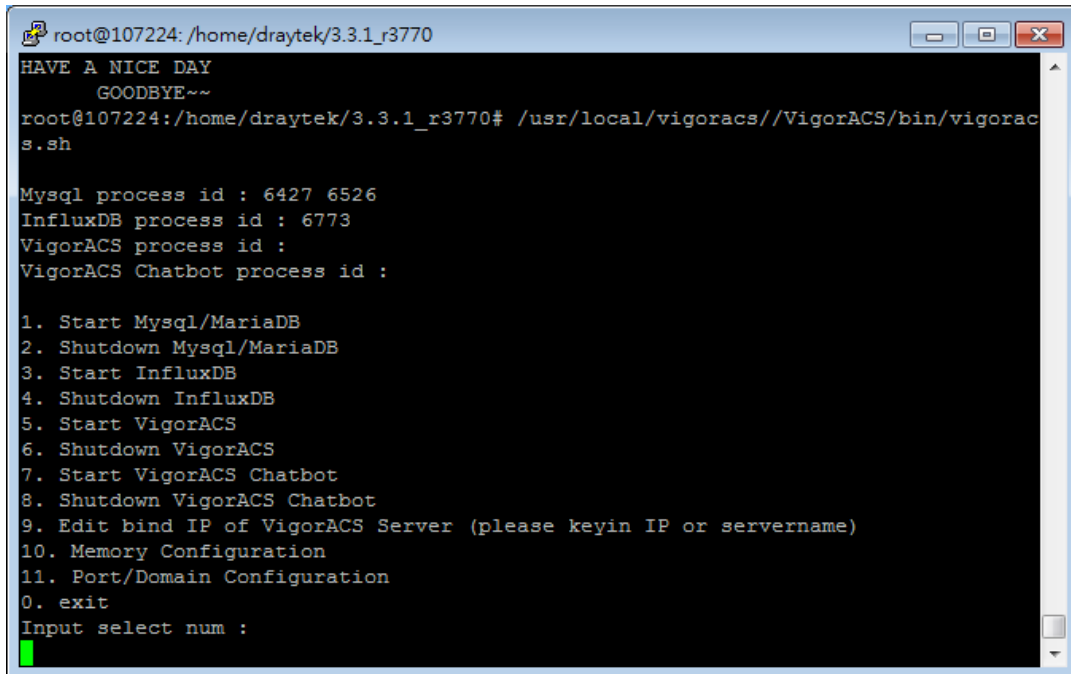


```
root@107224: /home/draytek/3.3.1_r3770
HAVE A NICE DAY
GOODBYE~~
root@107224:/home/draytek/3.3.1_r3770# /usr/local/vigoracs//VigorACS/bin/vigoracs.sh

Mysql process id : 6427 6526
InfluxDB process id : 6773
VigorACS process id :
VigorACS Chatbot process id :

1. Start Mysql/MariaDB
2. Shutdown Mysql/MariaDB
3. Start InfluxDB
4. Shutdown InfluxDB
5. Start VigorACS
6. Shutdown VigorACS
7. Start VigorACS Chatbot
8. Shutdown VigorACS Chatbot
9. Edit bind IP of VigorACS Server (please keyin IP or servername)
10. Memory Configuration
11. Port/Domain Configuration
0. exit
Input select num :
1
```

2.2.3 Start InfluxDB

After installing InfluxDB, access "`/usr/local/vigoracs//VigorACS/bin/vigoracs.sh`" and execute "`./vigoracs.sh`". Next, it is necessary to start InfluxDB for VigorACS. Select item 3 to start InfluxDB.

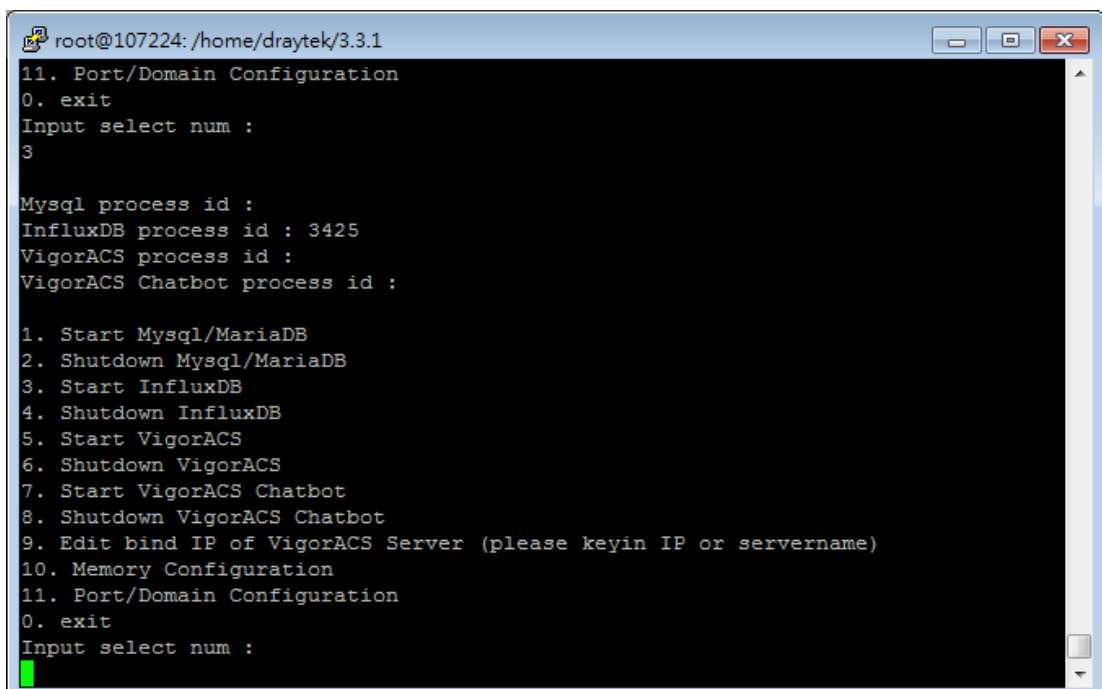


```
root@107224: /home/draytek/3.3.1
11. Port/Domain Configuration
0. exit
Input select num :
3

Mysql process id :
InfluxDB process id : 3425
VigorACS process id :
VigorACS Chatbot process id :

1. Start Mysql/MariaDB
2. Shutdown Mysql/MariaDB
3. Start InfluxDB
4. Shutdown InfluxDB
5. Start VigorACS
6. Shutdown VigorACS
7. Start VigorACS Chatbot
8. Shutdown VigorACS Chatbot
9. Edit bind IP of VigorACS Server (please keyin IP or servername)
10. Memory Configuration
11. Port/Domain Configuration
0. exit
Input select num :
3
```

2.2.4 Start VigorACS

After installing VigorACS, access “/usr/local/vigoracs//VigorACS/bin/vigoracs.sh” and select item 5 to start VigorACS.

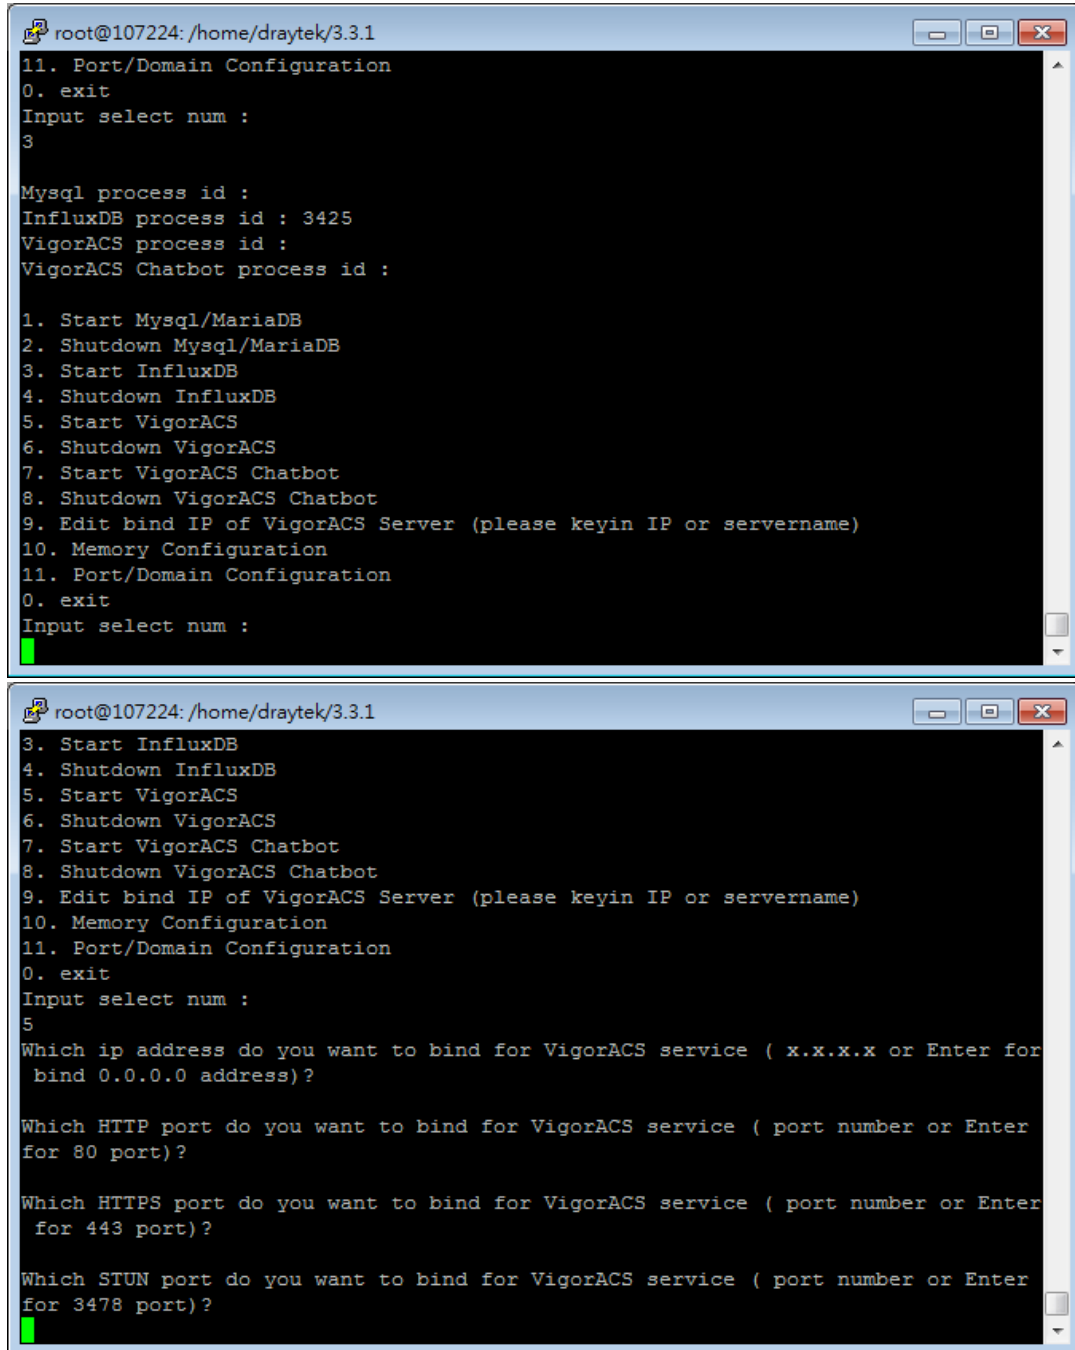

```
root@107224: /home/draytek/3.3.1
11. Port/Domain Configuration
0. exit
Input select num :
3

Mysql process id :
InfluxDB process id : 3425
VigorACS process id :
VigorACS Chatbot process id :

1. Start Mysql/MariaDB
2. Shutdown Mysql/MariaDB
3. Start InfluxDB
4. Shutdown InfluxDB
5. Start VigorACS
6. Shutdown VigorACS
7. Start VigorACS Chatbot
8. Shutdown VigorACS Chatbot
9. Edit bind IP of VigorACS Server (please keyin IP or servername)
10. Memory Configuration
11. Port/Domain Configuration
0. exit
Input select num :
```

```
root@107224: /home/draytek/3.3.1
3. Start InfluxDB
4. Shutdown InfluxDB
5. Start VigorACS
6. Shutdown VigorACS
7. Start VigorACS Chatbot
8. Shutdown VigorACS Chatbot
9. Edit bind IP of VigorACS Server (please keyin IP or servername)
10. Memory Configuration
11. Port/Domain Configuration
0. exit
Input select num :
5

Which ip address do you want to bind for VigorACS service ( x.x.x.x or Enter for
bind 0.0.0.0 address)?

Which HTTP port do you want to bind for VigorACS service ( port number or Enter
for 80 port)?

Which HTTPS port do you want to bind for VigorACS service ( port number or Enter
for 443 port)?

Which STUN port do you want to bind for VigorACS service ( port number or Enter
for 3478 port)?
```

```
root@107224: /home/draytek/3.3.1_r3770
bind 0.0.0.0 address)?

Which HTTP port do you want to bind for VigorACS service ( port number or Enter
for 80 port)?

Which HTTPS port do you want to bind for VigorACS service ( port number or Enter
for 443 port)?

Which STUN port do you want to bind for VigorACS service ( port number or Enter
for 3478 port)?

Which syslog port do you want to bind for VigorACS service ( port number or Ente
r for 514 port)?

Which Netflow port do you want to bind for VigorACS service ( port number or Ent
er for 20314 port)?

How many memory do you want to set for VigorACS service? (Enter for default MAX
Memory is 1024, MIN Memory is 900 MB)
MAX Memory What you want? (Unit: MB)

MIN Memory What you want? (Unit: MB)

MAX Memory What you want? (Unit: MB)

MIN Memory What you want? (Unit: MB)

Mysql process id : 6427 6526
InfluxDB process id : 6773
VigorACS process id : 8884 9063
VigorACS Chatbot process id :


1. Start Mysql/MariaDB
2. Shutdown Mysql/MariaDB
3. Start InfluxDB
4. Shutdown InfluxDB
5. Start VigorACS
6. Shutdown VigorACS
7. Start VigorACS Chatbot
8. Shutdown VigorACS Chatbot
9. Edit bind IP of VigorACS Server (please keyin IP or servername)
10. Memory Configuration
11. Port/Domain Configuration
0. exit
Input select num :
```

If you ever reboot the machine after installing VigorACS, just select item 1 to start mysql/mariadb first. Then, select item 5 to start VigorACS.

2.2.5 Start VigorACS Chatbot

Activate the chatbot server. The user account can check general information of VigorACS server through specific mobile phone device and/or PC.

Select item 7 to start VigorACS Chatbot.

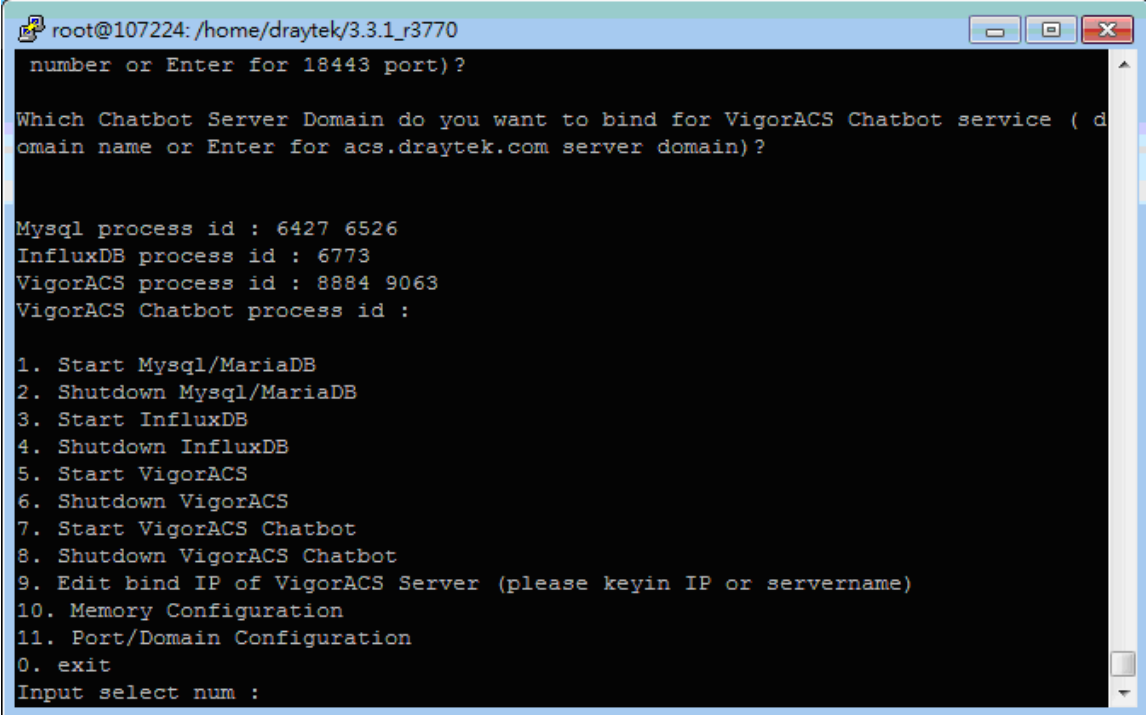


```
root@107224: /home/draytek/3.3.1_r3770
number or Enter for 18443 port)?

Which Chatbot Server Domain do you want to bind for VigorACS Chatbot service ( d
omain name or Enter for acs.draytek.com server domain)?

Mysql process id : 6427 6526
InfluxDB process id : 6773
VigorACS process id : 8884 9063
VigorACS Chatbot process id :

1. Start Mysql/MariaDB
2. Shutdown Mysql/MariaDB
3. Start InfluxDB
4. Shutdown InfluxDB
5. Start VigorACS
6. Shutdown VigorACS
7. Start VigorACS Chatbot
8. Shutdown VigorACS Chatbot
9. Edit bind IP of VigorACS Server (please keyin IP or servername)
10. Memory Configuration
11. Port/Domain Configuration
0. exit
Input select num :
```

Later, the VigorACS Chatbot process ID will be shown on the screen.

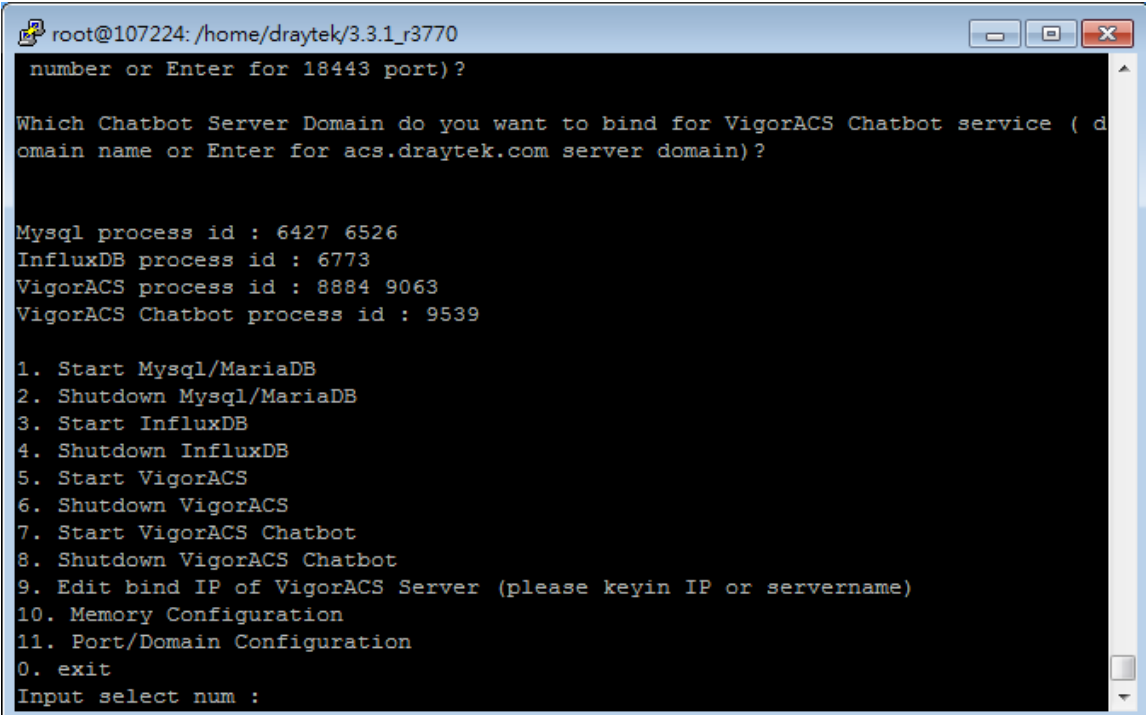

```
root@107224: /home/draytek/3.3.1_r3770
number or Enter for 18443 port)?

Which Chatbot Server Domain do you want to bind for VigorACS Chatbot service ( d
omain name or Enter for acs.draytek.com server domain)?

Mysql process id : 6427 6526
InfluxDB process id : 6773
VigorACS process id : 8884 9063
VigorACS Chatbot process id : 9539

1. Start Mysql/MariaDB
2. Shutdown Mysql/MariaDB
3. Start InfluxDB
4. Shutdown InfluxDB
5. Start VigorACS
6. Shutdown VigorACS
7. Start VigorACS Chatbot
8. Shutdown VigorACS Chatbot
9. Edit bind IP of VigorACS Server (please keyin IP or servername)
10. Memory Configuration
11. Port/Domain Configuration
0. exit
Input select num :
```

2.2.6 Edit VigorACS IP

When starting the VigorACS at first time on Solaris or Linux, startup program will ask you input Server IP or input Enter key by using the IP address of the host. Once you input the IP address, VigorACS will keep it on startway.txt. Next time, if you want to change it, you can select item 9 to edit startway.txt using vi editor.

2.3 Registering VigorACS


For the first time to activate VigorACS, the system will ask you to register VigorACS onto DrayTek MyVigor server. Refer to the following sections to register VigorACS on different platforms.

-
-  While installing VigorACS, install program will register MySQL/MariaDB to Windows Service. MySQL/MariaDB will startup automatically after installing VigorACS or rebooting system. Normally, you don't need to worry about this step on Windows. But if you find any problems on VigorACS, you should check mysql/mariadb first. Please go to Windows Service check the MySQL/MariaDB Service starts or not.
- After installing VigorACS, the software will startup automatically. Normally, you don't need to worry about this step on Windows. But, if you find any problem on VigorACS, you could shut down VigorACS and start VigorACS again.
-

2.3.1 Registration for VigorACS via Windows Platform

Below shows the steps to register VigorACS:


1. Login VigorACS. Use a web browser and enter "*localhost:portnumber*". Note that the port number must be the one defined for HTTP and HTTPS port while installing VigorACS. For example, if HTTPS is defined as 8011, then the URL will be "*localhost:8011*".
2. The login page of VigorACS will be shown as the following. Please enter "**root**" as user name and "**admin123**" as password and enter the authentication code. Then click **Login**.

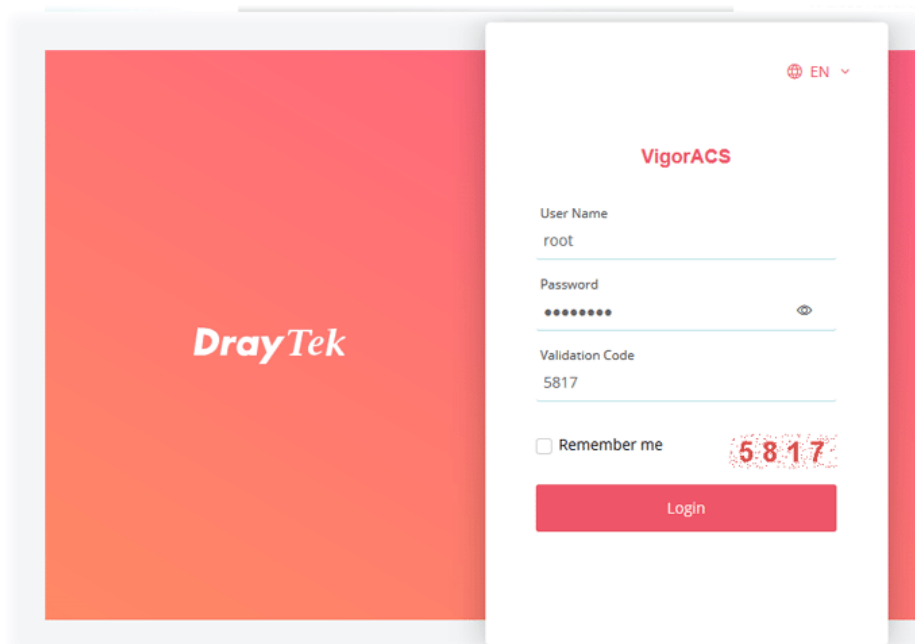


The image shows the VigorACS login interface. On the left is a large red-to-orange gradient rectangle with the 'DrayTek' logo in white. On the right is a white login form with a red header bar containing a globe icon, 'EN', and a dropdown arrow. The form title is 'VigorACS'. It contains four input fields: 'User Name' with 'root', 'Password' with masked characters and a toggle icon, 'Validation Code' with '5817', and a 'Remember me' checkbox. Below the inputs is a red 'Login' button. A red stamp with the code '5817' is visible next to the validation code field.

 "root" and "admin123" are default settings.

3. A License Error dialog appears as follows. Simply click **Active**.

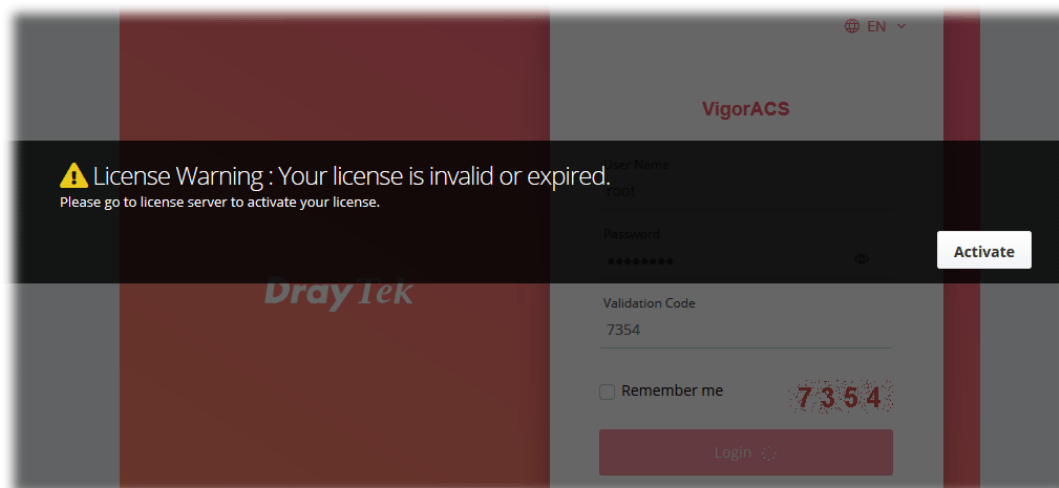


4. A login page for MyVigor web site will be popped up automatically. Type your account (user name) and password in this page. Check the box of "I'm not a robot". Then, click **Login**.

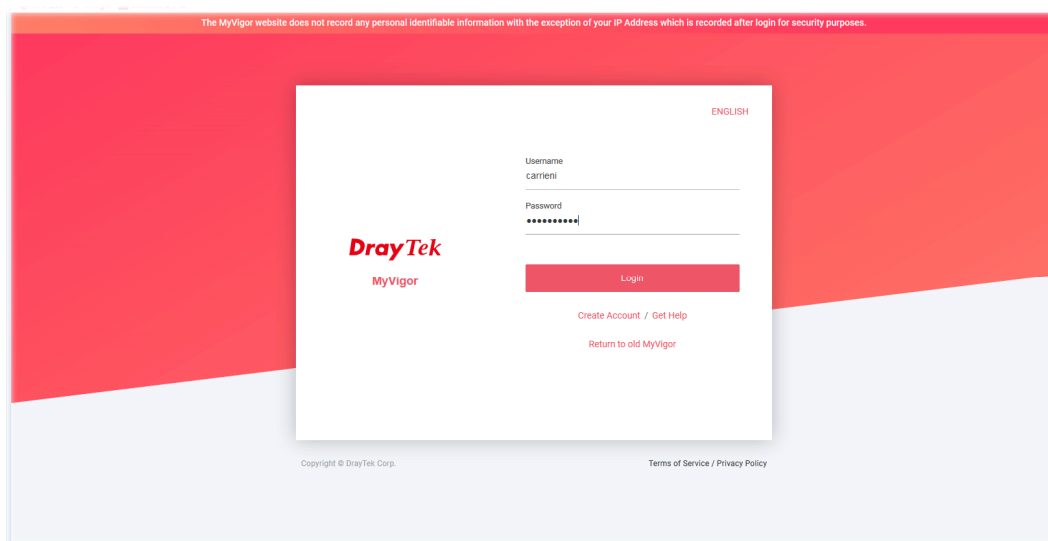

 If you do not have any account, simply click **Create Account** to create a new one for using the service provided by MyVigor web site.

5. MyVigor will verify and authenticate if the user account you typed is allowed to access into the web site. If yes, the following screen will appear. Enter a nickname for VigorACS and click **Submit**.

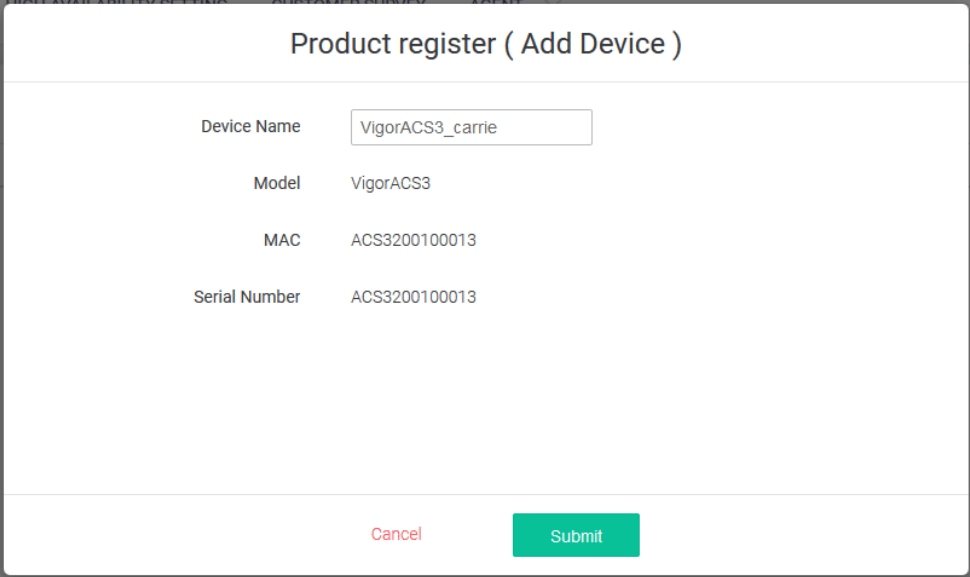


The image shows a modal window titled "Product register (Add Device)". It contains a form with the following fields:


Field	Value
Device Name	VigorACS3_carrie
Model	VigorACS3
MAC	ACS3200100013
Serial Number	ACS3200100013

At the bottom of the form, there are two buttons: "Cancel" (in red text) and "Submit" (in a green box).

6. The information related to VigorACS has been added to the database and has been registered to *myvigor* website successfully. Click **Activate License**.

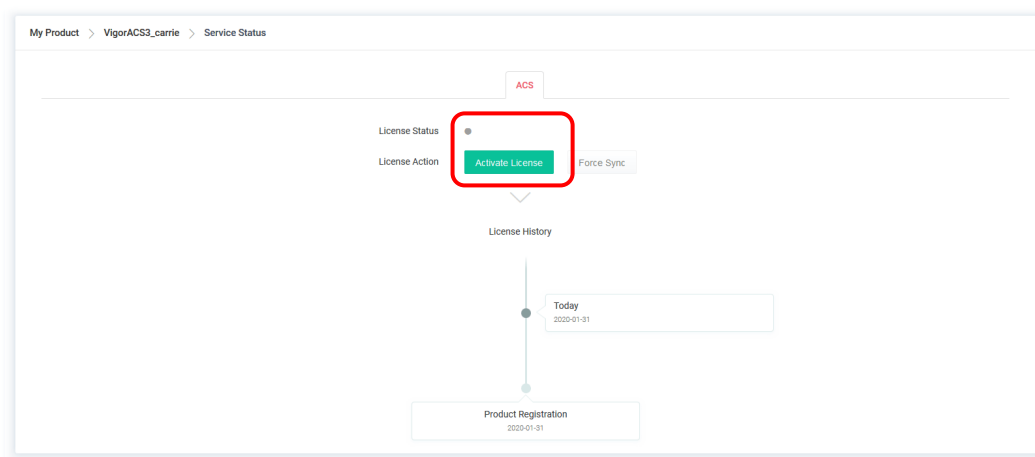

7. When the following page appears, click **Accept**.

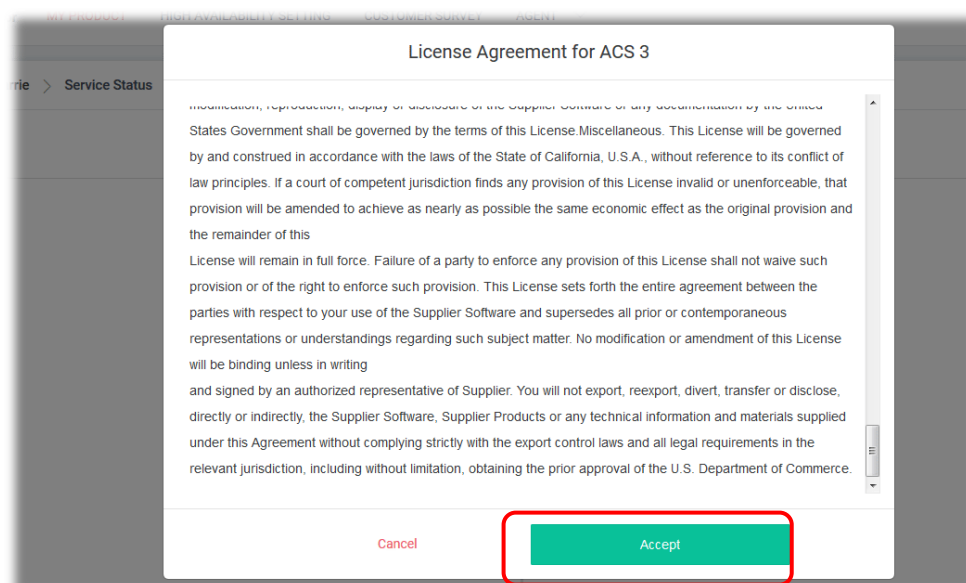


License Agreement for ACS 3

indication, reproduction, display or disclosure of the Supplier Software or any documentation by the United States Government shall be governed by the terms of this License. Miscellaneous. This License will be governed by and construed in accordance with the laws of the State of California, U.S.A., without reference to its conflict of law principles. If a court of competent jurisdiction finds any provision of this License invalid or unenforceable, that provision will be amended to achieve as nearly as possible the same economic effect as the original provision and the remainder of this License will remain in full force. Failure of a party to enforce any provision of this License shall not waive such provision or of the right to enforce such provision. This License sets forth the entire agreement between the parties with respect to your use of the Supplier Software and supersedes all prior or contemporaneous representations or understandings regarding such subject matter. No modification or amendment of this License will be binding unless in writing and signed by an authorized representative of Supplier. You will not export, reexport, divert, transfer or disclose, directly or indirectly, the Supplier Software, Supplier Products or any technical information and materials supplied under this Agreement without complying strictly with the export control laws and all legal requirements in the relevant jurisdiction, including without limitation, obtaining the prior approval of the U.S. Department of Commerce.

Cancel Accept

8. Make sure the registration date of VigorACS. Click **Next**.

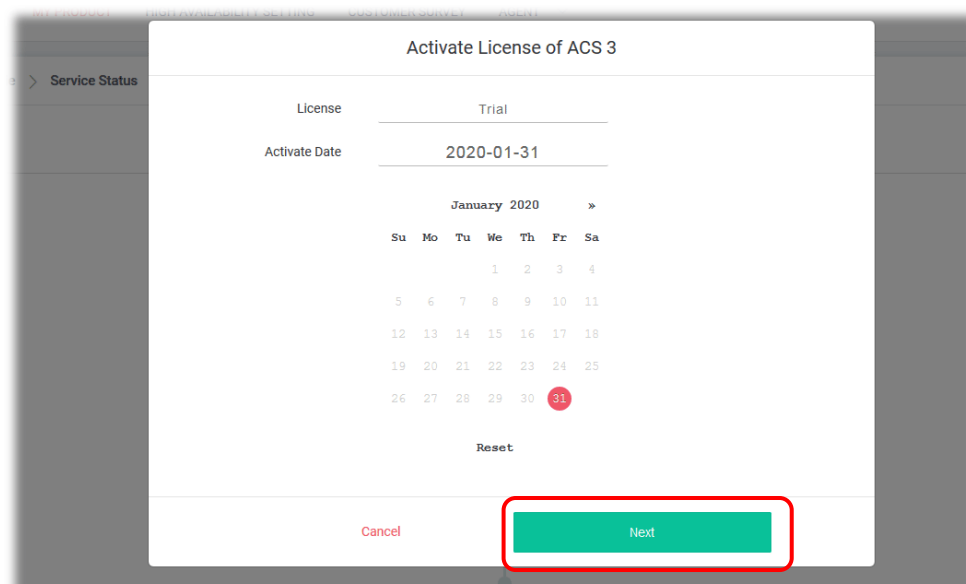

Activate License of ACS 3

License	Trial
Activate Date	2020-01-31


January 2020 »

Su	Mo	Tu	We	Th	Fr	Sa
			1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	

Reset

Cancel Next

9. Confirm the content and click **Activate**.

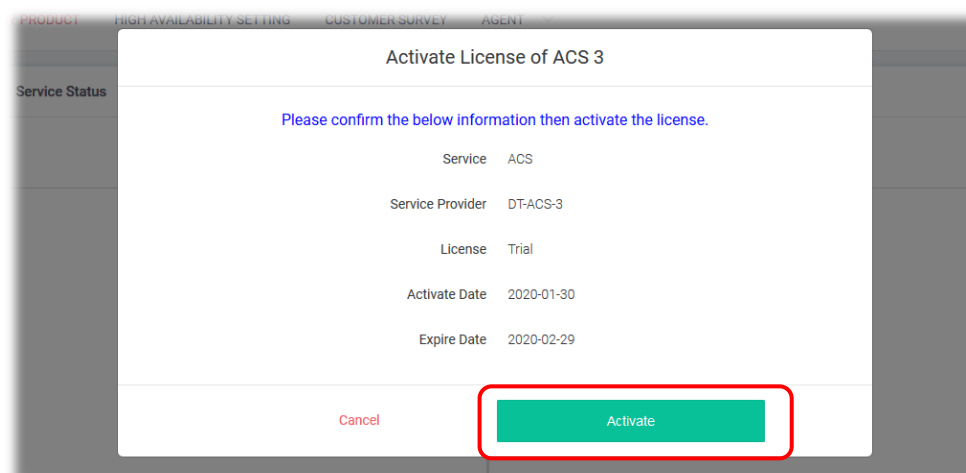


Activate License of ACS 3

Please confirm the below information then activate the license.


Service	ACS
Service Provider	DT-ACS-3
License	Trial
Activate Date	2020-01-30
Expire Date	2020-02-29

Cancel Activate


10. When the License Information page appears, the service is ready for you to use. Click **Login to ACS** to use VigorACS service.

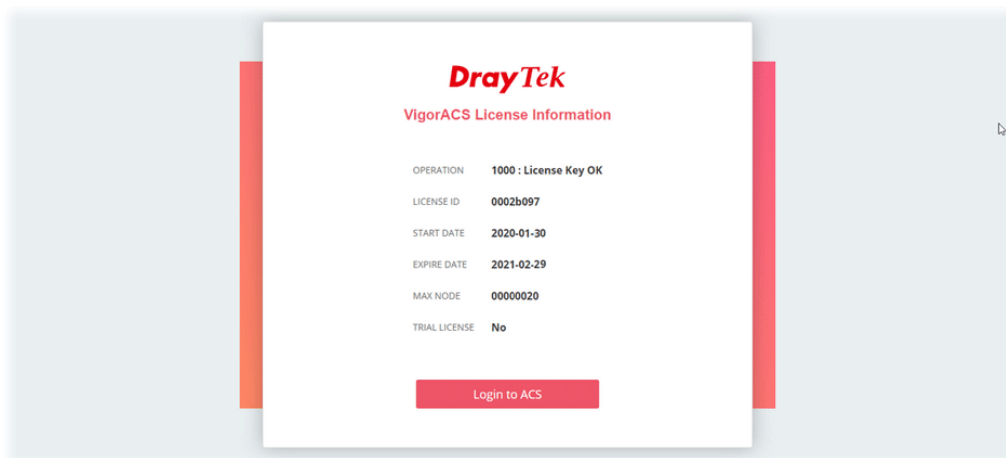

11. The login page will appear as follows. Type the default settings of User Name (root) and Password (admin123) and type the authentication code. Then, click **Login**.

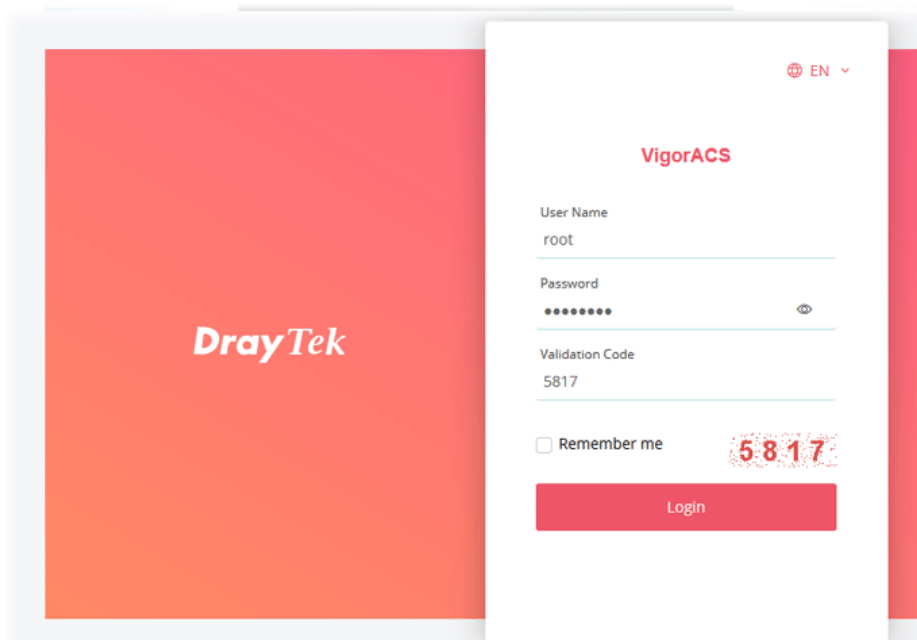

12. Now, the main screen of VigorACS will be shown as follows.

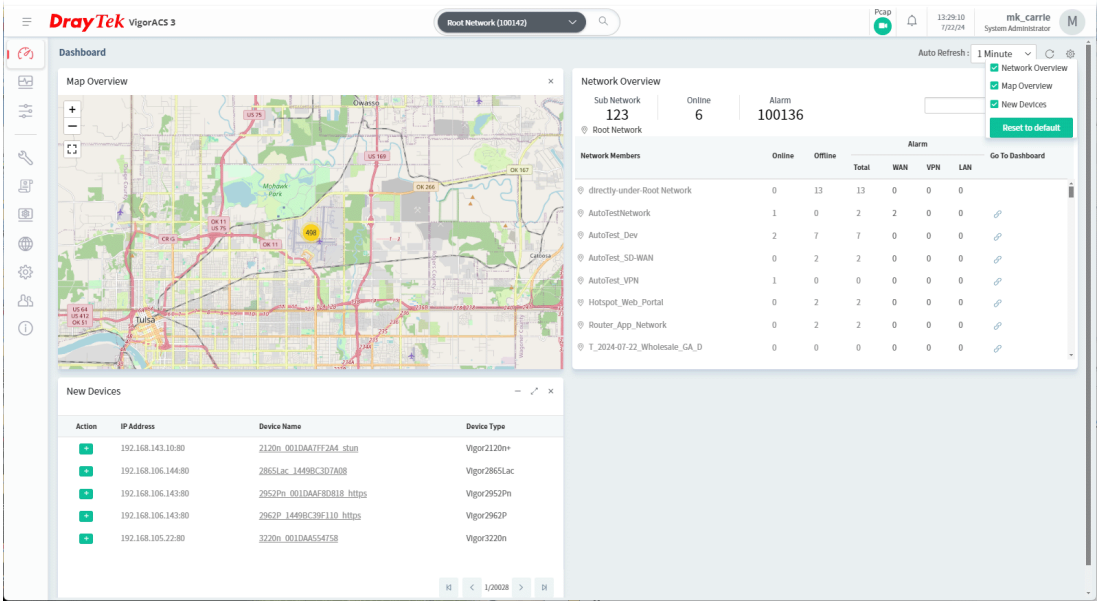

2.3.2 Troubleshooting for Unstable CPE Status

In some cases, the online status of CPE is unstable, which displayed offline when it is online. Check the following if you meet such kind of problem.



- **Allow TR-069 server access from the Internet**
Please make sure you have enabled the TR-069 server remote access from System Maintenance >> Management of CPE WebUI if your ACS server is on the Internet/WAN side.

System Maintenance >> Management

IPv4 Management Setup	IPv6 Management Setup	LAN Access Setup
Router Name DrayTek		
☐ Default: Disable Auto-Logout ☐ Enable Validation Code in Internet/LAN Access Note: IE8 and below version does NOT support DrayOS CAPTCHA auth code.		
Internet Access Control		
☒ Allow management from the Internet		
Domain name allowed		
☐ FTP Server ☐ HTTP Server ☐ Enforce HTTPS Access ☒ HTTPS Server ☐ Telnet Server ☒ TR069 Server ☐ SSH Server		
Management Port Setup		
☒ User Define Ports ☐ Default Ports		
Telnet Port 23 (Default: 23)		
HTTP Port 80 (Default: 80)		
HTTPS Port 443 (Default: 443)		
FTP Port 21 (Default: 21)		
TR069 Port 8069 (Default: 8069)		
SSH Port 22 (Default: 22)		
Note: Ports 8001 and 8043 are used for Hotspot Web Portal.		
Brute Force Protection		
☐ Enable brute force login protection		

● Enable Periodic Inform

The periodic inform option should be enabled from System Maintenance >> TR-069 of CPE WebUI. It is recommended to configure the 900 seconds as the inform interval. Sending inform too frequently may increase the loading of the ACS server.

CPE Client

Protocol ☒ HTTP ☐ HTTPS

URL

Port

Username

Password

Note: Please enable TR-069 server to allow access from Internet on [System Maintenance >> Management](#) page.

Periodic Inform Settings

☒ Enable ☐ Disable

Time Interval second(s)

Apply Settings to APs/Switches

☐ Enable ☒ Disable

AP/Switches Password

☐ AP/Switches Password

OK Clear

● Check TR-069 authentication

There are two sets of authentication info displayed on the CPE TR-069 setting page, which have different meanings.

– Register to the network of VigorACS 3

ACS will check the username and password fields from the TR-069 setting and assign to the corresponding network group.



VigorACS3

Network Management

Setting

Map

Search by Device ID/Name/Model/MAC/IP Address

Root Network(1)

3220n_00120A054758

General Settings

Network ID: 2

Name: Root Network

Location:

Username: acs

Password: *****

Save

CPE

System Maintenance >> TR-069 Setting

ACS and CPE Settings

Reporting Configuration

Export Parameters

TR-069 ☐ Disable ☒ Enable

Primary ACS Server

ACS Server On: Internet

☒ Enable TR069 Server on System Maintenance >> Management >> Internet Access Control

URL:

Wizard

Username: acs

Password: *****


STUN Settings

Server Address:

Enable ☒ Disable ☐

- Get CPE information

The authentication is required while ACS initiates the connection to CPE for information requested. The username and password between System Maintenance >> TR-069 >> CPE client (within CPE's GUI) and Network Management >> Device (on ACS) should be the same.

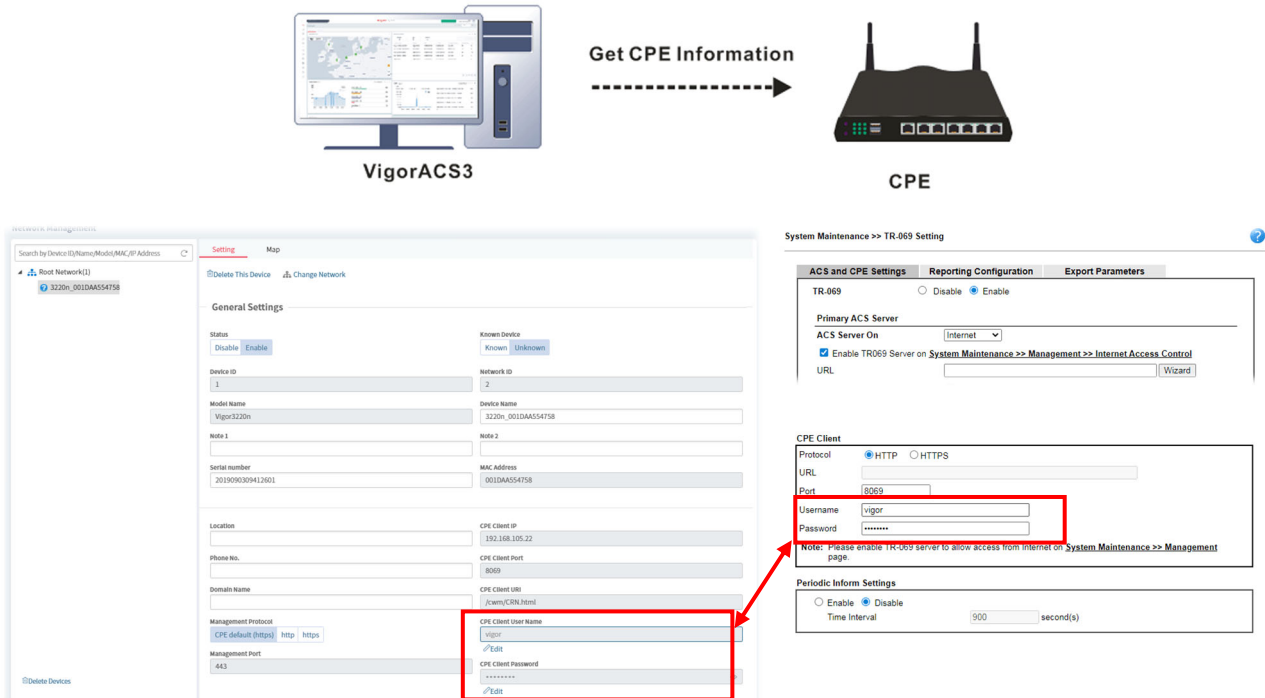

- **Check STUN setting**

If the CPE is behind NAT, do not forget to enable the STUN setting. Also, the STUN server is only allowed to use our ACS server. Please DO NOT use the 3rd party STUN server.

- **Check the ACL setting**

Make sure the IP of ACS server is also added into your access list once you enable it.


Access List from the Internet			CVM Access Control	
☒ Apply Access List to PING			☐ CVM Port	8000 (Default: 8000)
List Type	Index	Description	☐ CVM SSL Port	8443 (Default: 8443)
1	1-acs	11.22.33.44/255.255.255.255		
2	IP Object	None		
3	IP Object	None		
4	IP Object	None		
5	IP Object	None		
6	IP Object	None		
7	IP Object	None		
8	IP Object	None		
9	IP Object	None		
10	IP Object	None		

AP Management	
☒ Enable AP Management	
☒ Device Management	
☐ Respond to external device	

● **Check the firewall on ACS server**

Make sure your ACS server has correct firewall setting which allows those incoming traffic:


- HTTP port (Default tcp port 80)
- HTTPS port (Default tcp port 443)
- STUN port (Default udp port 3478)

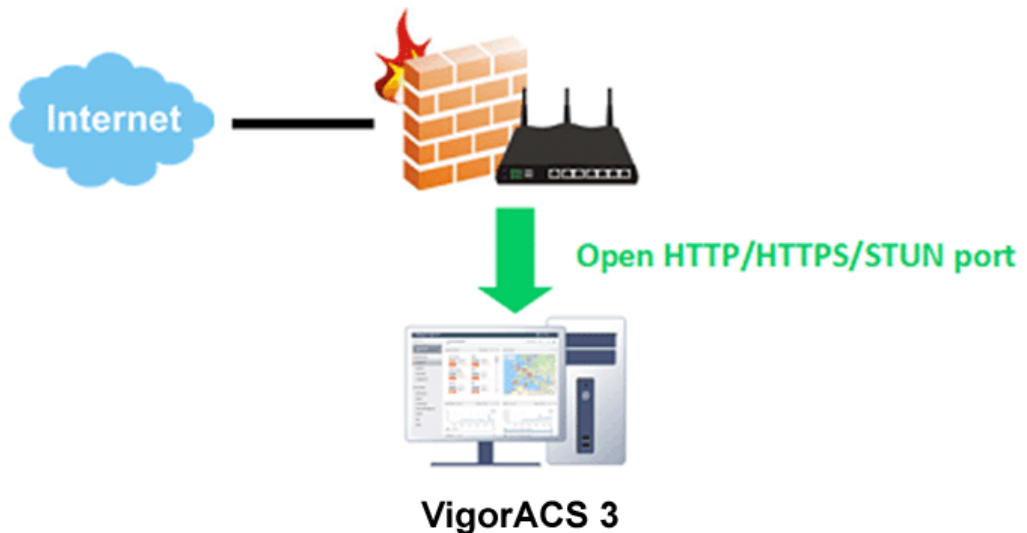


Chapter 3 Getting Started

3.1 Accessing Web Page of VigorACS

1. Login VigorACS. Use a web browser and type "*localhost:portnumber*". Note that the port number must be the one defined for HTTP and HTTPS port while installing VigorACS. For example, if HTTPS is defined as 8011, then the URL will be "*localhost:8011*".

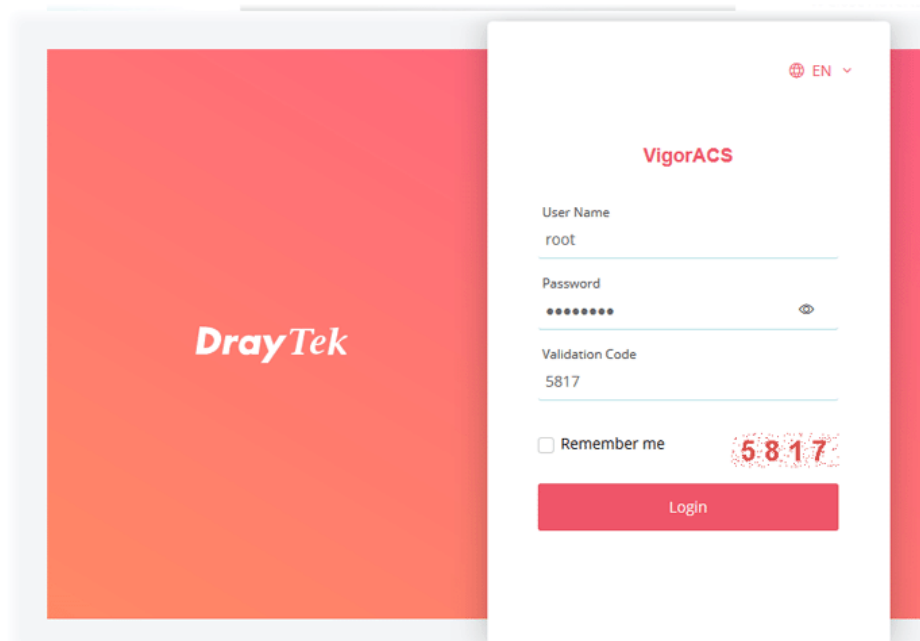


2. After clicking **Login**, main screen of VigorACS 3 will be shown as below.

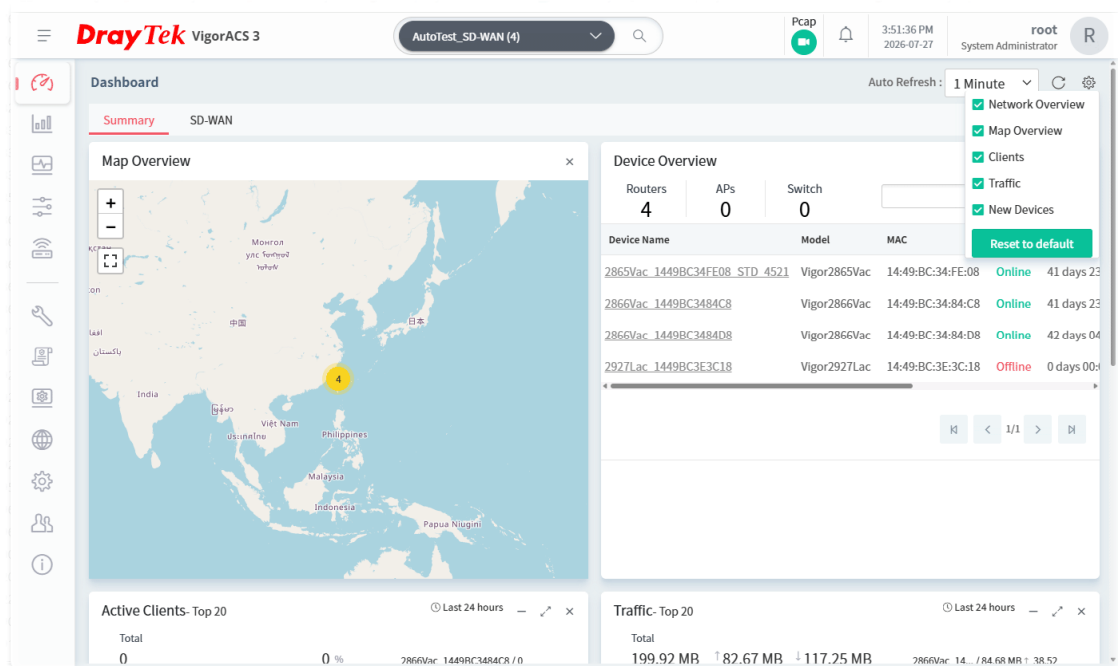

3.2 Dashboard

3.2.1 Dashboard for Root Network

The Dashboard displays general information and quick overview for all the devices (CPE, Access Point) managed by VigorACS.

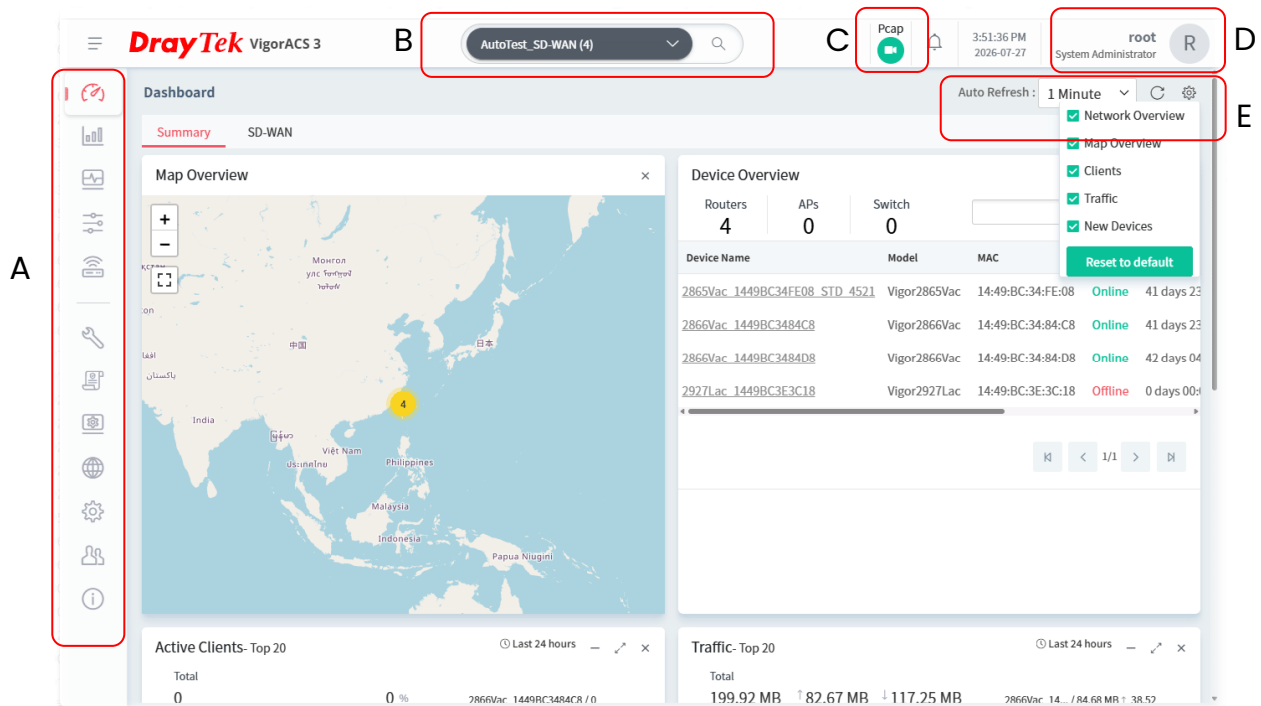

A: Menu Bar – Display the menu items related to the network.

B: Display Tab – Display current selected item, e.g., root network, group network and CPE model. In this page, the Root Network is selected.

C: Capture Packets – Offer options to view what packets that VigorACS server transmits or receives. To enable the function, open System>>System Parameter and choose True for ID number 81: PacketCaptureTool.


D: Selections – Display current used account and offer selections for setting password, two-factor authentication, manage notification, theme change and logout.

E: Auto Refresh, Manual Refresh, and Widget – For the widget, there are six display views to select, including Network Overview, Map Overview, New Devices and Reset to default. Only the selected one(s) will be displayed on the dashboard.

Overview – There are three types (Network Overview, Map Overview, New Devices) of overview under the Root Network.

3.2.2 Dashboard for a Network Group

Under the selected network group (e.g., RD8 in this case), there are two tabs to choose. One is Summary; the other is SD-WAN.

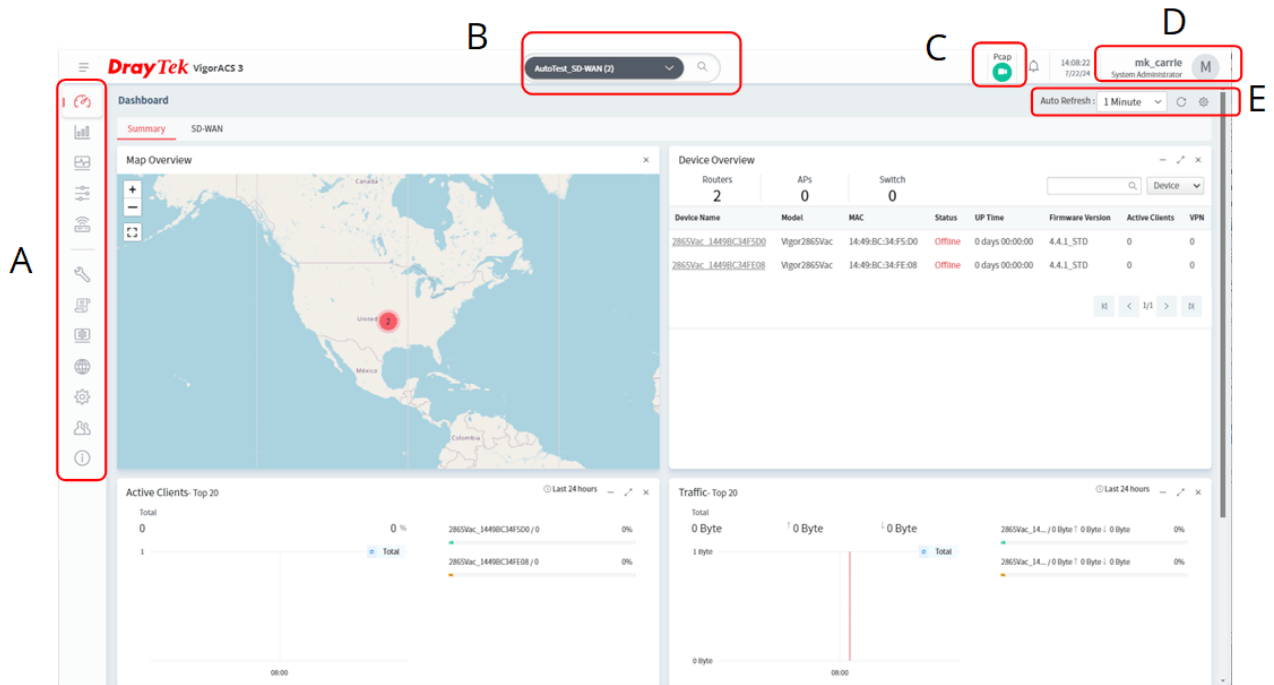

A: Menu Bar - Display the menu items related to the network.

B: Display Tab - Display current selected item, e.g., root network, group network and CPE model. In this page, the group network (e.g., RD8) is selected.

C: Capture Packets - Offer options to view what packets that VigorACS server transmits or receives. To enable the function, open System>>System Parameter and choose True for ID number 81: PacketCaptureTool.

D: Selections - Display current used account and offer selections for setting password, two-factor authentication, theme change and logout.

E: Auto Refresh, Manual Refresh, and Widget - For the widget, there are six display views to select, including Network Overview, Map Overview, Clients, Traffic, New Devices and Reset to default. Only the selected one(s) will be displayed on the dashboard.

Overview - There are five types (Network Overview, Map Overview, Clients, Traffic, New Devices) of overview for the Network Group.

Summary and SD-WAN - There are two tabs bringing different page contents.

3.2.3 Dashboard for a Device

This page offers device information such as system resource, connectivity and alerts for such device, wireless LAN configuration, wireless station overview, WAN overview, LAN overview, VPN overview, Port Status, Network Status, LTE Information, USB Modem Information, Map, VoIP Status, and Quick Tools for the selected device.

The screenshot shows the DrayTek VigorACS 3 dashboard for a specific device. The interface is organized into several sections:

- A: Menu Bar**: A vertical sidebar on the left containing icons for various system functions.
- B: Display Tab**: A dropdown menu at the top center showing the selected device ID: 2865Vac_1449BC34FE08.
- C: Status Bar**: A horizontal bar at the top right showing system status (Offline), alarms (1), active clients (0), and auto-refresh settings (1 Minute).
- D: Selections**: A user profile section at the top right showing the current user (mk_carrie) and options for password, two-factor authentication, notification, theme change, and logout.
- E: Status**: A section showing the device's current status (Offline) and a refresh button.
- F: WAN Overview**: A section displaying WAN statistics, including total traffic and individual WAN interface statistics (WAN1 through WAN6).
- G: Map**: A map section showing the device's location on a map, with a note field below it.
- H: Quick Tools**: A section at the bottom right containing links for 'Download Last Config' and 'Reboot Now'.

A: Menu Bar – Display the menu items related to the selected device (CPE).

B: Display Tab – Display current selected item, e.g., root network, group network and CPE model. In this page, a CPE device (e.g., Vigor2865 series) is selected.

C: Capture Packets – Offer options to view what packets that VigorACS server transmits or receives. To enable the function, open System>>>System Parameter and choose True for ID number 81: PacketCaptureTool.

D: Selections – Display current used account and offer selections for setting password, two-factor authentication, manage notification, theme change and logout.

E: Status – Display current status (online/offline) of the CPE and allow to refresh current page.



F: Time Setting - Display the clients detected within 24 hours, 7 days or 30 days.

G: Overview - There are several types (Network Overview, Map Overview, Clients, Traffic, New Devices) of overview under the selected device (CPE).

H: Quick Tools - Offer a quick method to backup configuration, restore last configuration, download last configuration and perform immediate reboot.

3.2.4 Menu Bar

Display the menu items available for the network or network group or selected device (CPE).

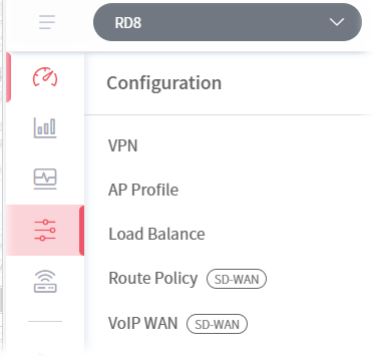
	Menu Bar for Root Network.		Menu Bar for Network Group.		Menu Bar for Selected CPE.
	 - Dashboard - Monitoring - Configuration ----- ----- - Maintenance - Reports - Provisioning - Network & Service Management - System - User - About		 - Dashboard - Statistics - Monitoring - Configuration - Hotspot Web Portal ----- ----- - Maintenance - Reports - Provisioning - Network & Service Management - System - User - About		 - Dashboard - Statistics - Monitoring - Configuration - Advanced ----- ----- - Maintenance - Reports - Provisioning - Network & Service Management - System - User - About
			Move the mouse cursor to each icon to open the drop down menu list. Select the menu item and access into the configuration web page.		

3.2.5 Root Network, Group Network, and Selected CPE

The information on the dashboard will be shown according to the root network, the network group or a CPE selected.

3.2.5.1 The Display Tab, Root Network


Click the **Display Tab** to display a drop-down list. This tab will display the name of the network group or the name of the selected CPE based on your selection. In default, Root Network will be shown on the Display Tab.

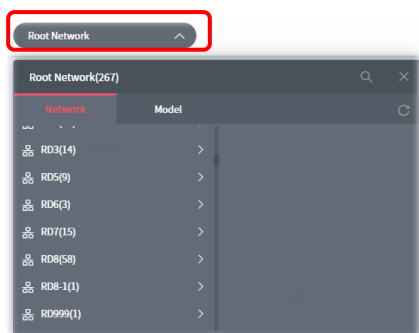

When the **Display Tab** shows a network group / CPE, and you want to return to Root Network, please move the mouse cursor on the Display Tab. Click to display the drop-down list and select the Root Network.


3.2.5.2 The Display Tab, Network Group

Click the **Network Tab**. Move the mouse cursor on the network groups. Scroll and click the one (e.g., RD8) you want. Later, the selected network group will be shown on the Display Tab.

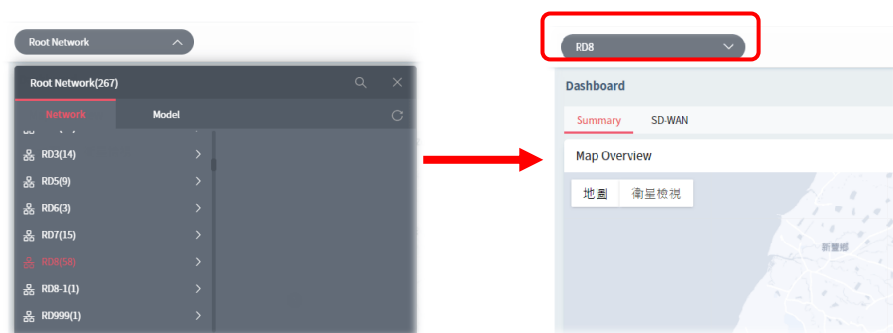

3.2.5.3 The Display Tab, CPE Device


Click the **Model Tab**. Next, click the ► button to list other CPE devices with the same model as the selected device. Select the device you want, then the selected CPE will be shown on the Display Tab.

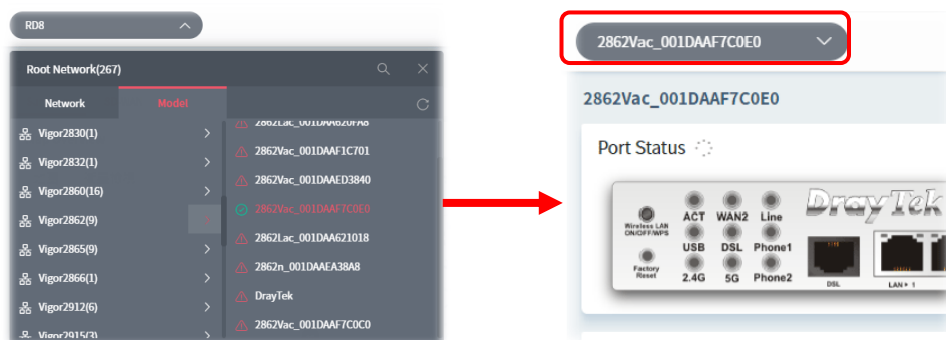

3.2.6 Capture Packets

Offer options to view what packets that VigorACS server transmits or receives.

The system administrator might want to inspect what packets that VigorACS server transmits or receives. He/she can perform the packet capturing by using Wireshark or use the Capture Packets icon on the top-right of VigorACS web page. The captured packets information between VigorACS server and CPE client will be the basis of debugging.

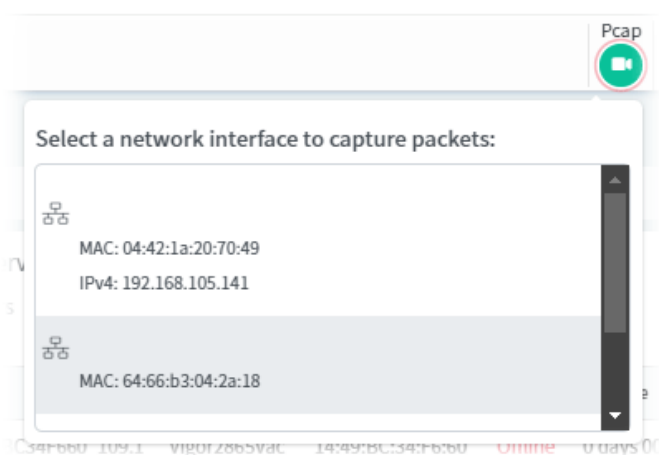

This function can be enabled or disabled on **System>>System Parameter**, ID 81 PacketCaptureTool. In default, it is disabled.

- If no WinPcap or Libpcap installed on VigorACS server, the following message will be shown on the screen instead of Capture Packets icon.

Pcap **No network device detected, please check if libpcap/WinPcap is installed.**


After clicking the Capture Packets icon, all of the network interfaces possessed by VigorACS server will be shown on a drop-down list. Under the network interface, corresponding IP address and MAC address also will be listed.

Click one of the network interfaces to configure settings for and perform the packet capturing.

These parameters are explained as follows:

Item	Description
Capture Settings	Filter Examples – Choose a filter for filtering the packet corresponding to the type selected. For example, when TCP Only is selected, only TCP packets will be captured and recorded. When IPv4 address 127.0.0.1 is selected, then only the packets coming from/sending to that IP address will be captured and recorded. Custom Filter – Variation of Filter Examples will change the setting in Custom Filter. However, the system administrator can define the filter by entering correct syntax (e.g., host 172.16.2.222) if required. Packet capturing will be executed according to Custom Filter setting.
Timer	Switch the toggle to enable/disable the setting. If enabled, VigorACS server will capture the packets within the time limit defined below. Timer (1-15 Minutes) – Enter a value as a time limit.
Start Capturing	Click to start packets capturing. After clicking it, VigorACS server will continuously capture the

packets until time up or manual stop. While capturing, the system administrator can perform any job on VigorACS still. The status will be shown as the following figure. If **Time Limit** is disabled, the status bar will not show the timer information.




- When the time is up or stop the job manually, the status of Pcap will be stored as a file on the hard disk. Later, use the tool of Wireshark to check the content of the file.
- In considering the network security, when someone performs the packet capturing on VigorACS server, other users are not permitted to use **Capture Packets** until the one finishes or stops the job. Only the one who performs the packets capturing can download the packet capture file.

▲ Pcap is now in use by "root", please wait for current capturing finished.


Click the **Refresh** button on the right side of Pcap status bar to check if someone else uses Pcap or not.

The default file format of **Pcap** file: user ID_date (YYYY-MM-DD.hhmmss). The following example figure shows the content of pcap file by using Wireshark.

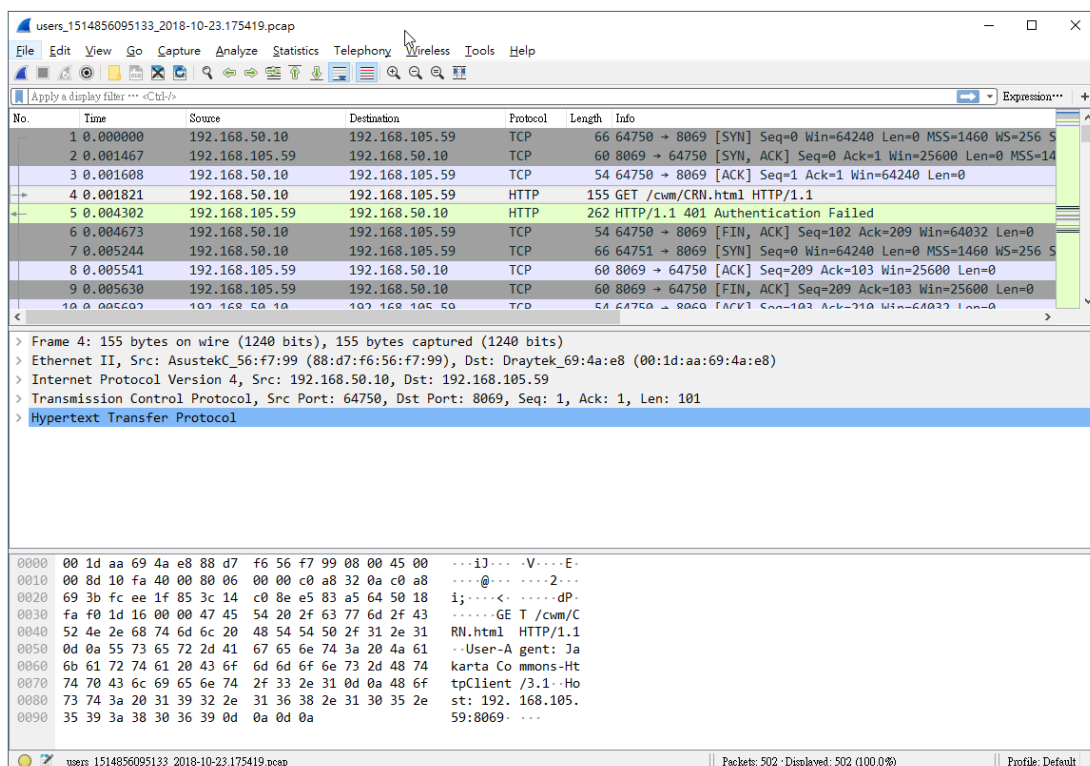


3.2.7 Set Password, Two-factor Authentication, Manage Notification, Change and Log Out

Display current used account and offer selections for setting password, two-factor authentication, Manage Notification, theme change and logout.

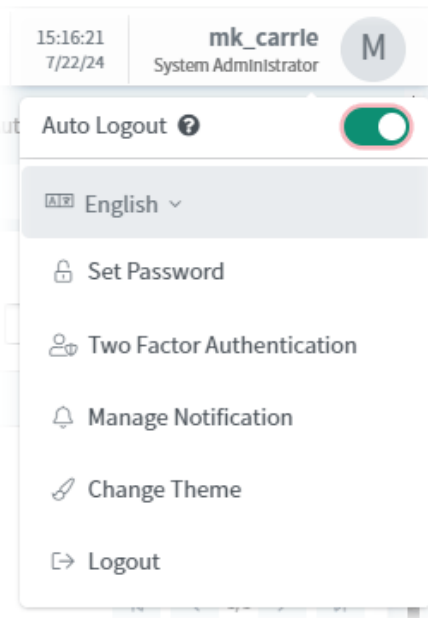


3.2.7.1 Change Language

The web pages of VigorACS can be expressed with different languages. Select the one you want.

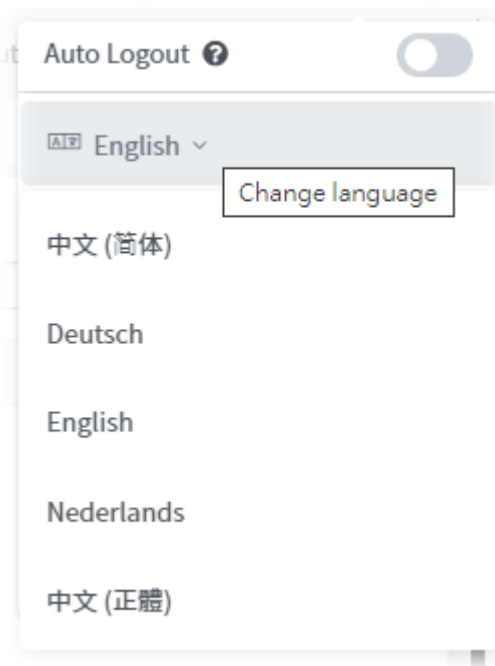

3.2.7.2 Set Password

The login password for current user account can be changed simply and easily by using Set Password from the drop down menu on the top-right corner.

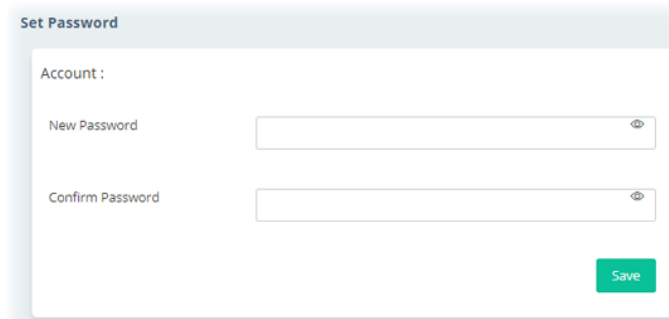

The 'Set Password' dialog box contains the following fields and controls:


- Account :** A label indicating the current user account.
- New Password**: A text input field with a password icon on the right.
- Confirm Password**: A text input field with a password icon on the right.
- Save**: A green button at the bottom right.

3.2.7.3 Two-factor Authentication

Usually, the system administrator can access into VigorACS by using user account and password. If network security is highly concerned, two-factor authentication will be strongly recommended.

For using two-factor authentication for accessing VigorACS;


1. Get and install **Google Authenticator** (iOS/Android) first.
2. Login VigorACS 3 by using the user account and password.

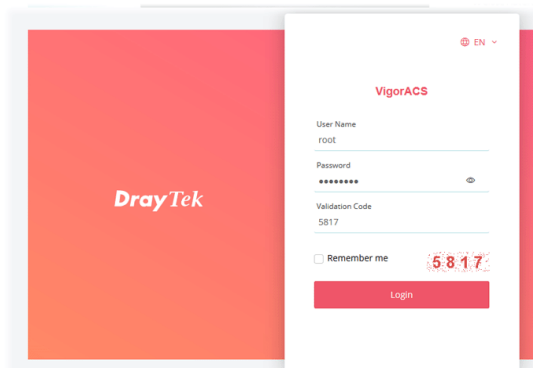

The login screen for VigorACS features a red DrayTek logo on the left and a white login form on the right. The form includes:

- User Name**: A text field with 'root' entered.
- Password**: A password field with masked characters and a toggle icon.
- Validation Code**: A text field with '5817' entered.
- Remember me**: A checkbox.
- Login**: A red button.

3. Open Root>>Two-factor Authentication and enable the button of Enable two-factor authentication.

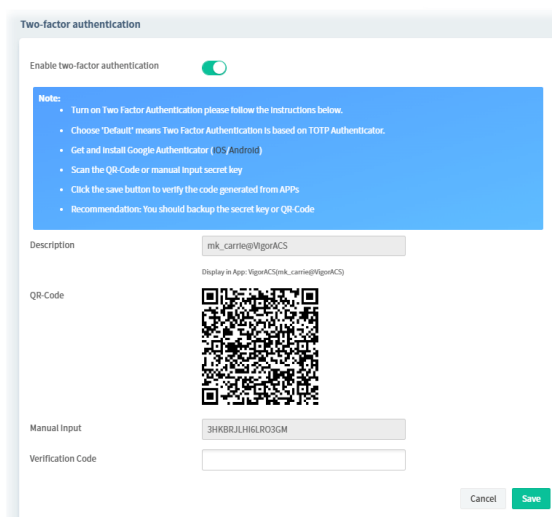

The 'Two-factor authentication' setup screen includes the following elements:

- Enable two-factor authentication**: A toggle switch that is currently turned on.
- Note:** A blue box containing instructions: 'Turn on Two Factor Authentication please follow the instructions below.', 'Choose "Default" means Two Factor Authentication is based on TOTP Authenticator.', 'Get and install Google Authenticator (iOS/Android)', 'Scan the QR Code or manual input secret key', 'Click the save button to verify the code generated from APPs', and 'Recommendation: You should backup the secret key or QR Code'.
- Description**: A text field with 'mik_carrie@VigorACS'.
- QR-Code**: A QR code for scanning.
- Manual Input**: A text field with '3HKBRJLH6LRO3GM'.
- Verification Code**: An empty text field for verification.
- Cancel** and **Save** buttons at the bottom right.

4. Use your cell phone to scan the QR-Code shown on the Two-factor Authentication page.



5. A key will be created randomly on the cell phone. Enter that key on the box of **Verification Code** and click the **Save** button.

Two-factor authentication

Enable two-factor authentication ☒

Notes:

- Turn on Two Factor Authentication please follow the instructions below.
- Choose 'Default' means Two Factor Authentication is based on TOTP Authenticator.
- Get and Install Google Authenticator (IOS/Android)
- Scan the QR-Code or manual input secret key
- Click the save button to verify the code generated from APPs
- Recommendation: You should backup the secret key or QR-Code

Description

Display in App: VigorACS@mk_carrie@VigorACS


QR-Code 

Manual Input

Verification Code


6. Logout VigorACS 3.

7. Re-login VigorACS 3. The first login web page requires you to enter the original user account and password.

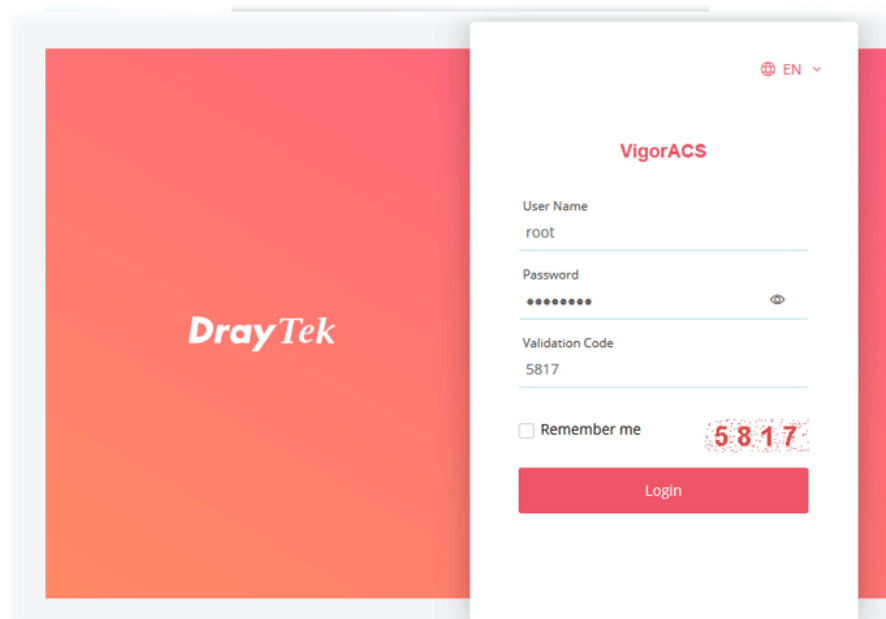

The image shows the VigorACS login interface. On the left is a large orange rectangle with the "DrayTek" logo. On the right is a white login form. At the top right of the form is a language selector showing "EN" with a dropdown arrow. The form title is "VigorACS". It contains three input fields: "User Name" with the text "root", "Password" with masked characters "••••••••", and "Validation Code" with the text "5817". Below the password field is a checkbox labeled "Remember me" and a red graphic showing the code "5817". At the bottom of the form is a red "Login" button.


After clicking the Login button, the **second** login web page appears. Please enter the verification code (created randomly) obtained from the APP (Google Authenticator) on your cell phone and click the Verify button.

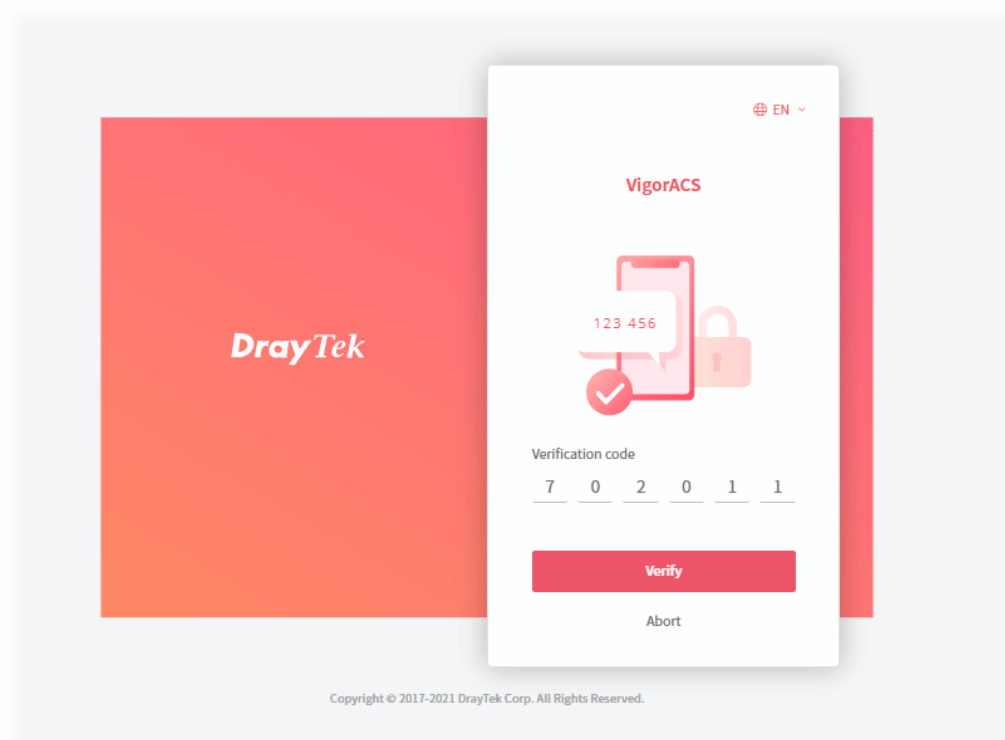

The image shows the VigorACS verification interface. On the left is a large orange rectangle with the "DrayTek" logo. On the right is a white verification form. At the top right is a language selector showing "EN" with a dropdown arrow. The form title is "VigorACS". It features a graphic of a smartphone displaying "123 456" and a red checkmark. Below this is a "Verification code" section with six input boxes containing the digits "7", "0", "2", "0", "1", and "1". At the bottom are two buttons: a red "Verify" button and a smaller "Abort" button. At the very bottom of the page, below the form, is the copyright text: "Copyright © 2017-2021 DrayTek Corp. All Rights Reserved."

3.2.7.4 Manage Notification

This option is available when the role of the user accessing the VigorACS server is the System Administrator.

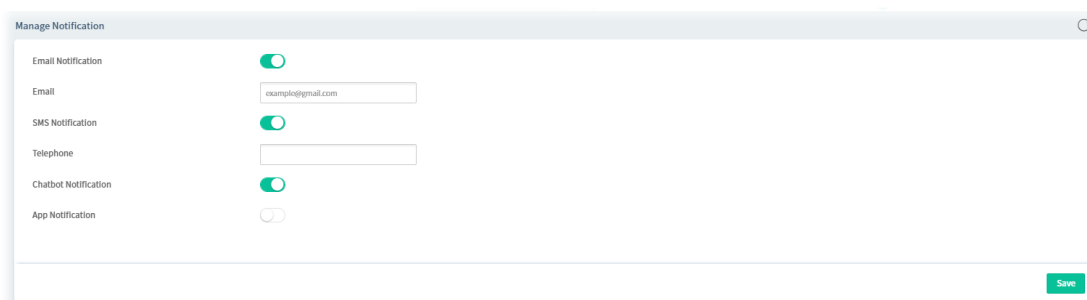


These parameters are explained as follows:

Item	Description
Email Notification	Switch the toggle to enable / disable the function. When it is enabled, an email will be sent to the user as a notification when the connected device gets alarms. Email - Enter the email for communication between the user and VigorACS server.
SMS Notification	Switch the toggle to enable / disable the function. When it is enabled, an SMS will be sent to the one listed here as a notification when the device gets alarms. Telephone - Enter the telephone number for receiving the SMS notification.
Chatbot Notification	Switch the toggle to enable / disable the function. When it is enabled, a notification will be sent to the user with a pop-up message when the device gets alarms, events, notifications and information related to VigorACS. If enabled, this user account can check general information of VigorACS server through specific mobile phone device and/or PC.
App Notification	Switch the toggle to enable / disable the function. If enabled, use the DrayTek Router App to scan the QR-Code for APP Notification.
Save	Save the settings.


3.2.7.5 Change Theme

Click **Change Theme** icon to choose light theme or dark theme for screen display.


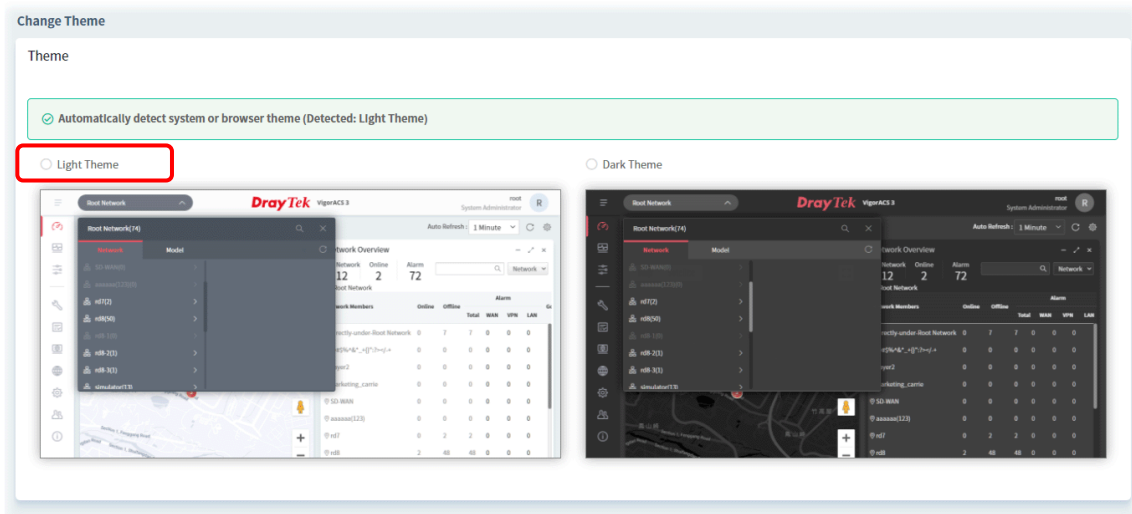


3.2.7.6 Logout VigorACS

Click **Logout** icon to logout VigorACS immediately. Or, switch the toggle of Auto Logout to enable the function of exiting VigorACS after five minutes without any operation.

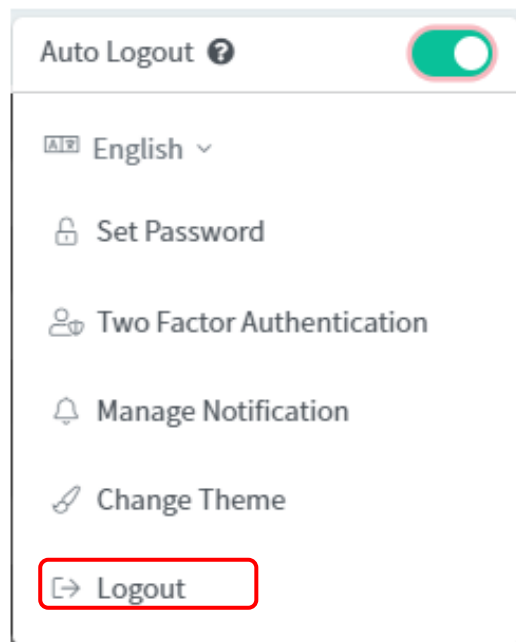


3.2.8 Auto Refresh, Manual Refresh, and Widget

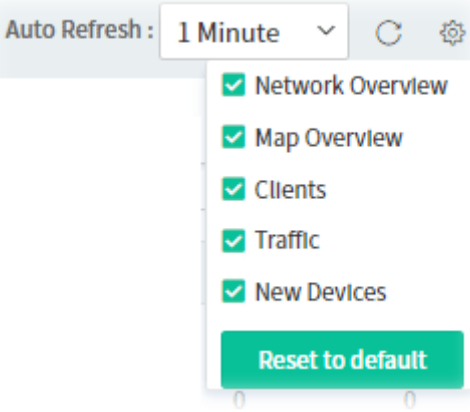	
Item	Description
Auto Refresh	Select the time interval for refresh the web page automatically. 
Manual Refresh	Click to refresh the web page immediately.
Widget	There are six display views to select, including Network Overview, Map Overview, Clients, Traffic, New Devices and Reset to default. Only the selected one(s) will be displayed on the dashboard.  Available quick overviews on the dashboard will vary according to the root network, selected group network and selected CPE.


3.2.9 Overviews

There are several types (Network Overview, Map Overview, Active Clients, Traffic, New Devices) of overview. The types will vary according to the root network, selected group network and selected CPE. Use the Widget drop menu to select or deselect the type of the overview.

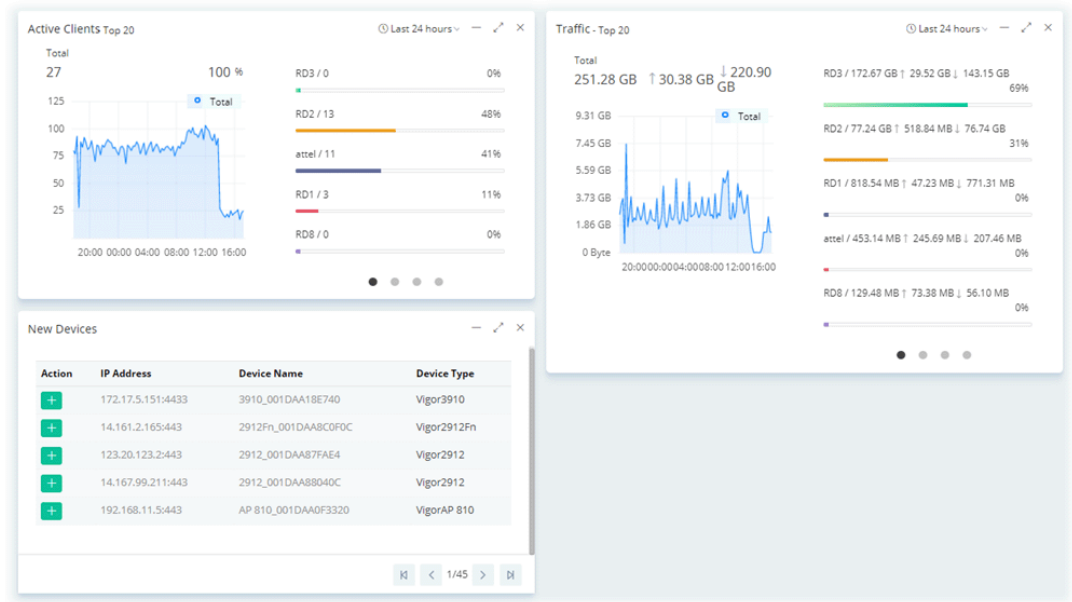

3.2.9.1 Network Overview / Device Overview

This area displays the Network Overview or the Device Overview.

Item	Description
Category	Switch between Network or Device . 
 / 	- (Minimize) - Hide the page.  (Fullscreen) - Display the page in fullscreen.
	x (Close) - Delete this widget.

Under **Network Overview**, all of the networks with names can be seen on this area. Use the scroll bar to view others networks. Icons of W, V and L represent WAN Alarm, VPN Alarm and LAN Alarm. The digit next to the word, Alarm, indicates the number of warning message received by that network. The number next to ONLINE indicates how many devices are active; the number next to OFFLINE indicates how many devices are inactive.

Auto Refresh: Disable ⌂ ⚙

Network Overview

Sub Network: **123** | Online: **4** | Alarm: **100138**

Root Network

Network Members	Online	Offline	Alarm				Go To Dashboard
			Total	WAN	VPN	LAN	
directly-under-Root Network	0	13	13	0	0	0	
AutoTestNetwork	0	1	3	2	0	0	🔗
AutoTest_Dev	2	7	7	0	0	0	🔗
AutoTest_SD-WAN	0	2	2	0	0	0	🔗
AutoTest_VPN	1	0	0	0	0	0	🔗
Hotspot_Web_Portal	0	2	2	0	0	0	🔗
Router_App_Network	0	2	2	0	0	0	🔗
T_2024-07-22_Wholesale_GA_D	0	0	0	0	0	0	🔗

Under **Device Overview**, move the scroll bar left and right to check basic information for each device. Click **>>** (Next) or **<<** (Previous) arrow to display next page for checking information for other devices.

Auto Refresh: Disable ⌂ ⚙

Device Overview

Routers: **141** | APs: **99995** | Switch: **6**



Device Name	Model	MAC	Status	UP Time	Firmware Version	Active Clients	VPN
2927Lac_1449BC023768	Vigor2927Lac	14:49:BC:02:37:68	Online	0 days 02:50:16	4.4.2.3	0	1
2120n_001DAA7FF2A4_stun	Vigor2120n+	00:1D:AA:7F:F2:A4	Online	41 days 20:00:29	3.8.10	0	0
2865Lac_1449BC3D7A08	Vigor2865Lac	14:49:BC:3D:7A:08	Offline	0 days 00:00:00	4.4.5_STD	0	0
2952Pn_001DAAF8D818_https	Vigor2952Pn	00:1D:AA:F8:D8:18	Offline	0 days 00:00:00	3.9.7.2	0	0
2962P_1449BC39F110_https	Vigor2962P	14:49:BC:39:F1:10	Online	46 days 19:57:10	4.3.2.6	0	1
3220n_001DAA554758	Vigor3220n	00:1D:AA:55:47:58	Offline	0 days 00:00:00	3.9.7.4	0	0
AP 810_001DAA7C2B50	VigorAP 810	00:1D:AA:7C:2B:50	Offline	0 days 00:00:00	1.3.4	0	0
AP 902_001DAA3F150E_stun	VigorAP 902	00:1D:AA:3F:15:0E	Offline	0 days 00:00:00	1.3.4	0	0

⏪ < 1/12518 > ⏩

3.2.9.2 Map Overview

This map displays the location of the devices managed by VigorACS. The number on the map points the quantity of the devices classified under the root network or network group. Move your mouse on the number and click it. The map will be zoomed in with more detailed information.

Map Overview will vary according to the root network or the network group selected.

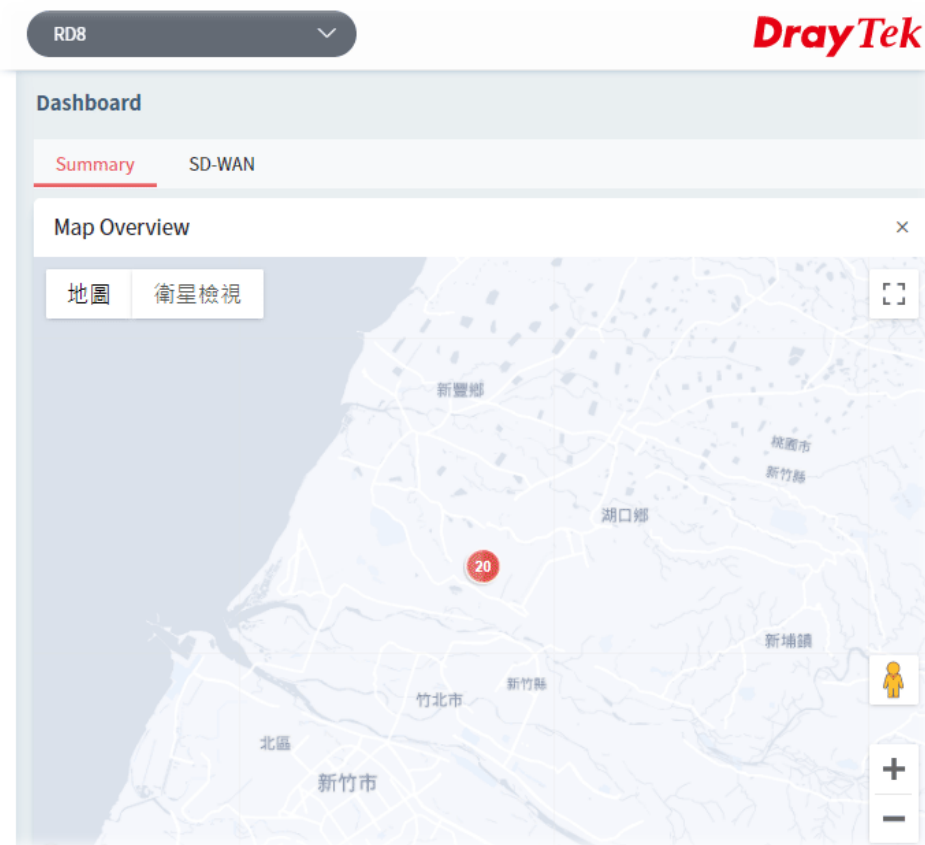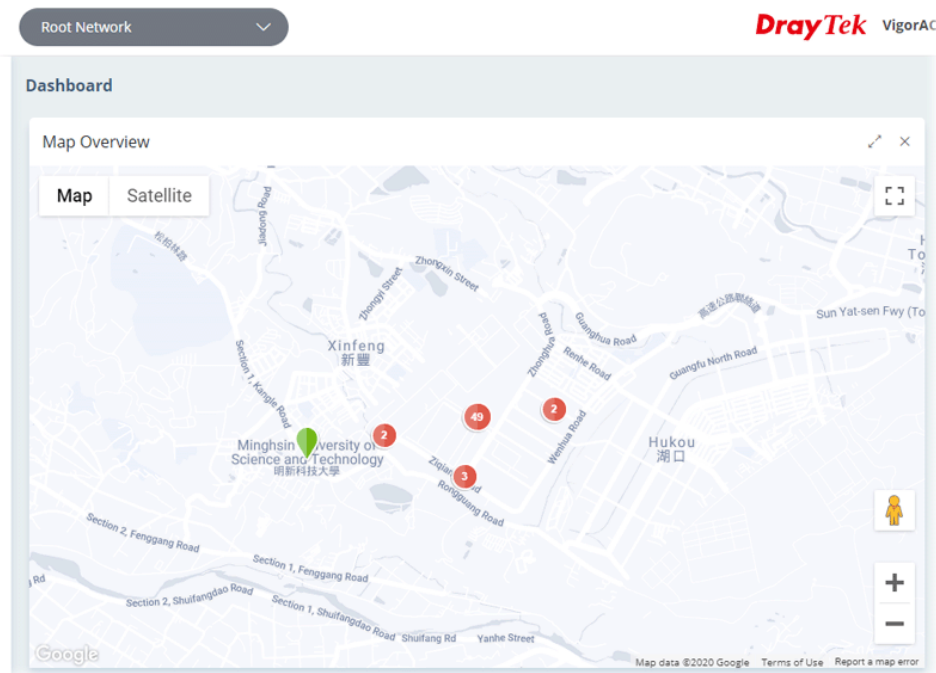

3.2.9.3 Active Clients

It is available for Group Network and CPE Device selected.

This area displays the top 10 clients or top 20 clients accessing into VigorACS during the last 24 hours, 7 days or 30 days.




Item	Description
Last 24 hours	Use the drop down list to specify the time period, last 24 hours, 7 days or 30 days.
 / 	- (Collapse) - Hide the page.  (Fullscreen) - Display the page in fullscreen.
	x (Delete) - Delete this widget.

3.2.9.4 Traffic

It is available for Group Network and CPE Device selected.


The figure displays the traffic for top 10 or 20 groups/devices during the last 24 hours, 7 days or 30 days.

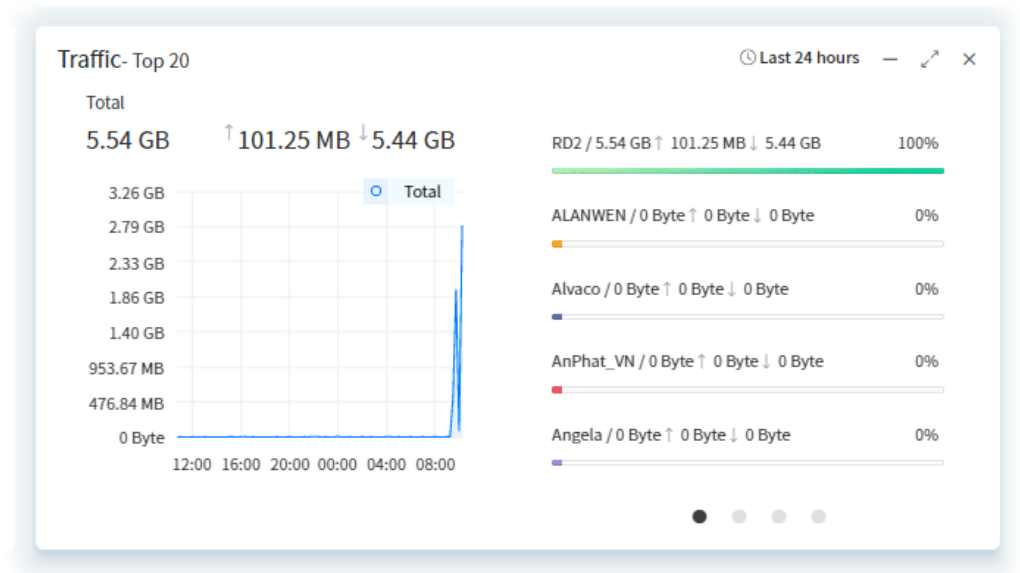

Item	Description
Last 24 hours	Use the drop down list to specify the time period, last 24 hours, 7 days or 30 days.
— / ↗	- (Collapse) - Hide the page. ↗ (Fullscreen) - Display the page in fullscreen.
✕	x (Delete) - Delete this widget.

3.2.9.5 New Devices


New added device(s) can be found on the field of **New Devices**. When you move your mouse on the device name of the device and click it, a detailed information page for that device will be displayed on the screen.

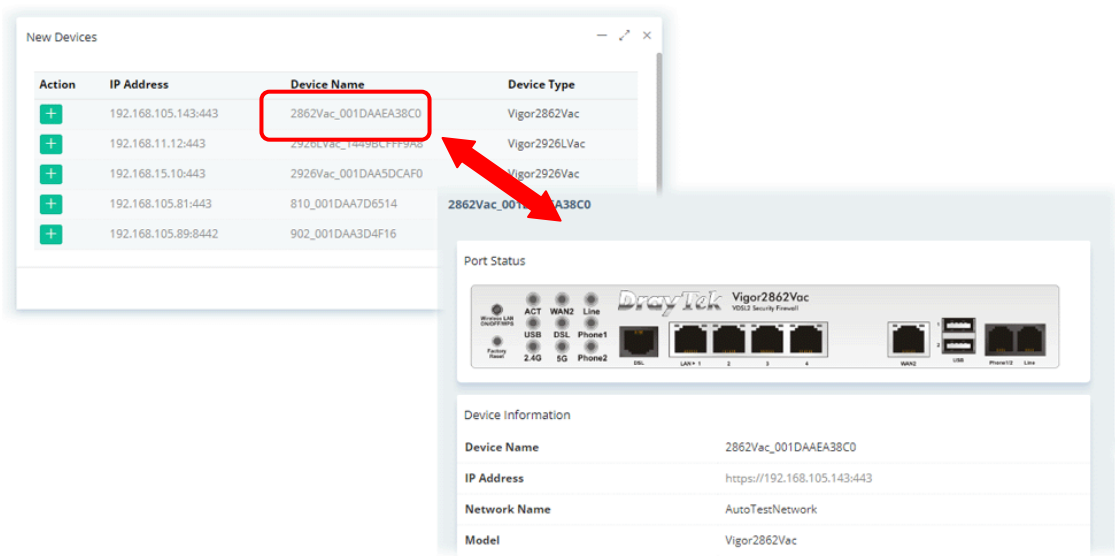

Item	Description
 / 	- (Collapse) - Hide the page.  (Fullscreen) - Display the page in fullscreen.
	x (Delete) - Delete this widget.
	Click the button to add a new device onto the network. Refer to "Applications, A.3 How to Assign a New Added CPE to a Network?" for detailed information.

3.2.9.6 Reset to Default

Use the Widget drop menu to select or deselect the type of the overview. Or, click Reset to default to restore the factory default overviews on the dashboard.

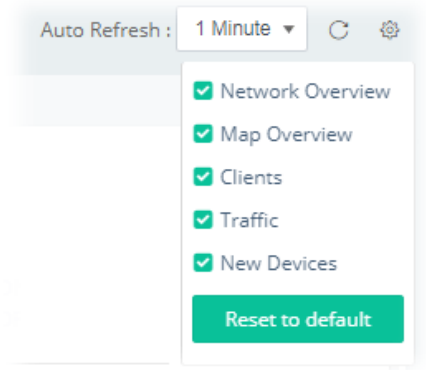

3.2.10 Icons Used in VigorACS 3

Item	Description
+	Add a new device.
– / 	Hide the page / Display the page in fullscreen.
	Delete the selected widget.
	Switch these two icons by click the mouse cursor on it.  – means “Enable”.  – means “Disable”.

3.3 Operation Procedure

Follow the instruction listed below to operate VigorACS 3:


- Create networks.
- Create users and user groups.

A user can own several CPE devices; however, each CPE device can be assigned to one “user group” only.

User shall be assigned under different user groups. RootGroup is the default user group.

- Edit and modify the settings for the TR-069 devices.

Below shows a brief illustration to describe the relationships among CPE, user group, network and network group.

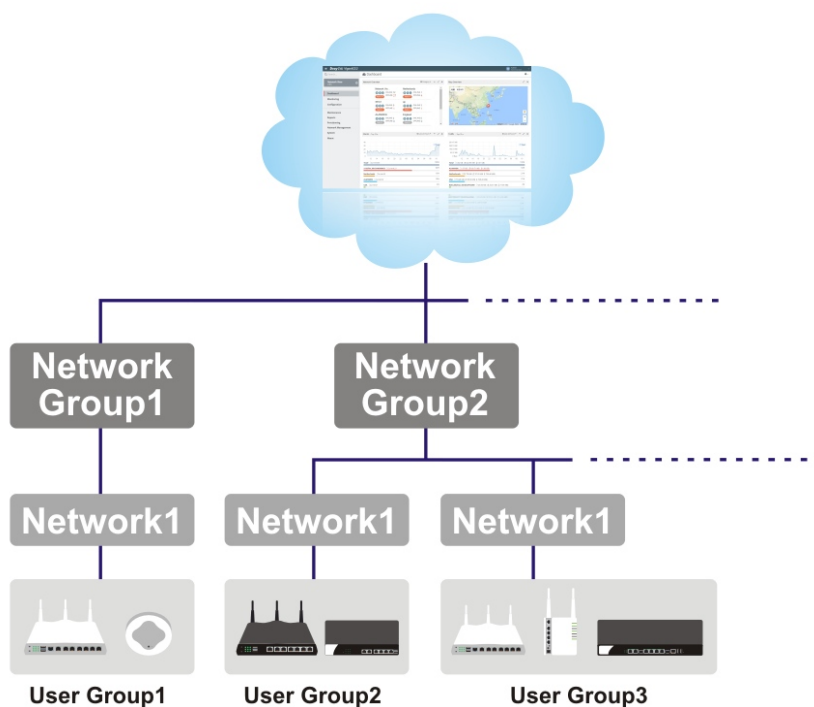

Applications

A.1 How to Register a CPE onto VigorACS 3?

This section briefly shows a simple way to register a CPE onto VigorACS 3 with few steps. For detailed information, refer to **Chapter 4**.

The CPE to be managed by VigorACS 3 must be configured and restarted. Here we take Vigor2927Vac as an example.

Note that STUN setting is required if CPE is behind a NAT device, for the purpose of keeping the connection between VigorACS 3 and Vigor device up.

1. Access into the web user interface of Vigor router.
2. Open **System Maintenance>>Management**.

System Maintenance >> Management

IPv4 Management Setup	IPv6 Management Setup
Router Name DrayTek	
☐ Default: Disable Auto-Logout ☐ Enable Validation Code in Internet/LAN Access	
Internet Access Control ☒ Allow management from the Internet Domain name allowed ☐ FTP Server ☐ HTTP Server ☐ Enforce HTTPS Access ☐ HTTPS Server ☐ Telnet Server ☒ TR069 Server ☐ SSH Server ☐ SNMP Server ☒ Disable PING from the Internet	
Management Port Setup ☒ User Define Ports ☐ Default Telnet Port HTTP Port HTTPS Port FTP Port TR069 Port SSH Port Note: Ports 8001 and 8043 are used Brute Force Protection ☐ Enable brute force login protection ☐ FTP Server	

- Allow management from the Internet – Enabled.
- TR-069 Server – Enabled.

3. Open **System Maintenance>>TR-069**.

System Maintenance >> TR-069 Setting

ACS and CPE Settings Reporting Configuration Export Parameters

TR-069 ☐ Disable ☒ Enable

ACS Server On

ACS Server

URL

☐ Acquire URL from DHCP option 43

Username

Password

Event Code

Last Inform Response Time : Sat Jan : (NA) ●

CPE Client

Protocol ☒ HTTP ☐ HTTPS

URL

Port

Username

Password

Note: Please enable TR-069 server to allow access from Internet on [System Maintenance >> Management](#) page.

- Specify the interface for ACS Server On.
 - Set URL, username, password for network group.
4. Click **OK** and click **Test With Inform**. When the green light appears (on the Last Inform Response Time), the settings on CPE have been configured well.

Last Inform Response Time : Sat Jan 11 0:12:57 2020 


5. Open the homepage of VigorACS 3.
6. Now, Vigor2927Vac has been registered onto VigorACS 3 and displayed on the homepage.

New Devices			
Action	IP Address	Device Name	Device Type
	172.17.5.151:4433	3910_001DAA18E740	Vigor3910
	14.161.2.165:443	2912Fn_001DAA8C0F0C	Vigor2912Fn
	123.20.123.2:443	2912_001DAA87FAE4	Vigor2912
	14.167.99.211:443	2926_001DAA88040C	Vigor2926Vac

A.2 How to Create a New Network?

VigorACS allows the administrator to build several networks (and sub-network) for different CPE devices under the root network.

1. Only the administrator has the right to create a new user group.
2. From the MENU bar, click **Network & Service Management**.

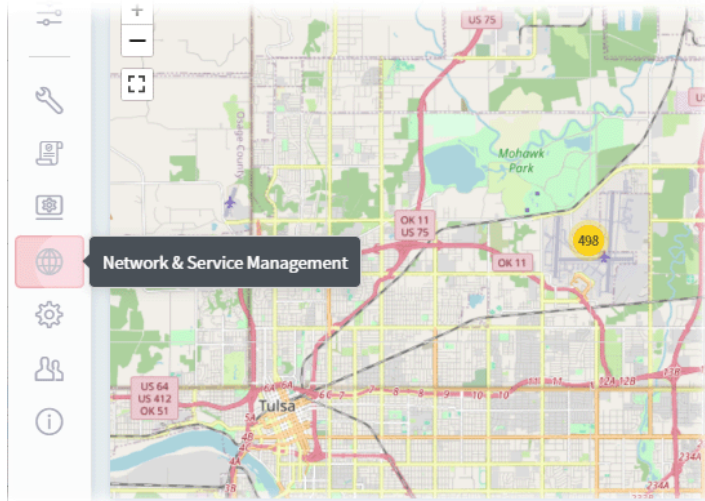

3. Select **Network Management**. When the following page appears, click the link of **+Add New Network**.

A screenshot of the 'Add New Network' form in the VigorACS interface. The form is titled '+Add New Network' and is highlighted with a red box. Below the title, there are three input fields: 'Network ID' with the value '2', 'Name' with the value 'Root Network', and 'Location' which is empty. The form is set against a light blue background with a map icon in the top right corner.

4. A pop-up window appears. Type the required information.

+ Add Network

Parent Network
Root Network

Name
Marketing_carrie ✓


Location
HsinChu

User Name
carrie ✓


Password
***** ✓

✕ Cancel + Add

- Name - Enter a new name of the network.
 - Location - Define the location of such network.
 - User Name - Enter a user name for such network.
 - Password - Enter a password for such network.
5. Click **+Add** to save the settings. The new created network will be seen under the **Root Network**.

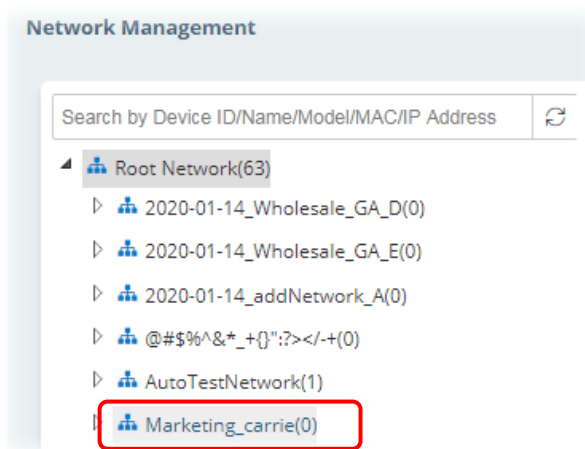


6. Click the **Map** tab. Manually input specific location of the device on the input box; GoogleMap will show the location for the new created network.

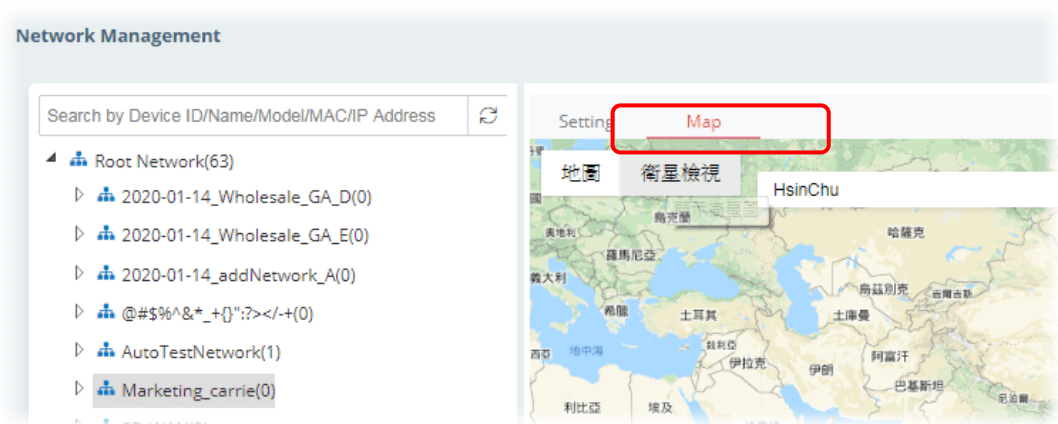

A.3 How to Assign a New Added CPE to a Network?

New added device can be grouped under Network. If no assignment, the new device will be grouped under Root Network in default.

1. On the Dashboard, locate the device from **New Devices**. Here, we take Vigor3910 as an example.

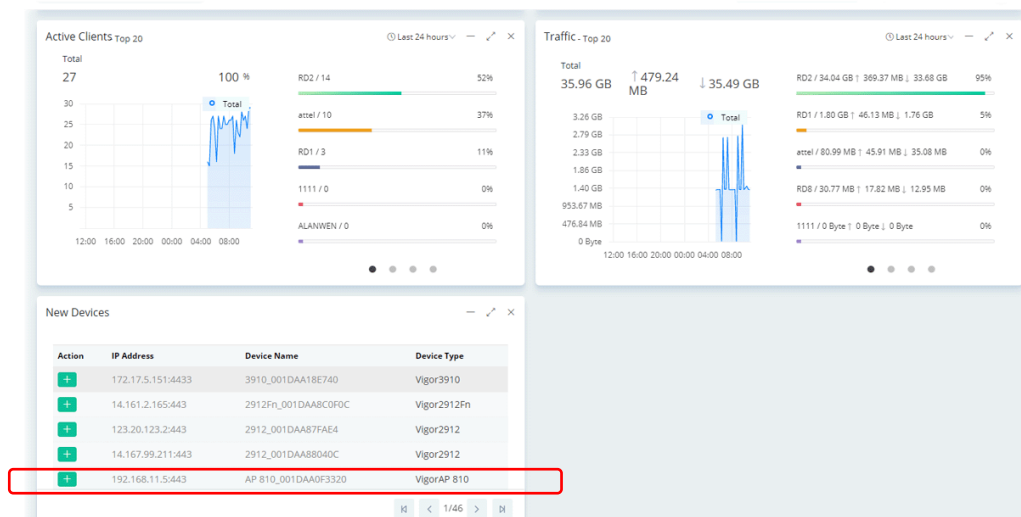

2. Click the add icon (+). The following dialog will appear.

The 'Add New Device' dialog box contains the following fields and options:

- Add to Network:** A dropdown menu with 'Root Network' selected.
- Device name:** A text field containing '3910_001DAA18E740'.
- Location:** An empty text field.
- Emergency phone:** An empty text field.
- Set to known device:** A toggle switch that is currently turned on (green).
- Buttons:** 'Cancel' and 'Apply' (highlighted in green).


- Add to network – Choose the network from the drop down list.
- Location – Enter the location of the selected device.
- Emergency phone – Enter the mobile phone for communication.
- Set to known device – Click to make the device visibly or invisibly.

3. Click **Apply** to save the changes.


A.4 How to Create a New User Group?

Only the administrator can create a new user group.

1. From MENU bar, open the **User** menu.

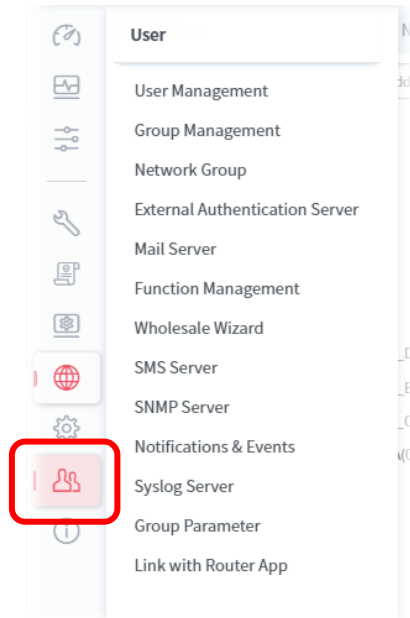


2. Click **Group Management**. The following page will appear.

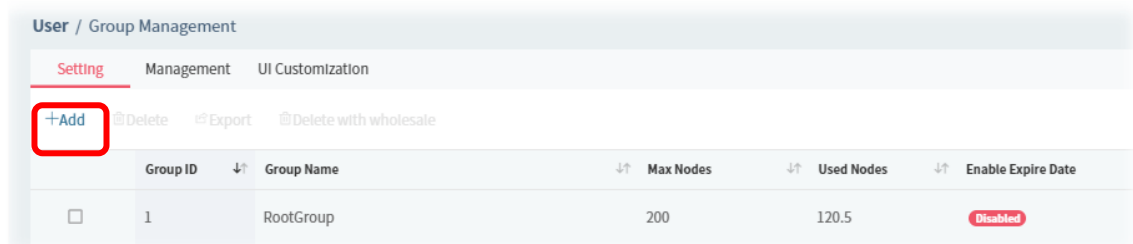

RootGroup is a default setting.

3. Click **+Add** to open the following page for creating a new one.

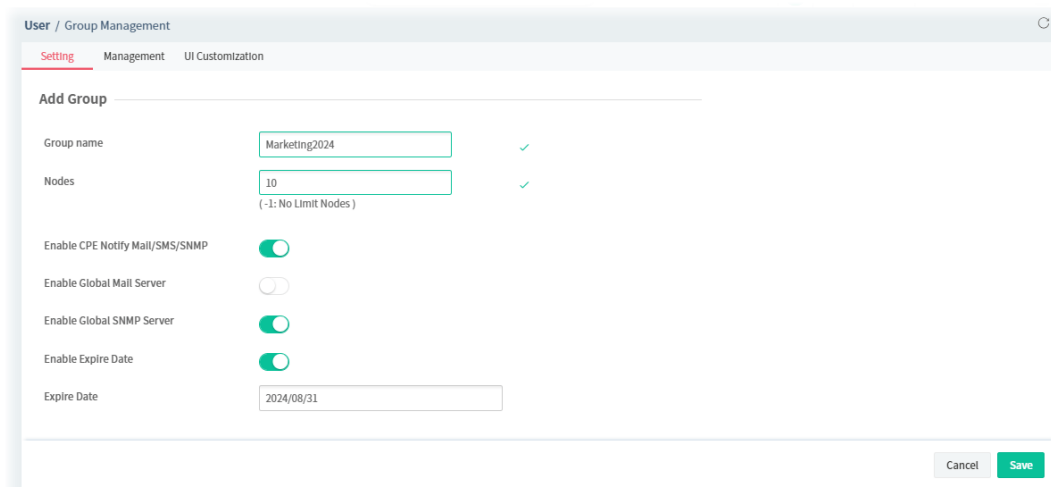

- Group name – Enter a new name.
- Nodes – Use ▲ or ▼ to add or decrease the number of nodes.
- Enable Global Mail Server – Click to enable or disable the service.

- Enable Global SNMP Server - Click to enable or disable the service.
 - Enable Expire Date - Click to enable the Expire Date mechanism.
 - Expire Date - If it is enabled, click the entry box to choose the date.
4. Click **Save** to save the settings and exit the dialog. The new network group has been created and displayed on the screen.

User / Group Management

Setting Management UI Customization

+Add Delete Export Delete with wholesale

	Group ID	Group Name	Max Nodes	Used Nodes	Enable Expire Date
☐	1	RootGroup	200	120.5	Disabled
☐	2	Marketing2024	No Limit Nodes	12	Disabled

This page is left blank.

Part II

SD-WAN




Chapter 4 SD-WAN Solution

Traditionally most business applications were running on the private servers in the HQ, and MPLS that routes all traffics to the center site made this model quite efficient.


However, with adopting more and more SaaS and private/public cloud applications, we need new technologies that can efficiently and dynamically route different traffics either to the central site or to the cloud directly.

SD-WAN is the solution to make the complex routing scheme simple and intuitive. Based on traditional load balancing and failover functions, SD-WAN further improves user experience by focusing on interface and application quality.

Take a look at the following two figures. The right one expresses a traditional network connection which is tunneled via the central site at a higher cost. However, the left one shows the direct Internet access with lower cost with the feature of SD-WAN.

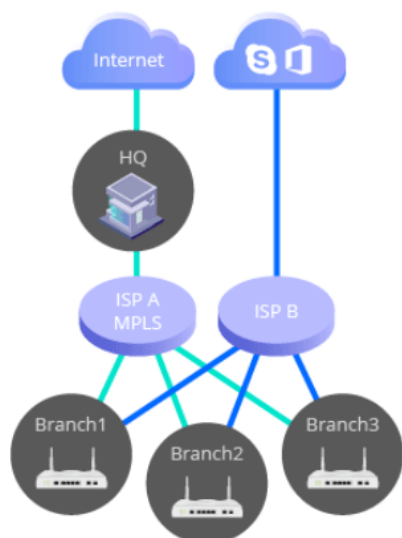


Direct Internet Access with lower cost

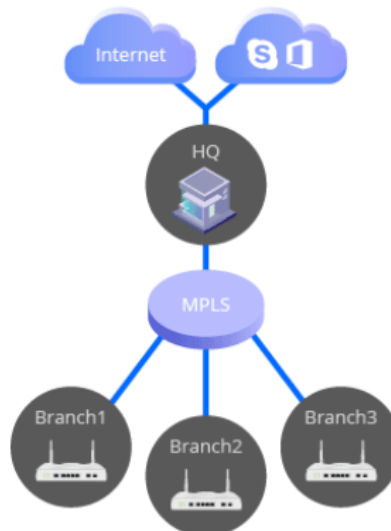

Tunneled via Central Site with higher cost

4.1 Topology of SD-WAN, Edge Router and ACS Server

VigorACS is the central software where network administrators perform the configurations, provisioning, and monitoring the activity. The multitenant capability makes xSP services easy.



The physical routers installed in HQ and branches are named **edge router**.


The network administrators can establish VPN tunnels (IPsec by default) from the branches to the HQ to form a Hub-and-Spoke topology. These routers can receive SD-WAN configurations from the VigorACS server, perform the edge computing according to SD-WAN policies, and upload the data to the **VigorACS server** for monitoring.

At present, the edge router (supporting SD-WAN) includes Vigor2927 series and Vigor2865 series.

4.1.1 Enabling SD-WAN on VigorACS

To enable SD-WAN function on VigorACS, simply open **Network & Service Management** and select **Network Management** under **Root Network**.

Specify a network group (e.g., RD8) which contains the CPEs supporting SD-WAN features. On the Setting page, turn on the toggle button of **Enable SD-WAN**. Then click **Reset Bulk Data Profiles to Default** to use the bulk data with the default values. At last, click **Save**.

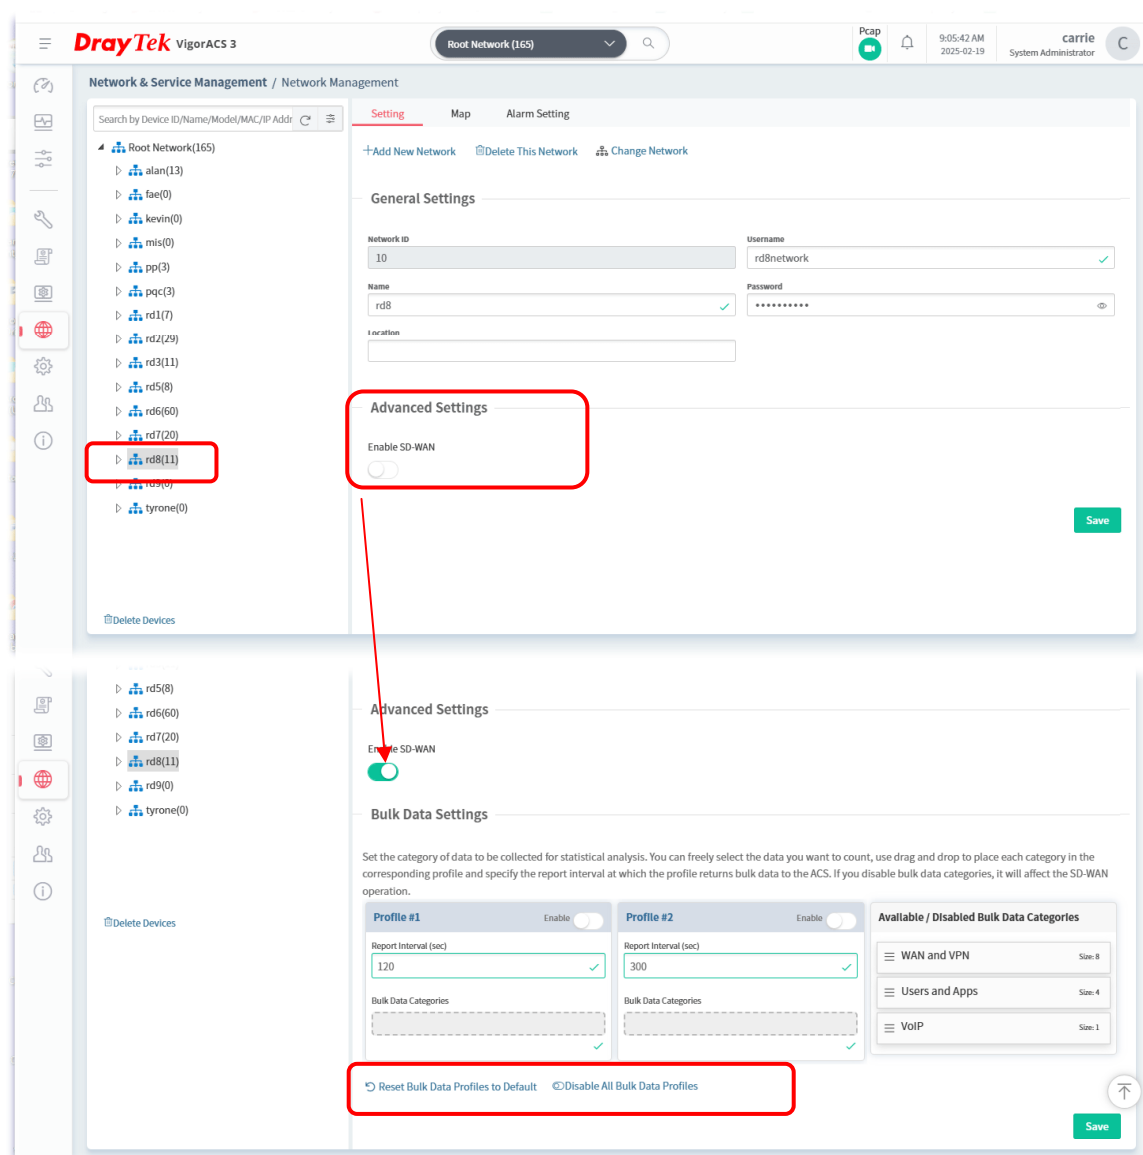

The main features for SD-WAN are manifested in three aspects:

- Auto VPN

- VoIP WAN, and
- Full Traffic Control with SD-WAN Route Policy


4.1.2 Auto VPN

There are two types of Auto VPN, Hub and Spoke and Full Mesh.

- For Hub and Spoke(s)


Select one of the devices as a hub router; other devices will be regarded as "spokes".

VigorACS server will automatically create one IPsec tunnel, with AES256 encryption method, from each spoke to the hub router. If a subnet conflict occurs, VigorACS server is capable to design and suggest LAN subnets for all devices.

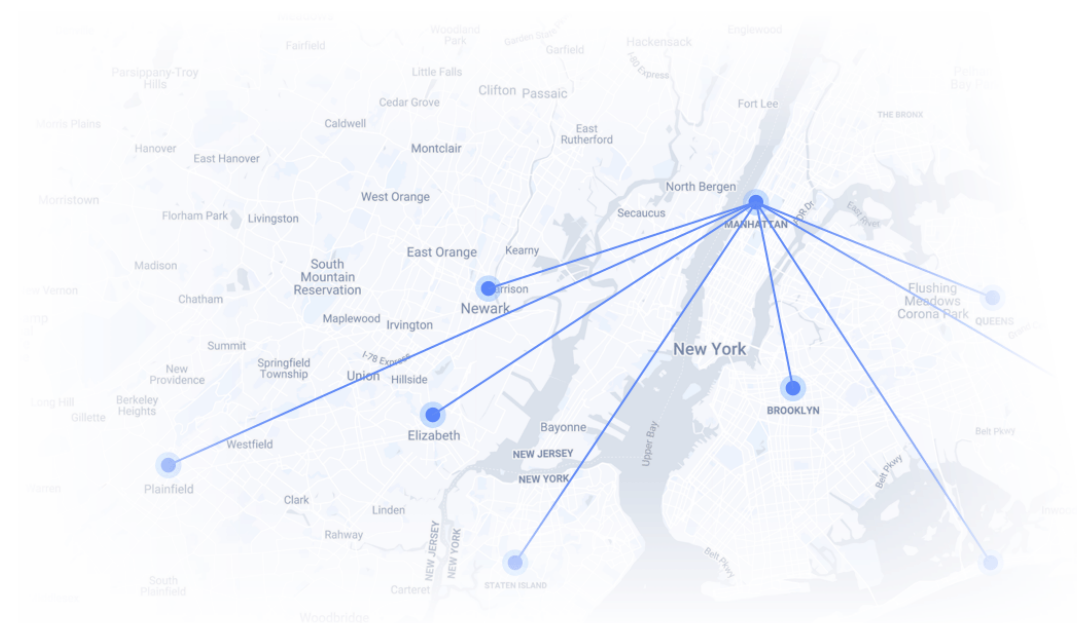

- For Full Mesh

VigorACS server will create tunnels between each router automatically. If a subnet conflict occurs, VigorACS server is capable to design and suggest LAN subnets for all devices.

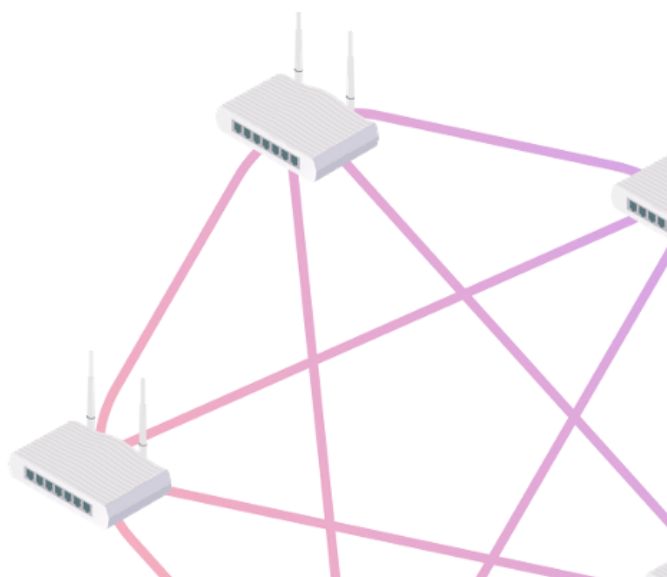


4.1.3 VoIP WAN

The router can automatically detect the best quality interface, named with VoIP WAN, from existed WAN interfaces to optimize VoIP performance.

SIP registrations will follow the VoIP WAN to make sure the upcoming inbound & outbound VoIP Call will be sent via VoIP WAN.

WAN1 : mos 4.3 ● VoIP WAN
WAN2 : mos 4.0 ●
WAN3 : mos 3.6 ●

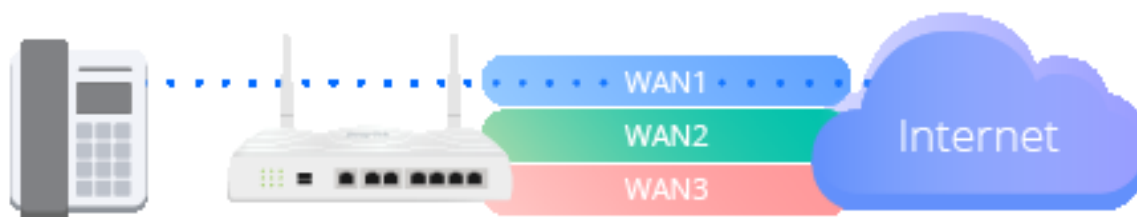

In a Route Policy, the Administrator can select VoIP WAN as the Interface for VoIP. So VoIP will always been sent via best quality WAN.

Real-time Call Quality Monitoring

- Every single call is continuously monitored with MOS (mean opinion score), from the beginning till the end.
- Supported interface including WAN and VPN.

Live Failover when Having Poor Call Quality

- Even being sent via best-quality WAN, sometimes call quality could still be poor due to some hops along the path.
- If enable this function, router will failover the RTP sessions for the poor quality calls (while good quality calls remain with VoIP WAN).


Live Failover Scenarios

- Interface is selected as VoIP WAN => failover to 2nd VoIP WAN.
- Interface is selected as VPN to Hub=> manually select your failover interface.

4.1.4 Full Traffic Control with the Route Policy

SD-WAN provides complete routing control by allowing Network Admin to specify the desired route for selected applications/domains to make sure the specific routing scenarios can be accomplished.

Please select a network, but do not select the Root Network.

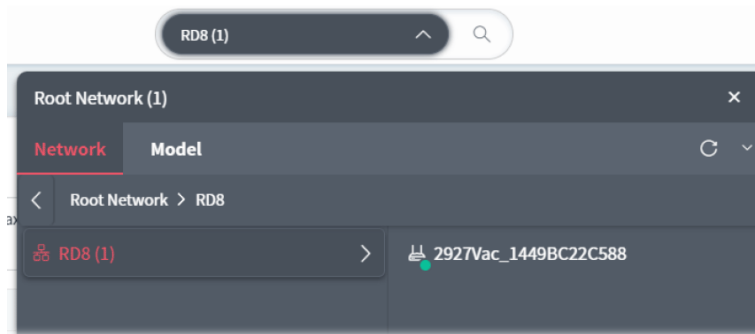


Then open **Configuration>>Route Policy>>+Add New Route Policy**.


A screenshot of a dialog box titled '+ Add a New Route Policy'. The dialog has a close button (X) in the top right corner. It contains several configuration fields: 'Enable' with a green toggle switch; 'Comment' with an empty text input field; 'Source' with a dropdown menu showing 'Any'; 'Destination' with a dropdown menu showing 'App Services' and a green checkmark; 'App Service Profile' with two buttons: 'Create a new profile' and 'From an existing profile'; 'Selected App Service' with a dropdown menu showing 'WhatsApp' and a green checkmark; 'Send via Interface' with a dropdown menu showing 'WAN 1'; 'Send via Gateway' with two buttons: 'Default Gateway' and 'Specific Gateway'; and 'Packet Forwarding to WAN/LAN' with two buttons: 'Force NAT' and 'Force Routing'. At the bottom right, there are two buttons: 'Cancel' and 'Save and set to CPEs'.

4.2 Dashboard for SD-WAN Network Group

To display the SD-WAN dashboard, select a network group first. Find the one you want from the Network list under the Root Network. In this case, we choose RD8 as an example.

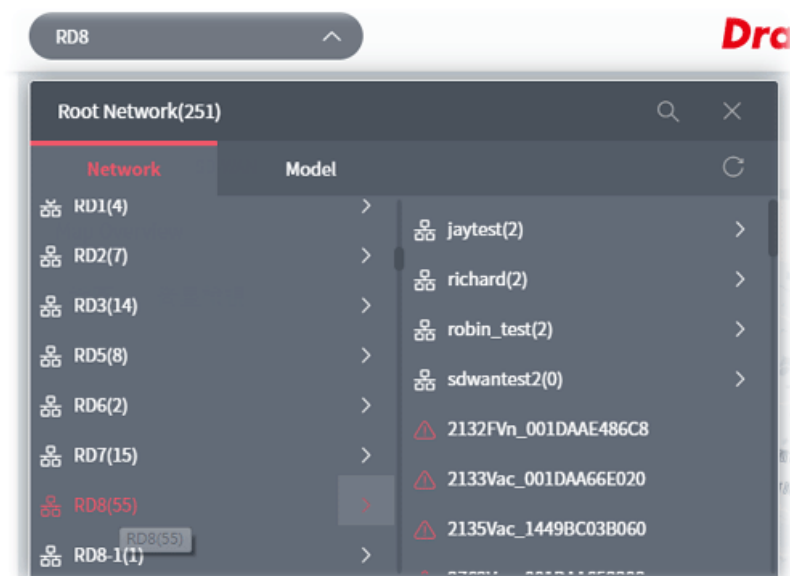

Click the **SD-WAN** tab to display the page of dashboard (for monitoring).

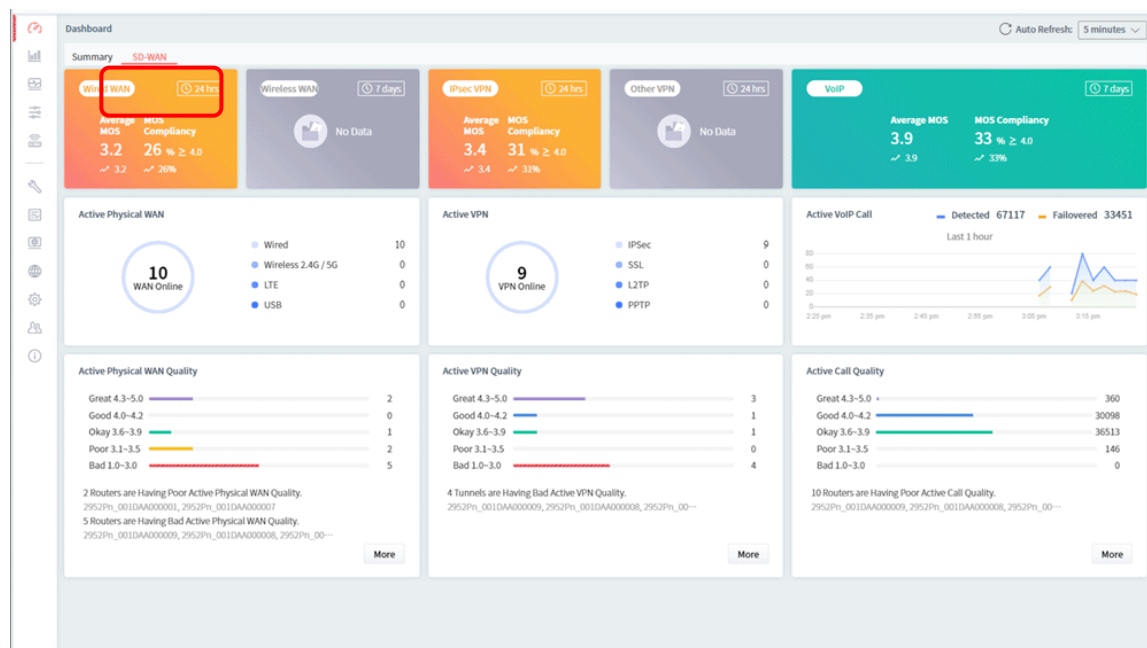


Item	Description
Wired WAN / Wireless WAN	Wired and Wireless WAN (including wireless 2.4G/5G WAN, LTE WAN, and USB WAN) quality monitoring are separated as wired WAN usually provides better quality. Only VPN tunnels that are established by the SD-WAN VPN tool are counted for VPN MOS.
IPsec VPN / Other VPN	Display the quality levels (Great, Good, Okay, Poor and Bad) for active VPN.

VoIP	Every NATed VoIP call is monitored with MOS (routed calls or VoIP via VPN are not counted at the moment). VigorACS only captures the signals from the SD-WAN CPE with VoIP feature.
More	Click to access the Monitoring>>WAN, VPN, or VoIP web page to get more detailed information.

4.3 Statistics for SD-WAN Network Group


The page offers statistics for all the devices listed under root networks, including usage overview, wireless clients Overview, data traffic, device ranking, and client ranking. By clicking Last 24 Hours, Last 7 Days, Last 30 Days or Custom setting (define the period), the administrator can obtain various statistics within the time period.

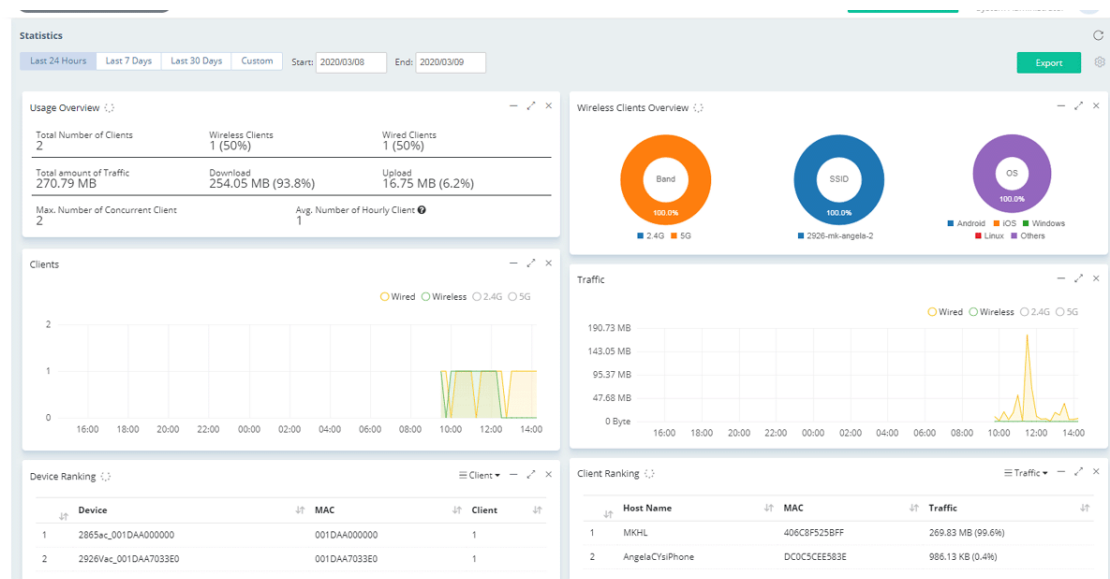

In addition, the statistics can be exported as ".XLS" file if you click the **Export** button on the top side.

4.4 Monitoring for SD-WAN Network Group

Monitoring menu offers options for monitoring the normal and abnormal actions for network group and CPE.

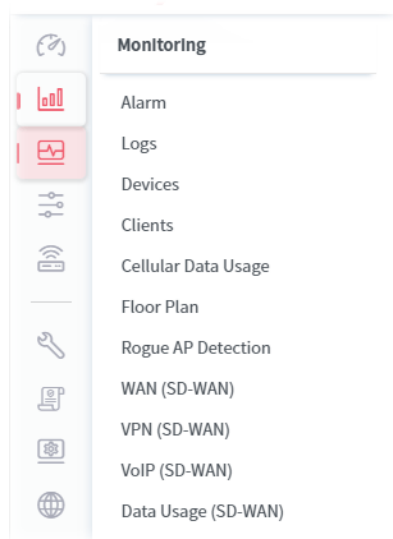


In which, the usage and settings for Alarm, Logs, Devices, Clients, Cellular Data Usage, Floor Plan and Rogue AP Detection are totally the same as the network group without SD-WAN enabled. For detailed information, refer to **Chapter 8 Network Group Menu**.

This section will describe configuration pages for WAN (SD-WAN), VPN (SD_WAN), VoIP (SD-WAN) and Data Usage (SD-WAN).

4.4.1 WAN (SD-WAN)


This page displays the location, name, interface/IP, uptime, usage, latency, jitter, packet loss and interface MOS of the routers within the group.

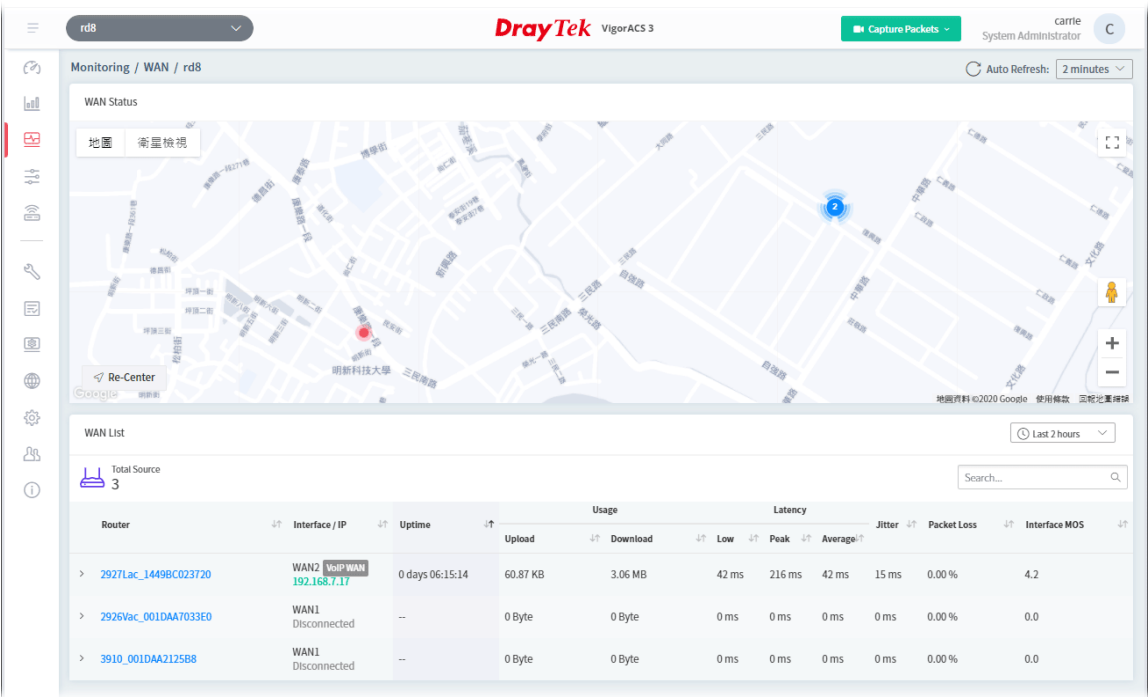

These parameters are explained as follows:


Item	Description
WAN Status	Display the location of the network group.
WAN List	Display the total number of CPEs within the selected group.

Click the name link of the router to get the following page.

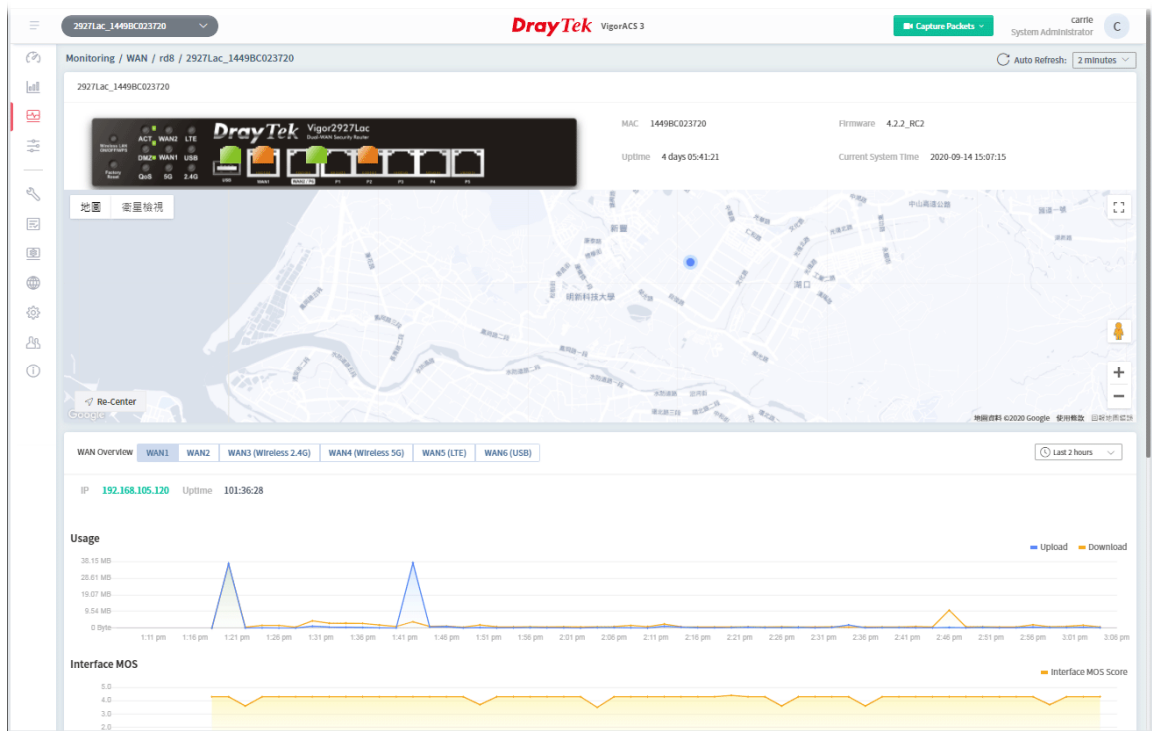

4.4.2 VPN (SD-WAN)

The monitoring page will vary based on VPN established or not. Before establishing VPN, the page will be shown as follows:

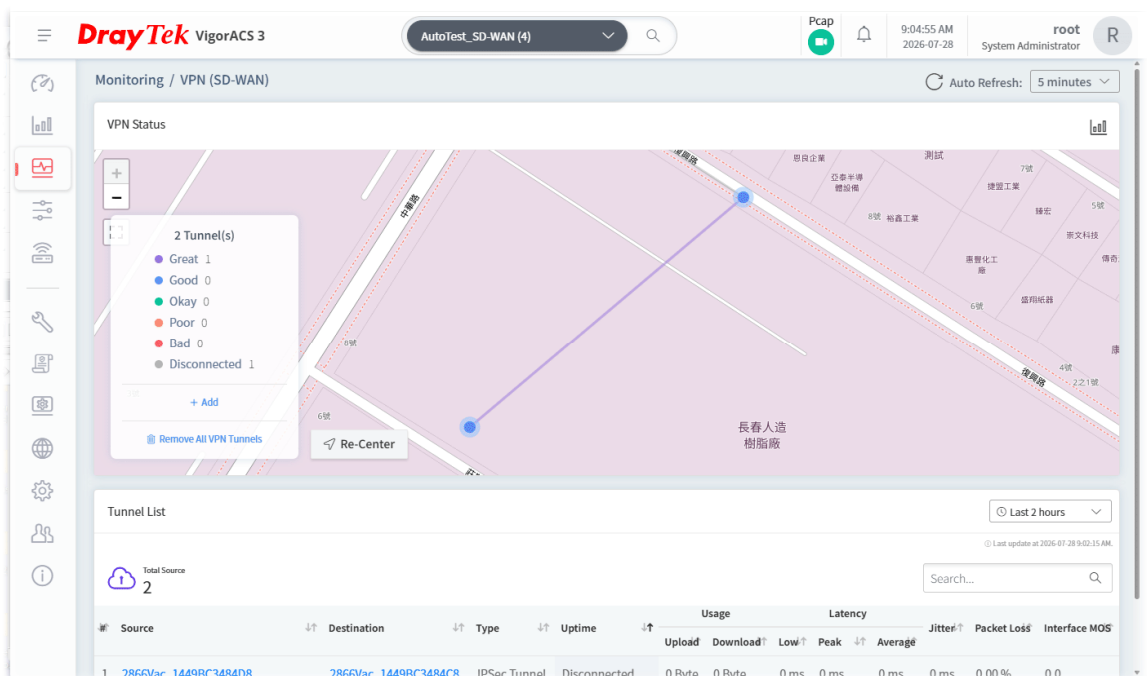

4.4.2.1 AutoVPN Establishment

As a Hub-and-Spoke network,



- VigorACS will create 1 IPsec tunnel from each spoke to the hub.
- VigorACS can auto create tunnels among the Routers.

- Vigor ACS is capable to design and suggest LAN subnets for all CPEs if meeting subnet conflicts.

4.4.2.2 Creating VPN with Basic Mode


1. Click **+Add**. In default, the settings based on Basic Mode will be shown as follows.

These parameters for Basic Mode are explained as follows:

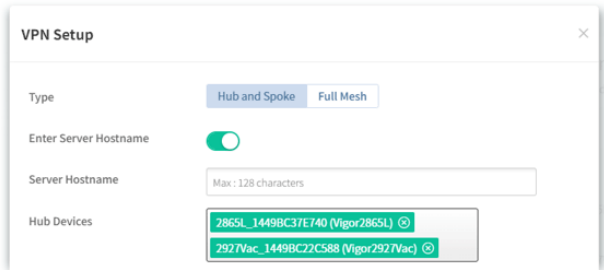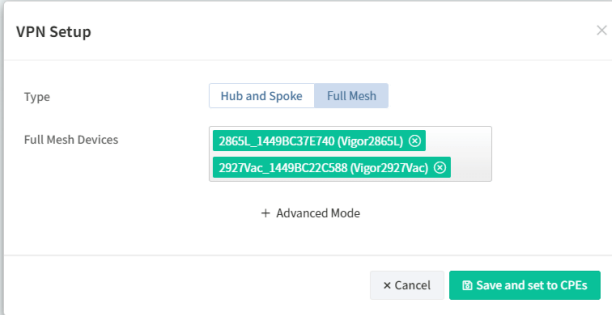Item	Description
Type	Hub and Spoke – Simply select a router as the hub router, the rests would be spokes automatically.  Full Mesh – It is effective only when there are more than three CPEs on the group. 
Enter Server Hostname	Switch the toggle to enable/disable the function. Server Hostname – Enter the hostname, URL of the server to establish

	the VPN connection.
Hub Devices / Full Mesh Devices	Lists the name of the hub device or full mesh device. Select one device as the hub device.
Support spokes count	Display the total number of devices, excluding the main device.
+Advanced Mode	Click to open the configuration page with more options.
Save and Set to CPEs	Save the above configuration and set to CPE devices.

2. Click **Save and set to CPEs**.

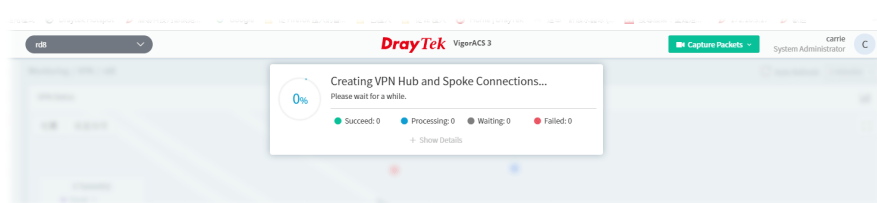

3. The VPN tunnel has been set successfully.



4.4.2.3 Creating VPN with Advanced Mode



1. Click **+Add VPN Tunnel** to get the following page.

2. Click **+Advanced Mode** to get the following page.


These parameters for Advanced Mode are explained as follows:

Item	Description
Spoke Devices	Lists the name of the devices. Select one device as the spoke device.
VPN Connection Through	Select a WAN interface. WANx First - While connecting, the router will use WANx or LTE as the first channel for VPN connection. If WANx or LTE fails, the router will use another WAN interface instead. WANx Only - While connecting, the router will use WANx or LTE as the first channel for VPN connection. If WANx or LTE fails, the connection will be off.
Dial Type	Select one of the tunnels for this VPN profile. ● IPsec Tunnel ● PPTP ● L2TP ● SSL
IPsec - IPsec Tunnel is selected as Dial Type	
IPsec	Customize IKE Pre-Shared Key - Click to enable or disable the IKE PSK setting. IKE Pre-Shared Key - Enter a string as PSK. IPsec Security Method - Authentication Header (AH) means data will be authenticated, but not be encrypted. The Encapsulating Security

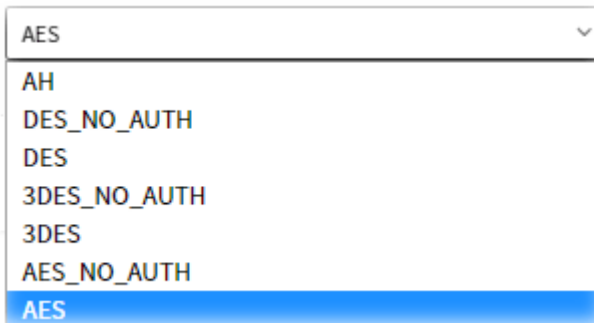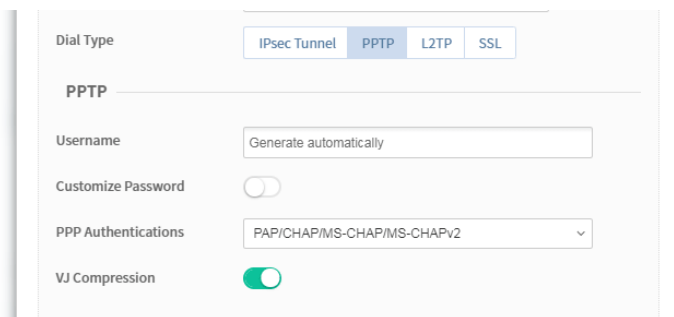
	Payload (ESP) protocol can be used to provide authentication and encryption to IPsec traffic. Three encryption standards are supported for ESP: DES, 3DES and AES, in ascending order of security. DES_NO_AUTH, 3DES_NO_AUTH and AES_NO_AUTH means the packets will be encrypted with no authentication. 
PPTP – PPTP is selected as Dial Type	
PPTP	Username – Enter a username for establishing VPN connection. Customize Password – Click to enable the password configuration. Password – Enter a username for establishing VPN connection. PPP Authentications – Authenticate dial-in users using the PAP protocol only or PAP/CHAP/MS-CHAP/MS-CHAPv2. VJ Compression – Click to enable Van Jacobson (VJ) header compression to improve throughput on slow connections. 
L2TP – L2TP is selected as Dial Type	
L2TP	L2TP with IPsec Policy – Allow the remote dial-in user to make a L2TP VPN connection through the Internet. You can select to use L2TP alone or with IPsec. Select from below: None – Do not apply the IPsec policy. Accordingly, the VPN connection employed the L2TP without IPsec policy can be viewed as one pure L2TP connection. Nice to Have – Apply the IPsec policy first, if it is applicable during negotiation. Otherwise, the dial-in VPN connection becomes one pure L2TP connection. Must – Specify the IPsec policy to be definitely applied on the L2TP connection.

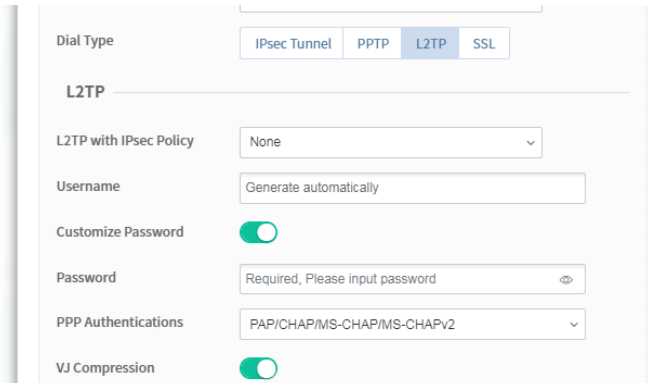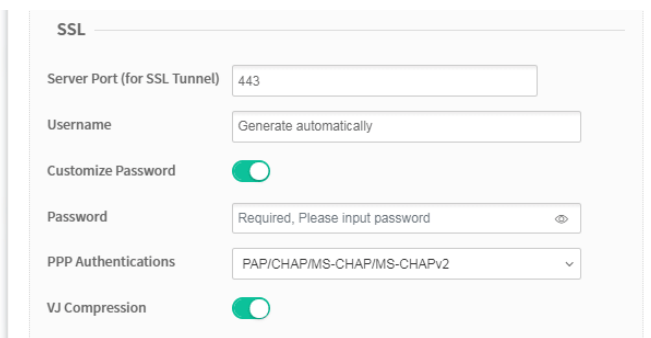	Username – Enter a username for establishing VPN connection. Customize Password – Click to enable the password configuration. Password – Enter a username for establishing VPN connection. PPP Authentications – Authenticate dial-in users using the PAP protocol only or PAP/CHAP/MS-CHAP/MS-CHAPv2. VJ Compression – Click to enable Van Jacobson (VJ) header compression to improve throughput on slow connections. 
SSL	Server Port (for SSL Tunnel) – Enter a port number for SSL Tunnel. The default is 443. Username – Enter a username for establishing VPN connection. Customize Password – Click to enable the password configuration. Password – Enter a username for establishing VPN connection. PPP Authentications – Authenticate dial-in users using the PAP protocol only or PAP/CHAP/MS-CHAP/MS-CHAPv2. VJ Compression – Click to enable Van Jacobson (VJ) header compression to improve throughput on slow connections. 
-Basic Mode	Click to return to configuration page with less options.
Save and Set to CPEs	Save the above configuration and set to CPE devices.


- After finished and save the above settings, the VPN tunnel has been set successfully.

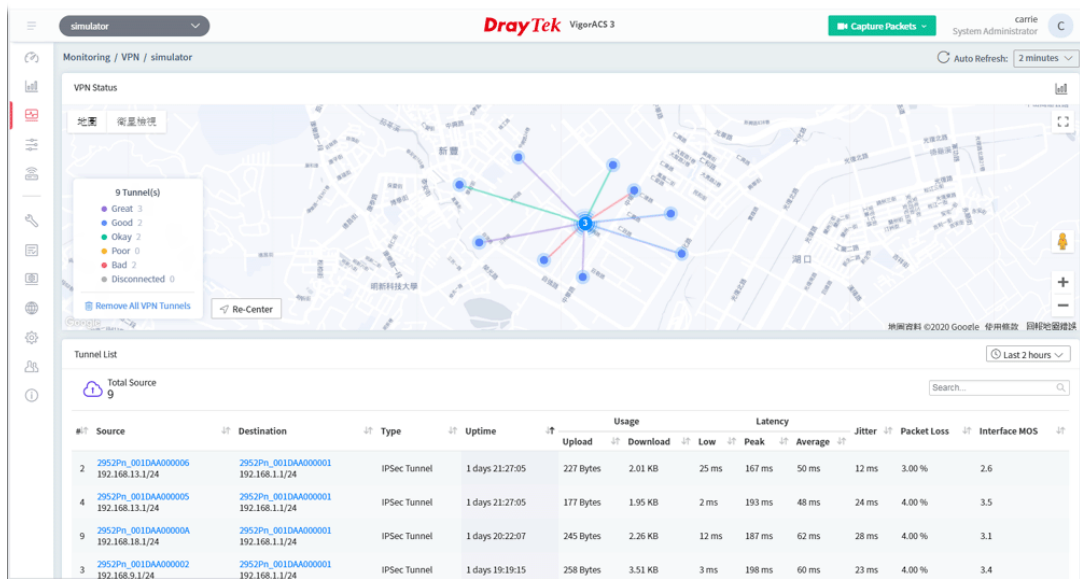


To have a sankey diagram, please click the right-top icon to display the following page.

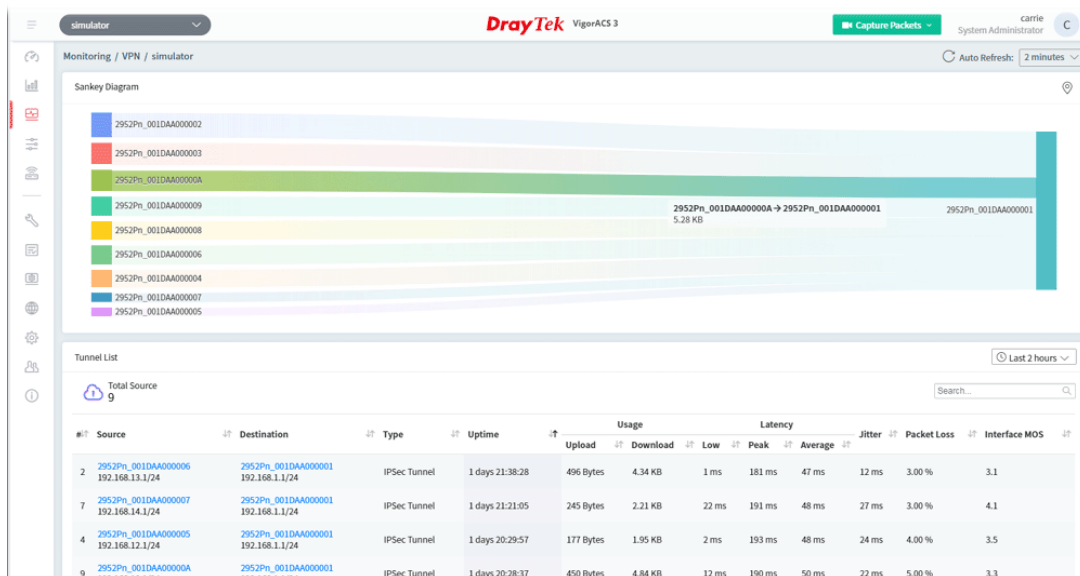


From the **Tunnel List**, click any CPE link to display the detailed information (e.g., Usage, Interface MOS, Latency and etc.) of the CPE. Here we take Vigor2952Pn as an example.

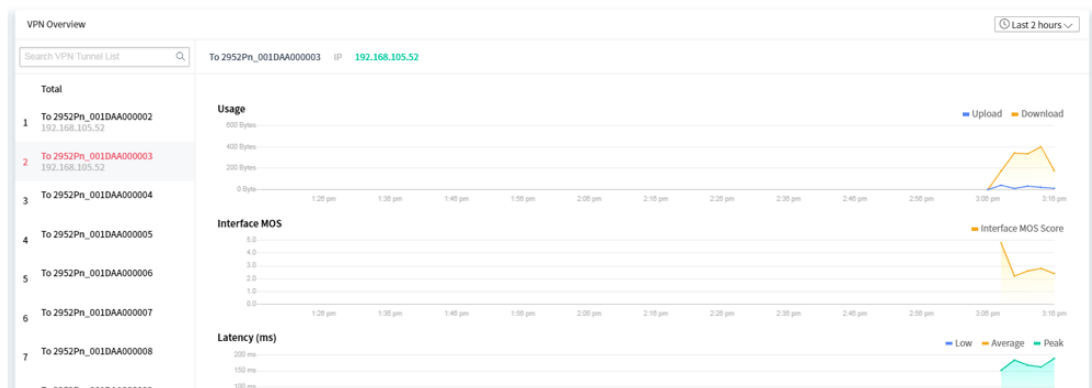

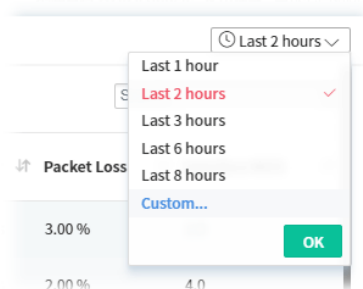

4.4.3 VoIP (SD-WAN)

VoIP call list displays the communication status related to incoming and outgoing calls via VoIP WAN.

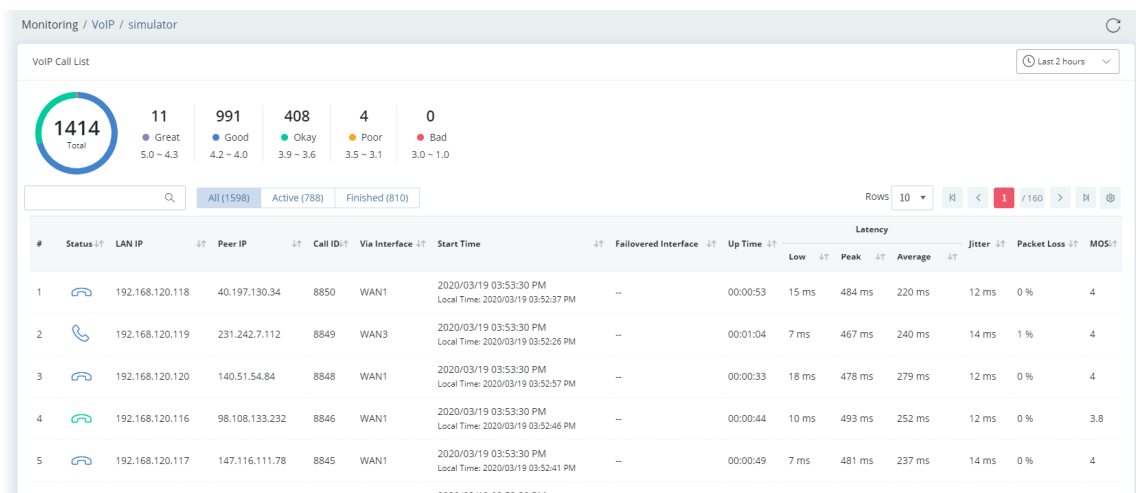


These parameters are explained as follows:

Item	Description
Great, Good, Okay, Poor, Bad	All the VoIP calls will be separated with different levels according to its quality.
	Enter the IP address (LAN IP/ Peer IP) as a condition to search the VoIP call.
Status	Display the status of the phone call. - Active call. Quality level is Good. - Finished call. Quality level is Good. - Finished call. Quality level is Okay.
LAN IP	Display the IP address of the local side.
Peer IP	Display the IP address of the peer side.
Call ID	Display the ID number of the caller.
Via Interface	Display the interface that VoIP call passing through.


Start Time	Display the start time of the VoIP call.
Failovered Interface	Display the failover interface for VoIP calls passing through.
Up Time	Display the time length of the VoIP call.
Latency	Display the transmission latency data (low, peak and average values) of the VoIP call.
Jitter	Display the packet jitter value of the VoIP call.
Packet Loss	Display the packet loss of the VoIP call.
MOS	Display the mean opinion score of the VoIP call. 1 means the worst; 5 means the best.

4.4.4 Data Usage (SD-WAN)

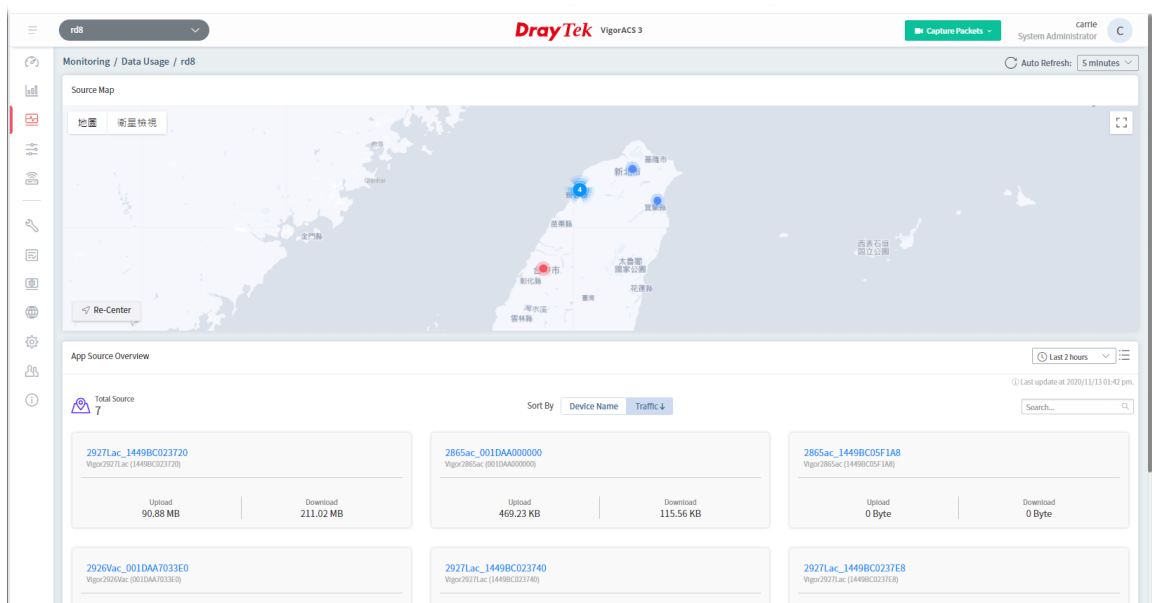

4.4.4.1 Data Usage of Selected CPE


Click a device link (e.g., Vigor2927Lac in this case).

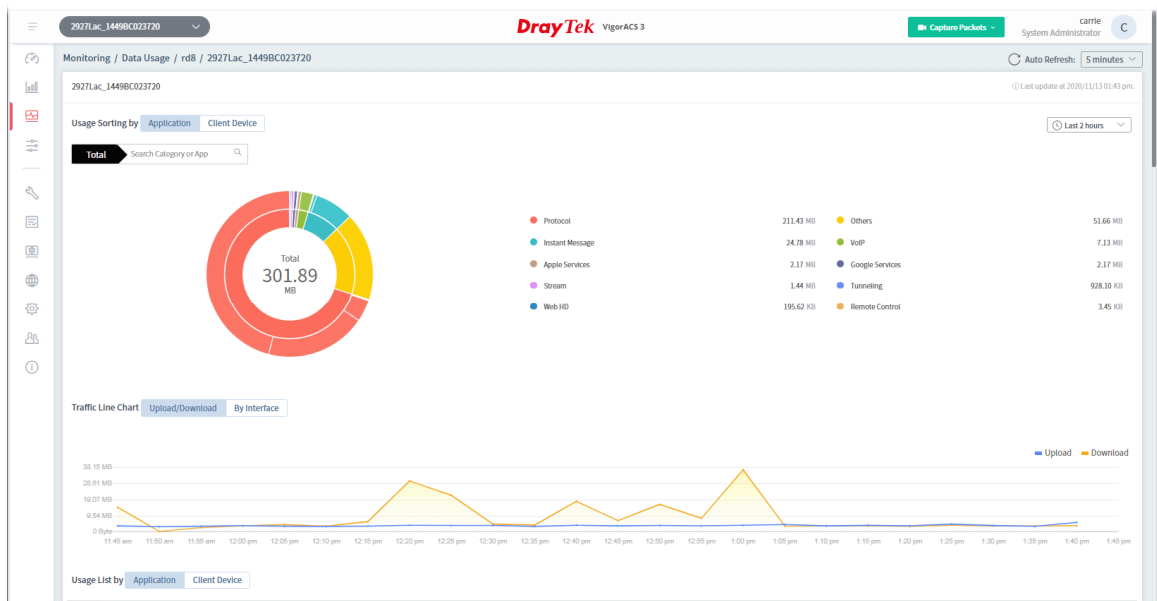

These parameters are explained as follows:


Item	Description
Usage Sorting by	Display a pie chart related to various application usage. Application - Click to display a pie chart for various application usage. Client Device - Click to display a pie chart for the selected CPE.
Traffic Line Chart	Display a line chart related to data upload/download, or traffic via the WAN interface. Upload/Download - Click to display data upload/download. By Interface - Click to display a line chart related to traffic via the WAN interface.
Usage List by	Display the data usage for common Apps or for connected client. Application - Click to display the data information related to various applications, including name of application, number of users, upload and download usage. Client Device - Click to display data information for the selected CPE, including host name, IP address, MAC address, connection type,

operation system, upload and download usage.

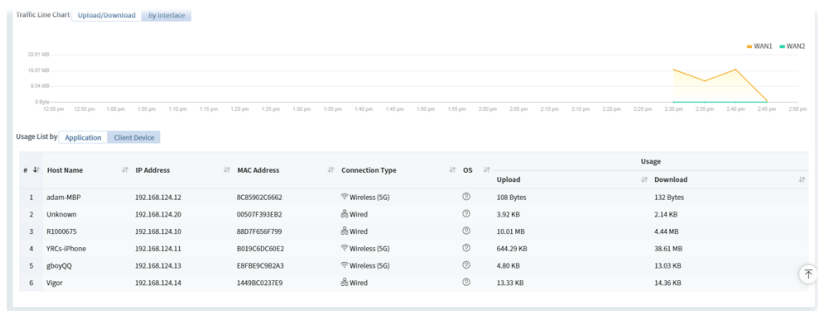


Chapter 5 SD-WAN CPE

The menu items related to a CPE:

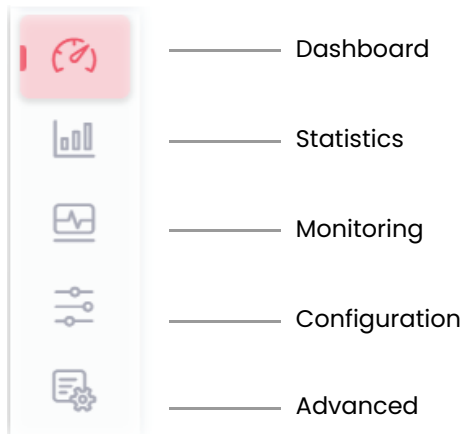


5.1 Dashboard for SD-WAN CPE

To display the SD-WAN CPE dashboard, find the one (a CPE with SD-WAN feature) you want from the list under the Model tab.

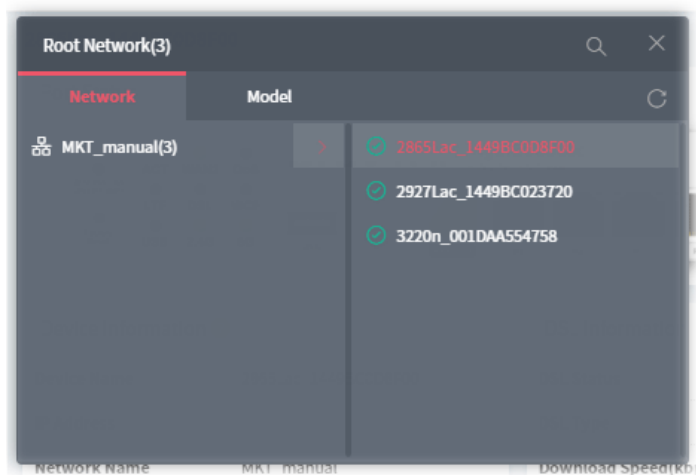


In this case, we choose Vigor2865 series (e.g., Vigor2865Vac) as an example.

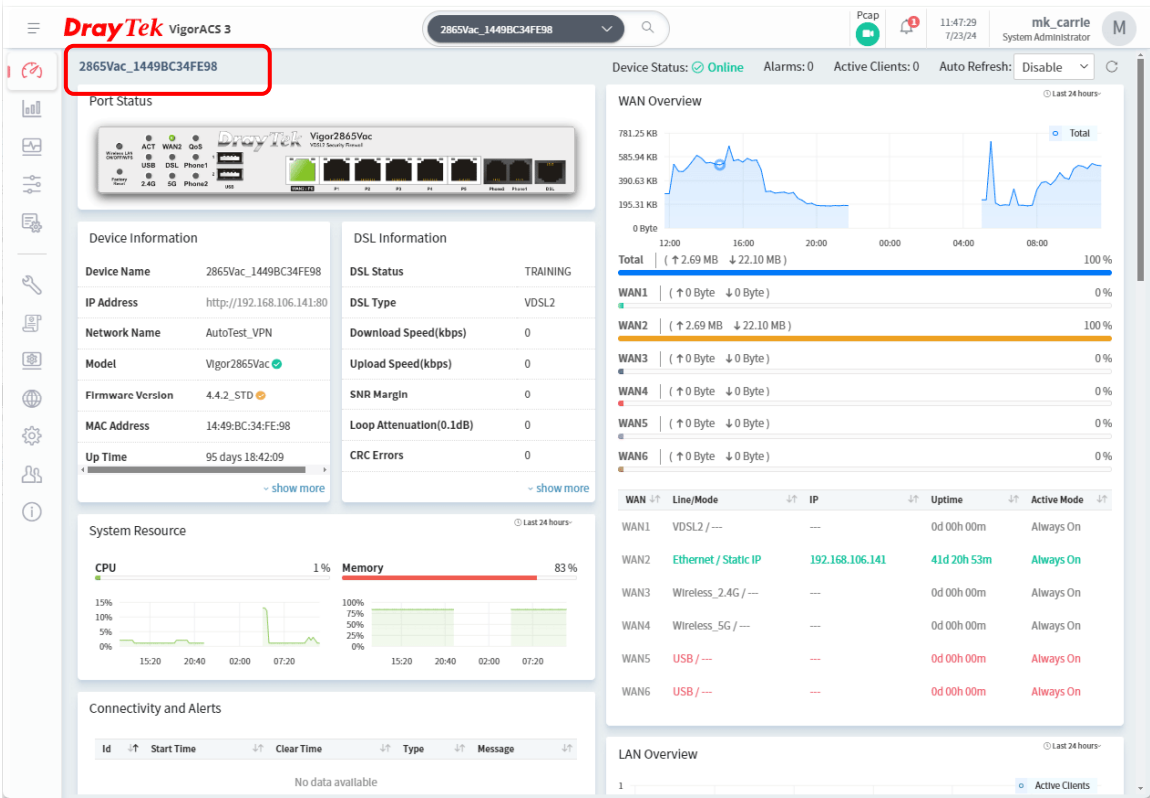

5.2 Statistics for SD-WAN CPE

The page offers statistics for all the devices listed under root networks, including usage overview, wireless clients Overview, data traffic, device ranking, and client ranking. By clicking Last 24 Hours, Last 7 Days, Last 30 Days or Custom setting (define the period), the administrator can obtain various statistics within the time period.

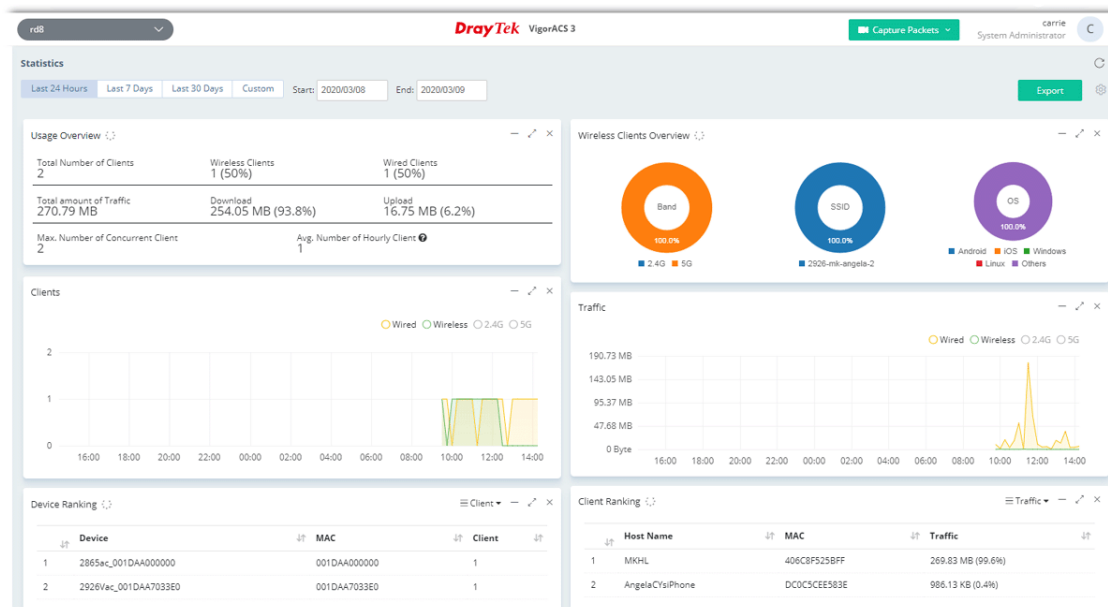


In addition, the statistics can be exported as ".XLS" file if you click the **Export** button on the top side.

5.3 Monitoring for SD-WAN CPE

Monitoring menu offers options for monitoring the normal and abnormal actions for network, group and CPE. This section offers Monitoring menu items for a selected SD-WAN CPE.

In this section, we choose Vigor2927Vac/Vigor2865ac series as an example.

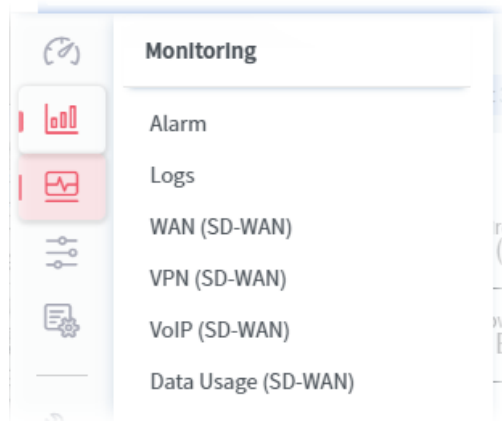

5.3.1 Alarm

Alarm message will be recorded on VigorACS 3 server when there is a trouble happened to the selected device (CPE).

The screenshot shows the DrayTek VigorACS 3 interface. At the top, there's a header with the DrayTek logo, 'VigorACS 3', a search bar containing '2927Lac_1449BC3E3C18', and user information 'root System Administrator'. Below the header, the 'Monitoring / Alarm' section is active. It shows a date range '2026/06/28 to 2026/07/28' and a search bar. The 'Alarm' tab is selected, showing a table with one alarm record.

No.	Ack Status	Time	Device Name	Network Name	MAC Address	Alarm Level	Alarm Message	Alarm Type
1044838	Not Ack	2026-07-28 9:10:20 AM	2927Lac_1449BC3E3C18	AutoTest_SD-WAN	14:49:BC:3E:3C:18	Critical	Device Loss Connection	Device Lost Connection

The screenshot shows the DrayTek VigorACS 3 interface with the 'History' tab selected. It displays a list of alarm records that have been solved and cleared. The table includes columns for No., Time, Device Name, Network Name, MAC Address, Clear Time, Alarm Level, and Alarm Message.

No.	Time	Device Name	Network Name	MAC Address	Clear Time	Alarm Level	Alarm Message
974825	2026-07-27 11:13:50 AM	2927Lac_1449BC3E3C18	AutoTest_SD-WAN	14:49:BC:3E:3C:18	2026-07-28 8:42:10 AM	Critical	Device Loss Connection
974824	2026-07-27 11:13:50 AM	2927Lac_1449BC3E3C18	AutoTest_SD-WAN	14:49:BC:3E:3C:18	2026-07-28 8:42:10 AM	Critical	Device Loss Connection
904796	2026-07-21 9:51:13 AM	2927Lac_1449BC3E3C18	AutoTest_SD-WAN	14:49:BC:3E:3C:18	2026-07-27 10:51:15 AM	Critical	Device Loss Connection
850198	2026-07-17 5:25:21 PM	2927Lac_1449BC3E3C18	AutoTest_SD-WAN	14:49:BC:3E:3C:18	2026-07-21 9:34:08 AM	Critical	Device Loss Connection
834681	2026-07-07 2:47:04 PM	2927Lac_1449BC3E3C18	AutoTest_SD-WAN	14:49:BC:3E:3C:18	2026-07-17 5:00:26 PM	Critical	Device Loss Connection
764678	2026-07-07 2:09:46 PM	2927Lac_1449BC3E3C18	AutoTest_SD-WAN	14:49:BC:3E:3C:18	2026-07-07 2:15:20 PM	Critical	Device Loss Connection
694666	2026-07-07 11:26:10 AM	2927Lac_1449BC3E3C18	AutoTest_SD-WAN	14:49:BC:3E:3C:18	2026-07-07 1:48:52 PM	Critical	Device Loss Connection

These parameters are explained as follows:

Item	Description
Alarm / History	Alarm – Display the alarm records recently. History – Display all the alarm records that have been solved and cleared.
Delete	Clear the alarm record which has been solved by VigorACS 3.
Ack Alarm/UnAck Alarm	Ack Alarm – Click to mark the selected alarm as acknowledged. This indicates that an administrator has reviewed the alarm and is handling it. UnAck Alarm – Click to mark the selected alarm as unacknowledged. This indicates that no administrator has acknowledged the alarm.
Delete All	Clear all of the alarm records which have been solved by VigorACS 3.
Download	Click to save alarm log as a XLS file.

No.	Display the index number of the alarm. It is offered by VigorACS 3 automatically.
Ack Status	Display the status of the records with the type specified here (Not Ack or Acked).
Time	Display the time of the device to be monitored.
Device Name	Display the name of the monitored device.
Network Name	Display the name of the network group.
MAC Address	Display the MAC address of the monitored device.
Alarm Level	Display the alarm message with the severity (e.g., Critical) specified.
Alarm Message	Display a brief explanation for the alarm sent by VigorACS 3 automatically.
Alarm Type	Display the type of the alarm (e.g., Device Lost Connection).
Ack Time	Display the time when the alarm was acknowledged.
Ack User	Display the administrator who acknowledged the alarm.

5.3.2 Logs

Log provides administrator records for all CPE Actions, Device Reboot, Reboot by CPE, Reset System Password, Set Parameter, File Transfer, Setting Profile, Device SysLog, CPE Notify, Device Register and Device Operate. Click each tab to get more detailed information.

The following page shows the log for all CPE actions executed, device name, MAC address, Device IP, and Current Time for CPE device managed and monitored by VigorACS.

ID	Device Name	Device ID	MAC Address	Current IP	Logged IP	Action	Action ID	Time
212081	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/23 12:36:41
212080	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/23 10:51:39
212041	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/23 05:21:33
212038	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/23 05:06:31
212035	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/23 05:00:13
212034	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/22 16:36:19
212023	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/22 14:21:17
212000	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/22 08:51:13
211998	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/22 08:36:13
211965	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/22 05:06:09
211962	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/22 05:00:15
211955	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/21 20:36:00
211938	2865Vac_1449BC34FE98	104956	14:49:BC:34:FE:98	192.168.106.141	192.168.106.141	Inform	---	2024/07/21 16:35:57


These parameters are explained as follows:

Item	Description
Log Type	Click one of the tabs (e.g., All CPE Actions, Device Reboot, Reboot By CPE, Reset System Password, Set Parameter, File Transfer, Setting Profile, Device SysLog, CPE Notify, Device Register, Device Operate and etc.) to display related log on this page.
search ID / Device Name / De Q	Enter the condition for VigorACS to search and display relational information.
Delete	Clear the selected record.
Delete All	Clear all of the records.
Download	Click this button to save log as a XLS file.


5.3.3 Flow

Vigor router adopts the function of NetFlow to collect the quantity and data of incoming and outgoing packets. With analysis of the collected data, the network administrator can get the source and destination IPs of the packets, type of network service, and the reason for network congestion.


Type 1: The working diagram among VigorConnect, Vigor router, and Standalone VigorACS.

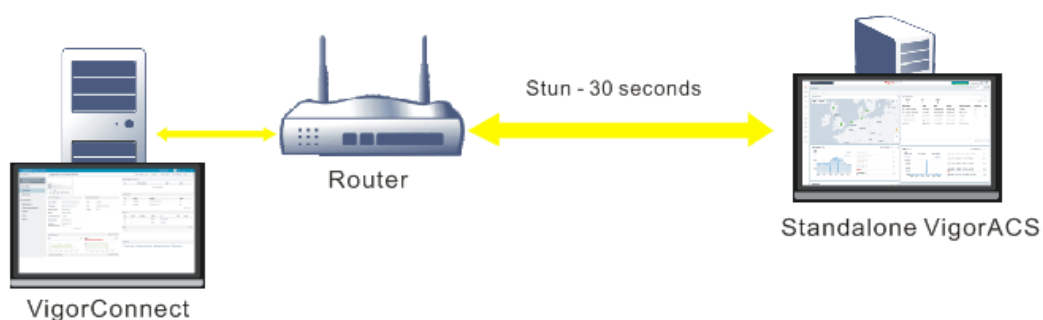

Type 2: The working diagram among VigorConnect, Vigor router, XMPP Server, and Cloud/Cluster VigorACS.

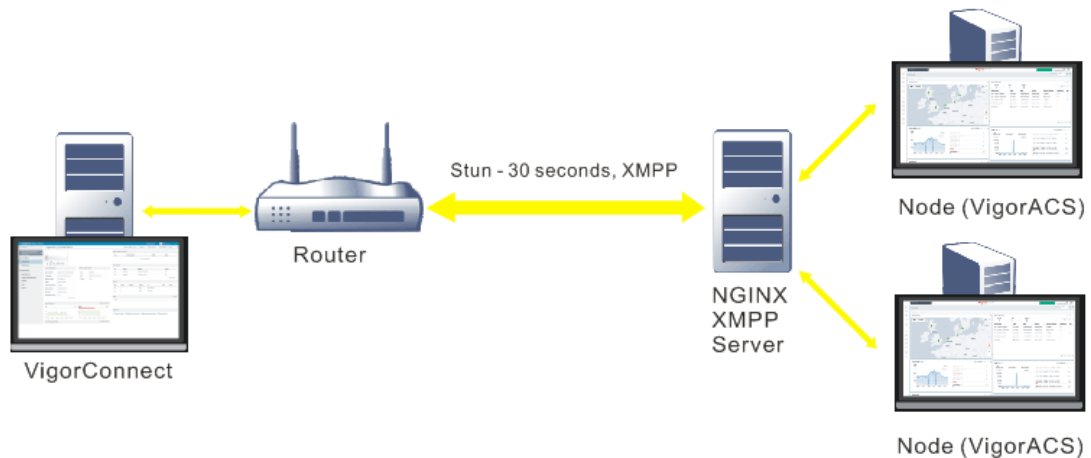

The following page appears if visiting this page for the first time.

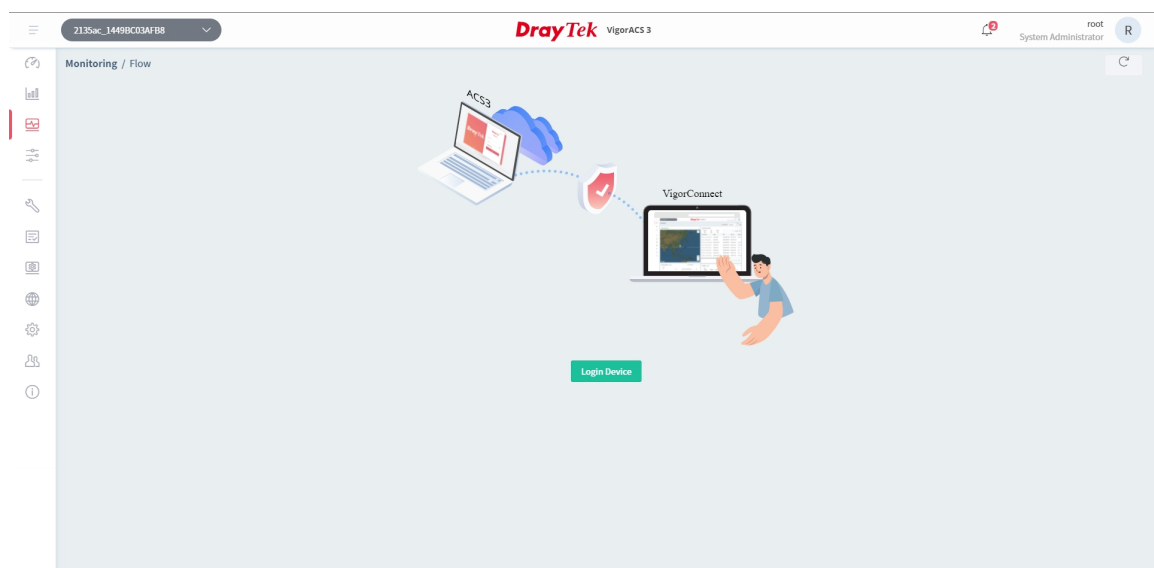


Click **Login Device** to display the advanced page.

-
-  The device must support and enable the NetFlow protocol. In addition, it has to be registered to both VigorACS and VigorConnect first.
-

5.3.3.1 Device Overview


NetFlow uses several types of data to identify the data flow, for example, source IP address, destination IP address, source port number, destination port number, IP protocol, interface, and so on.

This page displays the pie charts and tables related to the IP address(es) and the transmission data usage of the selected device.

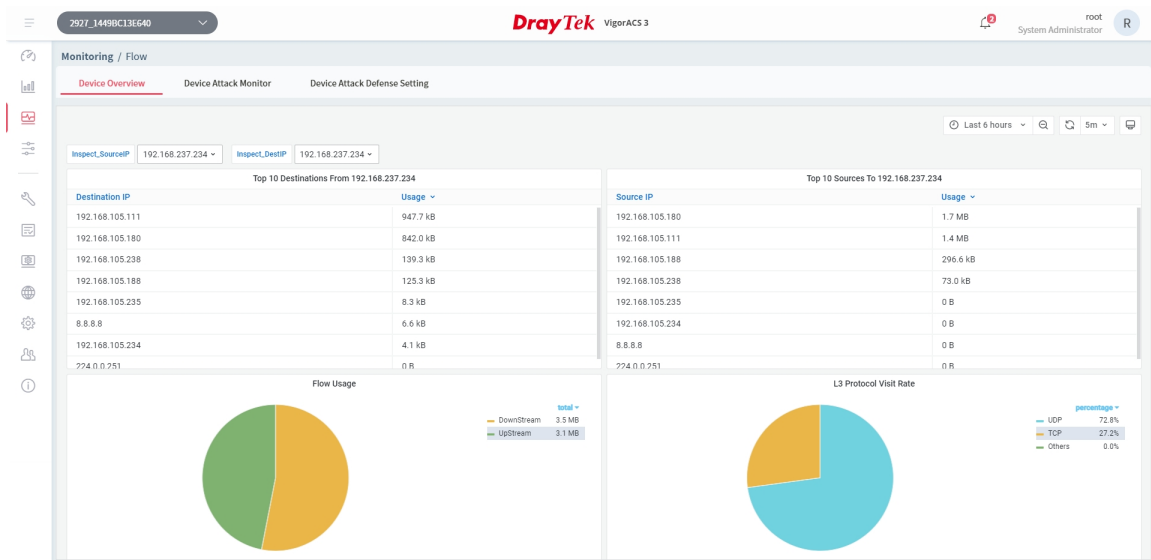


5.3.3.2 Device Attack Monitor

This page displays data information related to attacks on the device. Use the scroll bar to the right side of each column to get/view the detailed information.

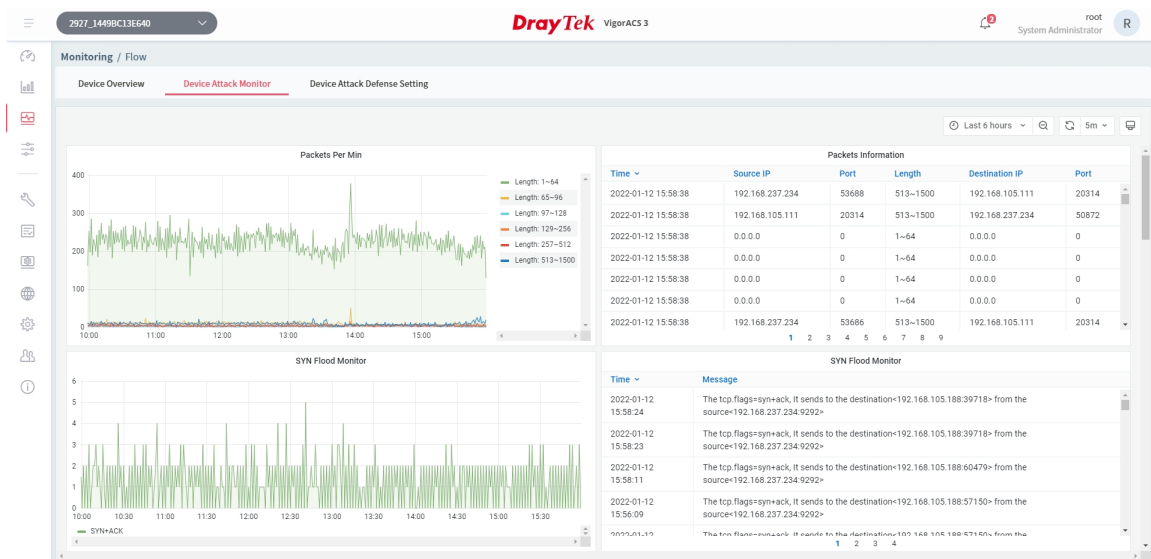

5.3.3.3 Device Attack Defense Setting


The purpose of this page is to configure the attack defense settings to detect the router from being attacked by external hackers or system attacks. When the volume of the transmitted packets arrives at a certain value and reaches the timeout, the system will notify the administrator through the mail, SMS, or SNMP service.

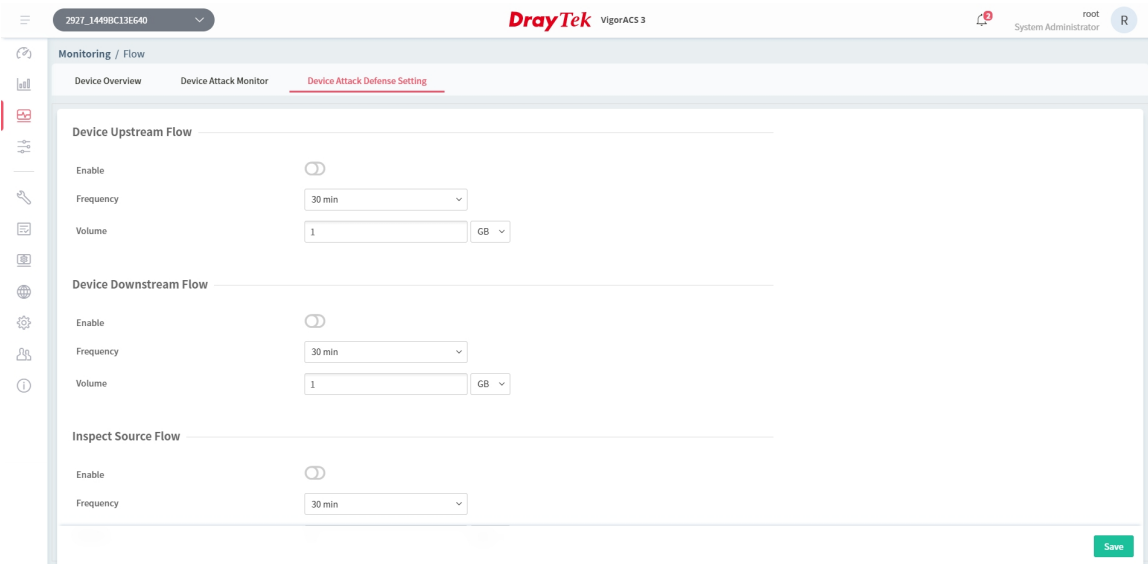


These parameters are explained as follows:

Item	Description
Device Upstream Flow / Device Downstream Flow	
Enable	Switch the toggle to enable the function of monitoring all upstream flow / downstream flow via this router.  - means "Enable".  - means "Disable".
Frequency	Set the timeout value.
Volume	Set the threshold value.

See the following example figure

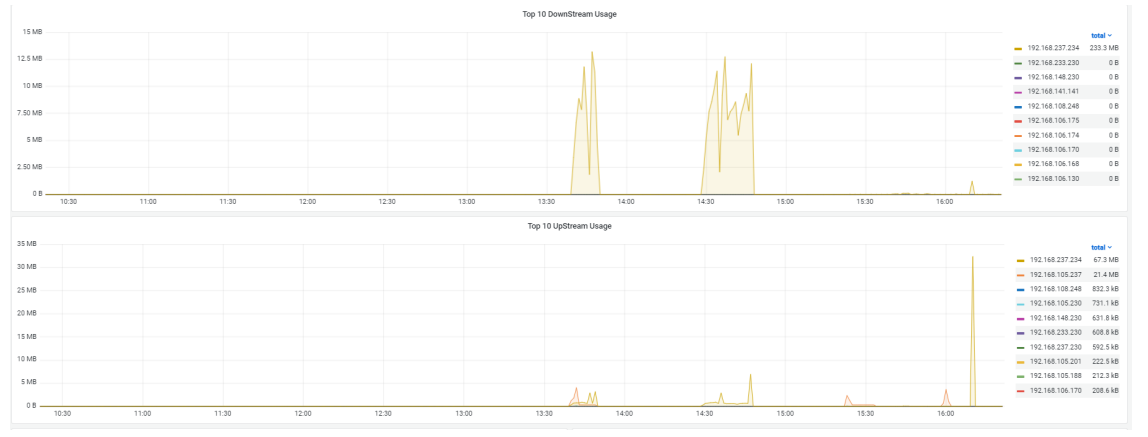

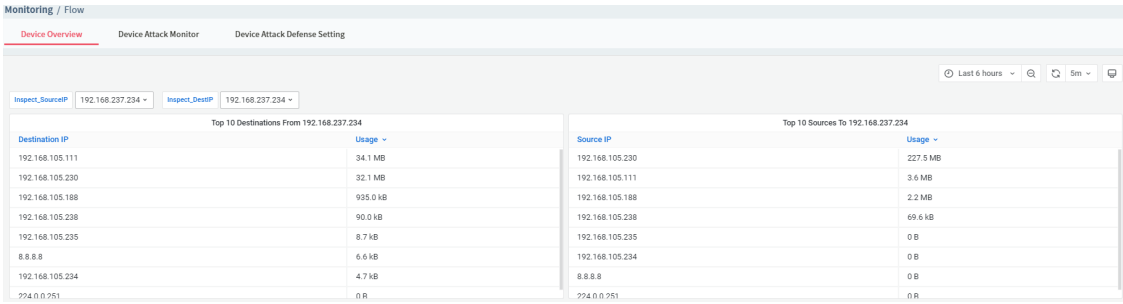Inspect Source Flow / Inspect Destination Flow																																					
Enable	Switch the toggle to enable the function of monitoring the data flow for specified source IP / destination IP.																																				
Frequency	Set the timeout value.																																				
Volume	Set the threshold value.																																				
See the following example figure																																					
 The screenshot displays the 'Monitoring / Flow' section of a network management interface. It shows two tables: 'Top 10 Destinations From 192.168.237.234' and 'Top 10 Sources To 192.168.237.234'. The destination table lists various IP addresses and their corresponding usage in MB and kB. The source table lists various IP addresses and their corresponding usage in MB and kB. <table border="1"> <thead> <tr> <th>Destination IP</th> <th>Usage</th> </tr> </thead> <tbody> <tr><td>192.168.105.111</td><td>34.1 MB</td></tr> <tr><td>192.168.105.230</td><td>32.1 MB</td></tr> <tr><td>192.168.105.188</td><td>935.0 kB</td></tr> <tr><td>192.168.105.238</td><td>90.0 kB</td></tr> <tr><td>192.168.105.235</td><td>8.7 kB</td></tr> <tr><td>8.8.8.8</td><td>6.6 kB</td></tr> <tr><td>192.168.105.234</td><td>4.7 kB</td></tr> <tr><td>224.0.0.251</td><td>0 B</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Source IP</th> <th>Usage</th> </tr> </thead> <tbody> <tr><td>192.168.105.230</td><td>227.5 MB</td></tr> <tr><td>192.168.105.111</td><td>3.6 MB</td></tr> <tr><td>192.168.105.188</td><td>2.2 MB</td></tr> <tr><td>192.168.105.238</td><td>69.6 kB</td></tr> <tr><td>192.168.105.235</td><td>0 B</td></tr> <tr><td>192.168.105.234</td><td>0 B</td></tr> <tr><td>8.8.8.8</td><td>0 B</td></tr> <tr><td>224.0.0.251</td><td>0 B</td></tr> </tbody> </table>		Destination IP	Usage	192.168.105.111	34.1 MB	192.168.105.230	32.1 MB	192.168.105.188	935.0 kB	192.168.105.238	90.0 kB	192.168.105.235	8.7 kB	8.8.8.8	6.6 kB	192.168.105.234	4.7 kB	224.0.0.251	0 B	Source IP	Usage	192.168.105.230	227.5 MB	192.168.105.111	3.6 MB	192.168.105.188	2.2 MB	192.168.105.238	69.6 kB	192.168.105.235	0 B	192.168.105.234	0 B	8.8.8.8	0 B	224.0.0.251	0 B
Destination IP	Usage																																				
192.168.105.111	34.1 MB																																				
192.168.105.230	32.1 MB																																				
192.168.105.188	935.0 kB																																				
192.168.105.238	90.0 kB																																				
192.168.105.235	8.7 kB																																				
8.8.8.8	6.6 kB																																				
192.168.105.234	4.7 kB																																				
224.0.0.251	0 B																																				
Source IP	Usage																																				
192.168.105.230	227.5 MB																																				
192.168.105.111	3.6 MB																																				
192.168.105.188	2.2 MB																																				
192.168.105.238	69.6 kB																																				
192.168.105.235	0 B																																				
192.168.105.234	0 B																																				
8.8.8.8	0 B																																				
224.0.0.251	0 B																																				
APP Flow																																					
Enable	Switch the toggle to enable the function of monitoring the data flow coming from various APPs via the router.																																				
Frequency	Set the timeout value.																																				
Volume	Set the threshold value.																																				
SYN Flood																																					
Enable	Switch the toggle to enable the function of monitoring SYN flood defense. When the arrival rate of SYN packets exceeds the Threshold value, the router will start to randomly discard TCP SYN packets for a period of time as defined in Timeout. This is to prevent TCP SYN packets from exhausting router resources. The default values of threshold and timeout are 2000 packets per second and 10 seconds, respectively.																																				
Frequency	Set the timeout value.																																				
Volume	Set the threshold value.																																				
ICMP Flood																																					
Enable	Switch the toggle to enable the function of monitoring ICMP flood defense. When the arrival rate of ICMP packets exceeds the Threshold value, the router will start to randomly discard TCP SYN packets for a period of time as defined in Timeout. The default values of threshold and timeout are 250 packets per second and 10 seconds, respectively.																																				

Frequency	Set the timeout value.
Volume	Set the threshold value.
UDP Flood	
Enable	Switch the toggle to enable the function of monitoring UDP flood defense. When the arrival rate of UDP packets exceeds the Threshold value, the router will start to randomly discard TCP SYN packets for a period of time as defined in Timeout. The default values of threshold and timeout are 2000 packets per second and 10 seconds, respectively.
Frequency	Set the timeout value.
Volume	Set the threshold value.
Land Flood	
Enable	Switch the toggle to enable the function of monitoring LAND attack events.
Frequency	Set the timeout value.
Volume	Set the threshold value.
Tiny Fragment	
Enable	Switch the toggle to enable the function of monitoring SYN packet fragments.
Frequency	Set the timeout value.
Volume	Set the threshold value.
Push ACK Flood	
Enable	Switch the toggle to enable the function monitoring the ACK Flood attack.
Frequency	Set the timeout value.
Volume	Set the threshold value.
RST Flood	
Enable	Switch the toggle to enable the function of monitoring the RST Flood attack.
Frequency	Set the timeout value.
Volume	Set the threshold value.
Save	Click to save the settings.

5.3.4 Diagnostics

The menu items for Diagnostics will vary based on the CPE model. In this case, we take Vigor2865 series as an example.

5.3.4.1 Ping

The screenshot shows the 'Monitoring / Diagnostics' section for a Vigor2865 device. The 'Ping' tab is selected in the left sidebar. The configuration fields are as follows:

- Protocol: IPv4
- Ping Through: Auto
- Ping To: DNS-8.8.8.8
- Source IP: Auto
- IP Address: 8.8.8.8


A blue note box contains the following text:

① Note:

- 1. If you want to ping a LAN PC or you don't want to specify which WAN to ping through, please select 'Auto' in Ping Through
- 2. If you select 'Auto' in Source IP, we will fill Source IP according to the interface you ping through.

A green 'Run' button is located at the bottom right of the configuration area.

These parameters are explained as follows:

Item	Description
Protocol	Select the protocol (IPv4 or IPv6) to perform the ping operation.
Ping Through	Select a WAN interface from drop down list to through which you want to perform the ping operation, or choose Auto to be let the router select the WAN interface.
Ping To	Select the type of target (Host/IP, DNS, Gateway) to which you wish to ping. 
Source IP	Select a WAN IP as the source IP. If Auto is selected, the source IP will be specified according to the interface chosen for ping through.
IP Address	Enter the IP address of the Host/IP that you want to ping.
Run	Click to perform the job.

5.3.4.2 Trace Route

This page allows you to trace the routes from router to the host. Simply Enter the IP address of the host in the box and click **Run**. The result of route trace will be shown on the screen.

These parameters are explained as follows:

Item	Description
Type	Select the IP version (IPv4/IPv6) used to perform the trace route.
Trace through	Select the WAN interface used to perform the trace route.
Protocol	Select either UDP or ICMP used to perform the trace route.
IP Address / Domain	Enter the hostname or the IP address of trace route destination.
Run	Click to perform the job.

5.3.4.3 Routing Table

This page displays the IPv4/IPv6 routing information.

Index	Destination	Subnet Mask	Gateway	Key	Face
1	0.0.0.0	0.0.0.0	192.168.105.1	*	WAN2
2	192.168.105.0	255.255.255.0	directly connected	C	WAN2
3	192.168.10.0	255.255.255.255	192.168.1.2	S~	LAN1
4	192.168.1.0	255.255.255.0	directly connected	C~	LAN1
5	211.100.88.0	255.255.255.255	192.168.1.3	S~	LAN1

Key
C: Connected S: Static R: RIP *: default -: private B: BGP

Destination	Prefix Length	Interface	Flags	Metric	Next Hop
FE80::	64	LAN1	U	256	::
FE80::	64	LAN2	U	256	::
FE80::	64	LAN3	U	256	::
FE80::	64	LAN4	U	256	::
FE80::	64	LAN5	U	256	::
FE80::	64	LAN6	U	256	::
FE80::	64	LAN7	U	256	::
FE80::	64	LAN8	U	256	::
FE80::	64	DMZ	U	256	::
FF00::	8	LAN1	U	256	::
FF00::	8	LAN2	U	256	::

5.3.4.4 ARP Table

This page displays the contents of the ARP (Address Resolution Protocol) cache held in the router. The table shows the mappings between Ethernet hardware addresses (MAC Addresses) and IP addresses.

The top screenshot shows the ARP Table interface with the LAN tab selected. The table displays the following data:

Index	IP	MAC Address	HOST ID	Interface	VLAN	Port	Device	Description	Comment
15	192.168.1.10	18-D6-C7-01-A2-34	R1000675	LAN1	---	P3			

The bottom screenshot shows the ARP Table interface with the WAN tab selected. The table displays the following data:

Index	IP	MAC Address	HOST ID	Interface	VLAN	Port	Device	Description	Comment
1	192.168.105.52	00-1D-AA-F8-D8-19		WAN2	---	--			
2	192.168.105.59	00-1D-AA-66-E0-21		WAN2	---	--			
3	192.168.105.62	00-1D-AA-F7-C0-E2		WAN2	---	--			
4	192.168.105.71	00-50-7F-F1-00-16		WAN2	---	--			
5	192.168.105.81	00-1D-AA-7D-65-14		WAN2	---	--			
6	192.168.105.96	00-1D-AA-BA-BB-C9		WAN2	---	--			
7	192.168.105.97	00-1D-AA-BA-BE-51		WAN2	---	--			

These parameters are explained as follows:

Item	Description
Show LAN / VLAN / WAN	Select the LAN(s), VLAN(s) and WAN(s) to display ARP table information. By default, information on all LANs, VLANs and WANs is displayed.

5.3.4.5 DHCP Table

This page provides information on IP address assignments. This information is helpful in diagnosing network problems, such as IP address conflicts, etc.

The screenshot shows the DHCP Table interface. The IPv4 Address Assignment Table displays the following data:

Name	IP	Mask	Start IP	End IP	DHCP Server
LAN1	192.168.1.1	255.255.255.0	192.168.1.10	192.168.1.209	On

Below the table, there is a note:

Note:
Please click on a specific LAN to display the detailed information of the DHCP client.

The IPv6 Address Assignment Table is empty, showing "No data available".

5.3.4.6 Sessions Table

This screen shows the 128 newest entries in the NAT sessions table.

2865ac_001DAA000000 / Monitoring / Diagnostics							
	Index	Private IP	Private Port	Pseudo Port	Peer IP	Peer Port	Interface
Ping	1	192.168.1.10	64325	32837	8.8.4.4	53	WAN2
Trace Route	2	192.168.1.10	64325	32837	8.8.8.8	53	WAN2
Routing Table	3	192.168.1.10	65186	33698	216.58.200.227	443	WAN2
ARP Table	4	192.168.1.10	65196	33708	52.229.206.30	443	WAN2
DHCP Table	5	192.168.1.10	65289	33801	40.90.189.152	443	WAN2
Sessions Table	6	192.168.1.10	65433	33945	204.79.197.219	443	WAN2
	7	192.168.1.10	49270	50550	210.61.142.105	30513	WAN2
	8	192.168.1.10	49300	50580	192.168.121.1	8069	WAN2
	9	192.168.1.10	49304	50584	172.16.3.136	8069	WAN2
	10	192.168.1.10	49322	50602	192.168.2.1	8069	WAN2
	11	192.168.1.10	49364	50644	20.184.57.167	443	WAN2
	12	192.168.1.10	49366	50646	210.61.142.105	30513	WAN2
	13	192.168.1.10	49388	50668	192.168.124.15	8069	WAN2
	14	192.168.1.10	49399	50679	192.168.124.11	8069	WAN2
	15	192.168.1.10	49437	50717	192.168.50.17	8069	WAN2
	16	192.168.1.10	49448	50728	192.168.50.101	8069	WAN2
	17	192.168.1.10	49469	50749	192.168.20.1	8069	WAN2
	18	192.168.1.10	50192	51472	52.229.206.30	443	WAN2


5.3.4.7 DNS Cache Table

This screen shows the cache information related to DNS.

5.3.5 GPS

It is available only when the selected CPE supports GPS feature.


The GPS page will display the moving path (including time and coordinate position, latitude, and longitude) of the Vigor device.

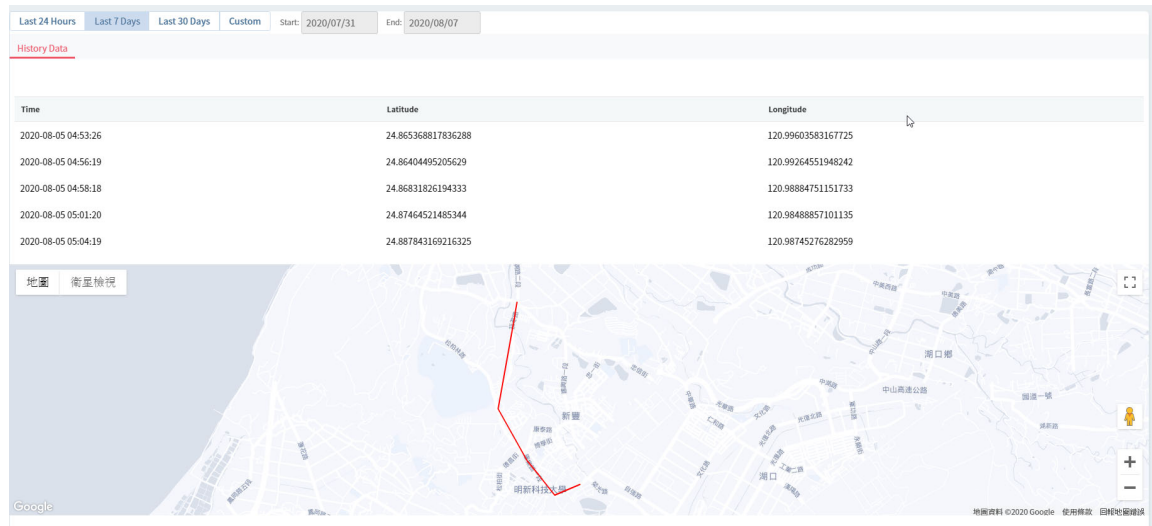

5.3.6 WAN (SD-WAN)

It is available when the selected CPE supports SD-WAN feature.

This page displays the location, MAC address, firmware used, uptime of the selected CPE and WAN overview.

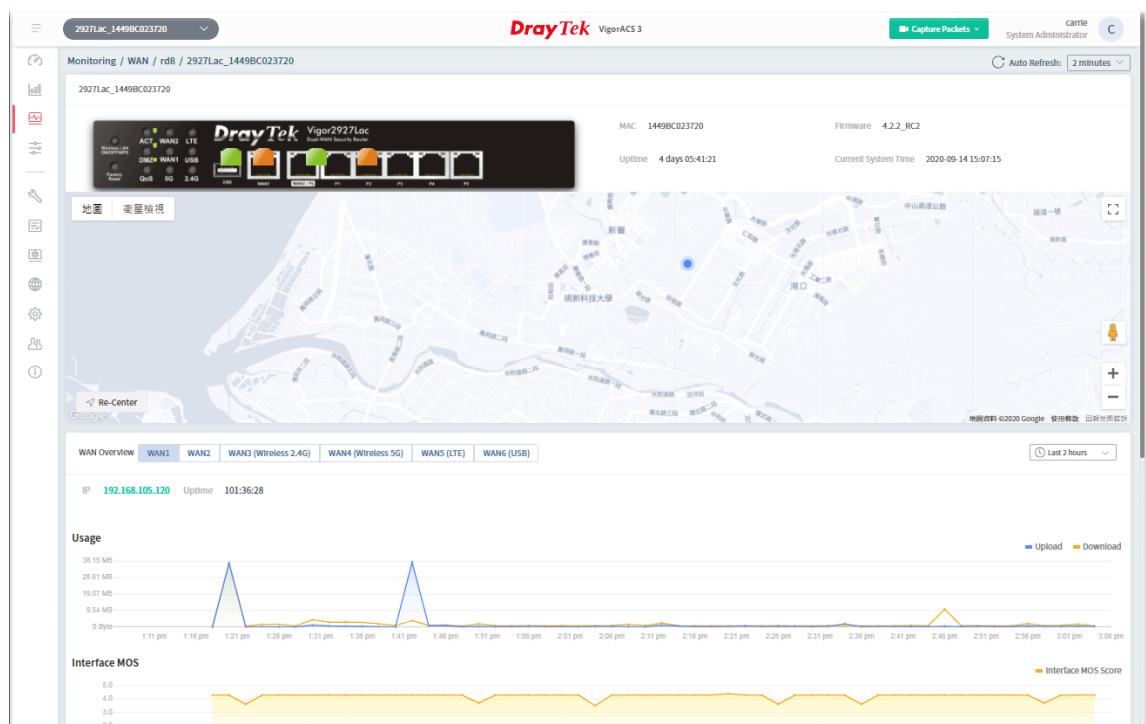

These parameters are explained as follows:


Item	Description
------	-------------

Google Map	Display the location of the selected CPE.
WAN Overview	Click the number of the WAN interface to display information related to traffic usage, estimated MOS score, latency, jitter, packet loss and so on.

5.3.7 VPN (SD-WAN)


This page displays the location, MAC address, firmware used, uptime of the selected CPE and the traffic for data download/upload by VPN.

The monitoring page will vary based on VPN established or not. Before establishing VPN, the page will be shown as follows:

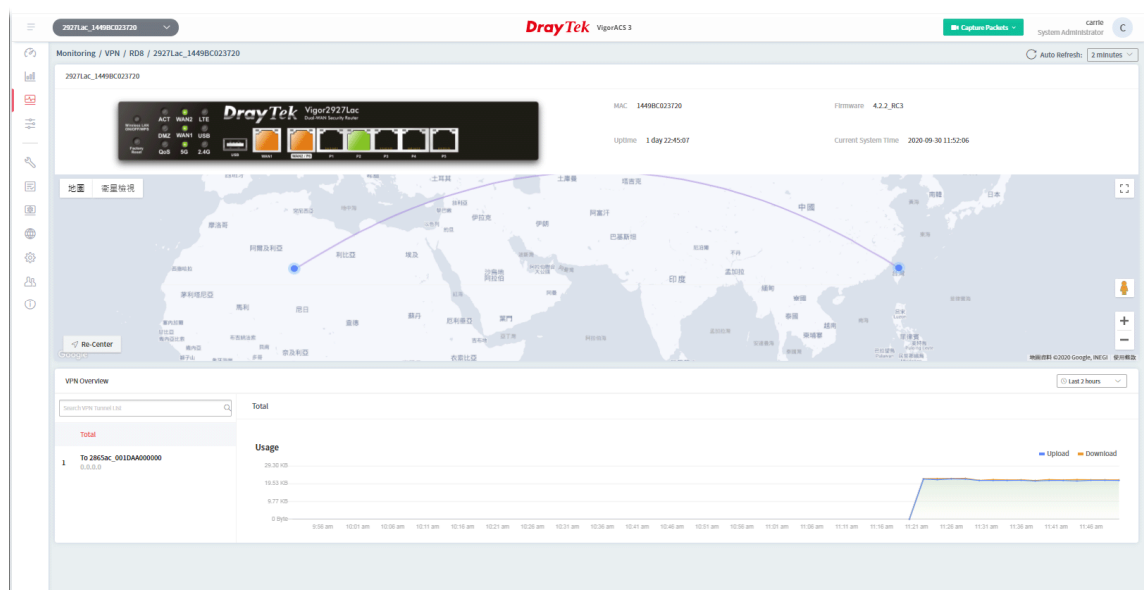

5.3.8 VoIP (SD-WAN)

VoIP call list displays the communication status related to incoming and outgoing calls via VoIP WAN.

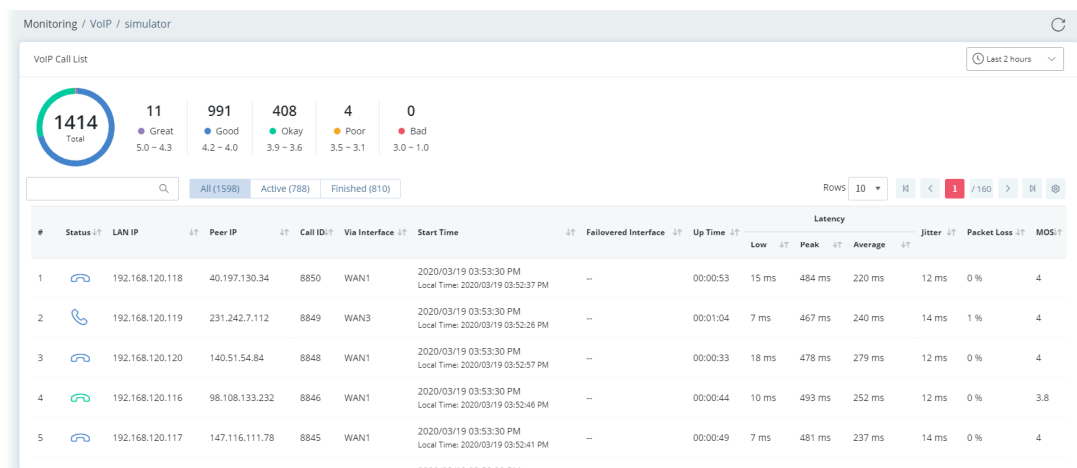


These parameters are explained as follows:

Item	Description
Great, Good, Okay, Poor, Bad	All the VoIP calls will be separated with different levels according to its quality.
	Enter the IP address (LAN IP/ Peer IP) as a condition to search the VoIP call.
Status	Display the status of the phone call. - Active call. Quality level is Good. - Finished call. Quality level is Good. - Finished call. Quality level is Okay.
LAN IP	Display the IP address of the local side.
Peer IP	Display the IP address of the peer side.
Call ID	Display the ID number of the caller.
Via Interface	Display the interface that VoIP call passing through.
Start Time	Display the start time of the VoIP call.
Failovered Interface	Display the failover interface for VoIP calls passing through.
Up Time	Display the time length of the VoIP call.
Latency	Display the transmission latency data (low, peak and average values) of the VoIP call.
Jitter	Display the packet jitter value of the VoIP call.

Packet Loss	Display the packet loss of the VoIP call.
MOS	Display the mean opinion score of the VoIP call. 1 means the worst; 5 means the best.


5.3.9 Data Usage (SD-WAN)

This page displays the data usage for a SD-WAN CPE.

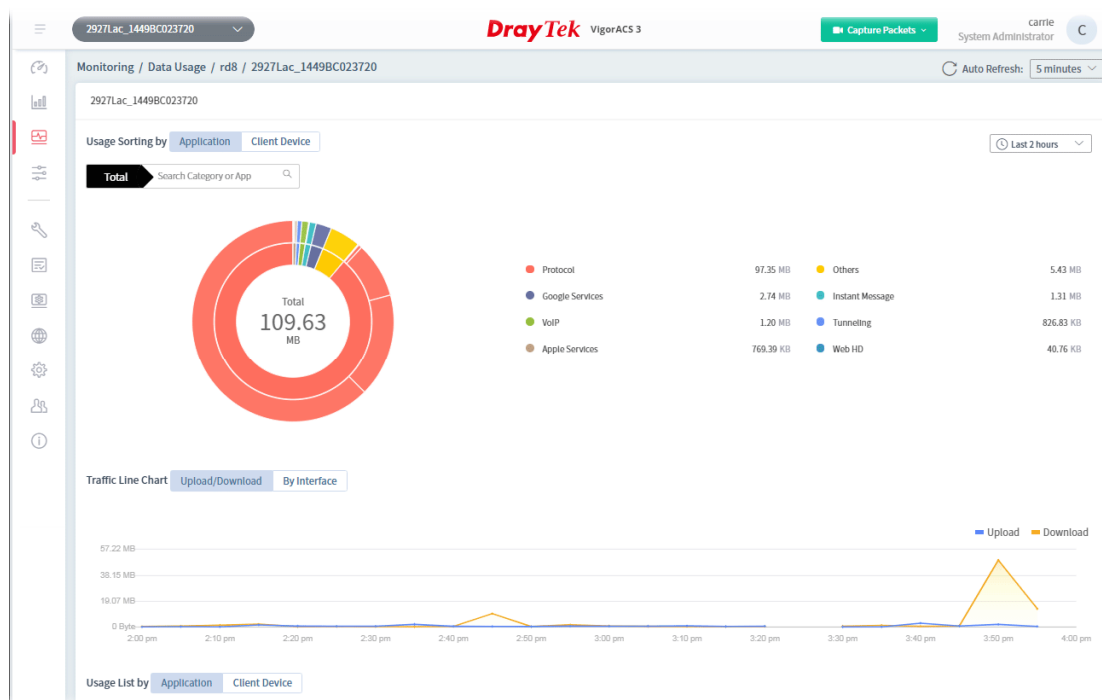

These parameters are explained as follows:

Item	Description
Usage Sorting by	Display a pie chart related to various application usage. Application - Click to display a pie chart for various application usage. Client Device - Click to display a pie chart for the selected CPE.
Traffic Line Chart	Display a line chart related to data upload/download, or traffic via the WAN interface. Upload/Download - Click to display data upload/download. By Interface - Click to display a line chart related to traffic via the WAN interface.
Usage List by	Display the data usage for common Apps or for connected client. Application - Click to display the data information related to various applications, including name of application, number of users, upload and download usage.

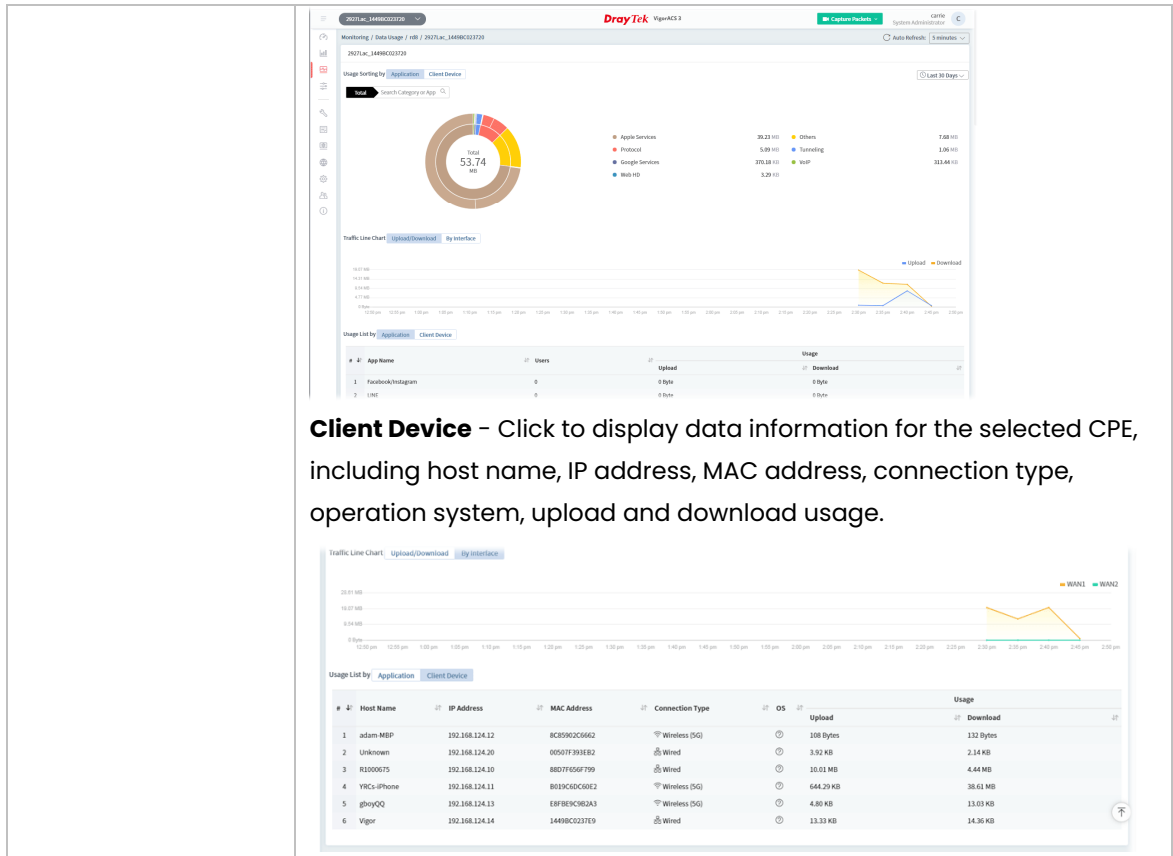

Client Device – Click to display data information for the selected CPE, including host name, IP address, MAC address, connection type, operation system, upload and download usage.

5.4 Configuration Menu for SD-WAN CPE

The configuration menu will vary in accordance with the CPE model. For more detailed information, refer to Part V, Chapter 9 Device Menu, Section 9.4 Configuration.

Part III

System Menu




Chapter 6 System Menu

System menu contains:

	_____ Maintenance
	_____ Reports
	_____ Provisioning
	_____ Network Management
	_____ System
	_____ User
	_____ About VigorACS

6.1 Maintenance

Settings in Maintenance can be applied onto numerous TR-069 CPEs instead of configuring settings for each CPE one by one.

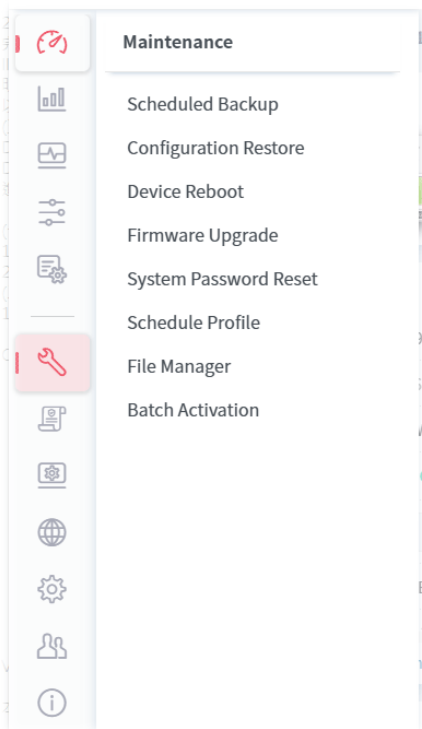


 Maintenance menu is available only for the role of **System Administrator, Group Administrator, Administrator** and **Standard** (limited in VigorACS cloud version).

6.1.1 Scheduled Backup


6.1.1.1 Networks & Devices

This page is used to specify a backup profile for the device / network. Later, the configuration backup for the device/network will be executed automatically by VigorACS.

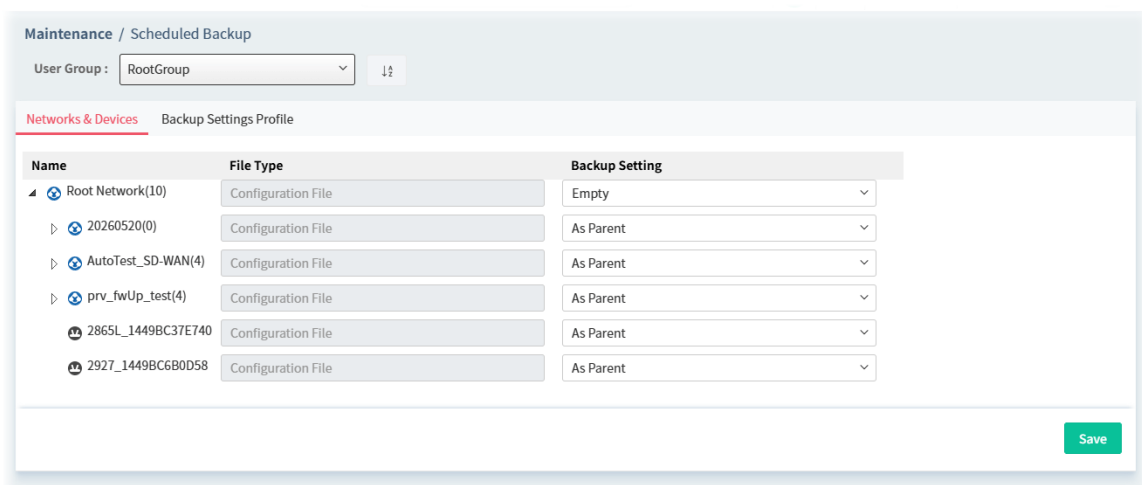

Name	File Type	Backup Setting
Root Network(10)	Configuration File	Empty
20260520(0)	Configuration File	As Parent
AutoTest_SD-WAN(4)	Configuration File	As Parent
prv_fwUp_test(4)	Configuration File	As Parent
2865L_1449BC37E740	Configuration File	As Parent
2927_1449BC6B0D58	Configuration File	As Parent

These parameters are explained as follows:

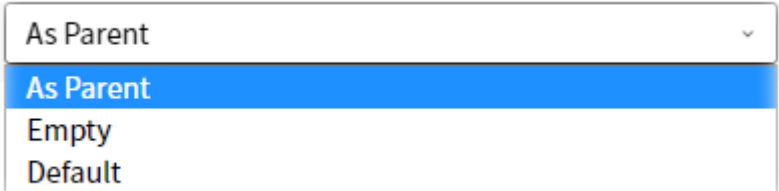Item	Description
User Group	Specify a user group for applying the backup settings profile. Each user group can be configured with different backup settings profiles.
File Type	Display the file type used for the device.
Backup Setting	Choose a profile defined in Backup Settings Profile for applying onto the selected CPE.  As Parent - The backup setting for the selected network / device is the same as the top setting. Empty - No backup setting for the selected network / device. Default - Use the default backup setting for the selected network /

	device. Others – In addition to As Parent, Disable and Default, profiles defined in Backup Settings Profile also will be listed in this drop-down list.
Save	Save the current settings.

6.1.1.2 Backup Settings Profile

This page determines the trigger time and method for firmware backup.


These parameters are explained as follows:



Item	Description
User Group	Specify a user group for applying the backup settings profile. Each user group can be configured with different backup settings profiles.
+Add	Click to create a new profile.
Edit	Click to modify, change the selected profile.
Delete	Click to delete the selected profile.

The following setting page appears when **+Add** is clicked.

These parameters are explained as follows:

Item	Description
------	-------------

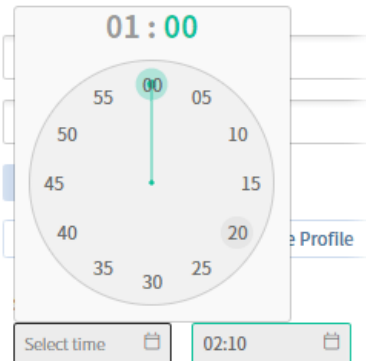User Group	Specify a user group for applying the backup settings profile. Each user group can be configured with different backup settings profiles.
Name	Enter a name of the backup profile.
Backup Period(days)	The number typed here means the interval for the backup executed by VigorACS. The unit is "day". If you type 1, that means the backup will be executed one time by one day.
Keep Files	Choose to keep all of the files (router's configuration files) or the last 20 files.
Backup Time	Set a time interval for executing the backup work for networks and devices. ● Now - The backup work will be executed immediately after clicking the Save button. ● Scheduled - The backup work will be executed at the specified time and date after clicking the Save button. ● Schedule Profile - The backup work will be executed according to the selected schedule profile after clicking the Save button.
Scheduled	Start Time / End Time - Click Select time to display a clock. Set the hour and minutes by clicking the number on the clock.  Specify Start Date - Click to enable the time setting. Date - Click to pop up a calendar to choose a date as the starting date.

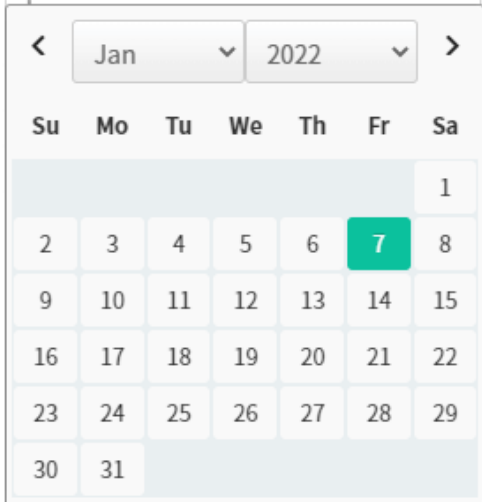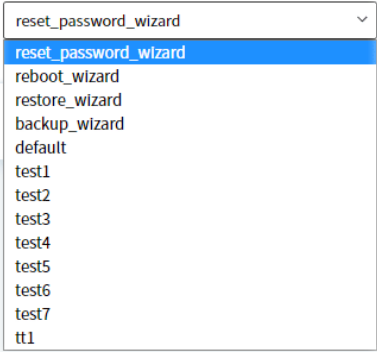	 Calendar for January 2022. The 7th is highlighted in green.
Schedule Profile	Choose a trigger profile from the drop down list. In which, VigorACS offers default schedule profile.  Dropdown menu options: - reset_password_wizard - reset_password_wizard - reboot_wizard - restore_wizard - backup_wizard - default - test1 - test2 - test3 - test4 - test5 - test6 - test7 - tt1
Save	Save the changes on this page.

6.1.2 Configuration Restore

6.1.2.1 Apply to Devices

This page can determine which device or network will be applied with restore profiles. Later, the configuration restoration for the device/network will be executed automatically by VigorACS.

Maintenance / Configuration Restore

User Group : RootGroup

Apply to Devices Restore Settings Profile

Quick Setting


Name	Apply	File List	Restore Profile
Root Network(10)			
20260520(0)			
AutoTest_SD-WAN(4)			
prv_fwUp_test(4)			
2865L_1449BC37E740	☐		Empty
2927_1449BC6B0D58	☐		Empty

Save

These parameters are explained as follows:

Item	Description
User Group	Specify a user group for applying the restore settings profile. Each user group can be configured with different restore settings profiles.
Quick Setting	This wizard offers a series of steps to specify configuration file which can be applied to multiple APs / Switches at one time.

In which, click the Common Config File to select a ".cfg" file. Then select a restore profile and specify the device filter (AP or switch). From the Select Devices list, select one or more APs/Switches required to apply the configuration file. Click **Next** to get the following page.

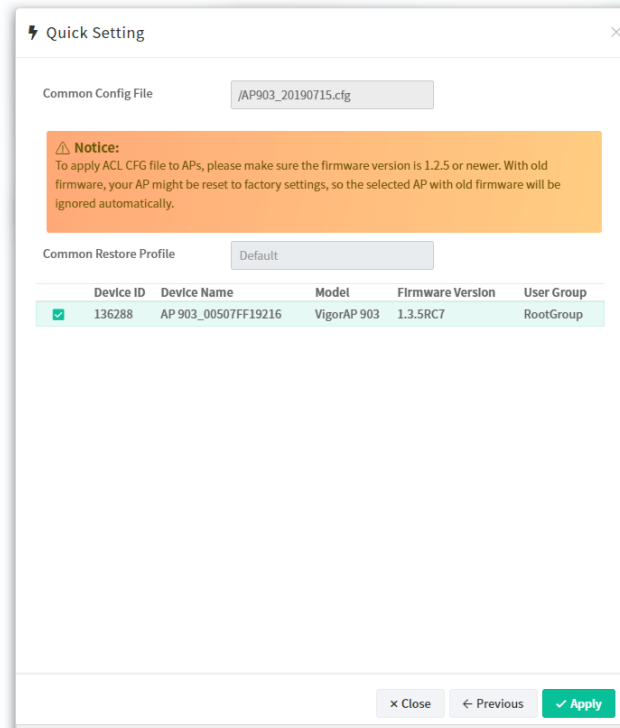


Check if the selected devices are correct or not. If yes, click **Apply**. The selected configuration file will apply to all of the selected devices.

Apply

Click the icon to enable configuration restoration for the selected CPE.


File List

Open a dialog to choose one of the files for the file restoration of the selected CPE.

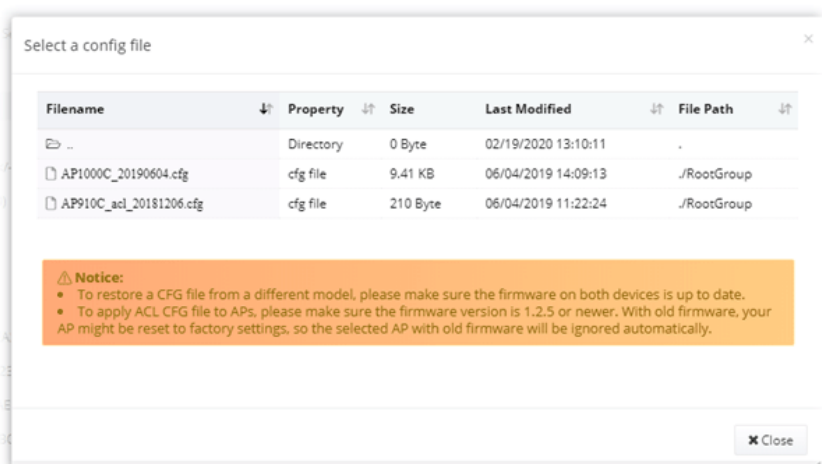


Restore Profile

Choose a profile defined in **Restore Settings Profile** for applying onto the selected CPE.

	 Empty - No restore setting for the selected network / device. Default - Use the default restore setting for the selected network / device. Others - In addition to Empty and Default, profiles defined in Restore Settings Profile also will be listed in this drop-down list.
Save	Save the current settings.

6.1.2.2 Restore Settings Profile

This page can determine the trigger time and method for firmware restoration.

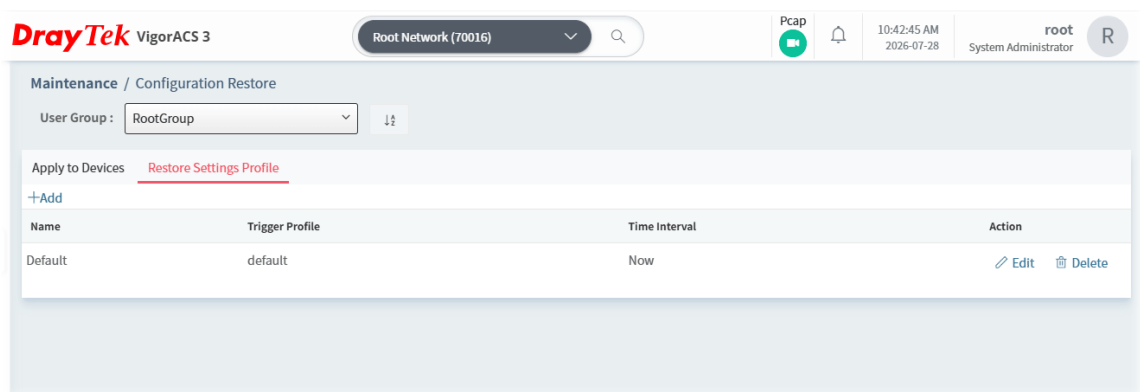

These parameters are explained as follows:

Item	Description
User Group	Specify a user group for applying the configuration restore settings profile. Each user group can be configured with different configuration restore settings profiles.
+Add	Click to create a new profile.
Name	Display the name of the restore setting profile.
Trigger Profile	Display the time schedule selected for the restore setting profile.
Time Interval	Display the time period to trigger the setting restoration.
Action	Edit - Click to modify, change the selected profile. Delete - Click to delete the selected profile.

The following setting page appears when **+Add** is clicked.

Maintenance / Configuration Restore

User Group :

Apply to Devices Restore Settings Profile

Name


Restore Time Now Scheduled Schedule Profile



Start Time

End Time

Specify Start Date ☐

These parameters are explained as follows:

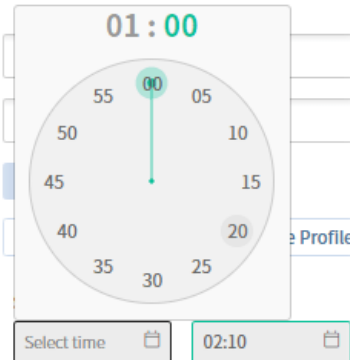Item	Description
User Group	Specify a user group for applying the restore settings profile. Each user group can be configured with different restore settings profiles.
Name	Enter a name of the restore setting profile.
Restore Time	Set a time interval for restoring the configuration settings for networks and devices. ● Now – The setting restoring work will be executed immediately after clicking the Save button. ● Scheduled – The setting restoring work will be executed at the specified time and date after clicking the Save button. ● Schedule Profile – The setting restoring work will be executed according to the selected schedule profile after clicking the Save button.
Now	The configuration restore will be executed after clicking Save .
Scheduled	Start Time / End Time – Click Select time to display a clock. Set the hour and minutes by clicking the number on the clock.  Specify Start Date – Click to enable the time setting.

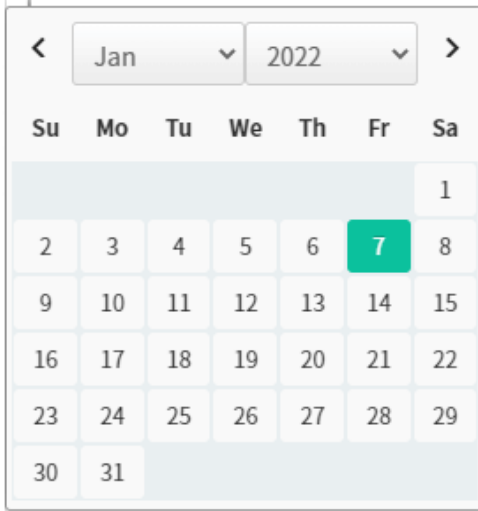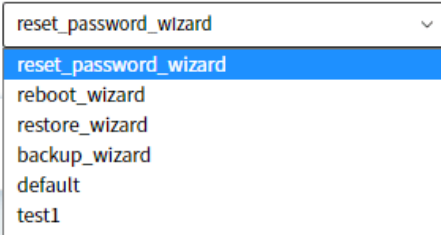	Date – Click to pop up a calendar to choose a date as the starting date. 
Schedule Profile	Trigger Profile – Choosing a trigger profile from the drop down list. In which, VigorACS offers default schedule profile. 
Save	Save the current settings.

6.1.3 Device Reboot

You can define the time schedule for rebooting the selected CPE(s) automatically by VigorACS. Open **Maintenance>>Device Reboot** to display the following page.

6.1.3.1 Networks & Devices

This page is used for configuring the reboot setting for network(s) & device(s)

Maintenance / Device Reboot


User Group : RootGroup ⌵

Networks & Devices Reboot Settings Profile

Name	Model Name	Firmware Version	Modem Version	Reboot Setting
Root Network(10)				Empty
20260520(0)				As Parent
AutoTest_SD-WAN(4)				As Parent
prv_fwUp_test(4)				As Parent
2865L_1449BC37E740	Vigor2865L	4.5.2.3_STD	Annex_A_STD	As Parent
2927_1449BC6B0D58	Vigor2927	4.4.5.8	No DSL	As Parent

Save

These parameters are explained as follows:

Item	Description
Reboot Setting	Choose a profile defined in Reboot Settings Profile for applying onto the selected CPE.  As Parent - The reboot setting for the selected network / device is the same as the top setting. Empty - No reboot setting for the selected network / device. Default - Use the default reboot setting for the selected network / device. Others - In addition to As Parent, Empty and Default, profiles defined in Reboot Settings Profile also will be listed in this drop-down list.
Save	Save the current settings.

6.1.3.2 Reboot Settings Profile

This page can determine the trigger time and method for device reboot.

Maintenance / Device Reboot

User Group : RootGroup ⌵

Networks & Devices **Reboot Settings Profile**

+ Add

Name	Period(Days)	Time Interval	Action
reboot_wizard	365	00:00-23:59	Edit Delete
Default	1	00:00-00:00	Edit Delete
tt1	1	Now	Edit Delete
llll	365	01:05-03:15	Edit Delete
cshih_test	1	13:15-17:05	Edit Delete

These parameters are explained as follows:




Item	Description
------	-------------

User Group	Specify a user group.
+Add	Click to create a new device reboot profile.
Edit	Click to edit / modify the settings for the selected profile.
Delete	Click to delete the selected profile.

The following setting page appears when **+Add** is clicked.

These parameters are explained as follows:

Item	Description
Name	Enter the name of the profile.
Period(days)	Determine the frequency for the CPE reboot by VigorACS. The default value is 1 day.
Reboot Time	Set a time interval for executing the device reboot. ● Now ● Scheduled - The device reboot will be executed at the specified time and date after clicking the Save button. ● Schedule Profile - The device reboot will be executed according to the selected schedule profile after clicking the Save button.
Scheduled	Start Time / End Time - Click Select time to display a clock. Set the hour and minutes by clicking the number on the clock.

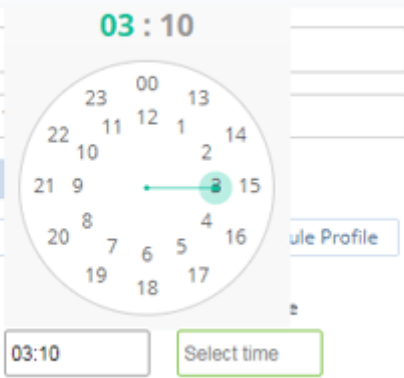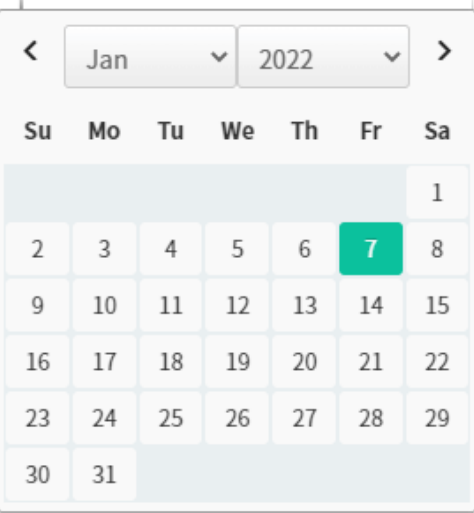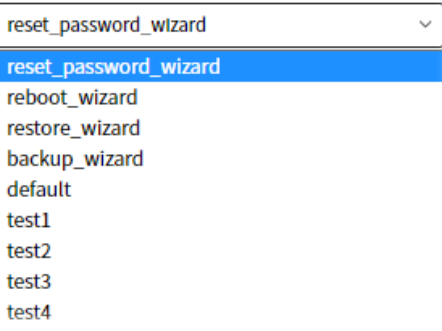	 Specify Start Date – Click to enable the time setting. Date – Click to pop up a calendar to choose a date as the starting date. 
Schedule Profile	Trigger Profile – Choosing a trigger profile from the drop down list. In which, VigorACS offers default schedule profile. 
Cancel	Discard current settings and return to previous page.
Save	Save the current settings.


6.1.4 Firmware Upgrade

When VigorACS server receives information from CPE about firmware upgrade, it will check if the received model name, modem firmware version, and software version correspond to the information recorded in VigorACS server. If everything can match but software version not, VigorACS will judge that the remote CPE requiring firmware upgrade. Next, VigorACS server will execute firmware upgrade with the file listed in Job List automatically at specified time.

This web page allows you to **specify** required information for matching with the CPE device. The profiles created here will be regarded as a basis that VigorACS server uses to compare information coming from CPE router with the information stored in VigorACS server's database.

 The firmware upgrade profile created in such page can be applied to single and selected devices (but not applied to the whole network).

For applying an upgrade provision profile to the whole network / group, please go to Provisioning>>Firmware Upgrade for more detailed information.

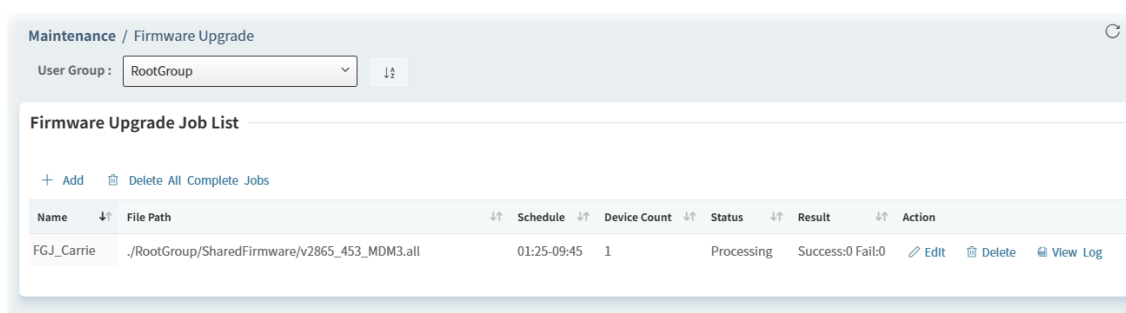

These parameters are explained as follows:

Item	Description
User Group	Specify a user group. The job list under that group will be displayed on this page.
+Add	Click to create a new job profile.
Delete All Complete Jobs	Click to delete all profile.
Edit	Click to edit / modify the settings for the selected profile.
Delete	Click to delete the selected profile.
View Log	Click to view the record of the firmware upgrade for the CPE

The following setting page appears when **+Add** is clicked.

Maintenance / Firmware Upgrade

User Group : RootGroup

Firmware Upgrade Job Settings

Status:

Name:

Upgrade Time:

Date:

Start Time:


End Time:




Note:

- ACS will only request the firmware upgrade while it receives TR-069 inform from CPE during the scheduled time.
- For batch upgrade by Network, please go to [Provisioning / Firmware Upgrade](#).


Apply Firmware:

These parameters are explained as follows:

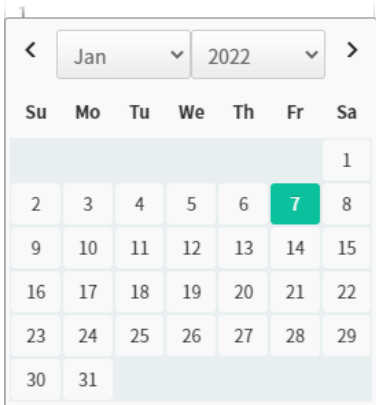Item	Description
Status	Click Enable to activate the firmware upgrade profile.
Name	Enter a name of the job profile.
Upgrade Time	Set a time interval for executing the firmware upgrade job for networks and devices. Now – The firmware upgrade job will be executed immediately after clicking the Save button. Scheduled – The firmware upgrade job will be executed at the specified time and date after clicking the Save button. Schedule Profile – The firmware upgrade job will be executed according to the selected schedule profile after clicking the Save button.
If Scheduled is selected	Date – Click to pop up a calendar to choose a date as the starting date. 

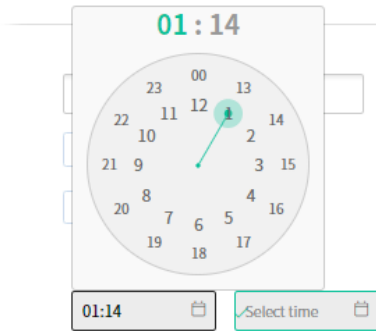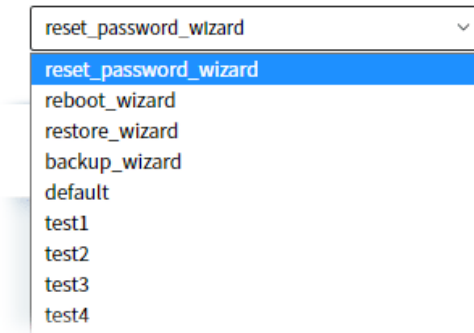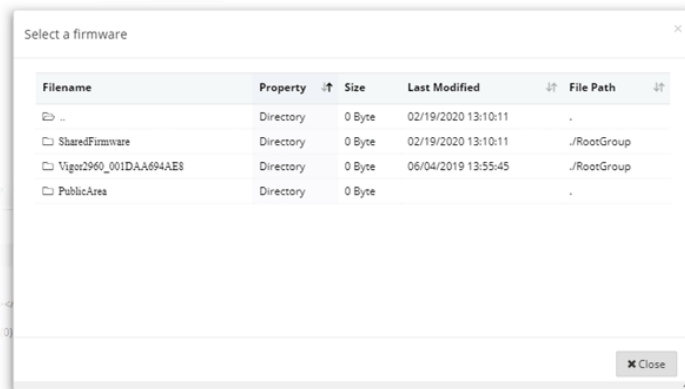	Start Time / End Time – Click Select time to display a clock. Set the hour and minutes by clicking the number on the clock. 
If Schedule Profile is selected	Trigger Profile – Choosing a trigger profile from the drop down list. In which, VigorACS offers default schedule profile. 
Apply Firmware	Click to open a dialog to select a firmware file. VigorACS will upgrade the selected CPE with the selected file. 
Protocol Options	Select the mechanism for performing firmware upgrade. TR069 – This is the default setting. HTTP – VigorACS will authenticate the router/CPE by router name and the password and then perform the firmware upgrade for the CPE. ● Router Username – Enter the name (e.g., admin) of the router as the username for accessing the router. ● Router Password – Enter the password (e.g., admin) of the router for accessing the router.

Send Report by Email	Send a firmware upgrade notification to the specific user. Recipients (User) – Select the user from the drop-down list. Recipients (Email) – Click +Add to enter the email address which will receive the report email.
Device to Upgrade	Click the Filter icon to set the filtering conditions. Device to Upgrade Filter Device Name MAC Address Model Firmware Version Modem Version Cancel Apply Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model Firmware Version Modem Version Device Name MAC Address Model</

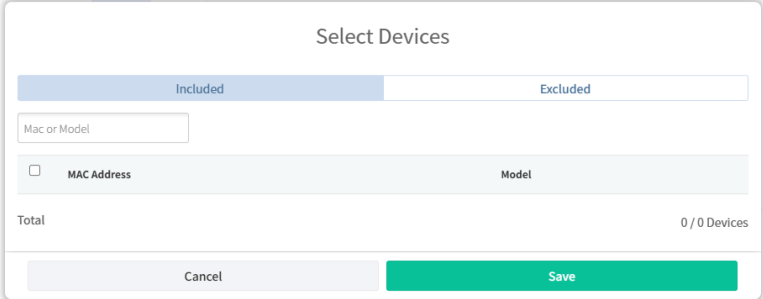	currently.
If Device Pool selected as the Select by	Select one device or more devices to apply the firmware upgrade provision. Device to Upgrade Select by Tree Device Pool Device Pool Profile Template Target Devices 0 Devices ✎ Device Pool Profile – Use the drop down menu to specify one profile. Or click Template. Target Devices – Click the edit button to select one device or devices to apply the firmware upgrade provision. 
Cancel	Discard current settings and return to previous page.
Save	Save the current settings and exit the page. The firmware upgrade job will be performed based on the above conditions automatically.

6.1.5 System Password Reset

This page is used to reset the default factory password for the administrator of CPE.

Maintenance / System Password Reset

Reset Time

Now

Scheduled

Start time

00:00

End time

23:59

Start Date


2026-07-28


Select devices

Name	Model Name	Firmware Version	Modem Version
Root Network(70016)			
20260520(0)			
AutoTestNetwork(1)			
AutoTest_Dev(2)			
AutoTest_SD-WAN(4)			
T_2026-07-21_Wholesale_GA_D(0)			
T_2026-07-21_Wholesale_GA_E(0)			

Save

These parameters are explained as follows:

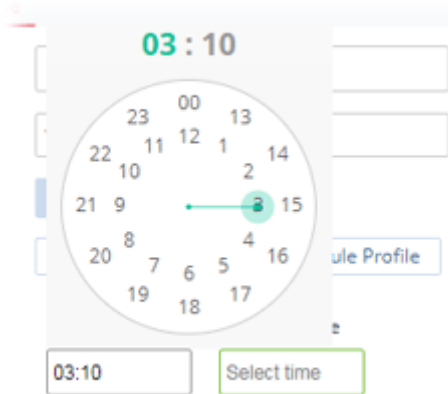Item	Description
Reset Time	Now – Reset the password for the selected device(s) immediately. Scheduled – To specify a certain time to perform the job, choose this one and specify start day, start time and end time respectively. VigorACS will perform the job for the selected CPE (s) according to the schedule set here. Start Time / End Time – Click Select time to display a clock. Set the hour and minutes by clicking the number on the clock.  Date – Click to pop up a calendar to choose a date as the starting date.

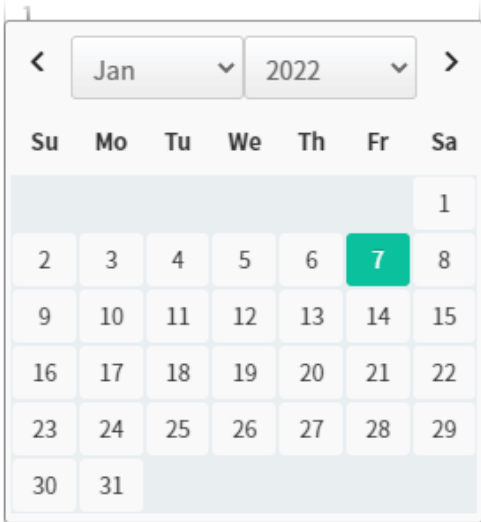	
Select devices	Choose the device that you want to do device password reset.
Save	Save the current settings.

6.1.6 Schedule Profile

Schedule profiles can be set to apply to devices managed by VigorACS 3. Later, you can not only schedule the router to dialup to the Internet at a specified time, but also restrict Internet access to certain hours so that users can connect to the Internet only during certain hours, say, business hours. The schedule profile is applicable to several functions driven by VigorACS 3.

The screenshot shows the 'Maintenance / Schedule Profile' page. At the top, there is a 'User Group' dropdown menu set to 'RootGroup' and a sort icon. Below this is a '+Add' button. A table lists the schedule profiles. The table has columns: Name, Start Day, End Day, Start Time, End Time, and Action. There is one row with the name 'default', empty Start Day and End Day fields, and '00:00' for both Start Time and End Time. The Action column for this row contains 'Edit' and 'Delete' links.

Name	Start Day	End Day	Start Time	End Time	Action
default			00:00	00:00	Edit Delete

These parameters are explained as follows:

Item	Description
User Group	Specify a user group. The schedule profiles under that group will be displayed on this page.
+Add	Click to create a new schedule profile.
Edit	Click to modify, change the selected profile.
Delete	Click to delete the selected profile.

The following setting page appears when **+Add** is clicked.

The screenshot shows the 'Maintenance / Schedule Profile' page with the form to add a new profile. The 'User Group' dropdown is still set to 'RootGroup'. The form fields are: Profile Name (text input), Date Type (dropdown menu set to 'Scheduled'), Start Date (date picker), Check End Date (toggle switch turned on), End Date (date picker), Time Type (dropdown menu set to 'Scheduled'), Start Time (time picker), and End Time (time picker). At the bottom right, there are 'Cancel' and 'Add' buttons.


These parameters are explained as follows:

Item	Description
Profile Name	Enter a name of the schedule profile.
Date Type	VigorACS 3 will perform the job for the selected CPE (s) according to


	the schedule set here. Now – When CPE meets settings configured in the profile, the job (e.g., upgrade) for the CPE will be performed immediately. Scheduled – To specify a certain day to perform the job, choose this one and specify start day and end day respectively.
Start Day	Use the drop down calendar to specify the day you want to start the operation.
Check End Day	Click to enable the end day to determine if the job is performed or not. For example, the end day for firmware upgrade is out of date, then the upgrade will not be executed for the selected CPE.
End Day	Use the drop down calendar to specify the day you want to end the operation.
Time Type	Now – When CPE meets settings configured in the profile, the job (e.g., upgrade) for the CPE will be performed immediately. Scheduled – To specify a certain time to perform the job, choose this one and specify start time and end time respectively. VigorACS will perform the job for the selected CPE (s) according to the schedule set here.
Start Time	Use the drop down menu to specify the hour and minutes you want to start the operation.
End Time	Use the drop down menu to specify the hour and minutes you want to finish the operation.
Cancel	Discard current settings and return to previous page.
Add	Save the current settings and create a new profile.

6.1.7 File Manager

Firmware driver, configuration file for devices (VigorAP, Vigor router or Vigor switches) can be managed or classified with different folders.

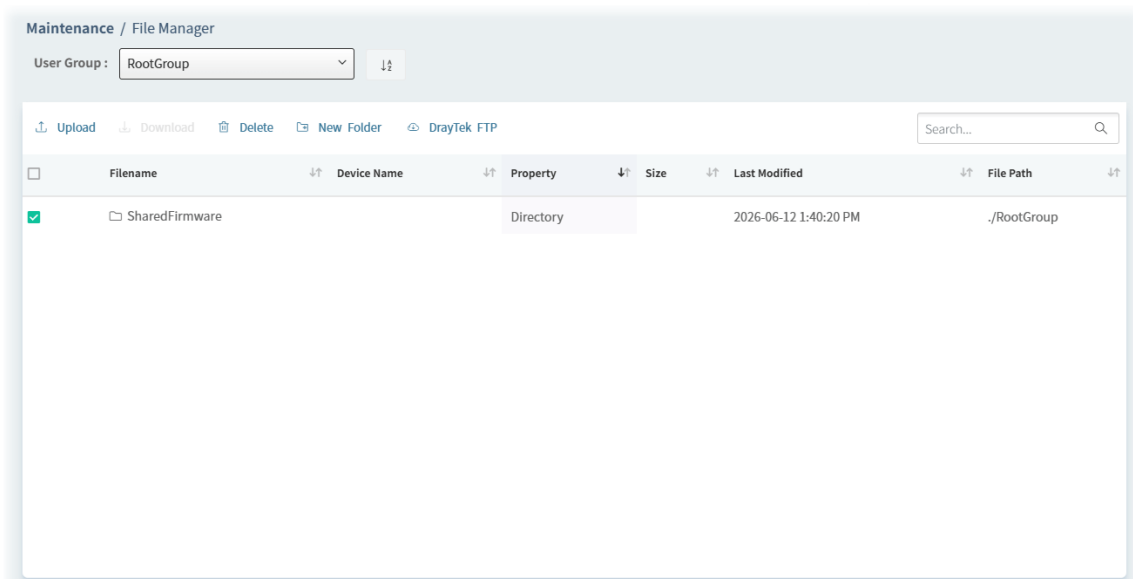

These parameters are explained as follows:

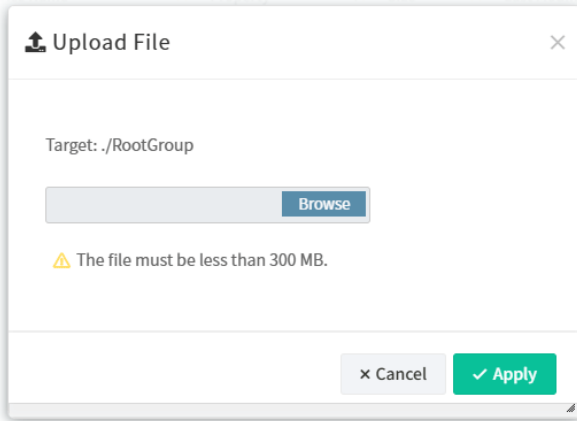Item	Description
User Group	Specify a user group. The devices (represented with MAC address) under that group will be displayed on this page. The PublicArea is designed for sharing firmware files. It allows users to upload and delete files. Therefore, if PublicArea is selected as the User Group, then information listed on this page can be downloaded, uploaded and used by any other user.
Upload	Click to upload a file to VigorACS 3 server. 
Download	Download a driver (*.all, *.rst and etc.) related to CPE device from VigorACS 3 server.
Delete	Click to delete the selected profile.
New Folder	Create folders for files classification/management.

DrayTek FTP

After clicking the link, the following page will appear for you to download file from DrayTek FTP directly.

Maintenance / DrayTek FTP

[← Back to Local Files](#)


Download to:

[Download](#)

Filename	Property	Size	Last Modify	Directory
ACS.2	Directory	-	2021-09-10 13:23	-
ACS.3	Directory	-	2021-09-10 13:21	-
ACS.SI	Directory	-	2015-09-26 17:44	-
APM	Directory	-	2016-10-17 16:39	-
Accessories	Directory	-	2023-12-05 14:02	-
DSLWGR_USB_MODEM	Directory	-	2008-08-24 22:10	-
Databook	Directory	-	2024-04-02 11:49	-
ISDNWgr128	Directory	-	2008-08-25 03:57	-
Legacy Products	Directory	-	2023-10-31 13:11	-

6.1.8 Batch Activation

Batch activation is convenient for a distributor to activate WCF filter service for multiple routers at one time. It is available only for Cyren web content filter service. In default, Batch Activation is disabled. To enable the feature, open **System >> System Parameter**. Locate the ID 48 and change the value as True. Then, open **Maintenance >> Batch Activation** to get the following page.

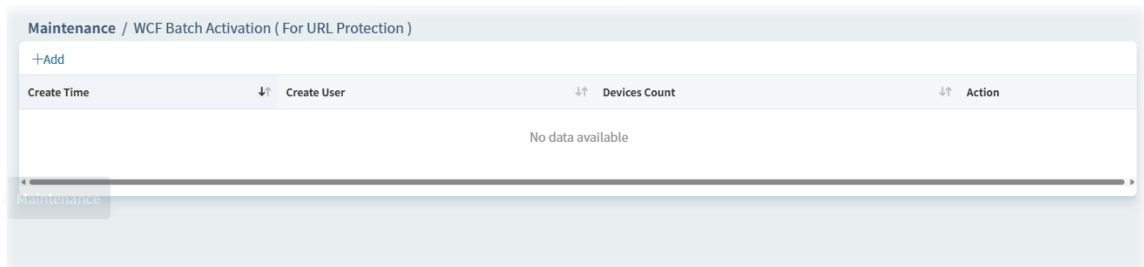

VigorACS will perform the job after creating a new profile. The execution result will be shown on the screen immediately.

1. Click **+Add** to create a new batch activation profile.

Item	Description
Username	Enter a user account with the distributor privilege. Once authenticated by MyVigor server successfully, the username will be brought out automatically next time.
Password	Enter the password. Once authenticated by MyVigor server successfully, the password will be brought out automatically next time.
Back to profile list	Return to the previous profile list page.
Login	Access into next page.

2. Enter the username and password and click **Login**. After authenticated by MyVigor server, the following page will be shown.

Maintenance / WCF Batch Activation (For URL Protection)


Import WCF batch activation data

Upload file [Browse](#)

[Download entry sample file](#)

[Back to profile list](#)

[Upload](#)

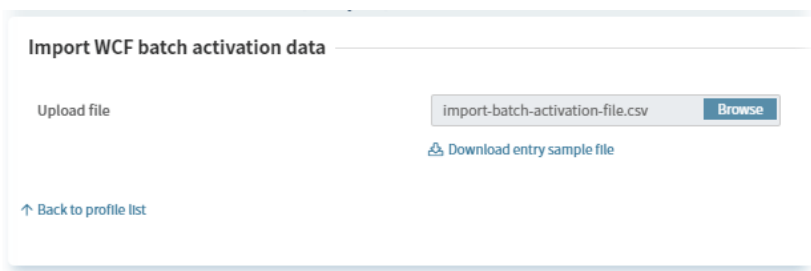Item	Description
Upload file	Click Browse to locate the CSV file with name of import-batch-activation-file.  If there is no file existed, click "Download entry sample file" link to download one file.
Download entry sample file	Click to download an entry sample file (import-batch-activation-file.csv). Open the CSB file and enter the "MAC address" and "WCF KEY" for each device.
Back to profile list	Return to the previous profile list page.
Login	Access into next page.

3. After locating the CSV file, click **Upload**. Later, the result will be shown as follows.

Upload Result

[Export](#)

	Device Name	Device MAC	Network	License Key	ACS Check Status
✓	286SLac_1449BC0D8F00	1449BC0D8F00	MKT_manual	6F6CD-CF2A6-EE7CE-6C5D2	Check OK

[Back to profile list](#)

[Previous](#) [Next](#)

4. Click **Next**. If one of the CPE device not registered to the MyVigor server yet, a dialog will appear as follows.

Confirmation

Do you want the devices to be associated with the specified MyVigor account?

Yes

No

5. Click **Yes** to get the following page. Click **NO** and skip to step 6.

Binding device with MyVigor account

MyVigor account name

draytek_rc8

MyVigor account e-mail

mickey_chiu@draytek.com

[Back to profile list](#)

Previous

Next

6. Enter an existed account name and account e-mail. The CPE device will be registered to the MyVigor server with this account.

MyVigor Devices & License Check

Export

	Device Name	Device MAC	Network	License Key	MyVigor Check Status
✓	2865Lac_1449BC0D8F00	1449BC0D8F00	MKT_manual	6F6CD-CF2A6-EE7CE-6C5D2	Check OK

[Back to profile list](#)

Previous

Activate

7. Click **Activate**. Wait for a minute.

Root Net...

DrayTek VigorACS 3

Maintenance

Save OK

Result

8. The batch activation profile has been created. The activation logs (time, user, device count and action) will be shown on this page.

+Add

Create Time	Create User	Devices Count	Action
2021-02-26 06:27:12	root	1	View Log Delete

Item	Description
+Add	Click to create a new batch activation profile.
View Log	Click to view the records of the WCF batch activation.
Delete	Click to remove the selected record.

Click **View Log** to see current processing status.

example 1

All

Processing

Complete

Fail

search Device Name / MAC / Key

Export

Device Name	MAC	License Key Number	License Date	Network	Last Update Time	Status	Result
2865Lac_1449BC0D8F00	1449BC0D8F00	B3072-A595A-FE7C3-F7CEF	2021-02-26~2021-03-28	MKT_manual	2021-02-26 06:27:14	Processing	MyVigor added license successfully

Back to profile list


example 2

Device Name	MAC	License Key Number	License Date	Network	Last Update Time	Status	Result
2860n+_001DAAD1E290	001DAAD1E290	03F10-D646B-2B0A1-40DA6	2019-02-13~2019-03-15	RD8	2019-04-02 11:30:41	Complete	CPE sync license successfully
2925Ln_001DAAD075B0	001DAAD075B0	671C8-8222F-55F4E-907CB	2019-02-13~2019-03-15	RD8	2019-04-02 11:32:40	Fail	Cannot connect to CPE (timeout)
Back to profile list							

Item	Description
All, Processing, Complete, Fail	Switch among these tabs to display the detailed information for the WCF application.
Export	Click to export current log to VigorACS server.
Back to profile list	Return to the previous profile list page.

6.2 Reports


VigorACS will send reports to certain users periodically based on the report task profile defined in this page. The report task profile can be configured what kind of data (e.g., LAN statistics, traffic or firmware used) will be recorded, with different CPE, content of report, time, recipient, and so on.

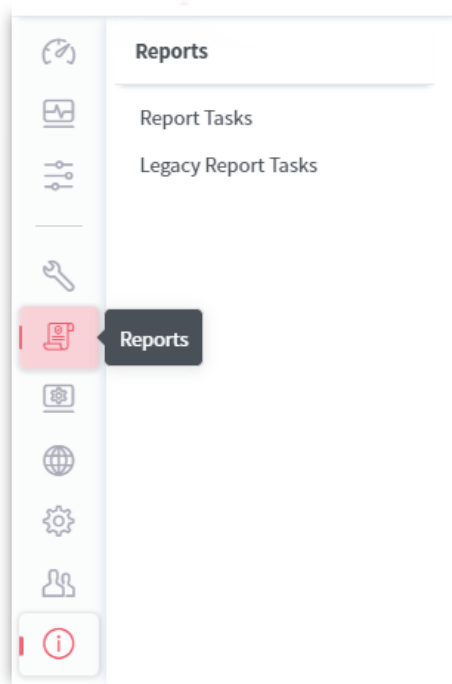

6.2.1 Report Tasks

6.2.1.1 Report Tasks

Open **Reports>Reports Tasks** to get the following page.

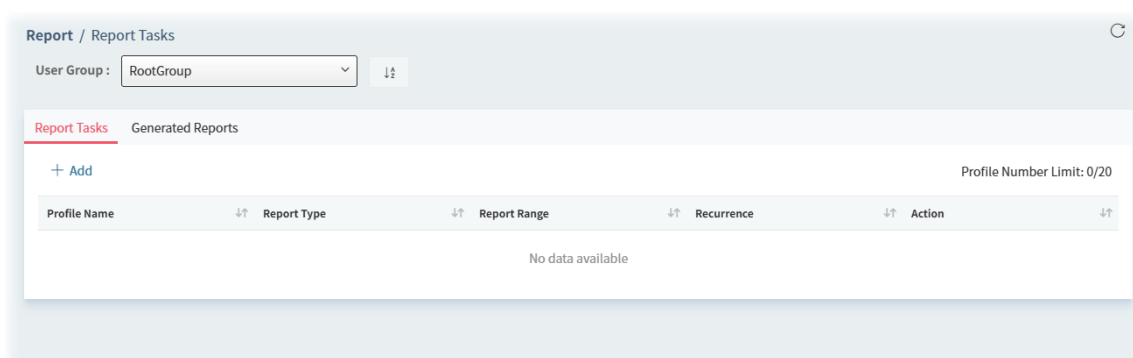


These parameters are explained as follows:

Item	Description
User Group	Use the drop down list to choose a group (e.g., RootGroup). Only the report task profiles defined for the selected user group will be shown on this page. If there is "no" profile displayed for the selected group, you may click the link of +Add to create a new one.


+Add	Click to create a new report task for specified CPE.
Action	Edit – Click to modify an existing report task. Delete – Click to remove the selected report task. Download – Click to download the report task as a "*.pdf" file for reference.

Click **+Add** to create a new report task. Select **Statistics Report** or **Comprehensive Report**. Then click **Apply**.

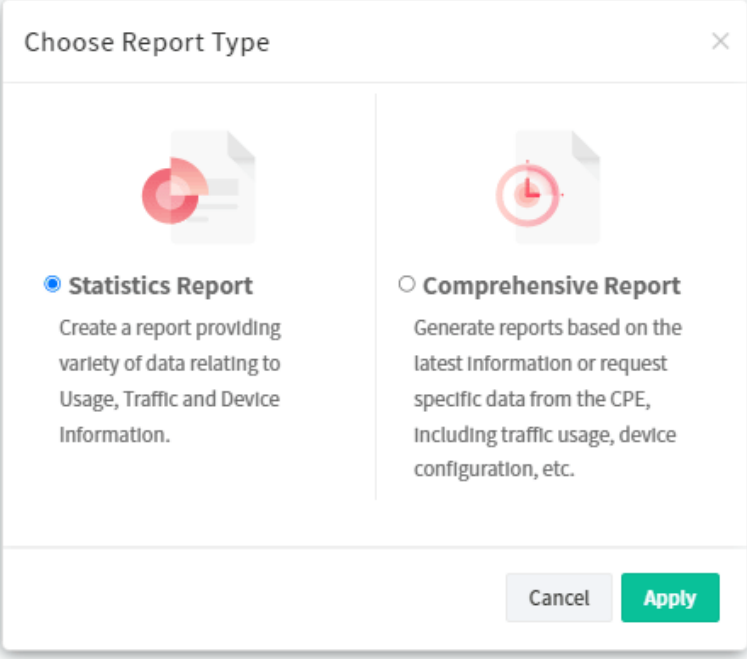

The dialog box titled "Choose Report Type" contains two options. The first option, "Statistics Report", is selected with a radio button. It includes a red circular icon with a white bar chart and a description: "Create a report providing variety of data relating to Usage, Traffic and Device Information." The second option, "Comprehensive Report", is unselected and includes a red circular icon with a white clock and a description: "Generate reports based on the latest information or request specific data from the CPE, including traffic usage, device configuration, etc." At the bottom right, there are "Cancel" and "Apply" buttons.

If **Statistics Report** is selected, the following setting page will appear.

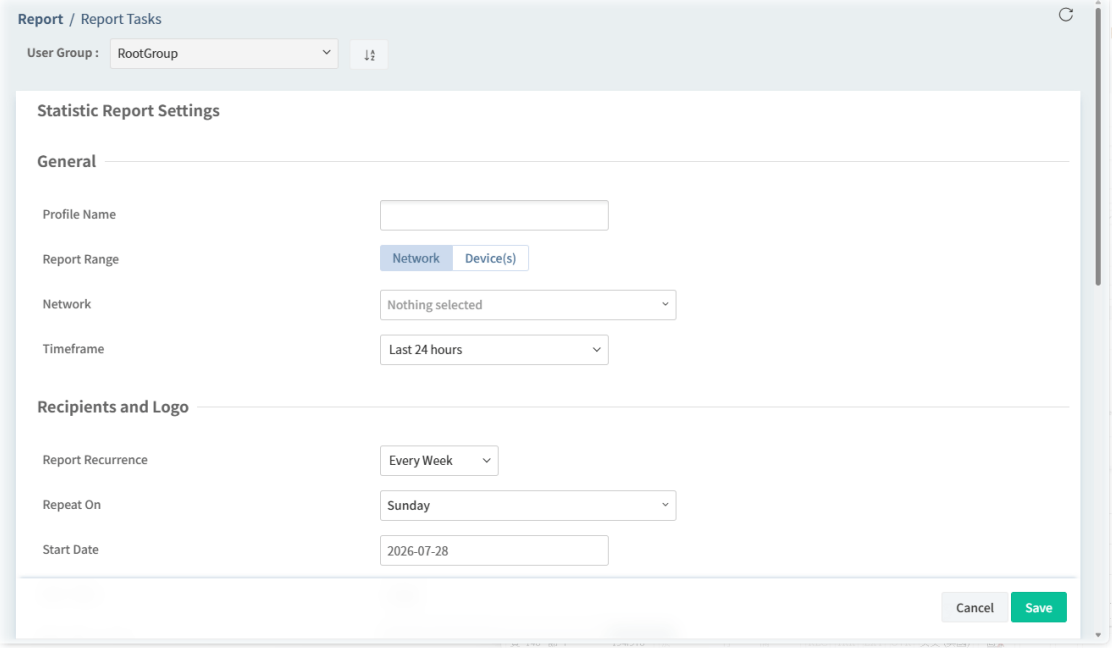

The "Report / Report Tasks" settings page shows the "Statistic Report Settings" section. Under the "General" tab, there are fields for "Profile Name", "Report Range" (with "Network" and "Device(s)" tabs), "Network" (a dropdown menu currently showing "Nothing selected"), and "Timeframe" (a dropdown menu currently showing "Last 24 hours"). Under the "Recipients and Logo" section, there are fields for "Report Recurrence" (a dropdown menu showing "Every Week"), "Repeat On" (a dropdown menu showing "Sunday"), and "Start Date" (a text field showing "2026-07-28"). At the bottom right, there are "Cancel" and "Save" buttons.

These parameters are explained as follows:

Item	Description
General	
Profile Name	Enter a name for such report task profile.
Report Range	Determine the content range (network or devices) of the report.
Network	Select one or more networks for generating the statistics report.
Timeframe	Display the report related to the CPE detected within 24 hours, 7 days, 3 days or user defined days.
Recipients and Logo	
Report Recurrence	Once – The report will be made just for one time. Every Day/Every Week/Every Month – The report will be made repeatedly. Set the day, starting date and starting time based on the selection.
Report file Logo	Click to put a logo on the report. Select the logo file (with the file size less than 100KB).
Send Report by Email	Switch the toggle to enable/disable this function. If enabled, Recipients (User) – Specify the subject for the email. Recipients (Email) – Enter the email address of the recipient. +Add – If there is more than one recipient for adding, click the link to have more entry box(es) for adding more recipients. Recipients (Email Subject) – Enter the subject of the email. Recipients (Email From) – Enter the email address of the sender. Recipients (Email Content) – Enter the content of the email.
Customized Widgets	
Items	Select the items related to Network Wide, Device/Client Ranking, Monitoring, and Hotspot Web Portal . Corresponding information will be shown on the statistics report.
Report Device(s)	If Devices(s) is selected as Report Range, this option will appear. Only the CPEs under the selected User Group (e.g., RootGroup in this case) will be shown in this field. Check the box to the left of the network group to select the device(s) you want to make report.

	General Profile Name Report Range Network Device(s) Report Device(s) ▼ <table border="1"> <thead> <tr> <th>Name</th> <th>MAC Address</th> <th>Model Name</th> </tr> </thead> <tbody> <tr> <td>Root Network(10)</td> <td></td> <td></td> </tr> <tr> <td>20260520(0)</td> <td></td> <td></td> </tr> <tr> <td>AutoTest_SD-WAN(4)</td> <td></td> <td></td> </tr> <tr> <td>prv_fwUp_test(4)</td> <td></td> <td></td> </tr> <tr> <td>☒ 2865L_1449BC3E740</td> <td>14-49-BC-37-E7-40</td> <td>Vigor2865L</td> </tr> <tr> <td>☒ 2927_1449BC6B0D58</td> <td>14-49-BC-6B-0D-58</td> <td>Vigor2927</td> </tr> </tbody> </table>	Name	MAC Address	Model Name	Root Network(10)			20260520(0)			AutoTest_SD-WAN(4)			prv_fwUp_test(4)			☒ 2865L_1449BC3E740	14-49-BC-37-E7-40	Vigor2865L	☒ 2927_1449BC6B0D58	14-49-BC-6B-0D-58	Vigor2927
Name	MAC Address	Model Name																				
Root Network(10)																						
20260520(0)																						
AutoTest_SD-WAN(4)																						
prv_fwUp_test(4)																						
☒ 2865L_1449BC3E740	14-49-BC-37-E7-40	Vigor2865L																				
☒ 2927_1449BC6B0D58	14-49-BC-6B-0D-58	Vigor2927																				
Save	Save the settings and return to previous page.																					

Device(s)

Once

Choose Report Type

☐ **Statistics Report**

Create a report providing variety of data relating to Usage, Traffic and Device Information.

☒ **Comprehensive Report**

Generate reports based on the latest information or request specific data from the CPE, including traffic usage, device configuration, etc.

Cancel

Apply

If **Comprehensive Report** is selected, the following setting page will appear.

Report / Report Tasks

User Group : RootGroup

Comprehensive Report Settings

General

Profile Name

Report Type Traffic

Report Content LAN Statistic

File Type PDF Word CSV Excel

Report Range Network Device(s)

Network Nothing selected



Recipients and Logo

Report Recurrence Every Week

Cancel

Save


These parameters are explained as follows:

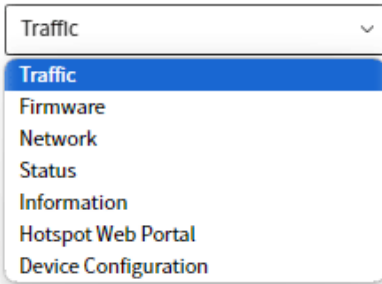Item	Description
General	
Profile Name	Enter a name for such report task profile.
Report Type	At present, VigorACS offers several types of report, including traffic, firmware, network, status, information and device configuration.  Use the scroll bar to choose the type you want and select an option for that type.
Report Content	Select the way (statistic or graph) to show the report. The content will vary based on the Report Type. 
File Type	Choose PDF, Word, CSV, or Excel as the file format for device configuration report.
Report Range	Determine the content range (network or devices) of the report.
Network	Select one or more networks for generating the statistics report.
Recipients and Logo	
Report Recurrence	Once – The report will be made just for one time. Every Day/Every Week/Every Month – The report will be made repeatedly. Set the day, starting date and starting time based on the selection.
Report file Logo	Click to put a logo on the report. Select the logo file (with the file size less than 100KB).
Send Report by Email	Switch the toggle to enable/disable this function. If enabled, Recipients (User) – Specify the subject for the email. Recipients (Email) – Enter the email address of the recipient. +Add – If there is more than one recipient for adding, click the link to

	have more entry box(es) for adding more recipients. Recipients (Email Subject) – Enter the subject of the email. Recipients (Email From) – Enter the email address of the sender. Recipients (Email Content) – Enter the content of the email.
Save	Save the settings and return to previous page.


6.2.1.2 Generated Reports

This page displays the report(s) generated by VigorACS server.

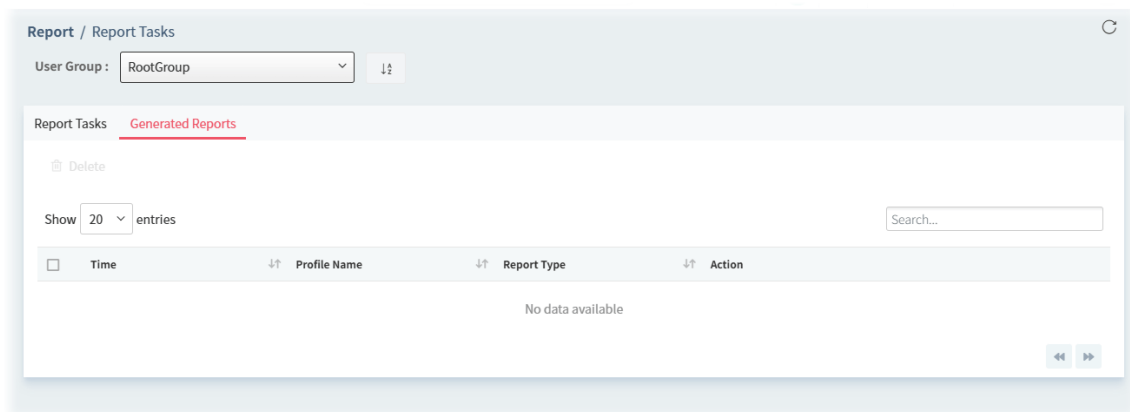

6.2.2 Legacy Report Tasks (Deprecated)

This page displays the legacy report tasks and is just for reference.

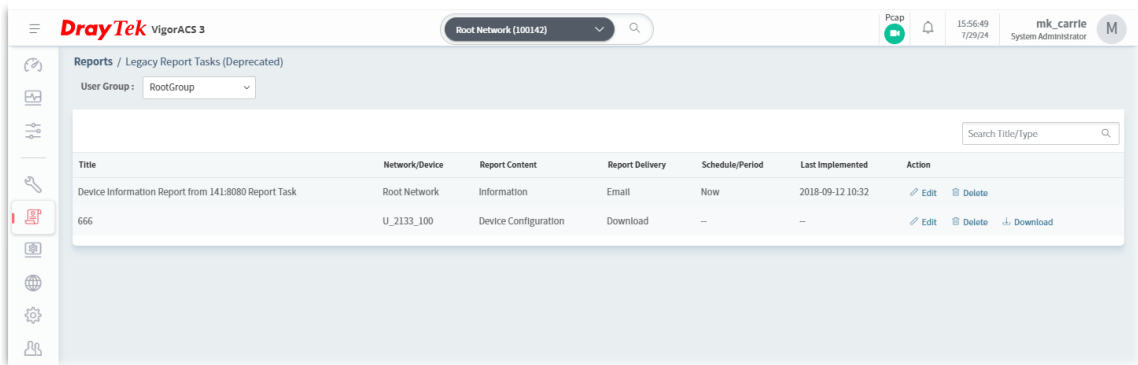

Click **Edit** to review the detailed settings.

Create new report Task

Enable This Task

☒

Task Title

Device Information Report from 141:80

Report Content

Information

Device Information

Report delivery

Send By Email

Download File

File Type

PDF

CSV

Excel

Word

Created By

root / Internal

Run Report

Once


Repeat

Now

Cancel

6.3 Provisioning

Provision functions allow users to set provision profiles for applying in numerous TR-069 CPEs instead of configuring settings for each CPE one by one.

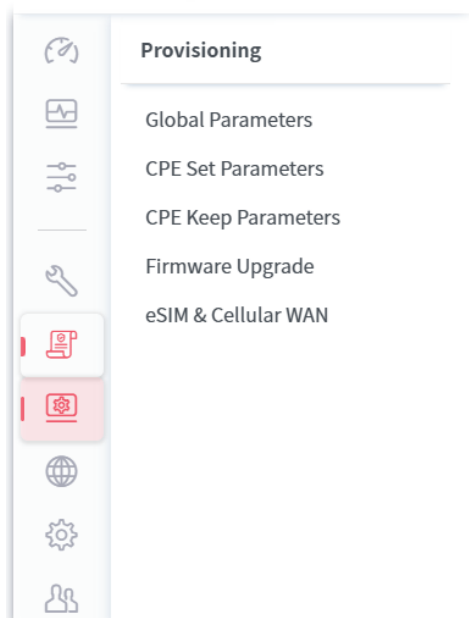

 Provisioning menu is available only for the role of **System Administrator**, **Group Administrator**, and **Administrator**.


6.3.1 Global Parameters

Global Parameters configured in this page can be applied to all of the CPEs/APs at the same time by using VigorACS instead of configuring them one by one.

 It is suitable and convenient when there are several CPE (with the same model) devices required to be configured with the same settings and values.



6.3.1.1 Global Profile

This page listed the parameters profiles with profile names, model, and the status of the profile to be kept or not.

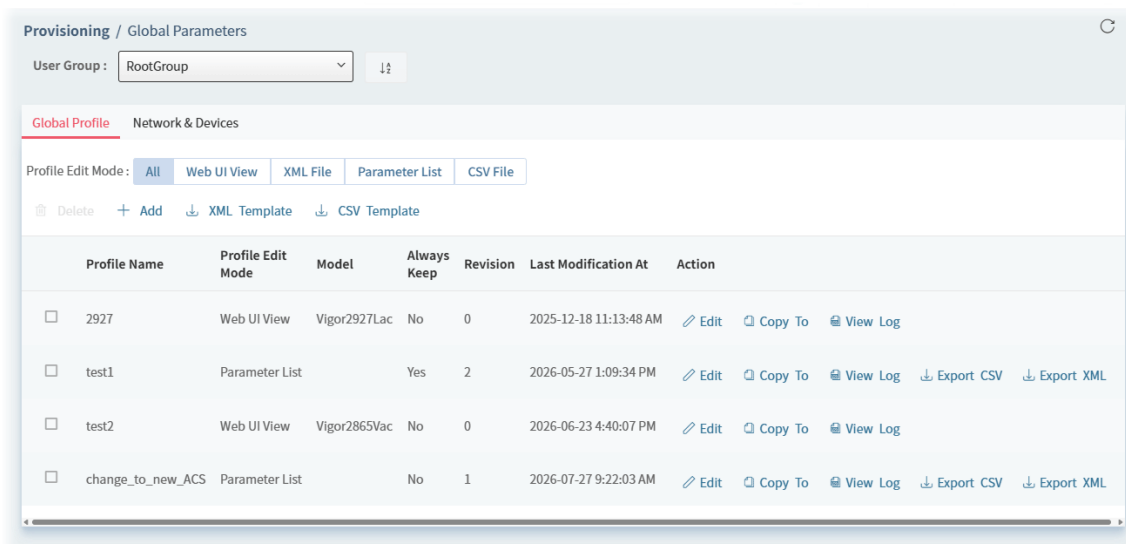

These parameters are explained as follows:

Item	Description
Profile Edit Mode	All – Display all of the profiles. Web UI View – Display the profiles related to web UI view. XML File – Display the profiles with the file format of "XML". Parameter List – Display the profiles related to parameter settings for different CPEs. CSV File – Display the profiles with the file format of "CSV".
Delete	Click to remove the selected profile.
+Add	Click to create a new provision profile.
XML Template	Click to store current global parameter configuration as a file (*.xml). The XML is separated into two parts, you may edit it based on your requirement: - Item: Specify the unique "item id" for each TR-069 parameter that you want to configure - Profile: Specify the parameter value for each "parameter id", ACS will check the parameter id(mapping to item id) with the parameter name. - Profile Name: The profile name will display in the global parameter page. - Iskeep: We could decide whether to keep the value of this parameter. Setup true then ACS will detect and change it back if someone edits the value; - ord: ACS will apply the setting based on the order of parameters. Buttons: Close, Download XML
CSV Template	Click to store current global parameter configuration as a file (*.CSV).

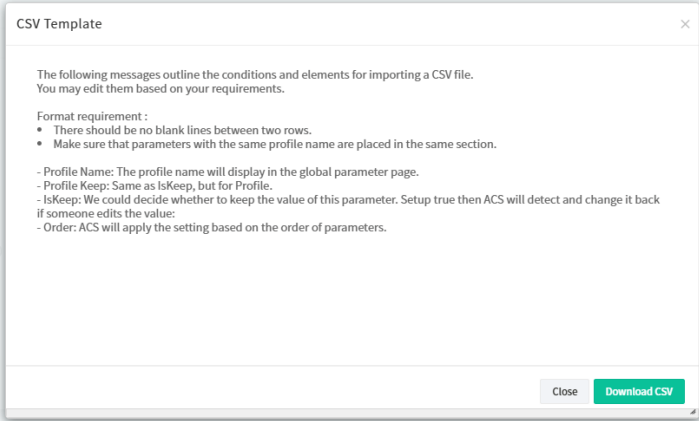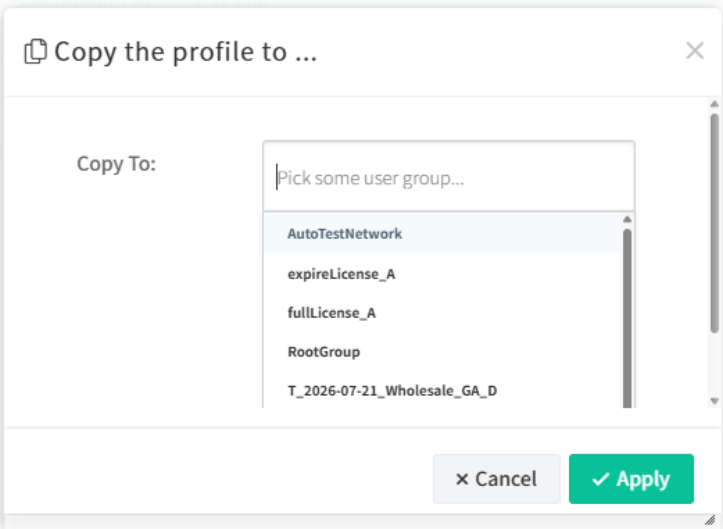	
Profile Name	Display the name of the profile.
Profile Edit Mode	Display the edit mode.
Model	Display the model name of the device.
Always Keep	Yes – Such profile is kept always. No – Such profile is not kept always.
Revision	Display the time for last modification.
Last Modification At	Display the time and date of the last modification of the provision.
Action	Edit – Click to configure settings for the selected profile. Copy To – If the administrator wants to apply the provision to certain user group, such action shall be used.  View Log – Click to review detailed information for the selected profile.

Global Profile

Network & Devices

Profile Information

Profile ID	6
Profile Name	root_group_always_keep
Profile Edit Mode	Web UI View
Model	General
Always Keep	Yes
Revision	559
Last Modified	2017/11/20 05:49:56 PM
Reboot after Provisioning	No

Status Overview

Device ID	Device Name	MAC Address	Network (ID)	Time	Result	Status
293	2952n_001DAAE061E8	001DAAE061E8	ALANWEN (82)	2019/09/27 12:00:46 AM		Complete.
295	2960_00507FFF3900	00507FFF3900	ALANWEN (82)			Not yet applied.
141243	3910_001DAA18E740	001DAA18E740	ALANWEN (82)			Not yet applied.

The following setting page appears when **+Add** is clicked.

Provisioning / Global Parameters

User Group : RootGroup

Global Profile

Network & Devices

Add a Profile

Create Profile by

--- Choose an action ---

Always Keep

☐

Reboot after Provisioning

☒

Note:

- After applying the parameters, ACS will check the CPE responses and ask the CPE to reboot if needed.

Provisioning Time

Now

Scheduled



Schedule Profile



Cancel

Add

These parameters are explained as follows:

Item	Description
Create Profile by	There are three methods (Sampling from an Online Device, Sampling from an XML file, Sampling from an CSV file, Creating a New Parameter List) to create a profile.
For Sampling from an Online Device ,	Profile Name – It is available when Sampling from an Online Device / Creating a New Parameter List is specified on “Create Profile by”. Enter a name for the parameter profile. Select Device – Click Edit to choose the device.

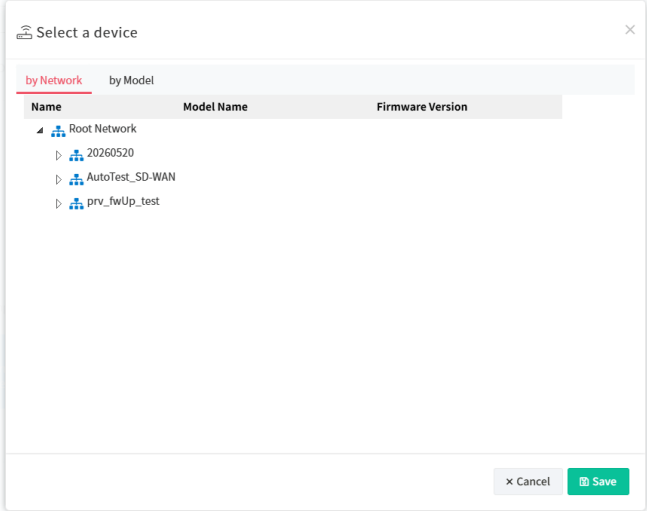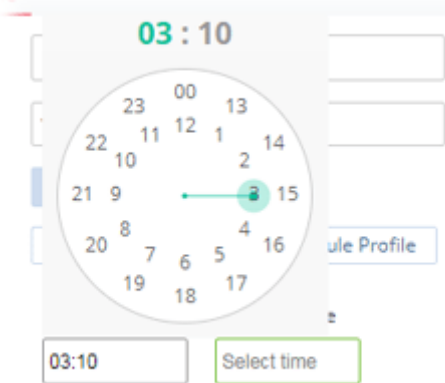	
For Sampling from an XML file ,	Select XML file – Click Browse to choose a file.
For Sampling from an CSV file ,	Select CSV file – Click Browse to choose a file.
For Creating a New Parameter List ,	Profile Name – Enter a name to create a new profile.
Always Keep	Some ISPs do not wish CPE client changing the parameters of CPE device, therefore make the profile being kept is required.
Reboot after Provisioning	Enable it to reboot the CPE after the provisioning is applied by certain CPE.
Provisioning Time	Set a time interval for executing the backup work for networks and devices. ● Now ● Scheduled ● Schedule Profile
Scheduled	Start Time / End Time – Click Select time to display a clock. Set the hour and minutes by clicking the number on the clock.  Specify Start Date – Click to enable the time setting.

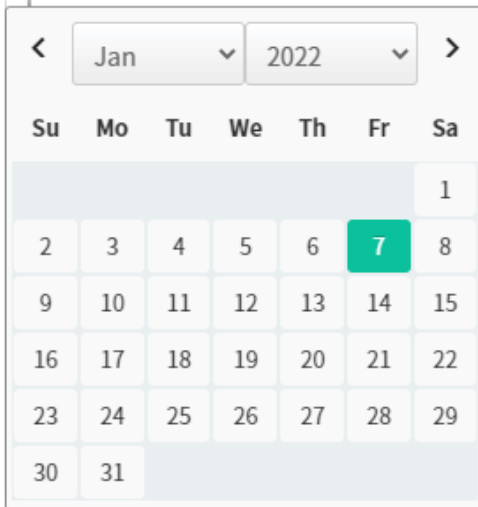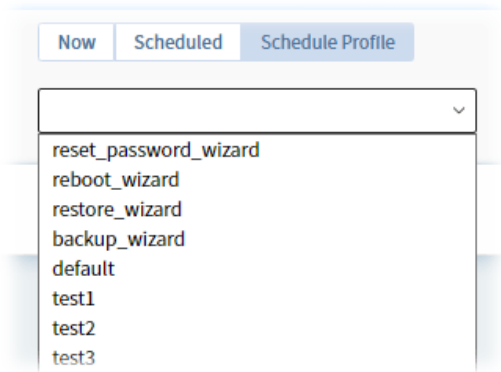	Start date – Click to pop up a calendar to choose a date as the starting date. 
Schedule Profile	Trigger Profile – Choose a trigger profile from the drop down list. In which, VigorACS offers default schedule profile. 
Cancel	Discard current settings and restore the default settings.
Add	Save and create the new profile.

6.3.1.2 Network & Devices

Specify certain profile (global parameter) to be applied in selected network, selected CPE/AP by clicking on the tree view structure.

Locate a CPE/AP by unfolding the tree view structure displayed under **Name**. Use the drop down list of **Profile Id** to specify the global parameter profile required for that CPE/AP.

Provisioning / Global Parameters

User Group : RootGroup

Global Profile Network & Devices

Name	Profile Id
Root Network(10)	Empty
20260520(0)	(As Parent)
AutoTest_SD-WAN(4)	(As Parent)
prv_fwUp_test(4)	(As Parent)
2865L_1449BC37E740	(As Parent)
2927_1449BC6B0D58	(As Parent)

Cancel Save


These parameters are explained as follows:

Item	Description
User Group	Specify a user group. The devices under that group will be displayed on this page.
Name	Display the CPE/AP with the authority of the selected group.
Profile Id	Choose a profile (with global settings) defined in Global Profiles to be applied in such selected CPE/AP. (As Parent) – Use the same setting as the previous layer.
Cancel	Discard current settings and restore the default settings.
Save	Save the settings.



6.3.2 CPE Set Parameters



CPE parameters configured here can be applied to all of the CPEs at the same time by using VigorACS instead of configuring them one by one.

-
-  CPE Set Parameters is suitable and convenient when there are several CPE (with the same model) devices required to be configured with **different** settings and values. However, Global Parameters is suitable and convenient when there are several CPE (with the same model) devices required to be configured with the **same** settings and values.
-

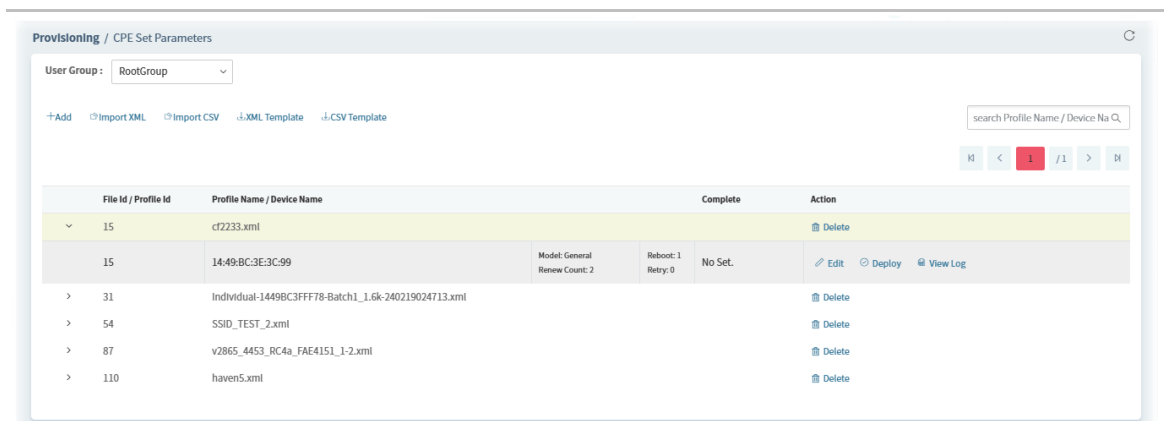

These parameters are explained as follows:

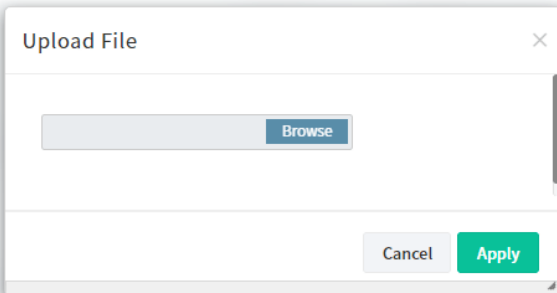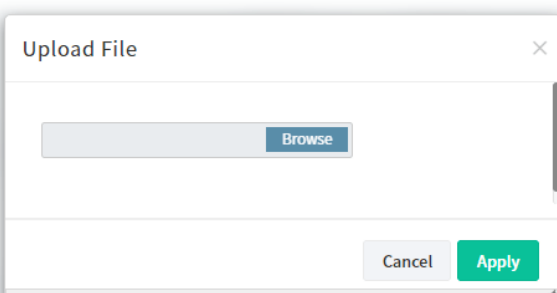Item	Description
User Group	Specify a user group. The devices under that group will be displayed on this page.
+Add	Click to create a file saved with the file format of XML.
Import XML	Click to upload a file to VigorACS 3 server. 
Import CSV	Click to upload a file to VigorACS 3 server. 
XML Template	Click to store current global parameter configuration as a file (*.xml).

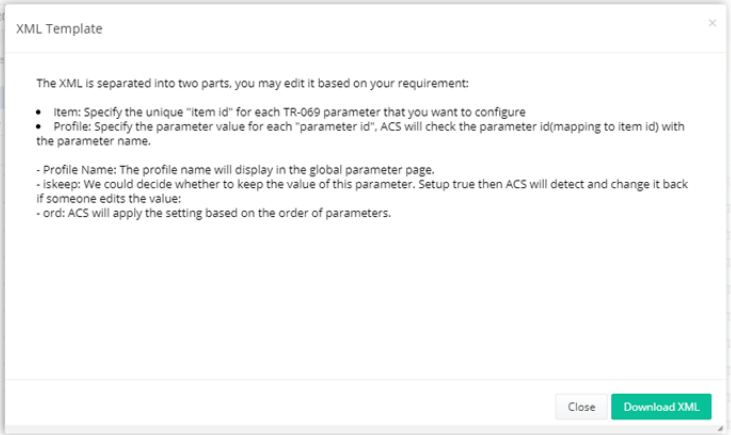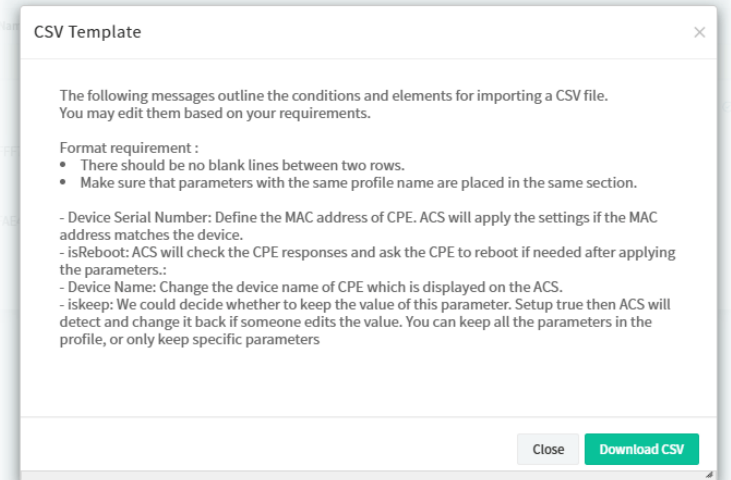	
CSV Template	Click to store current global parameter configuration as a file (*.xml). 
File Id / Profile Id	Display the number of parameter file or the ID number of the profile.
Profile Name / Device Name	Display the profile name or the device name.
Action	Delete – Click to delete the profile. View Parameters – Click to display parameter settings for the selected profile. View Log – Click to review detailed information for the selected profile.

The following setting page appears when **+Add** is clicked.

These parameters are explained as follows:

Item	Description
File Name	Enter a name for the parameter profile.
Device MAC or IP	Enter the MAC address or IP address. After typing the address, VigorACS 3 will search from the database and locate the one you specify.
Reboot after provisioning	Enable it to reboot the CPE after the provisioning is applied by certain CPE.
Cancel	Discard current modification.
Continue	Click to get into next setting page.

The following web page (varies according to the device selected) appears after clicking **Continue**.


These parameters are explained as follows:

Item	Description
Device	Display the name of the device which will be applied with the

	parameters configured in this page.
Web UI View	Parameters (including WAN, LAN, NAT, Object Settings, QoS, Firewall, System, Routing, Wireless, Applications and etc.) ready for each CPE provision profile can be seen and configured in this page. The setting page for each parameter listed in left side will be displayed on the right side. Simply click the parameter to expand the sub-menu items. Then, choose a sub-menu item and click +Add to open setting page. After entering the required information for that menu item, click Save.
Parameter List	Display an overview of settings configured in Primary View.
Back to Profile List	Return to Profile List page.

6.3.3 CPE Keep Parameters

This web page listed the parameters profiles with index number, profile names, and the status of the profile to be kept or not.

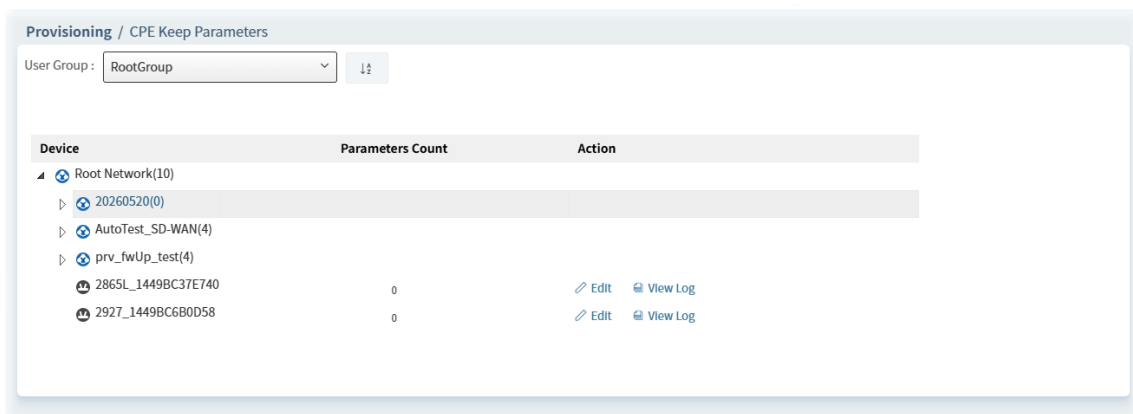

These parameters are explained as follows:

Item	Description
Edit	Click to open the configuration page. The menu on the left displays the available parameters for the device.

6.3.4 Firmware Upgrade


When VigorACS server receives information from CPE about firmware upgrade, it will check if the received model name, modem firmware version, and software version correspond to the information recorded in VigorACS server. If everything can match but software version not, VigorACS will judge that the remote CPE requiring firmware upgrade. Next, VigorACS server will execute firmware upgrade with the file listed in Job List automatically at specified time.

 The firmware upgrade profile created in such page can be applied to the whole **network / group**.

For applying an upgrade provision profile to single and selected **devices** (but not applied to the whole network), please go to **Maintenance>>Firmware Upgrade** for more detailed information.

6.3.4.1 Firmware Upgrade Job List

This web page allows you to **specify** required information for matching with the CPE device. The profiles created here will be regarded as a basis that VigorACS server uses to compare information coming from CPE router with the information stored in VigorACS server's database.

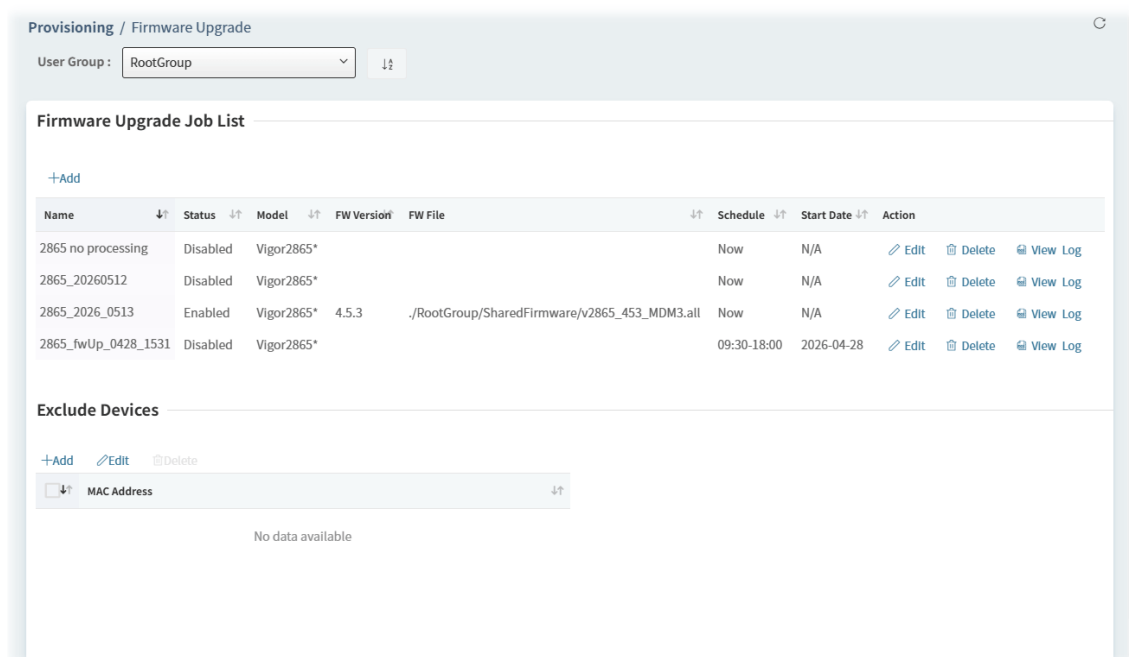

Name	Status	Model	FW Version	FW File	Schedule	Start Date	Action
2865 no processing	Disabled	Vigor2865*			Now	N/A	Edit Delete View Log
2865_20260512	Disabled	Vigor2865*			Now	N/A	Edit Delete View Log
2865_2026_0513	Enabled	Vigor2865*	4.5.3	./RootGroup/SharedFirmware/v2865_453_MDM3.all	Now	N/A	Edit Delete View Log
2865_fwUp_0428_1531	Disabled	Vigor2865*			09:30-18:00	2026-04-28	Edit Delete View Log

These parameters are explained as follows:

Item	Description
User Group	Specify a user group. The job list under that group will be displayed on this page.
Firmware Upgrade Job List	
+Add	Click to create a new job profile.

Edit	Click to modify, change the selected profile.
Delete	Click to delete the selected profile.
View Log	Click to view the record related to the firmware upgrade of the CPE.
Exclude Devices	
+Add	Specify the device that the firmware upgrade job configured and displayed on the job list will not perform for it. Click to display an entry box. Enter the MAC address of the device.
Edit	Click to modify the MAC address of the devices one by one.
Delete	Click to delete the selected device.
Check box	Check the box to specify a device. Later, the selected one can be deleted if required.
MAC Address	Display the MAC address of the device.
Cancel	Discard current settings and return to previous page.
Save	Save the current settings and exit the page.


The following setting page appears if **+Add** for **Firmware Upgrade Job List** is clicked.


The screenshot displays the 'Firmware Upgrade Job Settings' page. At the top, there's a breadcrumb 'Provisioning / Firmware Upgrade' and a 'User Group' dropdown set to 'RootGroup'. The main section is titled 'Firmware Upgrade Job Settings' and contains several fields and buttons:

- Name:** A text input field.
- Status:** Two buttons, 'Disable' and 'Enable'.
- Upgrade Time:** Three buttons, 'Now', 'Scheduled', and 'Schedule Profile'.
- Note:** A blue box with a note icon and text: 'ACS will request the firmware upgrade when it receives a TR-069 inform from CPE.'
- Job Type:** Two buttons, 'Normal' and 'Auth Key Check'.
- Protocol Options:** Two buttons, 'TR069' and 'HTTP'.
- Device Criteria:**
 - Model:** A dropdown menu showing 'Vigor C510*'. There's a help icon next to it.
 - Upgrade Type:** Three buttons, 'Target', 'Current', and 'Auto Upgrade'.
 - Device does not match the firmware version:** A dropdown menu showing '2.9.5'.
- Buttons:** 'Cancel' and 'Save' buttons at the bottom right.

These parameters are explained as follows:

Item	Description
Firmware Upgrade Job Settings	
Name	Enter a name of the job profile.
Status	Disable – Firmware upgrade is not allowed for such job profile. Enable – Firmware upgrade is allowed for such job profile.

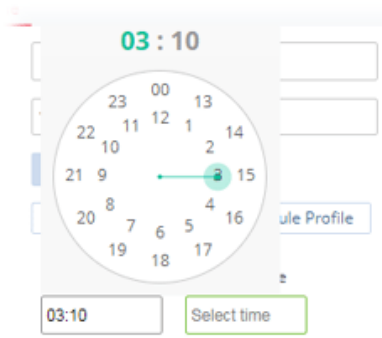Upgrade Time	Set a time interval for executing the backup work for networks and devices. ● Now ● Scheduled ● Schedule Profile
Job Type	Normal – VigorACS 3 performs firmware upgrade without using any authentication key. Auth Key Check – To avoid hacker's attack via Vigor device (router or AP), special authentication key is used for communication between Vigor device and VigorACS 3. That is, VigorACS 3 will verify all of the Vigor devices via authentication key issued by DrayTek to ensure the network security.
Protocol Options	Select the mechanism for performing firmware upgrade. TR069 – This is the default setting. HTTP – VigorACS will authenticate the router/CPE by router name and the password and then perform the firmware upgrade for the CPE. ● Router Username – Enter the name (e.g., admin) of the router as the username for accessing the router. ● Router Password – Enter the password (e.g., admin) of the router for accessing the router.
Scheduled	Start Time / End Time – Click Select time to display a clock. Set the hour and minutes by clicking the number on the clock.  Specify Start Date – Click to enable the time setting. Date – Click to pop up a calendar to choose a date as the starting date.
Schedule Profile	Trigger Profile – Choosing a trigger profile from the drop down list. In which, VigorACS 3 offers default schedule profile.

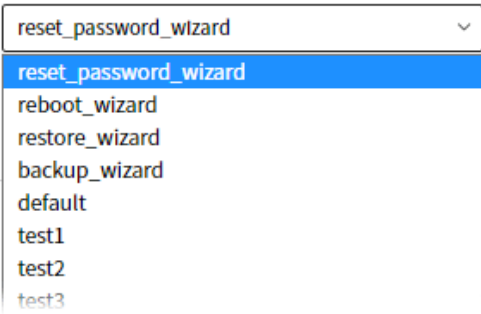	
Device Criteria	
Model	Choose a model for firmware upgrade.
Upgrade Type	Target – If the firmware version of the CPE is different from the one listed in "Device matches firmware version", the firmware upgrade job will be performed immediately. ● Device does not match firmware version – Display current firmware version recorded on VigorACS server. Current – If the firmware version of the CPE is the same as the one listed in "Device matches firmware version", the firmware upgrade job will be performed immediately. ● Device matches firmware version – Display current firmware version recorded on VigorACS server. Auto Upgrade – If the CPE firmware version does not match the latest firmware version, the ACS requests the CPE to upgrade its firmware.
Modem Version	Available versions from VigorACS 3 database will be displayed in this field. Choose the correct modem version of the device, e.g., Annex A, Annex B and etc. Before performing firmware upgrade for the CPE, VigorACS 3 will check if the received model name, modem firmware version, and software version match with the information recorded in VigorACS 3 server or not. If you type "" in this field, the modem version will not be regarded as a comparison condition in the process of firmware upgrade. It will be ignored.
Firmware Upgrade & Network selection	
Apply	As Parent – The setting for the selected network / device is the same as the top setting. NO – No setting for the selected network / device. YES – Use the firmware selected above for the network / device.
Cancel	Discard current settings and return to previous page.
Save	Save the current settings and exit the page.

6.3.5 eSIM & Cellular WAN

The eSIM profile is used to define the virtual SIM card information for identification by Telecom operators. With the eSIM profile, users can connect to the telecom operator's network via Vigor router for VoIP, internet, and sending and receiving SMS messages.

6.3.5.1 Cellular WAN Setting

It is available for LTE WAN only. LTE WAN uses the embedded module to access Internet.

Provision / eSIM & Cellular WAN

User Group : RootGroup

Cellular WAN Setting eSIM Pool CPE eSIM Deployment

Cellular WAN Profile

+Add Profile

search Profile Name

Profile Name	Schedule	Start Date	Action
No data available			

Show 10 entries

Device Provisioning

Name	MAC	Model Name	Last Provisioned	Cellular WAN Profile
Root Network(10)				Empty
20260520(0)				(As Parent)
AutoTest_SD-WAN(4)				(As Parent)
prv_fwUp_test(4)				(As Parent)

Save

These parameters are explained as follows:


Item	Description
Cellular WAN Profile	
+Add Profile	Click to add a new cellular WAN profile.
Profile Name	Display the name of the cellular WAN profile.
Schedule	Display the provision time.
Start Date	Displays the date on which the provision will be triggered.
Action	Edit – Click to modify the detailed settings of the selected WAN profile. Delete –Click to remove the detailed settings of the selected WAN profile. Copy To – Click to open a setting page. Then, select a user group. After clicking the Apply button, the configuration of selected cellular WAN profile will be copied to the selected user group. View Log – Click to review detailed information for the selected profile.

Device Provisioning	
Cellular WAN Profile	Specify one cellular WAN profile for the selected CPE. As Parent – Choose the same setting as the previous layer.
Save	Save the current settings and exit the page.


The following setting page appears if **+Add Profile** for **Cellular WAN Profile** is clicked.

These parameters are explained as follows:

Item	Description
Cellular WAN Profile Setup	
Profile Name	Enter a name of the profile.
Provision Time Schedule	
Provision Time	Set a time interval for executing the cellular WAN profile. ● Now ● Scheduled ● Schedule Profile
Scheduled	Start Time / End Time – Click Select time to display a clock. Set the hour and minutes by clicking the number on the clock.

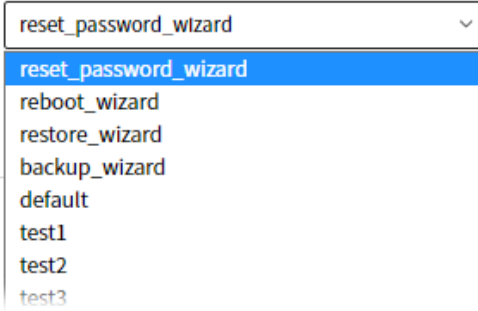	Specify Start Date – Click to enable the time setting. Start Date – Click to pop up a calendar to choose a date as the starting date.
Schedule Profile	Trigger Profile – Choosing a trigger profile from the drop down list. In which, VigorACS 3 offers default schedule profile. 
Cancel	Discard current settings and return to previous page.
Next	Click to open the next page.

After finished and save the above settings, click **Next** to open the following page.

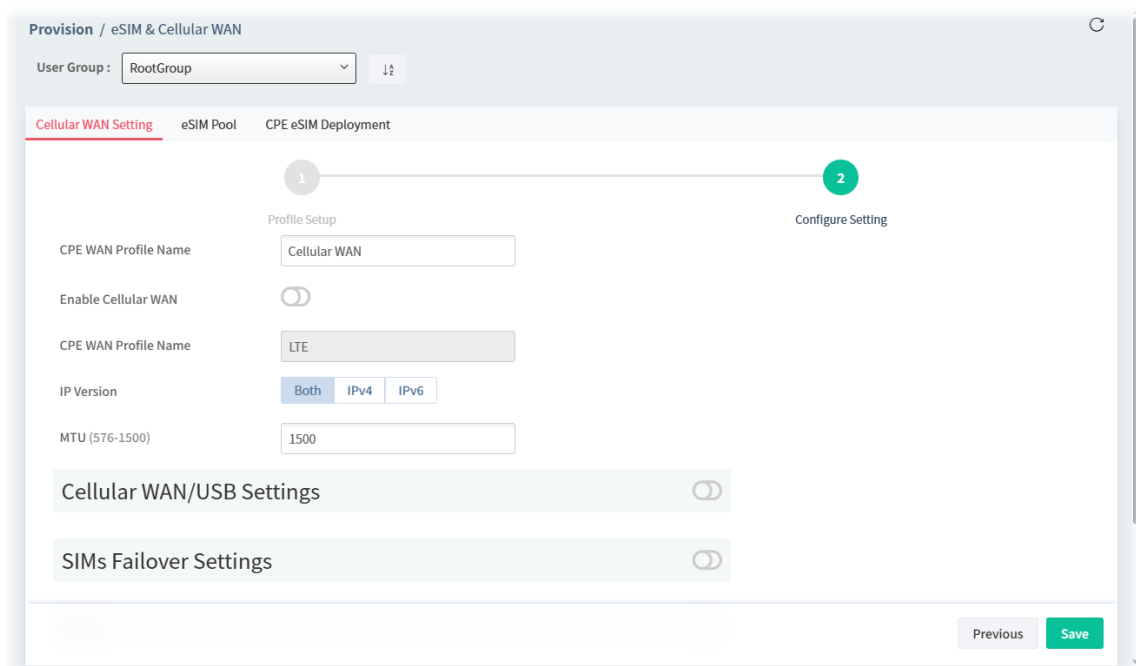

These parameters are explained as follows:

Item	Description
CPE WAN Profile Name	Enter a name of the profile used for a CPE.
Enable Cellular WAN	Click to enable the cellular WAN settings.
CPE WAN Profile Name	Displays current WAN interface.

IP Version	Set the protocol (IPv4 or IPv6 or both) that this WAN interface used.
MTU	Maximum Transmission Unit, the size of the largest packet, in bytes, that can be transmitted to the WAN. The maximum value is 1500. For PPPoE connections, there is always an 8-byte overhead, so the maximum valid MTU value for PPPoE is 1492.
Cellular WAN/USB Settings	
Cellular WAN/USB Settings	Click to enable the Cellular WAN/USB settings.
WAN Connection Type	DHCP – Dynamic Host Configuration Protocol is used to establish a connection. PPP – Point-to-Point Protocol is used to establish a connection.
Select SIMs to Configure	Physical SIMs – Select SIM1 and/or SIM2 for configuration. Physical SIMs – Select the ACS SIM profile. Physical SIMs ☒ SIM1 ☐ SIM2 Physical SIMs ☐ ACS eSIM1 ☐ ACS eSIM2 ☐ ACS eSIM3 SIMs – Display the name of the physical SIM. Enable SIMs – Click to enable/disable the SIM settings. PIN Code – PIN code of the SIM card in the modem. The maximum length of the PIN is 8 characters. Enable Auth – Click to enable/disable the authentication. • PAP only – Only PAP (Password Authentication Protocol) is used. • PAP or CHAP – Both PAP and CHAP (Challenge-Handshake Authentication Protocol) can be used for PPP authentication. Router negotiates with the PPTP or L2TP server to determine which protocol to use. Username – Username provided by the ISP for authentication (optional). Password – Password provided by the ISP for authentication (optional). Auto APN Name – Access Point Name to be used for the connection. Please contact your ISP or carrier for the appropriate value. APN Name – If disabling this feature, enter the APN name. Enable Ping To Keep Alive LTE – Normally, this function is designed for Dynamic IP environments because some ISPs will drop connections if there is no traffic within certain periods of time.

	If selected, ping a WAN host to maintain the connection. If unselected, ping to keep WAN alive is disabled. Ping to the IP Address – IP address of host to be pinged. Interval – Number of minutes to wait before sending a ping request to the WAN host. Timeout – Vigor system will send a packet per second to the specified IP address. If the system does not receive any reply from that IP within 10 seconds, Vigor system will reboot LTE module until successfully set LTE connection.
SIMs Failover Settings	
SIMs Failover Settings	Click to enable the SIMs failover settings. Then configure settings for SIM failover WAN.
Name	Displays the names representing the practical SIM (1 & 2) and virtual SIM profiles (ACS eSIMs and Local eSIMs).
Dial Up Timeout	Set the time out interval (50 to 255 seconds).
Fail Count Threshold	Define the number of failures allowed for the WAN connection to failover.
Bridge Mode	Click to enable the bridge mode setting. If the function is enabled, the router will work as a LTE bridge modem. If enabled, configure the following setting: Bridge Specific MAC Address – Enter the MAC address of the device (e.g., a computer, router or a Wi-Fi router) which needs to be connected to the Internet through the LTE modem.
IPv4	
IPv4	Click to enable the time setting. It is available if Both or IPv4 is selected as the IP Version.
WAN DNS	Select Auto or Manual. If Manual is selected, specify the primary and secondary DNS servers. IPv4 Primary DNS –IP address of primary DNS server. IPv4 Secondary DNS – IP address of secondary DNS server.
WAN Connection Detection Mode	Configures how the WAN connection is monitored. Always On – The router assumes the WAN connection is always active. PPP Detect – The router sends a PPP Echo Request every 5 seconds. If no Echo Reply is received within 30 seconds, the WAN connection is deemed to have failed. Ping Detect – The router sends an ICMP (Internet Control Message Protocol) echo request based on the ping interval setting to the host,

	whose address is specified in the Ping Gateway IP field, to verify the WAN connection. If the remote host does not respond within certain seconds (defined in the ping interval), the WAN connection is deemed to have failed. Ping Gateway IP – Click to enable use the current WAN gateway IP address for pinging. With the IP address(es) pinging, Vigor router can check if the WAN connection is on or off. TTL – Time To Live, the maximum allowed number of hops to the ping destination. Valid values range from 1 to 255. Ping Interval – Enter the interval for the system to execute the PING operation. Ping Retry – Enter the number of times that the system is allowed to execute the PING operation before WAN disconnection is judged.
IPv6	
IPv6	Click to enable the time setting. It is available if Both or IPv6 is selected as the IP Version.
IPv6 Connection Type	Offline – When Offline is selected, the IPv6 connection will be disabled. DHCPv6 – Use DHCPv6 protocol to obtain IPv6 address from server.
If DHCPv6 is selected as the IPv6 Connection Type	Authentication Protocol – This protocol will be used for the client to be authenticated by DHCPv6 server before accessing into Internet. There are three types can be specified, Reconfigure Key, Delayed and None. In general, the default setting is None. Reconfigure Key – During the connection process, DHCPv6 server will authenticate the client automatically. Delayed – During the connection process, DHCPv6 server will authenticate and identify the client based on the key ID, realm and secret information specified in these fields. • Key ID – Type a value (range from 1 to 65535) which will be used to generate HMAC-MD5 value. • Realm – The name (1 to 31 characters) typed here will identify the key which generates HMAC-MD5 value. • Secret – Type a text (1 to 31 characters) as s a unique identifier for each client on each DHCP server.
WAN DNS	Select Auto or Manual. If Manual is selected, specify the primary and secondary DNS servers. IPv6 Primary DNS – IP address of primary DNS server. IPv6 Secondary DNS – IP address of secondary DNS server.
WAN Connection Detection Mode	Configures how the WAN connection is monitored. Always On – The router assumes the WAN connection is always

	active. NS Detect – The router verifies connectivity by issuing Neighbor Solicitation packets. Ping Detect – The router sends an ICMP (Internet Control Message Protocol) echo request based on the ping interval setting to the host, whose address is specified in the Ping IP field, to verify the WAN connection. If the remote host does not respond within certain seconds (defined in the ping interval), the WAN connection is deemed to have failed. If you choose Ping Detect as the detection mode, you have to enter required settings for the following items. • Primary Ping IP – Enter an IP address in this field for pinging. • Secondary Ping IP – Enter an IP address in this field for pinging. • TTL –Time To Live, the maximum allowed number of hops to the ping destination. Valid values range from 1 to 255. • Ping Interval (Sec, 10–3600) – Enter the interval for the system to execute the PING operation. • Ping Retry – Enter the number of times that the system is allowed to execute the PING operation before WAN disconnection is judged.
Previous	Discard current settings and return to previous page.
Save	Click to save the settings.

6.3.5.2 eSIM Pool

eSIM Pool is used to manage a group of available eSIM profiles for CPE deployment. The system assigns eSIM profiles from the pool to CPE devices during the deployment process and manages their availability status for future use.

The screenshot shows the 'eSIM Pool Overview' page. At the top, there's a 'User Group' dropdown set to 'RootGroup'. Below it, three tabs are visible: 'Cellular WAN Setting', 'eSIM Pool' (selected), and 'CPE eSIM Deployment'. The main content area is divided into two columns. The left column contains three summary cards: 'Installed' (0) with sub-statuses 'Success/Fail/Processing', 'Available' (0) with sub-status 'Ready to Install', and 'Locked By Job' (0) with sub-status 'Reserved for Installation'. The right column is titled 'eSIM Installed Result' and shows a legend for 'Status' with 'Success (0)' in green, 'Fail (0)' in red, and 'Processing (0)' in blue. Below these cards, there's a 'Condition' dropdown set to 'All' and a search bar labeled 'search Network Name/De'. At the bottom, there are links for 'Delete Available' and 'Import'. A table header is visible at the very bottom with columns: eSIM Profile Name, Activation Code, Confirmation Code, Phone Number, Condition, Provider, ICCID, Status, Job Name, Network Name, Device Name, Slot Name, and Installation Time. The table body is empty, showing 'No data available'.

6.3.5.3 CPE eSIM Deployment

CPE eSIM Deployment is a function used to manage eSIM profiles on CPE devices. The Install operation deploys an eSIM profile to a selected CPE device to enable mobile network connectivity. The Uninstall operation removes the eSIM profile from the device when the service is no longer required or when the device needs to be reassigned.

The screenshot shows the 'CPE eSIM Deployment Job List' page. At the top, there's a 'User Group' dropdown set to 'RootGroup'. Below it, three tabs are visible: 'Cellular WAN Setting', 'eSIM Pool', and 'CPE eSIM Deployment' (selected). The main content area is titled 'CPE eSIM Deployment Job List' and includes a '+Add' button and a search bar labeled 'search Name'. Below this is a table with columns: Name, Job Type, Schedule, Start Date, End Date, and Action. The table body is empty, showing 'No data available'. At the bottom right, there's a 'Show 10 entries' control. Below the table, there's a section titled 'Device Provisioning' which contains a table with columns: Name, Model Name, Last Provisioned, ACS eSIM1, ACS eSIM2, ACS eSIM3, ACS eSIM1 Job Profile, and ACS eSIM2 Job Profile. The table lists four entries under 'Root Network(0)': '20260520(0)', 'AutoTest_SD-WAN(0)', and 'prv_fwUp_test(0)'. Each entry has dropdown menus for 'ACS eSIM1 Job Profile' and 'ACS eSIM2 Job Profile', all currently set to 'Empty' or '(As Parent)'. A green 'Save' button is at the bottom right.

To add a job, click **+Add** to open the following page.

The screenshot shows the 'Provision / eSIM & Cellular WAN' interface. At the top, there's a 'User Group' dropdown set to 'RootGroup'. Below it, three tabs are visible: 'Cellular WAN Setting', 'eSIM Pool', and 'CPE eSIM Deployment' (which is active and underlined in red). The main section is titled 'CPE eSIM Deployment Job Setting'. It contains several input fields and buttons: 'Job Name' (text input), 'Job Type' (radio buttons for 'Install' and 'Uninstall'), 'Deploy Time' (radio buttons for 'Now', 'Scheduled', and 'Scheduled Profile'), and 'Specify End Date' (a toggle switch). There are two blue note boxes: the first says 'Note: The Locked By Job eSIMs will become to Available after the selected end date.' and the second says 'Note: Extra number of applied eSIM will be installed automatically once new devices added to the'. At the bottom right, there are 'Cancel' and 'Save' buttons.


These parameters are explained as follows:

Item	Description
CPE eSIM Deployment Job Setting	
Job Name	Enter a name of the deployment job for identification.
Job Type	The eSIM deployment job contains Install job and Uninstall job. ● Install ● Uninstall
Deploy Time	Now – This eSIM deployment profile will be forced up immediately. Scheduled –This eSIM deployment profile will be forced up /down based on the following time schedule. ● Start Time – Specifies the beginning time of the schedule. The scheduled action will be activated at this time. ● End Time – Specifies the ending time of the schedule. The scheduled action will be deactivated at this time. ● Specify Start Date – Click to enable this option and configure the Start Date. ● Start Date – Use the drop-down calendar to specify correct date. Scheduled Profile – This eSIM deployment profile will be forced up /down based on the schedule profile used (profiles created via Maintenance >> Schedule Profile). ● Trigger Profile – Use the drop-down list to specify a profile.

Specify End Date	Click to enable this option and configure the End Date of the eSIM deployment profile. End Date – Use the drop-down calendar to specify correct date.
Select eSIMs to Install	-- This option is available if Install is selected as the Job Type
Filter Available eSIMs	Additional applied eSIMs will be installed automatically once new devices are added to the selected network. Enter the name (keyword) of the eSIM as a search filter condition. View Matched eSIMs – Click to display the searching (filtering) result of eSIM profiles.
Apply Matched eSIMs	Defines the maximum number of eSIM profiles that can be configured for this profile.
Cancel	Discard current modification.
Save	Click to save the change.

6.4 Network & Service Management

Network Management allows you to modify the information for Networks and Devices.

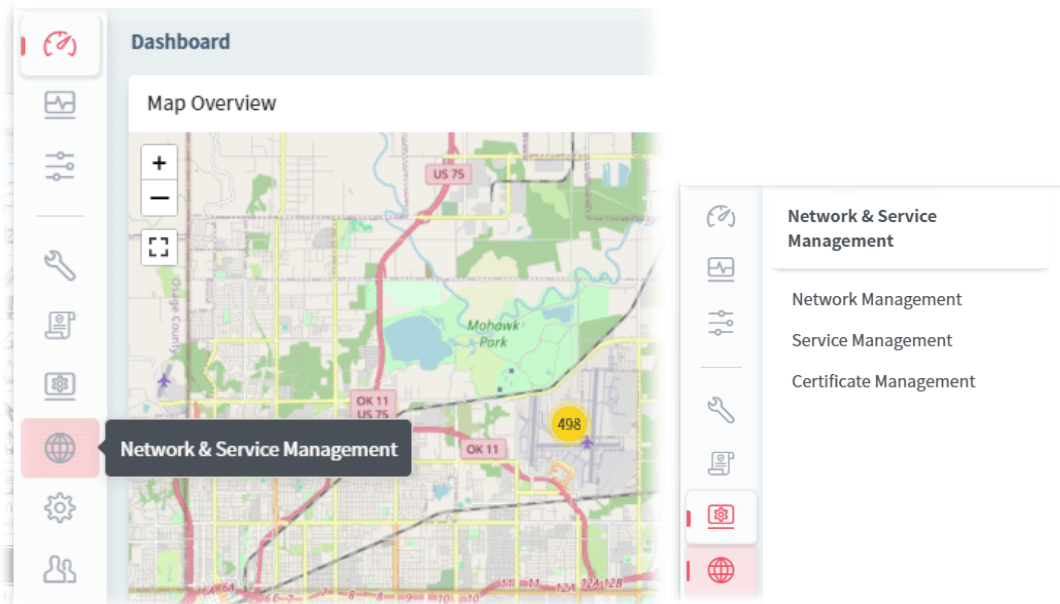

It can


- Add new network (s) for new client which will be managed by VigorACS.
- Delete existed network if the client will not be managed by VigorACS.
- Modify the name and location of the network for management.

 Network Management is available only for the role of **System Administrator, Group Administrator, Administrator** and **Standard** (limited in VigorACS cloud version).

6.4.1 Network Management

To add, change or delete a network, please open **Network Management**.

6.4.1.1 Settings for Root Network

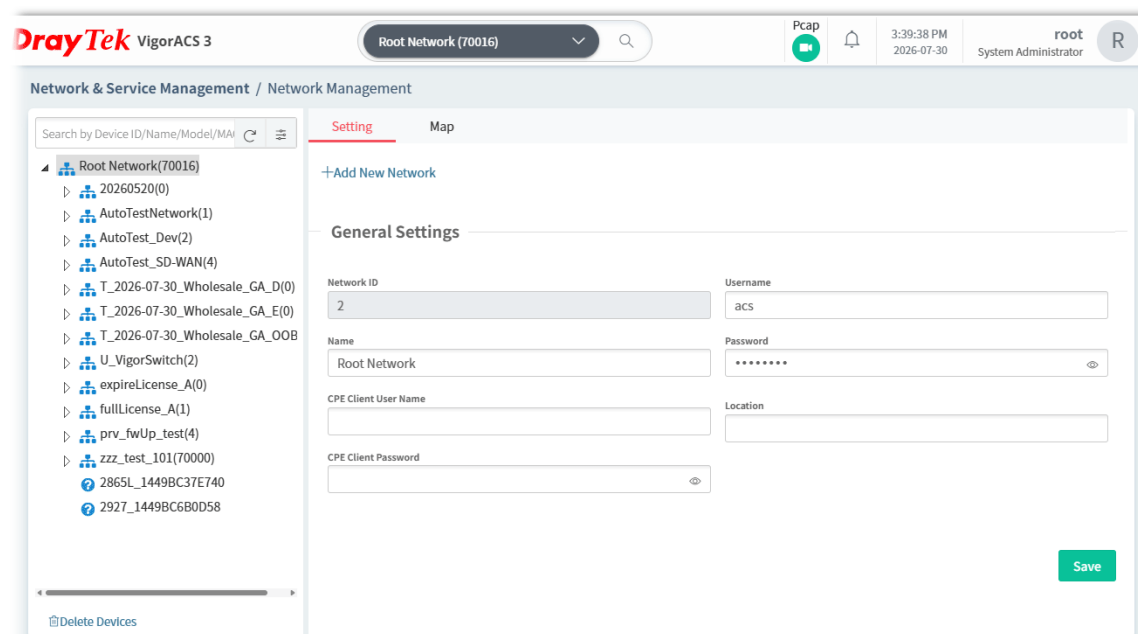

These parameters are explained as follows:

Item	Description
Search by Device ID/Name/Model/MAC/IP Address	Enter the ID, name, model or MAC/IP address of the device you want to locate.
+Add New Network	Click to add a new network.
General Settings	
Network ID	Display a number which is given by VigorACS randomly for the selected network.
Name	Display the name of the parent network. You can modify it if required.
CPE Client User Name	Set the username and password that VigorACS 3 can use to access into the CPE.
CPE Client Password	Set the username and password that VigorACS 3 can use to access into the CPE.
Username	Display the name of the selected network. Change it if required.
Password	Display the password of the selected network. Change it if required.
Location	Type the location (e.g., HsinChu, New York) for such network.
Save	Click to save the change.

The following setting page appears when **+Add New Network** is clicked.

The screenshot shows a dialog box titled "+ Add Network". It has a close button (X) in the top right corner. The dialog contains the following fields:

- Parent Network:** A dropdown menu with "Root Network" selected.
- Name:** A text input field containing "Marketing_carrie" with a green checkmark to its right.
- Location:** A text input field containing "HsinChu".
- Username:** A text input field containing "carrie" with a green checkmark to its right.
- Password:** A password input field with dots, a green checkmark, and an eye icon to its right. Below the field, the word "medium" is displayed.


At the bottom right, there are two buttons: "Cancel" (with an X icon) and "+ Add" (in red).

These parameters are explained as follows:


Item	Description
Parent Network	Display the name of the root network. New created network will be the sub-network of the parent network. In default, Root Network is the parent network for any new created network.
Name	Enter a name for the new network.
Location	Enter the location for the new network. Later, you can locate such network on the web page of Network Management>>Map .
Username	Enter a login name (e.g., carrie) for the new network which will be used for communication between Vigor device and VigorACS.
Password	Enter a password (e.g., admin123) for this new network. If you are going to group several devices under such network, please open System Maintenance>>TR-069 in the web configuration page of CPE. Then, type the user name and password defined in this page (e.g., in this case, they are <i>carrie</i> and <i>admin123</i>) in the corresponding fields.
Cancel	Discard current modification.
+Add	Save the current settings and exit the page.


6.4.1.2 Settings for Network Group


To add, change or delete a network group, please specify a network group (under **Network Management**).

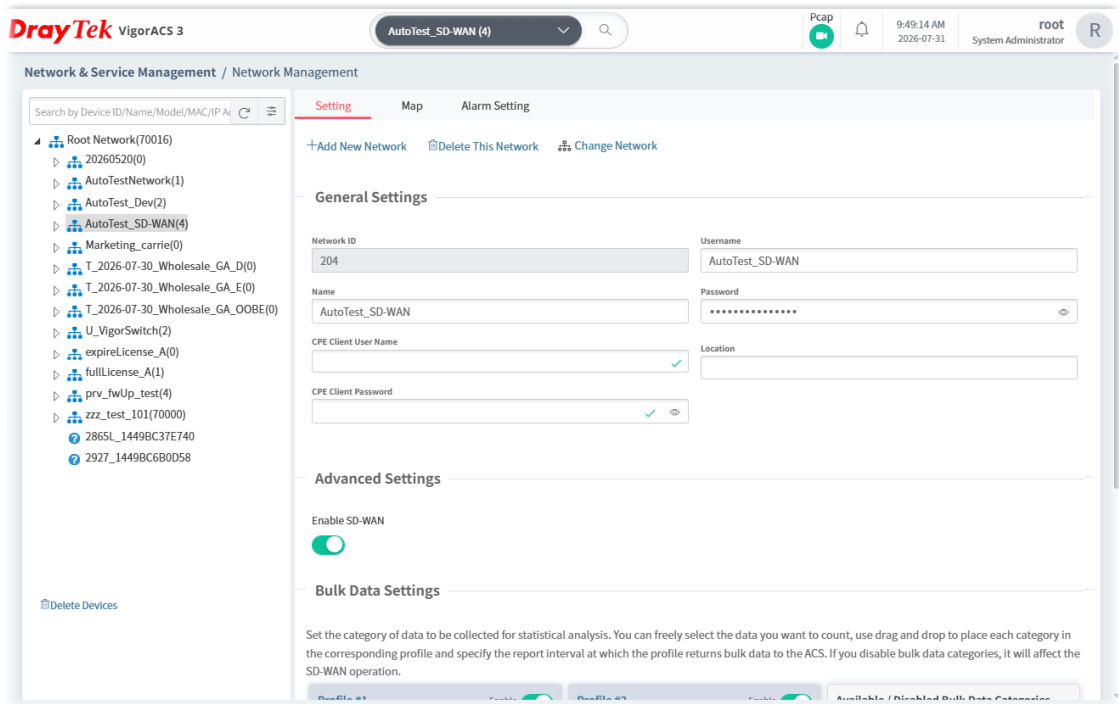


These parameters are explained as follows:

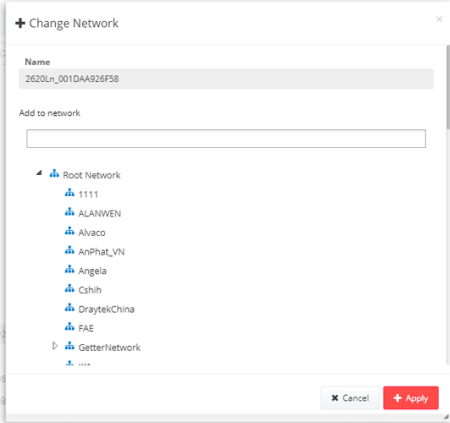Item	Description
Search by Device ID/Name/Model/MAC/ C/ IP Address	Enter the ID, name, model or MAC/IP address of the device you want to locate.
+Add New Network	Click to add a new network. New created network will be the sub-network of current selected network.
Delete This Network	Remove current network group.
Change Network	Click to change the network / group for the selected CPE.  Move the mouse cursor on the network you want and click Apply.

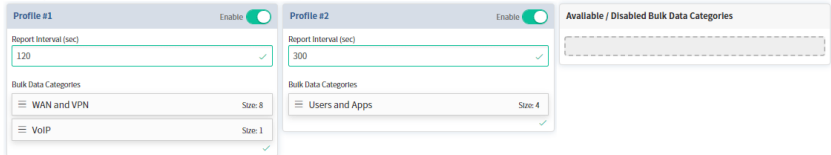General Settings	
Network ID	Display a number which is given by VigorACS randomly for the selected network.
Name	Display the name of the parent network. You can modify it if required.
CPE Client User Name	Set the username and password that VigorACS 3 can use to access into the CPE.
CPE Client Password	Set the username and password that VigorACS 3 can use to access into the CPE.
Username	Display the name of the selected network (e.g., rd8, in this case). Change it if required.
Password	Display the password of the selected network. Change it if required.
Location	Type the location (e.g., HsinChu, New York) for this network.
Advanced Settings	
Enable SD-WAN	Enable or disable the SD-WAN function for current network group.
Bulk Data Settings	
Profile #	Enable - Click to enable or disable the profile. If you disable bulk data categories, it will affect the SD-WAN operation.
Report Interval (sec)	Specify the report interval for the profile returning a bulk data to VigorACS server.
Bulk Data Categories	Set the category of data to be collected for statistical analysis. You can freely select the data you want to count. Use drag and drop to place each category in the corresponding profile, and specify the report interval at which the profile returns a bulk data to VigorACS server.
Available / Disabled Bulk Data Categories	At present, available categories include <i>VoIP, WAN and VPN, Users and Apps</i> . Each category can be joined to the selected profile or be removed from the selected profile, by using drag-and-drop.
Reset Bulk Data Profiles to Default	Click to reset to factory default settings of Bulk Data Settings. 
Disable All Bulk Data Profiles	After clicking the link, all data categories on Profile # will be removed. The data report for all CPEs under the selected network group will not be collected for VigorACS. Thus, no data, message can be collected by and displayed on the sub items based on SD-WAN feature under

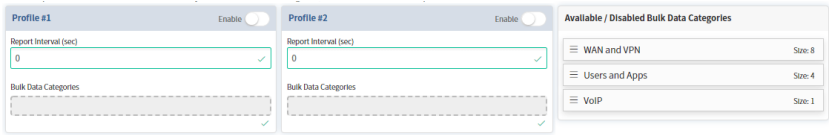	Monitoring menu. However, the SD-WAN functions such as Hub and Spoke, Full Mesh VPN, Route Policy, and VoIP WAN for the selected network group are still active. 
Save	Click to save the change.


The following setting page appears when **+Add New Network** is clicked.

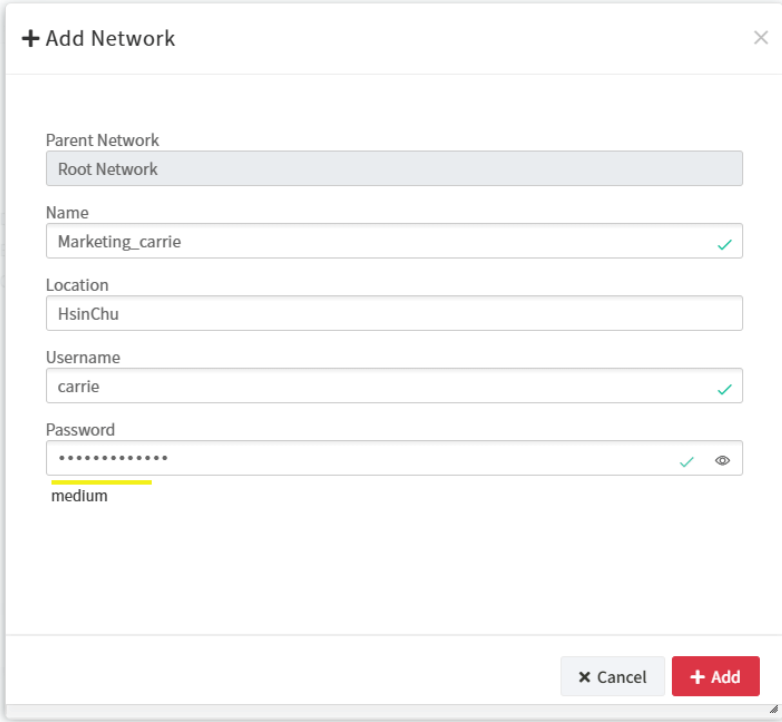

These parameters are explained as follows:

Item	Description
Parent Network	Display the name of the selected network group (e.g., rd8 in this case). New created network will be the sub-network of the parent network.
Name	Enter a name (e.g., MKT) for the new network.
Location	Enter the location for the new network. Later, you can locate such network on the web page of Network Management>>Map .
Username	Enter a login name (e.g., YFN) for the new network group which will be used for communication between Vigor device and VigorACS.
Password	Enter a password (e.g., admin123) for this new network group.
Cancel	Discard current modification.
+Add	Save the current settings and exit the page.

After clicking **+Add**, the new network group (MKT) will be listed below its parent network, rd8.

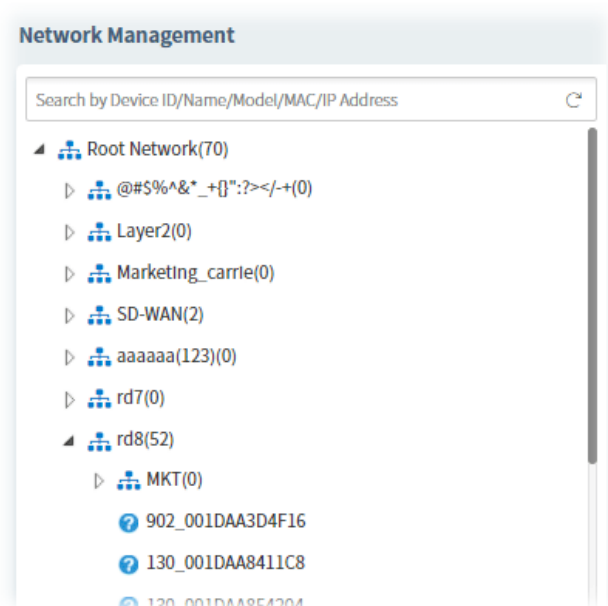

6.4.1.3 Settings for Device

The administrator can create several sub networks for different CPEs. Also, the administrator can change the network for the CPEs.

Open **Network Management**. This web page allows to:

- Modify the name of the device (CPE) for easy identification and management by VigorACS.
- Modify the location of the device (CPE) easily. It can be identified precisely while using GoogleMap to search it.
- Modify the user name/password of certain device (non-DrayTek CPE) to be managed by VigorACS.
- Enable or disable the management of the device (CPE) for VigorACS.
- Select certain protocol (e.g., TR-069) for the device (CPE) for management.

Choose and click any one of the CPE displayed on **Root Network** tree view to get the following web page.

Network & Service Management / Network Management

Setting Map Alarm Setting

Search by Device ID/Name/Model/MAC/IP Address

Delete This Device Change Network

General Settings

Status: Disable Enable Known Device: Known Unknown

Device ID: 104532 Network ID: 4472

Model Name: Vigor2927Vac Device Name: 2927Vac_1449BC22C630_102.1

Note 1: Note 2:

Serial number: MAC Address: 14:49:BC:22:C6:30

Location: CPE Client IP: 192.168.103.10


Phone No.: CPE Client Port: 8069

Domain Name: CPE Client URI: /cwm/CRN.html

Management Protocol: CPE default (http) http https CPE Client User Name: vigor

Management Port: 80 CPE Client Password: ***** Edit


These parameters are explained as follows:

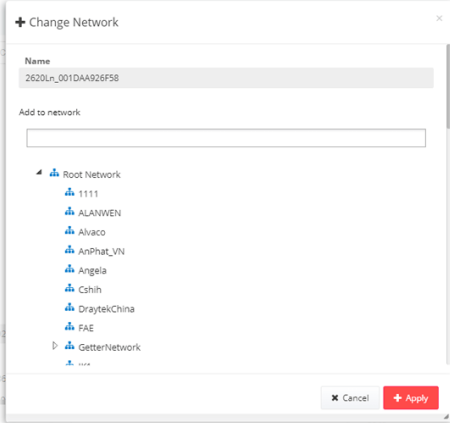Item	Description
Delete This Device	Click to remove the selected CPE from current group.
Change Network	Click to change the network / group for the selected CPE.  Move the mouse cursor on the network you want and click Apply.
General Settings	
Status	Disable – The selected device will be hidden on the tree view. Enable – The selected device can be displayed on the tree view.
Known Device	Known – The selected CPE is known (👤) to VigorACS 3. Unknown – If the selected CPE is new added device, it will be identified as Unknown (❓).
Device ID / Network ID	Device ID – Display the number of that device which is given by VigorACS 3 randomly. Network ID– Display the ID number of the network that selected

	device is grouped under.
Model Name / Device Name	Model Name – Display the model name of the selected device. Model name cannot be changed. Device Name – Display the name of the device for identification. It can be changed if required.
Note 1 / Note 2	Note 1 – Display brief description for the selected device. Note 2 – Display brief description for the network.
Serial number / MAC Address	Serial number – Enter a number for identification of the device. MAC Address – Display the MAC address of the device.
Location	Display the position of the device.
Phone No.	It is optional and is used to offer additional information for reference. If required, Enter a phone number for such device.
Domain Name	Enter a domain name for a CPE. Later, simply click the domain name to access into the CPE.
Management Port	Enter a port number which will be used for accessing into web user interface of the CPE.
Management Protocol	Choose HTTPS or HTTP.
CPE Client IP / Port / URI	Display the IP address, port number and URI.
CPE Client User Name / Password	Display the username and password that VigorACS 3 can use to access into the CPE. Edit – Click to change the username and password.

6.4.1.4 Map


This page displays the location of the network / device on Google map / Leaflet map.

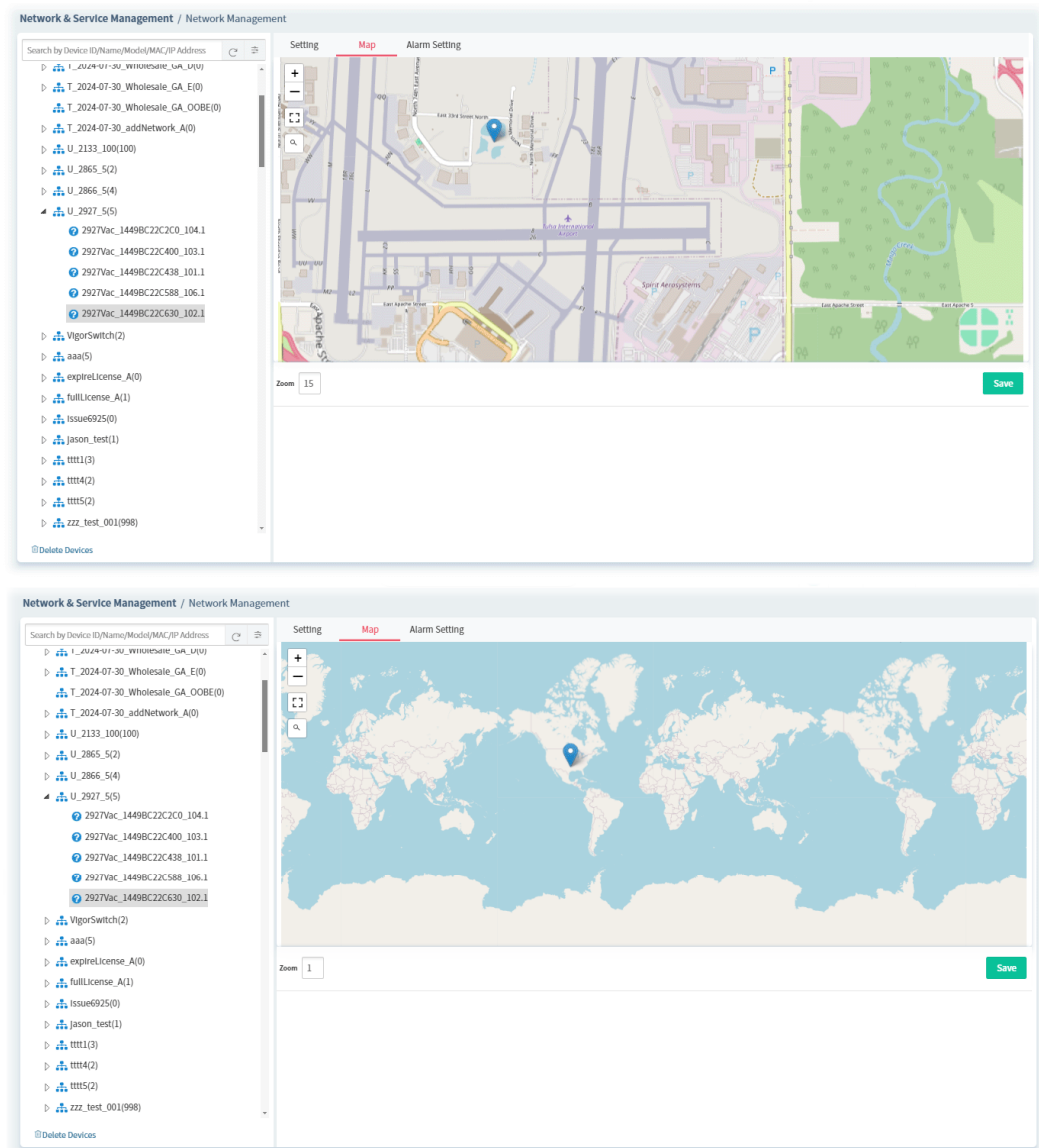

Click the **Save** button to save any changes to this map.

6.4.1.5 Alarm Setting

VigorACS can detect the WAN interface for specific CPE or network group and send alarm message if the selected WAN interface disconnection due to some reasons.

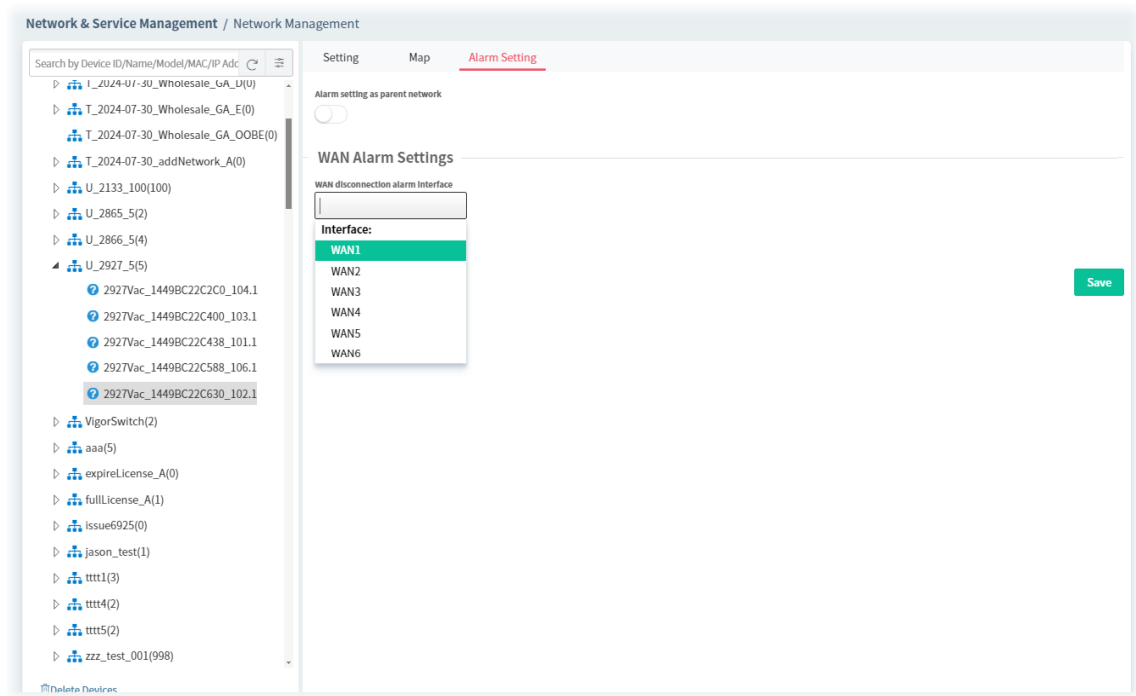

These parameters are explained as follows:

Item	Description
Alarm setting as parent network	Switch the toggle to enable/disable the setting. Enable – If enabled, the alarm setting for specified CPE will be the same as the parent network. Disable – If disabled, please specify the WAN interfaces independently for the specified CPE. ● WAN Alarm Settings – Select WAN interfaces to let VigorACS send an alarm message to the CPE if the selected WAN interface disconnected.


Click the **Save** button to save any changes to this page.

6.4.2 Service Management


The System Administrator can import DrayTek WCF license keys and assign them to or cancel the assignment of the keys to the managed user groups.

6.4.2.1 Service Subscription

Open **Network & Service Management >> Service Management**. Click the **Service Subscription** tab.

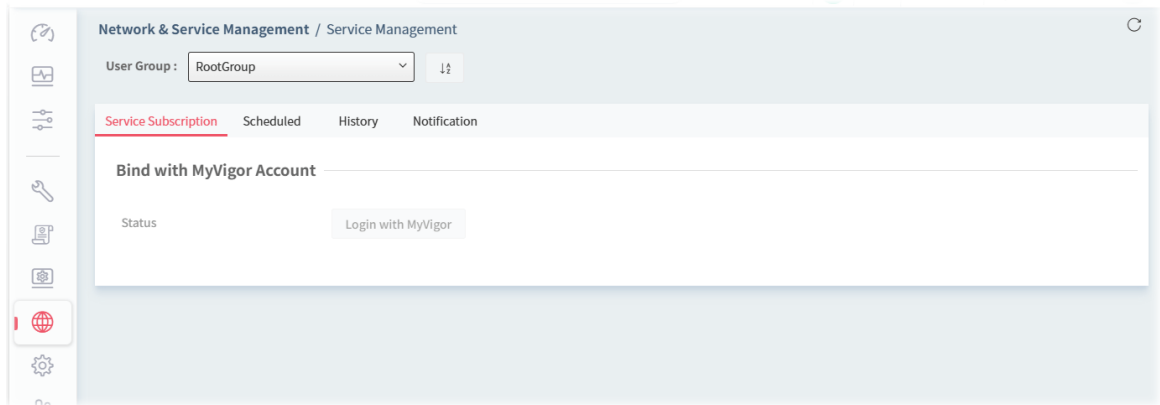


Click **Login with MyVigor** to get the following dialog.

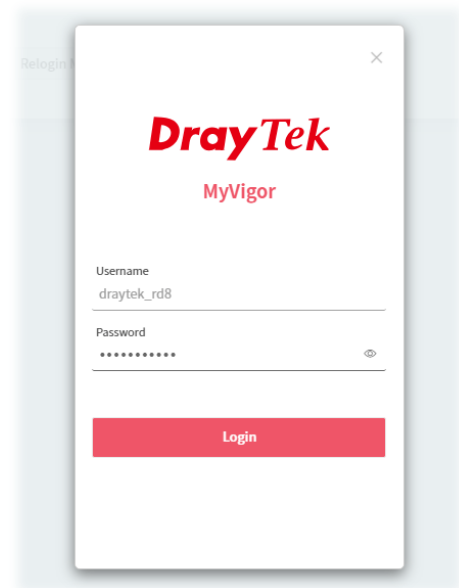



Please enter the username and password registered for the MyVigor server.

The following web page will appear.

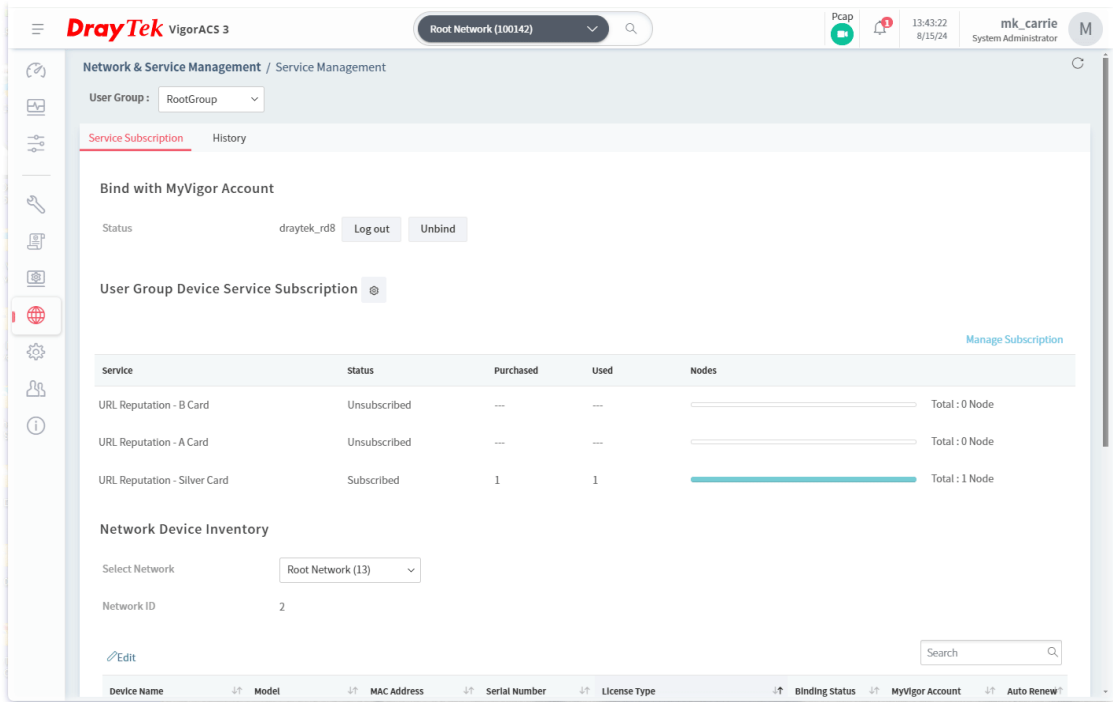

These parameters are explained as follows:

Item	Description
Bind with MyVigor Account	
Status	To bind with MyVigor Account, make sure you already have one set of user account and user password to login MyVigor website. If not, apply one account first. Login with MyVigor – Enter the user name and user password using MyVigor account to login MyVigor website. Relogin MyVigor – This button appears if you have login MyVigor website previously and successfully. Click to access MyVigor again. Log out – Log out MyVigor website but still bind with MyVigor server. Unbind – Unbind from MyVigor website.
User Group Device Service Subscription	
	Click this icon to open the settings dialog. Settings Auto Apply ☒ Auto Renew ☐ Cancel Save Auto Apply – Switch the toggle to enable or disable the function. When enabled, the VigorACS server will automatically send a license

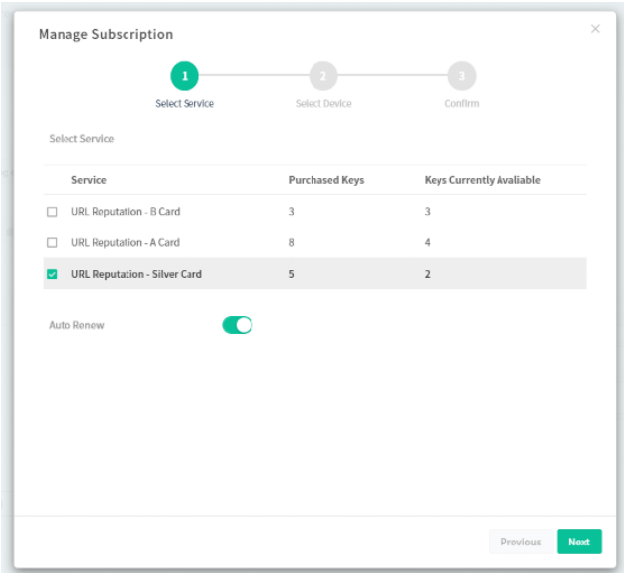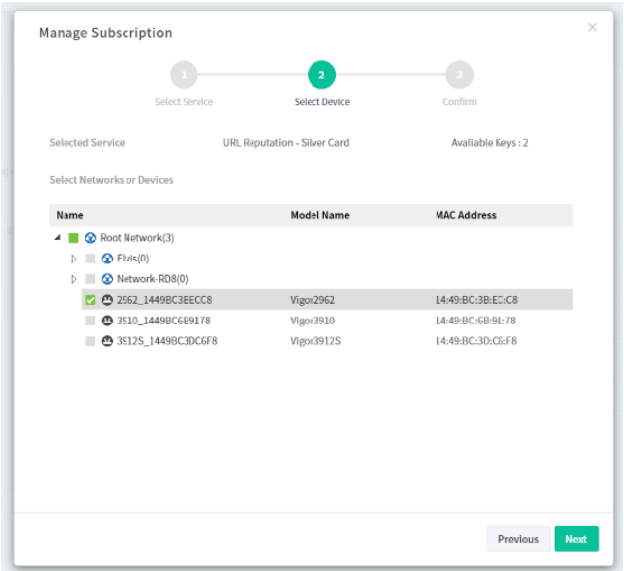	key to a newly added device for the currently selected user group. Auto Renew – Switch the toggle to enable or disable the function. When enabled, the VigorACS server will renew a license key for the device with a nearly expired key for the currently selected user group.
Manage Subscription	Bind the selected license keys to specified device. Click to open the following page.  Enable Auto Renew to renew the licenses for all specified devices automatically. After selecting the service card (s), click Next.  Select the CPE(s) to apply the service card. Then click Next.

Manage Subscription

1 Select Service 2 Select Device 3 Confirm

Confirm

Selected Service	Available Keys	Selected Devices	Remaining Keys
URL Reputation - Silver Card	2	1	1

Auto Renew ☐ Enable

Previous Apply

Click **Apply**.

Manage Subscription

Enable List

Device Name	Model	MAC Address	Status	Message
7962_1449BC3BECC8	Vigor7962	1449BC3BECC8	1	Success

Selected Service	Available Keys	Success Devices	Remaining Keys
URL Reputation - Silver Card	2	1	1

Auto Renew ☐ Enable

Finish

The page with brief summary will be shown as above. Click **Finish** to exit this page.


Service	Display the name of the service (e.g., URL Reputation).
Status	Display current status (Unsubscribed or Subscribed) of the service.
Purchased	Display the quantity of the service card purchased.
Used	Display the quantity of the service card used.
Nodes	Display the number of nodes that have used this service card.
Network Device Inventory	
Select Network	To view the status of keys bound of CPE devices under some group, use the drop-down list to select the network you want.
Network ID	Display the index number of the current network, randomly assigned by VigorACS for identification.
Edit	Click the button to activate and enable the Auto Renew, Cancel, and Save buttons for editing.
Device Name	Display the name (composed by model and MAC address) of the device.
Model	Display the model name of the CPE.

MAC Address	Display the MAC address of the model.
Serial Number	Display the serial number of the model.
License Type	Display the license type used by the model.
Binding Status	Display the binding status (expired, or others).
MyVigor Account	Display the name of MyVigor account.
Auto Renew	Switch the toggle to enable / disable the Auto Renew function.
Save	Save the current settings.

Click the **Save** button to save any changes to this page.

6.4.2.2 History


This page displays the binding record of CPE and WCF license.

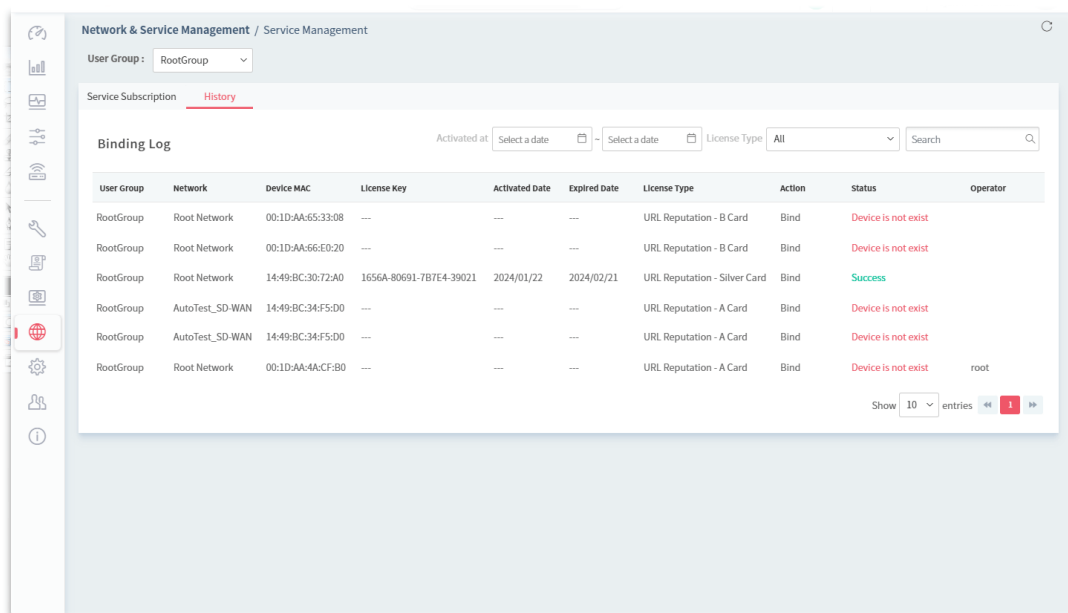

User Group	Network	Device MAC	License Key	Activated date	Expired Date	License Type	Action	Status	Operator
RootGroup	Root Network	00:1D-AA-65:33:08	---	---	---	URL Reputation - B Card	Bind	Device is not exist	
RootGroup	Root Network	00:1D-AA-66:E0:20	---	---	---	URL Reputation - B Card	Bind	Device is not exist	
RootGroup	Root Network	14:49:BC:30:72:A0	1656A-80691-7B7E4-39021	2024/01/22	2024/02/21	URL Reputation - Silver Card	Bind	Success	
RootGroup	AutoTest_SD-WAN	14:49:BC:34:F5:D0	---	---	---	URL Reputation - A Card	Bind	Device is not exist	
RootGroup	AutoTest_SD-WAN	14:49:BC:34:F5:D0	---	---	---	URL Reputation - A Card	Bind	Device is not exist	
RootGroup	Root Network	00:1D-AA-4A:CF:B0	---	---	---	URL Reputation - A Card	Bind	Device is not exist	root

6.4.2.3 Notification

This page allows you to enable or disable email notifications and configure the recipient list.

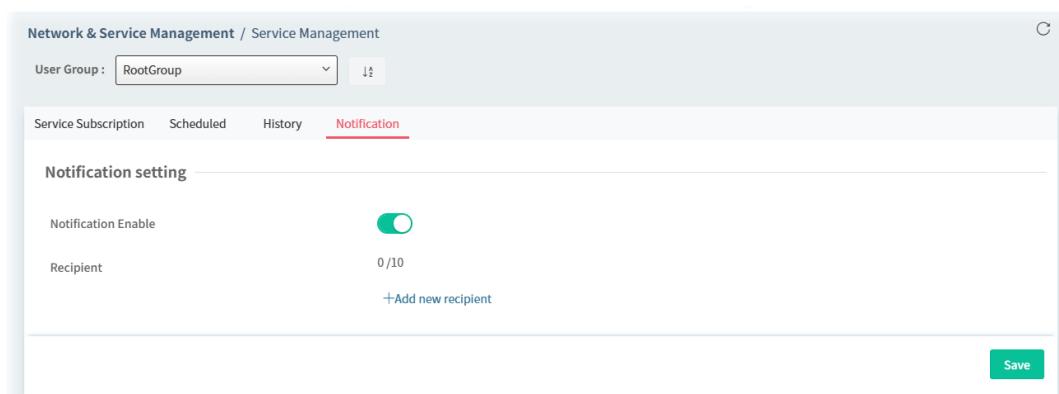

Notification setting

Notification Enable ☒

Recipient 0/10

[+Add new recipient](#)

[Save](#)

6.4.3 Certificate Management

This page allows the user (with the role of **System Admin** or **Auditor**) to manage the certificates for CPE devices. With this feature, users can

- Upload the certificate to VigorACS server for easy management
- View or inspect certificates owned by the user conveniently
- Easily import the certificate to specified CPE at the specified time or by schedule

6.4.3.1 Trusted CA Certificate

This page displays the total number of **Trusted CA** certificates owned by the current user group, whether the certificates are secure, whether they have expired, etc. It also allows the user to upload an X509 Trusted CA certificate additionally.

The screenshot shows the 'Certificate Management' page under 'Network & Service Management'. The 'User Group' is set to 'RootGroup'. The 'Trusted CA Certificate' tab is active. A 'Total Certificate' summary table shows counts for Total, OK, Unsecure, Expires within 30 days, Expired, and Not Valid Yet, all currently at 0. Below this is the 'X509 Trusted CA Certificate list' with an '+Upload' button and a search bar. A table with columns for Comment, Certificate, UID, Subject, Number Of Routers, Status, Expiration Time, and Action is shown, but it contains no data. At the bottom right, there is a 'Show 10 entries' pagination control.

Click **+Upload** to open the following page to select an existing certificate and upload to VigorACS server.


The screenshot shows the 'Upload X509 Trusted CA Certificate' dialog. It has a 'Trusted Certificate (.crt, .pem, .cer)' field with a 'Browse' button. There is also a 'Comment' text area. At the bottom right, there are 'Cancel' and 'Save' buttons.

These parameters are explained as follows:

Item	Description
Browse	Click to select an existing certificate.
Comment	Enter a brief explanation for the certificate.
Cancel	Discard current settings and return to previous page.
Save	Save and activate the current settings.


6.4.3.2 Router Certificate

This page displays the number of **trusted CA certificates** imported via VigorACS, their expiration dates, usage status, and other relevant information for CPEs managed by VigorACS.

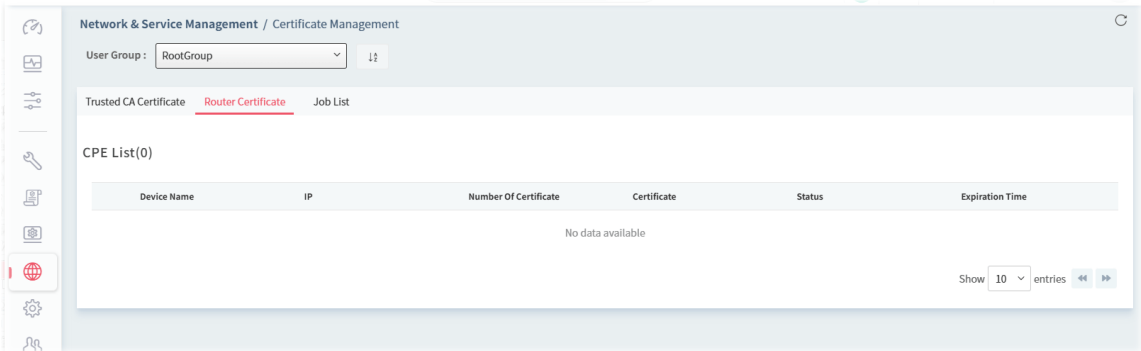

6.4.3.3 Job List

Users can import their existing VigorACS certificates into a specified device at a designated time through the Job List. Then users can view the Job History List to check the status of job execution directly.


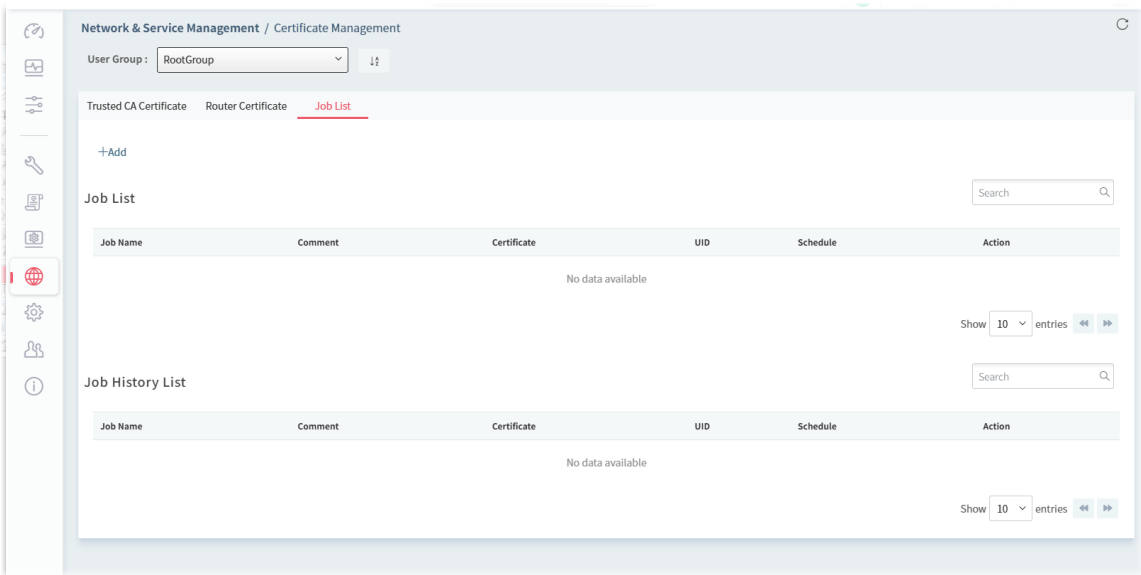




Click **+Add** to create a new job.

These parameters are explained as follows:

Item	Description
Job Name	Enter a name for the new job.
Job Type	Select the job type for the action to be executed. Import Certificate – Import the trusted CA certificate. Replace Certificate – Import a new certificate and remove the old certificate. Delete Certificate – Remove the Trusted CA certificate.
When Import Certificate is selected as the job type	
Import Certificate	
Certificate	Select one trusted CA certificate from the drop-down list. Before making your selection, ensure that at least one certificate has been stored on your host. If there is no certificate listed, go to “6.4.3.1 Trusted CA Certificate” to upload one certificate for current user group first.
Upload Time	Now – Click it to import the certificate immediately after clicking Save. Scheduled – Click it to specify a date, period of time for importing the certificate. Start date – Select correct date from the drop-down calendar.

	Now Scheduled Schedule Profile 2025-06-18 ◀ Jun ▼ 2025 ▼ ▶ <table><tr><td>Su</td><td>Mo</td><td>Tu</td><td>We</td><td>Th</td><td>Fr</td><td>Sa</td></tr><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td></tr><tr><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td><td>13</td><td>14</td></tr><tr><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr><tr><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td><td>27</td><td>28</td></tr><tr><td>29</td><td>30</td><td></td><td></td><td></td><td></td><td></td></tr></table> ● Start Time – Set the starting time by specifying hours and minutes. 00 : 00 00 12 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 ● End Time – Set the ending time by specifying hours and minutes. Schedule Profile – Click it to specify a schedule profile for importing the certificate. ● Trigger Profile –Select a schedule profile from the drop-down list.	Su	Mo	Tu	We	Th	Fr	Sa	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30					
Su	Mo	Tu	We	Th	Fr	Sa																																					
1	2	3	4	5	6	7																																					
8	9	10	11	12	13	14																																					
15	16	17	18	19	20	21																																					
22	23	24	25	26	27	28																																					
29	30																																										
Send Report by Email	+Add new recipient – Enter an e-mail address. It will be used for receiving the notification or log sent by VigorACS server.																																										
Add CPE	Devices belonging to the current user group will be displayed in this list. Name – Display the name of the device (CPE). MAC Address – Display the MAC address of the device. Model Name – Display the model name of the device.																																										
When Replace Certificate is selected as the job type																																											
Import Certificate																																											
Certificate	Select a trusted CA certificate from the drop-down list. Before making your selection, ensure that at least one certificate has been stored on your host.																																										

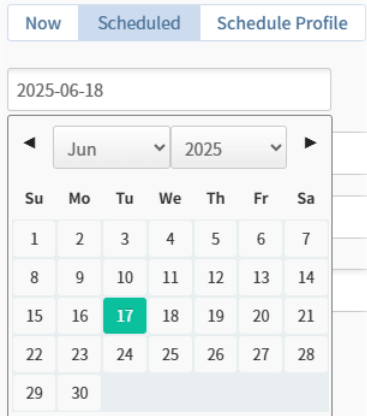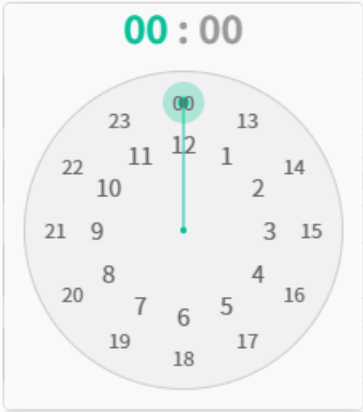
Upload Time	Now – Click it to importing the certificate immediately after clicking Save. Scheduled – Click it to specify a date, period of time for importing the certificate. ● Start date – Select correct date from the drop-down calendar.  ● Start Time – Set the starting time by specifying hours and minutes.  ● End Time – Set the ending time by specifying hours and minutes. Schedule Profile – Click it to specify a schedule profile for importing the certificate. ● Trigger Profile – Select a schedule profile from the drop-down list.
Send Report by Email	+Add new recipient – Enter an e-mail address. It will be used for receiving the notification or log sent by VigorACS server.
Delete Certificate	
Original Certificate	Select a certificate to remove from the drop-down list.
Expiration Time	Display the expiration time of the selected certificate.
Delete Time	Now – Click it to delete the certificate immediately after clicking Save. Scheduled – Click it to specify a date, period of time for deleting the certificate.

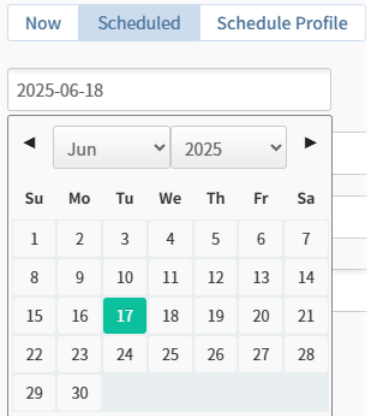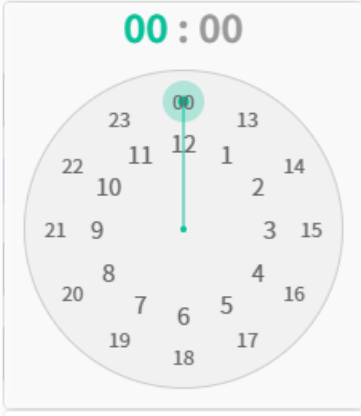	● Start date – Select the correct date from the drop-down calendar.  ● Start Time – Set the starting time by specifying hours and minutes.  ● End Time – Set the ending time by specifying hours and minutes. Schedule Profile – Click it to specify a schedule profile for deleting the certificate. ● Trigger Profile – Select a schedule profile from the drop-down list.
Current CPE	The devices that possess the certificate will be shown in this list.
When Delete Certificate is selected as the job type	
Delete Certificate	
Original Certificate	Select a certificate to remove from the drop-down list.
Expiration Time	Display the expiration time of the selected certificate.
Delete Time	Now – Click it to delete the certificate immediately after clicking Save. Scheduled – Click it to specify a date, period of time for deleting the certificate. ● Start date – Select the correct date from the drop-down calendar.

	Now Scheduled Schedule Profile 2025-06-18 ◀ Jun ▼ 2025 ▼ ▶ <table><tr><th>Su</th><th>Mo</th><th>Tu</th><th>We</th><th>Th</th><th>Fr</th><th>Sa</th></tr><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td></tr><tr><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td><td>13</td><td>14</td></tr><tr><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td></tr><tr><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td><td>27</td><td>28</td></tr><tr><td>29</td><td>30</td><td></td><td></td><td></td><td></td><td></td></tr></table> ● Start Time – Set the starting time by specifying hours and minutes. 00 : 00 00 12 ● End Time – Set the ending time by specifying hours and minutes. Schedule Profile – Click it to specify a schedule profile for deleting the certificate. ● Trigger Profile – Select a schedule profile from the drop-down list.	Su	Mo	Tu	We	Th	Fr	Sa	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30					
Su	Mo	Tu	We	Th	Fr	Sa																																					
1	2	3	4	5	6	7																																					
8	9	10	11	12	13	14																																					
15	16	17	18	19	20	21																																					
22	23	24	25	26	27	28																																					
29	30																																										
Send Report by Email	+Add new recipient – Enter an e-mail address. It will be used for receiving the notification or log sent by VigorACS server.																																										
Current CPE	The devices that possess the certificate will be shown in this list.																																										
Cancel	Discard current settings and restore the default settings.																																										
Save	Save and activate the current settings.																																										

6.5 System

System menu varies according to the role (**System Administrator, Group Administrator, Administrator, Operator, View Only Operator, Auditor** and **Standard** (limited in VigorACS cloud version)) used for logging into VigorACS. Here we take System Administrator as an example.

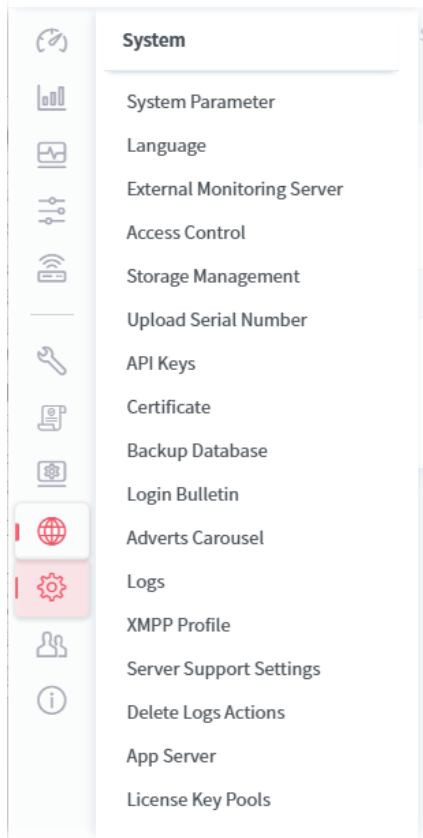

6.5.1 System Parameter

Open **System** >> **System Parameter** to get the following web page:

System / System Parameter

Search...

ID	Name	Value
105	Drayos5CommonUiFirmwareUploadTimeoutInMinutes	10
104	LostConnectionSendNotificationDelaySecond	0
103	ResendGlobalParameterByBootstrap	false
102	DisableAlarmSNMPTrapForDeviceLossConnectionByACSReboot	false
101	ResetCredentialAfterMovingNetwork	false
100	MaximumUploadFileSize	300
99	EnableNewFirmwareReleaseNotify	true
98	HeartbeatInterval	900
97	ResendSetParameterByBootstrap	false
96	EnableAccessControlByMac	false
95	WebServicesRateLimit	10
94	ShowRootNetworkGraphicStatistics	false
93	MaxFlowSetDestConfi	40153*1000

[Reset to default](#) Cancel Save

These parameters are explained as follows:

Item	Description
	Reset to default Click the link to reset all of the system parameters with factory default values.
1	ProvisionKeepParameter It can be set with true or false. True – Enable the function of Keep Profile (profile or parameters in provision). False – VigorACS will disable the function of Keep Profile .
2	ProvisionWaitCount It means how many times VigorACS will compare the parameter values got from CPEs with the parameter values set within profiles. If these values are different from each other (from CPEs and from profiles), VigorACS will increase the count number by one. When the count increases to the value that users defined here, VigorACS will perform Keep Profile function.
3	ProvisionFactoryResetEnable True – The function of keep profile will perform immediately for CPE without reaching the value of 'ProvisionWaitCount'.
4	FirmwareUpgradeCount The value indicates how many CPEs can perform firmware upgrade at the same time. Set a proper value to prevent hardware from over loading and causing a crash.

5	ProvisionDeviceAutoEnable False – The CPE would not be added in Homepage when a profile defines a CPE with different names but with the same serial number. True – The CPE would be added in Homepage when a profile defines a CPE with different names but with the same serial number.
6	ProvisionChangeDeviceNameEnable True – If it is set with true and a profile defines a CPE with different name but same MAC address, VigorACS would modify current CPE name with the pre-defined setting in profile. That is, if the device name in profile is not the same as the log recorded in VigorACS database, the system will modify the device name automatically.
7	SettingProfileSpaceSetEnable True – Users can use space as character in parameter values. For example, users can use the space character as their password.
8	ParameterListLongWaitCount It is a positive integer (ms). After upgrading firmware, VigorACS will scan and get all parameters to restore the parameter backup. The value determines how long the waiting time out is. Multiplying the value with 50 is the maximum waiting time in millisecond. It will take effect after VigorACS restarts. Default is 1200.
12	GetSetParameterCount When applying the provision onto CPEs, VigorACS tries to get or set parameter from or onto CPEs. This value determines how many parameter values can be obtained or set at the same time. For example, set the value as 20. That means there are 20 parameters which can be obtained at the same time. Set this value properly to prevent CPEs from crashing or improve the efficiency.
13	IsDownloadUsedHttps When a CPE connects to VigorACS with Https, users can enable this parameter (set with true) to let CPE download file from VigorACS via Https.
14	ProvisionProfileFormat It can be set with 1, 2, 3 or 4. This value indicates the format of text configured profile. If the value is set with 1, the format is defined as serial number, network_device name, isreboot, and [parameter1, parameter2,.. and so on]. If the value is set with 2 (as the default format), the format is defined as serial number, device name, isreboot, network, and [parameter1, parameter2,.. and so on]. If the value is set with 3, the format is defined as serial number, network_device name, isreboot, address and [parameter1, parameter2,.. and so on]. If the value is set with 4, the format is defined as serial number, network_device name, isreboot, network, address and [parameter1, parameter2,.. and so on].

15	IsRebootAfterDownload True- After downloading and upgrading the firmware, reboot the CPE. False - Users must reboot the CPE manually.
16	KeepProfileUpdateRule It can be set with is 1, 2 or 3. The value 1 means after uploading profile, keep original Keep Profile settings and add extra parameter settings (if the profile contains more parameter settings). The value 2 means after uploading profile, delete original Keep Profile setting if the device name changed. The value 3 means after uploading profile, delete original Keep Profile settings every time.
17	IsSetGlobalParameter False - Disable global parameter configuration function. When it is disabled, even users set global parameters, these parameters won't be applied.
19	IsTurnOffPeriodicInform True - If PeriodicInform interval (configured in 59. CPEPeriodicInformInterval) is too short, CPE may send too much information to VigorACS and cause the server crash. Set this value true only if the case happened (server crashed). The default interval setting shall be 900 seconds. False - After adjusting the PeriodicInform (configured in 59. CPEPeriodicInformInterval) of CPEs, remember to set this value false.
20	PollingDeviceCount The value determines the maximum number of CPEs to poll at one time. If this value is set too small (e.g., 500), it might cause server overload. However, if it is set too big (e.g., 600000), it could make CPE status refresh very slowly. Note: After changing this parameter value, restart VigorACS to apply the change.
21	DeviceAutoEnable True - If it is set true, after obtaining the information from CPE, the newly added device would be added in the tree view of Homepage. False - When VigorACS receives information from new added device, it will not display the CPE on the tree view of Homepage until make configuration in SYSTEM MENU>>Network Management.
22	PollingInterval Set the polling interval for VigorACS to examine CPE. The unit is milliseconds. Default is 900000.
23	CPEWebUiPort Set a port number for VigorACS system accesses into CPE's WUI.
26	VPNIPSecDefaultSecurity

	Set the default security method for establishing VPN based on IPsec.
27	CheckDeviceStatusCount Determine how many times shall VigorACS system check the device before the device becomes offline.
28	VPNChangeEnable True – If one of the WAN IP addresses changes on both ends of VPN, VigorACS will change the setting automatically to rebuild the VPN tunnel. False – Default value.
29	WANSeverity Set the severity (critical, major, minor, warning and normal) for WAN connection.
30	VPNSeverity Set the severity (critical, major, minor, warning and normal) for VPN connection.
32	EnableHttpChunkedMode True – Use chunked mode (chunked transfer encoding) for HTTP. False – Default value.
33	CPEWebUiProtocol Set HTTP (default) or HTTPS as the protocol for accessing CPE's web user interface.
34	EnableValidateCodeCheck True – Enable the function of validating code check on the login page. False – Disable the function. It is the default value.
35	VPNIPSecDefaultMode Set the default mode for IPsec VPN connection. Main Aggressive
36	StatisticsStep Set the time interval (default is 900) for data collection for RRD traffic.
38	EnableWebServices True – The third party software can get/set VigorACS functions through web services. False – Default value.
41	HidePassword True – Hide the password value on provision page. False – Default value.
43	VPNEnablePingKeepAlive True – Enable the function of Enable PING to keep VPN alive for CPE while creating VPN by using the VPN wizard. False – Default value.

44	CPEDetectMode Set the CPE detection mode. 0 means TR069; 1 means ping.
46	EnableRRD True – Enable the function of data collection (StatisticsStep) for RRD traffic.
47	AutoDetectRouteName True – Get CPE's router name. False – Default value.
48	EnableBatchActivation True – Enable the batch activation license to MyVigor portal server function. False – Default value.
49	DefaultSetDeviceKnown True – Set the new added CPE as a known device. False – Default value.
50	KeepProfileRebootByBOOTSTRAP True – VigorACS will ask the CPE to reboot if receiving CPE request including BOOTSTRAP. False – Default value.
51	DisableAlarmMailByACSReboot True – VigorACS will not send alarm message within 15 minutes after turning on VigorACS. False – Default value.
52	DeleteOldDeviceBySameIP True – If a new CPE with an IP address which is the same as an old device recorded on VigorACS database, VigorACS will delete the information for the old device. False – Default value.
54	DisablePolling True – Disable VigorAP to poll CPE. Restart VigorACS after finished the configuration. False – Default value.
55	DisableAlarmMailByClear True – Disable the function of sending alarm e-mail when alarm status is clear. It is the default setting. False – VigorACS will send alarm e-mail when alarm status is clear.
56	UseStunAddressForVpn True – Remote IP address will use the STUN IP address for VPN connection. False –Default value.
57	EnableChangeNetworkByNetworkUser

	True – Default value. When VigorACS finds that the username and password sent from the CPE changed, it will move the CPE to the network group with the same username and password. False – Disable such function.
58	FWUpgradeFailInterval If the firmware upgrade failed, the next firmware upgrade will execute after the time interval configured here. Default value is 86400 seconds.
59	CPEPeriodicInformInterval CPE will send general information to VigorACS periodically. The default value is 900 seconds. If required, enter the time interval for the CPE to send general information to VigorACS.
60	EnableForceSetCPEPeriodicInformInterval True –Default value. Enable the function of CPEPeriodicInformInterval. False – Disable the function of CPEPeriodicInformInterval.
61	TimeFormat Display the time format. 0 means 24-hour clock; 1 means 12-hour clock.
62	EnableRecordActionLog True – Enable the function of record action log. It is the default value. False – Disable the function of record action log.
63	EnableBackupCheck True – VigorACS will check the parameter value of “InternetGatewayDevice.X_00507F_System.ConfigBak.ConfigChanged” and perform the configuration backup automatically if any change made for CPE’s configuration. False – Default value.
64	CheckCPEValidByAuthKey True – VigorACS will check if the authentication key informed by CPE is valid or not. False – Default value.
65	New_DeleteOldDeviceBySameIP True – If a new CPE with an IP address which is the same as an old device recorded on VigorACS database, VigorACS will delete the information for the old device and write the configuration on the database related to the old CPE onto new CPE. False – Default value.
66	CheckCPEValidByNetworkUser True – Each network can be set with a group of username and password individually. All of the CPEs grouped under the network shall use such username and password for connecting to VigorACS. Such function let VigorACS check if the username and password sent from the CPE match with the settings on the network or not. If not, VigorACS will ignore the CPE request and change the group of the CPE into root

	network. False – Default value.
67	EnableAutoChangeWebPort True – Enable for changing web port automatically. It is the default setting. False – Disable the function.
68	DisableSaveInformLog True – Disable the function of Save Inform Log. False – Default value.
70	ShowTreeCount Set how many devices will be shown on the home device tree. Default value is 100.
71	EnableSendCPENotify True – When the value of parameters for CPE is changed, a notification of 'IntenetGatewayDevice.X_00507F_Notify' will be sent to VigorACS. VigorACS will send the message to the specified user by e-mail, SMS or SNMP. False – When the value of parameters for CPE is changed, a notification of 'IntenetGatewayDevice.X_00507F_Notify' will be sent to VigorACS. VigorACS will not send the message to the specified user.
72	HealthierExposelp It means the exposed IP in Monitoring Server message. Default is one of VigorACS host IP addresses. You can change to any IP without restarting ACS Server.
73	HealthierWebFolder It means the folder name of VigorACS in JBoss deployment folder. It is used to create the URL for the device in Monitoring Server message. Default folder name is set as "web".
74	EnableFirmwareCheck True – VigorACS will compare current firmware of the device with the file version detected from DrayTek website. Therefore, while viewing the Firmware Version on the dashboard of the selected device, a pop-up window with current firmware version detected will appear if both firmware versions are different.
75	EnableGatewayGrouping True – Enable the function of grouping VigorAP devices by using gateway addresses and displaying AP devices behind the gateway routers. False – Default value.
76	EnableUIGraph True – Enable the function of displaying graph of web user interface. It is the default value. False – Disable the function.

78	EnableAuditorActionLog True – The auditor action will be recorded and displayed on SYSTEM MENU >> System >> Delete Logs Actions. False – Default value. When the auditor deletes logs or protects identity information on clients, the action will NOT be recorded.
79	EnableAuditorDeletedLog True – The selected logs will be moved to another table which can be read by auditors. While protecting client identity information, the protected value can be recovered for auditors. False – Default value. The selected logs will be deleted from database permanently. While protecting client identity information, the protected value cannot be recovered for auditors.
80	HttpProxyPort It can be set with 0 to 65535, or a port range (e.g. 10000–10005). If the value set to 0, the proxy port number will be automatically allocated. If you start the proxy server before change this value, you have to restart VigorACS Server to apply this change on the current proxy. If the proxy port is only one number large than 0, you can only create one proxy server for each time.
81	PacketCaptureTool True – VigorACS will capture the packets automatically and the result will be specified from the drop down list of Capture Packets on the top-right of the screen. False – Default value.
82	ClientRecordAliveTimeInDays Set the number of days for reserving the record (about client traffic). When exceeding the day limit, VigorACS will delete the record. Default value is 30(days).
83	IsDeleteExpiredClientTrafficByTimestamp True – Enable the function of ClientRecordAliveTimeInDays. False – Default setting.
84	EnableClientRecord True – Default value. Enable the function of recording client traffic and displaying related information on NETWORK MENU >> Monitoring >> Clients.
85	NotifyServerProcessCountPerMinute It can be set with -1, 100 to 100000. This parameter determines how many Emails, SMS, and health parameters notification items the notification server can process per minute. -1 means unlimited.
86	ForceWUIRedirectHttps


	True - Force ACS WUI to HTTPS only. If you encounter login failed error after changing this parameter, please clear the browser's cache then try again. If the EnableSecureCookieSessions parameter is set to "true", this parameter will be automatically enabled and disallow set to false.
87	JbossConfigForStandaloneMode The Default Configuration for standalone Mode is "standalone.xml" (default). The standalone-secure.xml will enhance the security protections of your ACS website with plugins that prevent hacking.
88	EnableSecureCookieSessions True - Secure flag is to prevent cookies from being observed by unauthorized parties due to the transmission of a the cookie in clear text. If the value set to true, the ForceWUIRedirectHttps parameter will be automatically enabled and the cookie will only be sent in a secure manner (i.e. Https). False - Default setting.
89	LogRotationHandlerType - Select one of the following types for log. ● Size ● Periodic ● Periodic-size
91	MapServiceProvider There are two mechanisms to display maps on VigorACS, Google and Leaflet.
92	EnableUsermailValidation true - If it is enabled, the user will receive an e-mail first and be guided to pass the authentication when he tries to log in to VigorACS. After switching the toggle to enable this function, the VigorACS system will open the User>>Mail Server page. You have to check if the mail server is enabled and other options have been configured correctly. false - Default setting.
93	NetflowSetPortConfig The function in "Monitoring>>Flow" requires VigorConnect servers, which are installed in remote networks, to collect NetFlow data from routers in the background. When browsing "Monitoring>>Flow" on VigorACS, the corresponding VigorConnect servers will establish connections to VigorACS. Thus, VigorACS can retrieve the relevant data. The idle timeout of the connection is 30 minutes. This parameter defines the allowed port range on the VigorACS server to be used for incoming connections from VigorConnect.
94	ShowRootNetworkGraphicStatistics true - If it is enabled, the graphic statistics can be seen on the Dashboard for the Root Network. false - Default setting.

95	WebServicesRateLimit Set a number that allows the web service API to receive requests from the user. The default is 10. It means 10 requests can be accepted by the VigorACS server within 1 minute.
96	EnableAccessControlByMAC If enabled (true), VigorACS permits CPE registration with MAC address listed in System>> Upload Serial Number only.
97	ResendSetParameterByBootstrap If enabled (true), VigorACS will resend the corresponding set parameter when the 0 BOOTSTRAP event code is received from CPEs. This allows you to push configuration again when CPE has been factory reset.
98	HeartbeatInterval It is the VigorACS server method to determine whether a CPE is online. When the value equals 0, VigorACS will poll CPE automatically; when there is no response, VigorACS will consider the CPE offline. When the value exceeds 0, and the CPE does not send an Inform within this period, the VigorACS server will consider the CPE offline. That means the VigorACS will not actively check the online and offline status of the CPE. Notes: ● The time unit is in second. ● VigorACS needs to restart after changing the setting.
99	EnableNewFirmwareReleaseNotify If enabled (true), Notification Center will show the notification about new firmware release.
100	MaximumUploadFileSize Set the maximum upload size (unit: MB) for the CPE firmware file.
101	ResetCredentialAfterMovingNetwork The parameter can change CPE TR069 Username and Password. If enabled (true), TR069 Username and Password of CPE moved to a network with blank Username and Password will be changed to the Username and Password of the higher level network.
102	DisableAlarmSNMPTrapForDeviceLossConnectionByACSReboot If enabled (true), VigorACS will suspend alarm messages by SNMP trap so the device loses connection after VigorACS restarts.
103	ResendGlobalParameterByBootstrap If enabled (true), VigorACS will resend the corresponding global parameters when the 0 BOOTSTRAP event code is received from CPEs. It allows the configuration to be pushed again when the CPE has been factory reset.

104	LostConnectionSendNotificationDelaySecond Delays sending the disconnection alarm notification. If the device reconnects during the delay period, the notification is not sent.
105	Drayos5CommonUiFirmwareUploadTimeoutInMinutes
Save	Save the current settings.


6.5.2 Language

VigorACS 3 can be displayed and operated with different language texts. Choose the language system from the top-right of the login page. Later, VigorACS will be shown with the language you want.

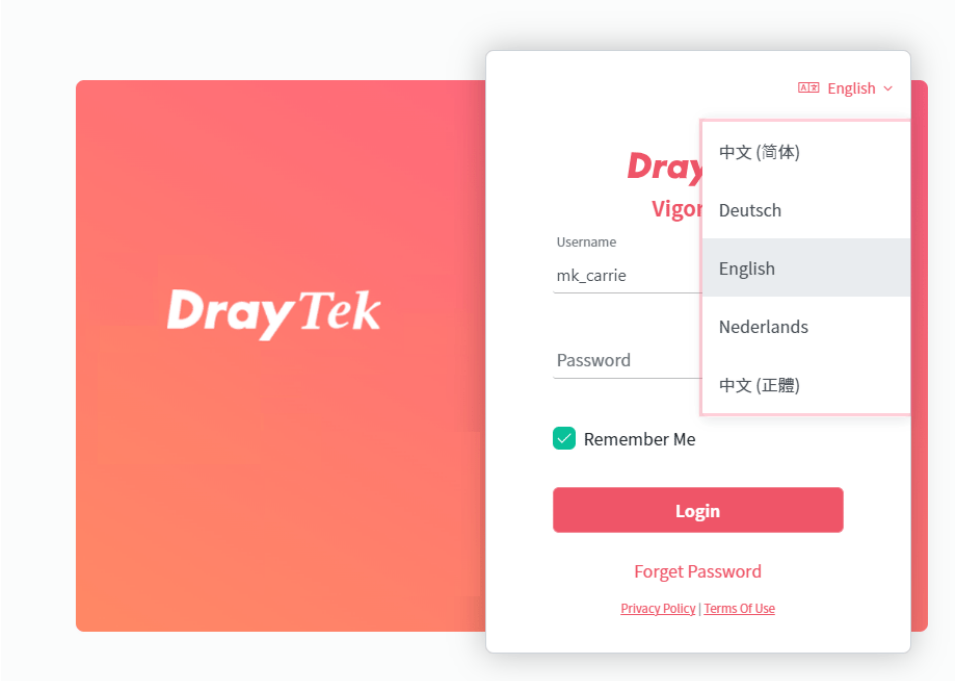

In general, lang_EN.txt is the default language for VigorACS 3. If necessary, you can download a text file with VigorACS 3 settings; translate/edit the file with the language you want; and upload the edited file onto VigorACS.

Open **System >> Language**.

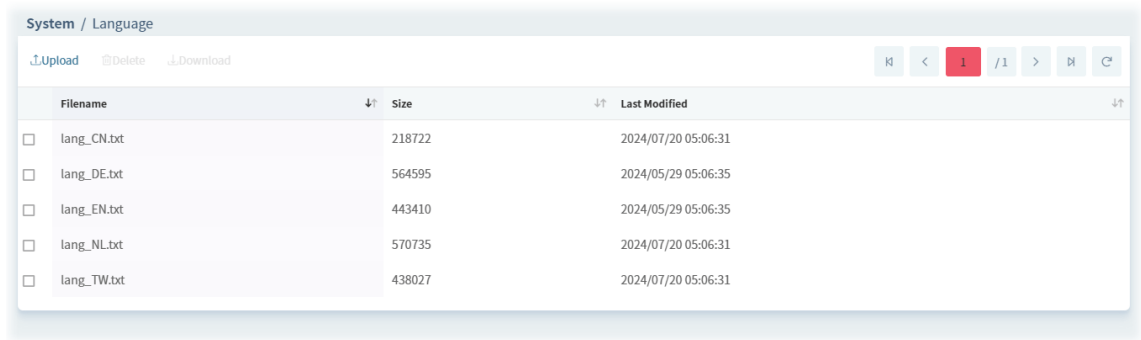

These parameters are explained as follows:

Item	Description
Upload	Click this button to upload a language file from your host to VigorACS.
Delete	Remove the selected language system.
Download	Click this button to download a txt file from VigorACS to your computer. User can edit such text file (containing all of the fields) if required.

6.5.3 External Monitoring Server

6.5.3.1 Health Server

The health information for CPE can be transferred to the server of third party periodically.

System / External Monitoring Server

Health Server

Wireless Client Information Server

Enable Server ☒

URL

Username

Password

API

Cancel Save

These parameters are explained as follows:

Item	Description
Enable Server	Click the icon to enable / disable the server.
URL	Enter the URL or IP address of the third party's server.
Username	Enter the user name for accessing into the third party's server.
Password	Enter the password for accessing into the third party's server.
API	Use the drop down menu to specify the third party's server.
Cancel	Discard current settings and restore the default settings.
Save	Save and activate the current settings.

6.5.3.2 Wireless Client Information Server

The sever defined in this page is used to record information for wireless client information periodically.

System / External Monitoring Server

Health Server

Wireless Client Information Server

User Group

Enable Server ☒

Authentication

URL

API

Save

These parameters are explained as follows:

Item	Description
User Group	Use the drop down list to specify a user group. In which, RootGroup contains all of the users with the role of system administrator in default.
Enable Server	Click the icon to enable / disable the server.

Authentication	Enter a string for authentication.
URL	Enter the URL or IP address of the third party's server.
Dns API Service	Use the drop down menu to specify the third party's server.
Save	Save and activate the current settings.

6.5.4 Access Control

VigorACS can restrict network connection for clients by locking their IP address into a black or white list.

6.5.4.1 General Setting

Regardless of web login, CPE service or API web service, you can set a blacklist or whitelist to allow clients in the list to use or prohibit use.

The screenshot shows the 'System / Access Control' interface. The 'General Setting' tab is active. It contains three rows of settings, each with three buttons: 'None', 'Blacklist', and 'Whitelist'.
 - WUI Login: 'Blacklist' is selected.
 - CPE Service: 'None' is selected.
 - API WebService: 'None' is selected.
 A green 'Save' button is located at the bottom right of the settings area.

These parameters are explained as follows:

Item	Description
WUI Login	None - It means no limitation for any client. Blacklist - It means clients in the list are not allowed to login the WUI managed by VigorACS. Whitelist - It means clients in the list are allowed to login the WUI managed by VigorACS.
CPE Service	None - It means no limitation for any client. Blacklist - CPE clients in the list are not allowed to connect to VigorACS. Whitelist - CPE clients in the list are allowed to connect to by VigorACS.
API WebService	None - It means no limitation for any client. Blacklist - It means clients in the list are not allowed to use API web service managed by VigorACS. Whitelist - It means clients in the list are allowed to use API web service managed by VigorACS.

6.5.4.2 Blacklist

This page is used for creating blacklist profiles.

System / Access Control

General Setting

Blacklist

Whitelist

Block Device List

Search IP / Description

Q

+ Add

Delete All

Limit: 3/256

IP	Description	WUI Login	CPE Service	API WebService	
1.1.1.1	tt1	☒	☐	☐	EditDelete
111.111.111.111	tt2	☒	☒	☒	EditDelete
192.168.105.210	tt5	☒	☐	☐	EditDelete

Save

These parameters are explained as follows:

Item	Description
Search IP / Description	Enter an IP or a brief description for searching the profile.
+Add	Click to create a new profile with a blacklist.
Delete All	Click to delete all profiles.
IP	Display the IP address, IP range, or subnet specified on the profile.
Description	Display the comment of the profile.
WUI Login, CPE Service, API WebService	Display the type(s) selected for the profile. Select the type(s) by checking the box(es).
Edit	Click to modify, change the selected profile.
Delete	Click to remove the selected profile.
Save	Click to save the settings.

The following setting page appears when **+Add** is clicked.

+ IP Address Form

Description: Marketing_CAN


Address Type: Single IP Address

Start IP Address: 123.12.1.1 ✓

Service Enable: ☒ WUI Login ☒ CPE Service ☒ API WebService

× Cancel Save

These parameters are explained as follows:

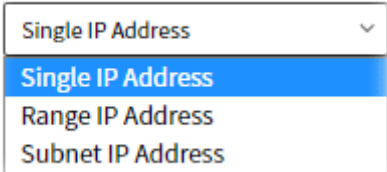Item	Description
Description	Enter a name of the blacklist profile.
Address Type	Specify the address type to enter the IP address.  Single IP Address – Select it to specify one IP address. Range IP Address – Specify a range of IP addresses. Subnet IP Address – Specify a subnet IP address.
Start IP Address	It is available when Single IP Address or Range IP Address is selected. Enter an IP address as a starting point.
End IP Address	It is available when Range IP Address is selected. Enter an IP address as the ending point.
Subnet Mask	It is available when Subnet IP Address is selected. Enter a mask address.
Service Enable	Select the service for this blacklist profile applying to.
Cancel	Discard current settings and restore the default settings.
Save	Click to save the settings.

6.5.4.3 Whitelist

This page is used for creating whitelist profiles.

IP	Description	WUI Login	CPE Service	API WebService	
192.168.105.140~192.168.105.145	192.168.105.141	☒	☒	☒	Edit Delete

These parameters are explained as follows:

Item	Description
Search IP / Description	Enter an IP or a brief description for searching the profile.
+Add	Click to create a new profile with a whitelist.
Delete All	Click to delete all profiles.
IP	Display the IP address, IP range, or subnet specified on the profile.
Description	Display the comment of the profile.
WUI Login, CPE Service, API WebService	Display the type(s) selected for the profile. Select the type(s) by checking the box(es).
Edit	Click to modify, change the selected profile.
Save	Click to save the settings.

The following setting page appears when **+Add** is clicked.

+ IP Address Form

Description

white_for_market

Address Type

Single IP Address

Start IP Address

123.12.1.1d

✓


Service Enable

☒ WUI Login ☒ CPE Service ☒ API WebService

Cancel


Save

These parameters are explained as follows:

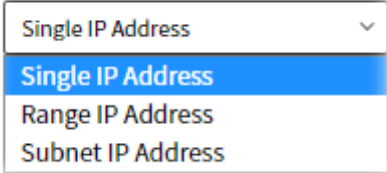Item	Description
Description	Enter a name of the whitelist profile.
Address Type	Specify the address type to enter the IP address.  Single IP Address - Select it to specify one IP address. Range IP Address - Specify a range of IP addresses. Subnet IP Address - Specify a subnet IP address.
Start IP Address	It is available when Single IP Address or Range IP Address is selected. Enter an IP address as a starting point.
End IP Address	It is available when Range IP Address is selected. Enter an IP address as the ending point.
Subnet Mask	It is available when Subnet IP Address is selected. Enter a mask address.
Service Enable	Select the service for this blacklist profile applying to.
Cancel	Discard current settings and restore the default settings.
Save	Click to save the settings.

6.5.4.4 Block Device List

This page displays information related to device(s) blocked by the VigorACS server.

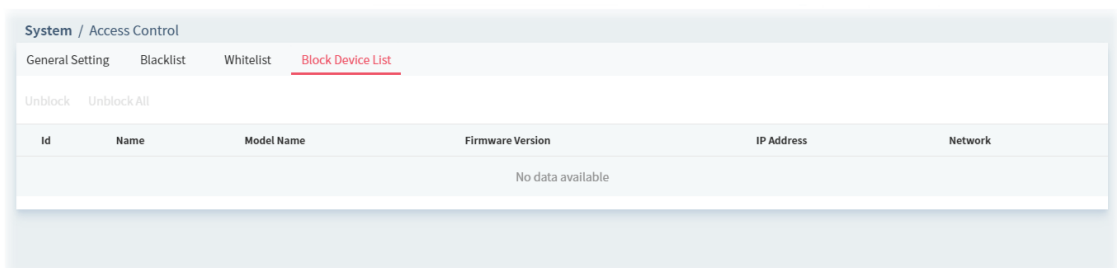

6.5.5 Storage Management

VigorACS will keep log until overload the capacity of hard disk. To avoid such trouble, use Clear Logs to delete the log periodically.

System / Storage Management

Clear Logs

Delete Time: All

Delete Type: ☐ Alarm, ☐ Log, ☐ Device Syslog, ☐ SD-WAN, ☐ Client Connect Record

Auto Clear: ☒


Duration: ☒ Every Day, ☐ Every Week, ☐ Every Month

Periodic(days): 1

Clear Now Save

These parameters are explained as follows:

Item	Description
Delete Time	Use the drop down list to specify the timing to delete the log. All – All of the logs recorded. Before 1, 3, 6 Month – Log recorded before 1, 3 or 6 month ago. Before 1, 2 Years – Log recorded before 1 or 2 years ago.
Delete Type	At present, there are five types (Log, Alarm, Device Syslog, SD-WAN, and Client Connect Record) that corresponding log can be deleted through this feature.
Auto Clear	When it is enabled, VigorACS will periodically delete the logs based on the conditions configured below.
Duration	Every Day – VigorACS deletes the log every day. Every Week – VigorACS deletes the log every week. Every Month – VigorACS deleted the log every month.
Periodic (days / weeks / months)	Remove the log per days, per weeks or per months. For example, type "2" for Periodic (months). That means the system will clear the log every two months.
Day	It is available when Every Month is selected as the Duration. Specify the day within a month that VigorACS performs the log deletion. For example, choose 4 means VigoACS will delete the log on the fourth day of every month.
Week	It is available when Every Week is selected as the Duration. Specify

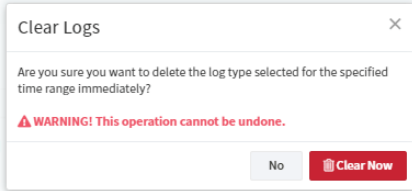	Monday, Tuesday, Wednesday, Thursday, Friday, Saturday and Sunday. For example, choose Saturday means VigorACS will delete the log on Saturday every week.
Clear Now	Click to remove the log immediately. A pop-up window will appear for confirmation. If yes, click Clear Now; if not, click No to discard the action. 
Save	Save and activate the current settings.

6.5.6 Upload Serial Number

The information for serial number on the rear side / bottom of the CPE or VigorAP can be uploaded onto VigorACS as a reference to be inspected by the administrator.

System / Upload Serial Number

Upload

Download Template

Export

+ Add

Delete

Search

Rows10

K

<

1

/ 1


>


M

C

☐	Mac Address	Serial Number	Device Name	Network	Model	WAN IP	LAN IP	FW
☐	001DAA9FD698	1234657987						
☐	001DAA80BB78	99999999999999						
☐	001DAAE5CFA8	6543213212						
☐	001DAAFEF9D0	77777777777777						
☐	001DAAFEF9F0	8888888888						

These parameters are explained as follows:

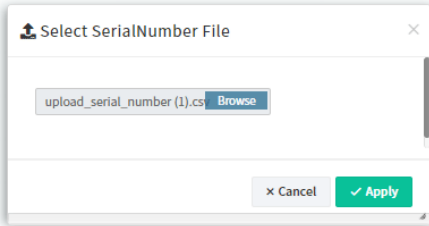Item	Description
Upload	Click to upload a ".CSV" file (located on host) to VigorACS. After comparing the MAC address listed on the file with the information of device(s) managed by VigorACS, the result (device name with serial number) will be shown on this page immediately. 
Download Template	Click to download a template from the VigorACS server to your local host.

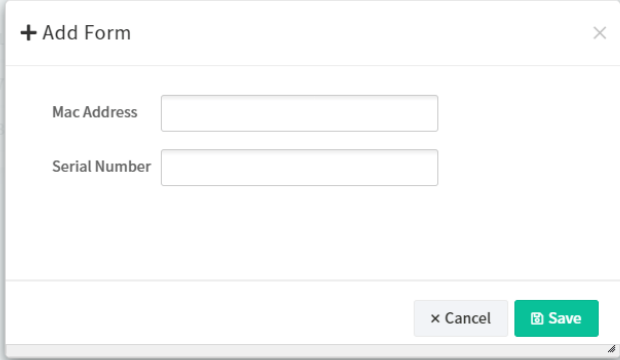	This template is convenient for the system administrator to enter the required information for lots of devices at one time. Later, the template can be uploaded to VigorACS server. Please open the template with a software which can read and write ".CSV" file. Fill the MAC address and serial number (printed on the rear side / bottom) of a device.
Export	Click to export the current serial number table as a file.
Add	Click to add a CPE or VigorAP onto this table. 
Delete	Click to delete the selected entry.
☐ Check box	Check the box to specify an entry. Later, the selected one can be deleted if required.

6.5.7 API Key

Before using the API of Google Map, it is necessary to apply and get a key from Google. Later, enter the key in this page to activate the Google Map. After clicking **Save**, VigorACS will be granted to display the map on the dashboard.


These parameters are explained as follows:

Item	Description
Google Maps API Key	Enter the key you obtained from Google. Function Management – Click this button to open the setting page. Determine which user role can view the map and switch the toggle to enable the map display for the user. System Parameters – There are two mechanisms to display maps on VigorACS, Google and Leaflet. Select the one you need.
Google Analytics API Key	Enter the analytics API key for tracking the data.
Save	Save and activate the current settings.

6.5.8 Certificate

On website browsing, at present, the security offered by HTTP is less than HTTPS.

It is suggested to use HTTPS protocol for encrypting the connection between the browser and the web server for every website to prevent private information (such as account, password, personal data, credit number, and others) entered by users from leakage.

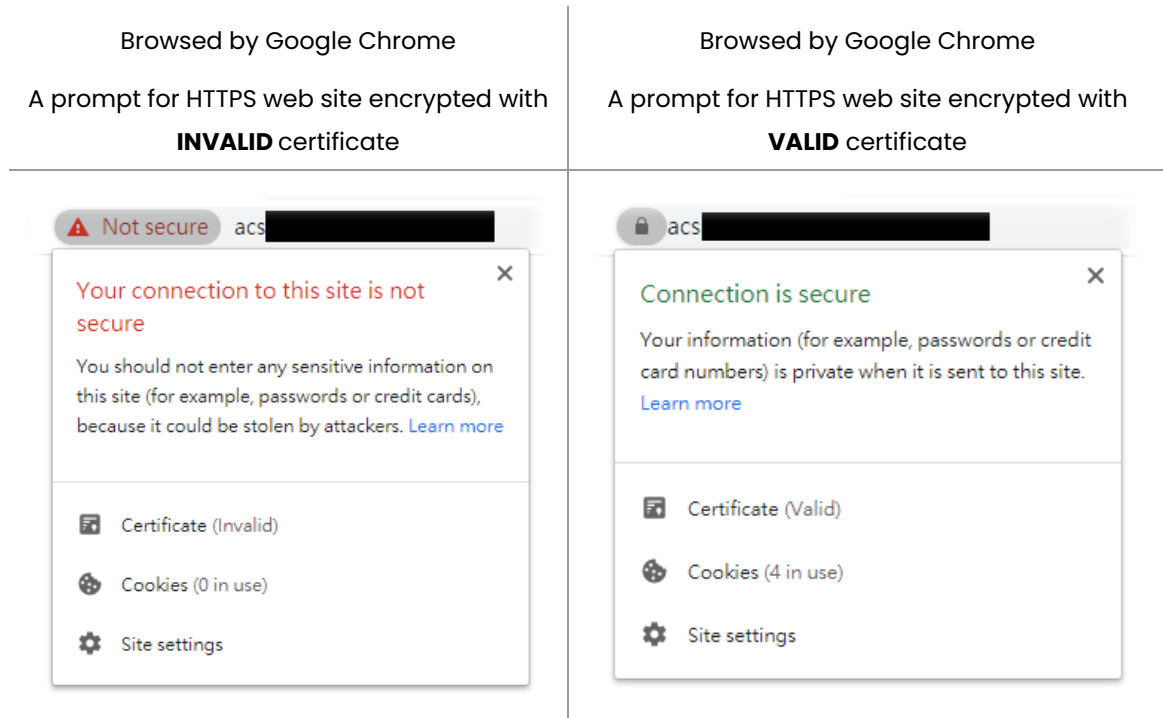

6.5.8.1 Certificate

For using HTTPS, it is necessary to prepare a certificate issued by the third-party certificate authority.

This page can generate CSR (certificate signing request) file for certificate signing and import the HTTPS certificate file from third-party certificate authority to VigorACS server. Later, after restarting VigorACS server, Vigor system will apply such HTTPS certificate.

These parameters are explained as follows:

Item	Description
Generate a CSR	Click to generate a CSR certificate.
Import Certificate	Click the Browse button to specify a file to apply the HTTPS certificate. ● Root CA Certificate ● Intermediate CA Certificate ● Trusted Certificate
Save	Save current settings and uploading/pasting the certificate.

6.5.8.2 Certificate with Private Key

Some of certificate authority (third-party) does not submit CSR file but generate a private key and sign a certificate (e.g., SSL for free, COMODO, and so on) to be applied by other web site. This page is used for uploading a certificate with private key from a certificate authority (third-party) to VigorACS server.

These parameters are explained as follows:

Item	Description
Certificate form	Confirm the file format of the certificate issued by the certificate authority and then select a file with corresponding file format for uploading or pasting on this page directly. ● With Root and Intermediate Certificate(s) ● With CA Bundle ● One PEM File – The certificate issued by the certificate authority contains only one PEM file. ● None of above – The certificate issued by the certificate authority contains only one certificate (CRT file) with a private key.
Import Method	Upload Files – The content of the certificate / key shall be obtained by uploading a file. Paste Contents Directly – The content of the certificate / key shall be pasted from clipboard.
Private Key (.key)	Click the Browse button to select one key file or obtain the content of the key from the clipboard.
When With Root and Intermediate Certificate(s) is selected	
Root CA Certificate (.cer, .crt)	Click the Browse button to select one root CA certificate or obtain the content of the certificate from the clipboard.
Intermediate CA Certificate (.cer, .crt)	Enter the name of intermediate CA certificate or Click the Browse button to select one intermediate CA certificate or obtain the content of the certificate from the clipboard. Add – If there is more than one intermediate CA certificate file, Click to import more.

Trusted Certificate (.cer, .crt)	Click the Browse button to select one Trusted CA certificate or obtain the content of the certificate from the clipboard.
When With CA Bundle is selected	
CA Bundle (.cer, .crt)	Click the Browse button to select one certificate or obtain the content of the certificate from the clipboard.
Trusted Certificate (.cer, .crt)	Click the Browse button to select one Trusted CA certificate or obtain the content of the certificate from the clipboard.
When One PEM File is selected	
PEM File (.pem)	Click the Browse button to select one PEM file.
Save	Save current settings and uploading/pasting the certificate.

Example

The following example shows the file formats of certificates issued by Comodo. It is suitable for “With Root and Intermediate Certificate(s)”.

 AddTrustExternalCARoot.crt 類型: 安全性憑證	Root CA Certificate
 COMODORSAAAddTrustCA.crt 類型: 安全性憑證	Intermediate CA Certificate 1
 COMODORSADomainValidationSecureServerCA.crt 類型: 安全性憑證	Intermediate CA Certificate 2
 download_xpertextdata_nl.crt 類型: 安全性憑證	Trusted Certificate
 download_xpertextdata_nl.key 類型: KEY 檔案	Private Key

The following example shows the file formats of certificates issued by SSL For Free. It is suitable for “With CA Bundle”.

 ca_bundle.crt 類型: 安全性憑證	CA Bundle
 certificate.crt 類型: 安全性憑證	Trusted Certificate
 private.key 類型: KEY 檔案	Private Key

The content of PEM file shall contain at least one group of Private Key and Certificate or one Private Key with multiple certificates. See below:

```

-----BEGIN PRIVATE KEY-----
MIIEkjc....
-----END PRIVATE KEY-----
-----BEGIN CERTIFICATE-----
MIIGDjCCBPag....
-----END CERTIFICATE-----

```

6.5.8.3 PKCS #12

PKCS #12 file indicates a valid certificate which can be output and protected with a password setting. Also, it means a file which merges the private key with signed certificate by using keytool and protected with a password setting.

This page is used for importing PKCS #12 file and applying to VigorACS server with specified password.

These parameters are explained as follows:

Item	Description
Import PKCS #12 file	Click the Browse button to specify the file.
PKCS #12 Password	Enter a string as password for PKCS #12 certificate.
Save	Save and activate the current settings.

6.5.8.4 Let's Encrypt

This page will help to

- create a Private Key & Account from Let's Encrypt .
- create a Certificate signed by Let's Encrypt Account.
- automatically change your keystore file form your Certificate.

System / Certificate

Certificate
Certificate with private key
PKCS #12
Let's Encrypt

Register Domain

Auto Renew
☐

Challenge Type
HTTP-01 Challenge
DNS-01 Challenge

Copy Current Domain to Register Domain
Copy to register domain

Note:
ACME Let's Encrypt will do the following things:

- Creating a Private Key & Account from Let's Encrypt.
- Creating a Certificate sign by Let's Encrypt Account.
- Automatically change your keystore file from your Certificate.

Note:

- Let's Encrypt provides rate limits to ensure fair usage by as many people as possible. For more information please visit ACME website.

Note:

- "HTTP-01 Challenge" can only be done on port 80

Generate
Save

and

System / Certificate

Certificate
Certificate with private key
PKCS #12
Let's Encrypt

Register Domain
allentestapp.ddns.net

Auto Renew
☐

Challenge Type
HTTP-01 Challenge
DNS-01 Challenge

API

Export Data

Key	Value	Action
UuickJNDs_token	aaaaaaaa bbbb cccc dddd eeeeeeeeeeee	

+ Add

Note:
ACME Let's Encrypt will do the following things:

- Creating a Private Key & Account from Let's Encrypt.
- Creating a Certificate sign by Let's Encrypt Account.
- Automatically change your keystore file from your Certificate.

Note:

- Let's Encrypt provides rate limits to ensure fair usage by as many people as possible. For more information please visit ACME website.

Note:

- "HTTP-01 Challenge" can only be done on port 80

Generate
Save

These parameters are explained as follows:

Item	Description
Register Domain	Enter the URL for registering the certificate.
Auto Renew	If enabled, the VigorACS server will periodically detect the validity of the certificate. It will be renewed automatically by VigorACS once the certificate is nearly expired.
Challenge Type	To validate the domain names, select HTTP-01 Challenge or DNS-01

	Challenge as the challenge type used by this certificate. The default setting is HTTP-01 Challenge.
API	Use the drop down list to select an interface.
Export Data	The third-party API (with specified key and value) can be exported for other purposes. Key - Enter the string provided by the third-party API. Value - Enter the information (e.g., URL, server ID, token, or number) provided by the third-party API. Delete - Click to remove the selected entry. +Add - Click to have new fields for creating new key and value.
Generate	Click to generate the Let's Encrypt certificate based on the above configuration.
Save	Save and activate the current settings.


6.5.9 Backup Database

6.5.9.1 Backup Tasks

VigorACS system will backup database periodically / immediately according to the selected task profile.

The purpose of task profile is to avoid failing to backup database in VigorACS server when transferring VigorACS server from one platform to another one due to damage on the database or hard disk.

The backup file will be stored on the hard disk of VigorACS Server located.

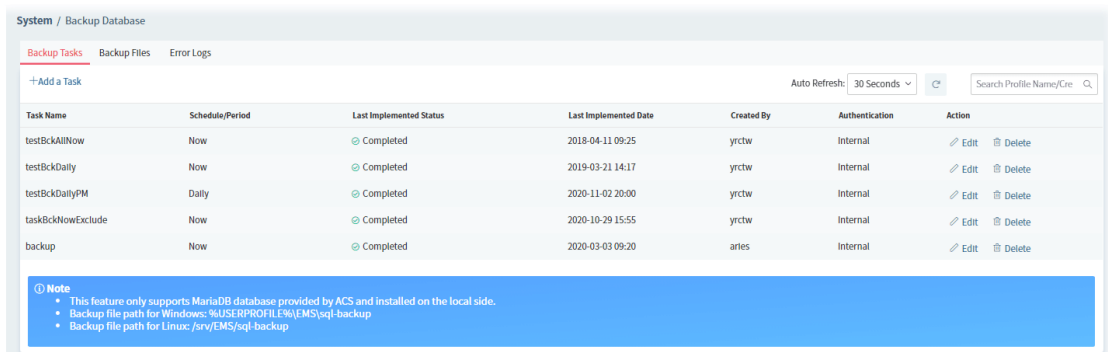

These parameters are explained as follows:

Item	Description
Search Profile Name / Created by	Specify the conditions (type the profile name, creator) for database task searching.
+Add a Task	Click to add a backup database task.
Task Name	Display the name of the task.
Schedule/Period	Display the schedule profile or period of time of database backup.
Last Implemented Status	Display the status (completed or backup failed) of database backup.
Last Implemented Date	Display last implemented date of database backup.
Created By	Display the name of the creator of such task.
Authentication	Display the identity (internal/external) of the user.
Action	Edit – Click to modify, change the selected profile. Delete – Click to delete the selected profile.

The following setting page appears when **+Add a Task** is clicked.

These parameters are explained as follows:

Item	Description
Task Settings	Enable This Task – Click to enable the task. Task Name – Enter a name for the new task.
Scheduling	Run Backup – Choose Once to perform the backup immediately or at certain time. Choose Repeat to perform the backup periodically. ● Later / Now – It is available when Once is selected as Run Backup. ● Starts on xxxxx – It is available when Repeat is selected as Run Backup. Click Edit to open the following web page for modifying the time setting.
Backup Options	Backup Type – Choose an option (MariaDB or InfluxDB) to perform the backup.

	If MariaDB is selected, configure the following options. Backup Table Type – Currently, five backup table types are supported: Log, Alarm, Device Syslog, SD-WAN, and Client Connect Record. Ignore License Tables – VigorACS system performs the database backup by ignoring the tables concerning of backup and license (such as syscd, sysssn, dslpamid, dslpms show and etc.,) to prevent from license error while transferring VigorACS server. The default value is "Enabled". Compress Backup File – The backup file will be compressed. After backup delete log tables – Delete the log tables immediately when VigorACS server finishes the backup job
Email Notification	Enable Email Notification – If enabled, VigorACS server will send a notification email about database backup to the recipient. ● Email Subject – Enter the subject for the email. ● Email From – Enter the email address of the sender/agent/registrar. ● Email Content – Enter the content of the email. ● Email To – Enter the email address of the recipient. ● +Add Recipient – Add more recipients to receive the email from VigorACS server.
Cancel	Discard current modification.
Save	Save the current settings and exit the page.

6.5.9.2 Backup Files

This page shows a list of backup files generated by VigorACS server.


Filename	Size	Last Modified
☐ backup_ACS_Trunk AutoBuild 13635_ExcludeSyslogAndLogVer_2020-02-24.2000.sql	11.88 MB	02/24/2020 20:00:02
☐ backup_ACS_Trunk AutoBuild 13635_ExcludeSyslogAndLogVer_2020-02-22.2000.sql	11.85 MB	02/22/2020 20:00:03
☐ backup_ACS_Trunk AutoBuild 13622_ExcludeSyslogAndLogVer_2020-02-21.2000.sql	11.86 MB	02/21/2020 20:00:03
☐ backup_ACS_Trunk AutoBuild 13584_ExcludeSyslogAndLogVer_2020-02-19.2000.sql	11.86 MB	02/19/2020 20:00:01
☐ backup_ACS_Trunk AutoBuild 13569_ExcludeSyslogAndLogVer_2020-02-18.2000.sql	11.86 MB	02/18/2020 20:00:01
☐ backup_ACS_Trunk AutoBuild 13548_ExcludeSyslogAndLogVer_2020-02-15.2000.sql	11.87 MB	02/15/2020 20:00:01
☐ backup_ACS_Trunk AutoBuild 13546_ExcludeSyslogAndLogVer_2020-02-14.2000.sql	11.86 MB	02/14/2020 20:00:02
☐ backup_ACS_Trunk AutoBuild 13532_ExcludeSyslogAndLogVer_2020-02-13.2000.sql	11.85 MB	02/13/2020 20:00:01
☐ backup_ACS_Trunk AutoBuild 13508_ExcludeSyslogAndLogVer_2020-02-12.2000.sql	11.85 MB	02/12/2020 20:00:02
☐ backup_ACS_Trunk AutoBuild 13451_ExcludeSyslogAndLogVer_2020-02-10.2000.sql	11.85 MB	02/10/2020 20:00:01
☐ backup_ACS_Trunk AutoBuild 13427_ExcludeSyslogAndLogVer_2020-02-08.2000.sql	11.83 MB	02/08/2020 20:00:03

These parameters are explained as follows:

Item	Description
Delete	Click to remove the selected filename.
Download	Click to download the file from the hard disk of VigorACS server located for restoration or transferring.
Filename	Display the name of the backup file.
Size	Display the size of the backup file.
Last Modified	Display the last modified time.

6.5.9.3 Error Logs

This page will display logs of the task which failed to back up the database.

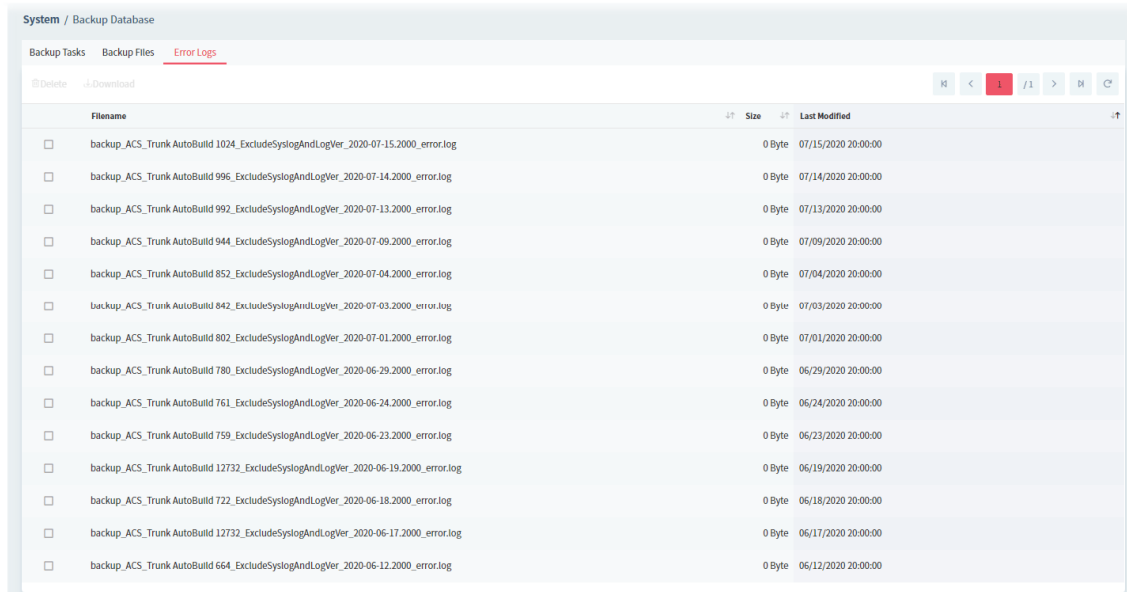

Filename	Size	Last Modified
☐ backup_ACS_Trunk AutoBuild 1024_ExcludeSyslogAndLogVer_2020-07-15.2000_error.log	0 Byte	07/15/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 996_ExcludeSyslogAndLogVer_2020-07-14.2000_error.log	0 Byte	07/14/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 992_ExcludeSyslogAndLogVer_2020-07-13.2000_error.log	0 Byte	07/13/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 944_ExcludeSyslogAndLogVer_2020-07-09.2000_error.log	0 Byte	07/09/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 852_ExcludeSyslogAndLogVer_2020-07-04.2000_error.log	0 Byte	07/04/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 842_ExcludeSyslogAndLogVer_2020-07-03.2000_error.log	0 Byte	07/03/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 802_ExcludeSyslogAndLogVer_2020-07-01.2000_error.log	0 Byte	07/01/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 780_ExcludeSyslogAndLogVer_2020-06-29.2000_error.log	0 Byte	06/29/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 761_ExcludeSyslogAndLogVer_2020-06-24.2000_error.log	0 Byte	06/24/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 759_ExcludeSyslogAndLogVer_2020-06-23.2000_error.log	0 Byte	06/23/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 12732_ExcludeSyslogAndLogVer_2020-06-19.2000_error.log	0 Byte	06/19/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 722_ExcludeSyslogAndLogVer_2020-06-18.2000_error.log	0 Byte	06/18/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 12732_ExcludeSyslogAndLogVer_2020-06-17.2000_error.log	0 Byte	06/17/2020 20:00:00
☐ backup_ACS_Trunk AutoBuild 664_ExcludeSyslogAndLogVer_2020-06-12.2000_error.log	0 Byte	06/12/2020 20:00:00

These parameters are explained as follows:


Item	Description
Delete	Click to remove the selected error log.
Download	Click to download the selected error log from the hard disk of VigorACS server located. The downloaded log file can be browsed by any text editor. If the content of the log contains the error message output by the program of “mysqldump”, the system administrator can get the reason for backup failure by analyzing the error message. If Email Notification is enabled, the error log file will be sent by e-mail to the recipient(s) defined in System>>Backup Database>>Backup Tasks.
Filename	Display the name of the error log.
Size	Display the size of the backup file.
Last Modified	Display the time that such error occurred.

6.5.10 Login Bulletin

VigorACS server operator can put several important messages on VigorACS login page.


6.5.10.1 Preview

This page displays a preview of bulletin with specified content on the login web page of VigorACS.

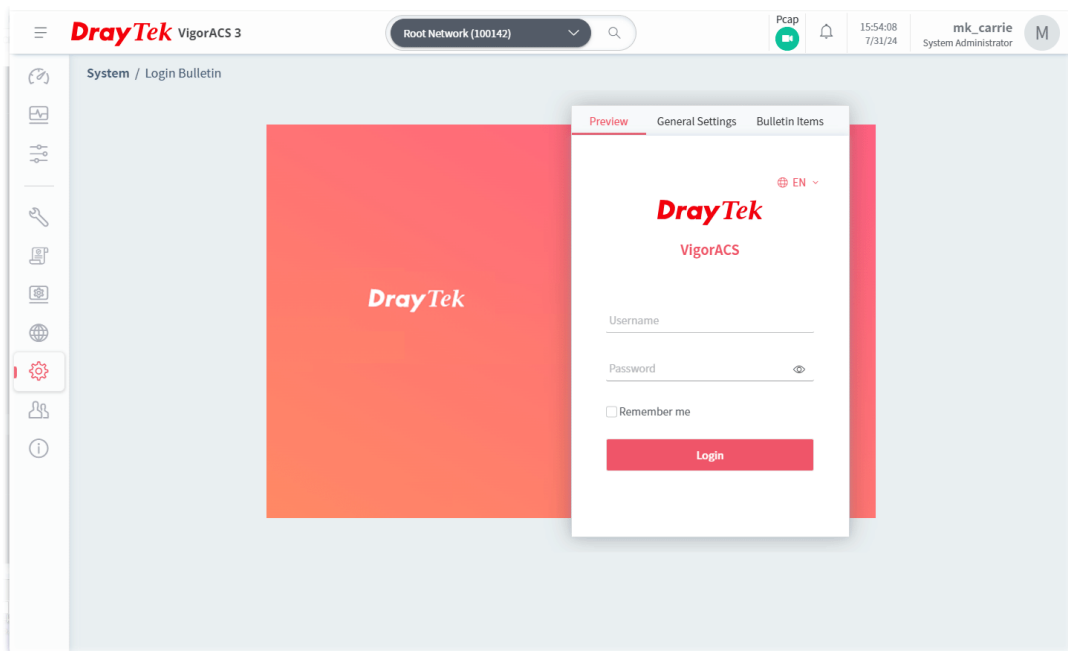

6.5.10.2 General Settings

It allows the user to enable and configure settings for login bulletin.

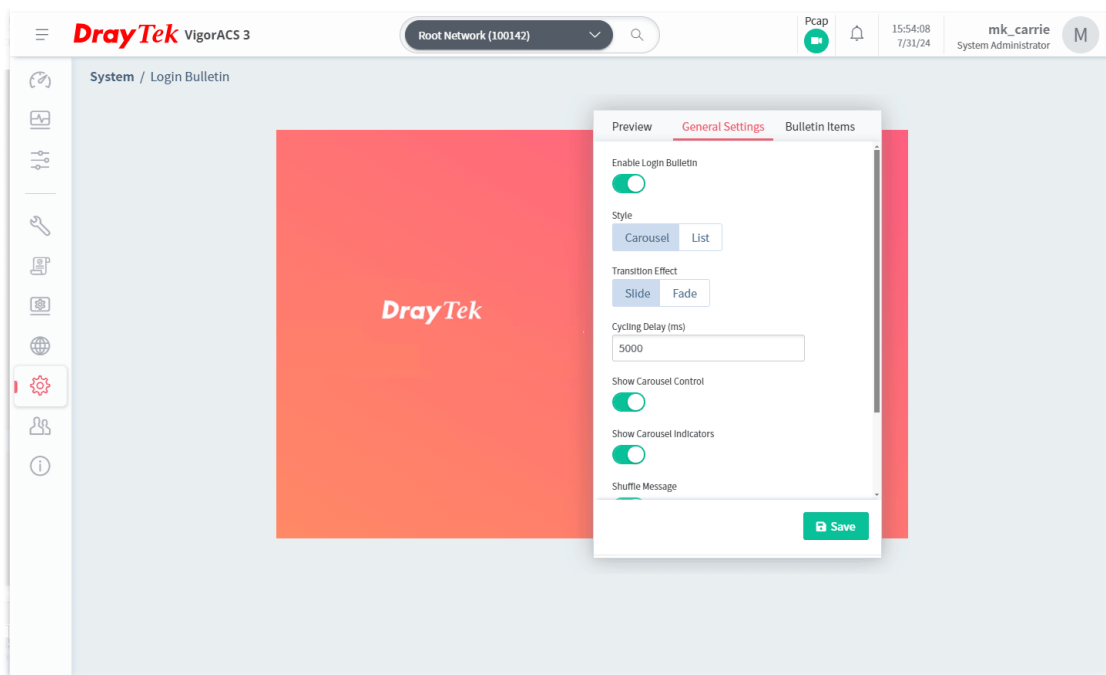


These parameters are explained as follows:

Item	Description
Enable Login Bulletin	If it is enabled, a bulletin with specified content will be shown on the login web page of VigorACS.
Style	The message on the bulletin will be displayed with carousel animation or listed one by one. Carousel – Messages in bulletin will be displayed with carousel animation. List – All of the messages in bulletin will be listed at one time.
Transition Effect	Slide –The messages will appear automatically from left to right or right to left by sliding. Fade – The message will appear one by one.
Cycling Delay	Set the time delay for every bulletin message item. The available range is 1000 to 60000 ms.
Show Carousel Control	Small arrows below the messages will be shown on the page if this function is enabled.
Show Carousel Indicators	Indicators of the slides below the message will be shown on the page if this function is enabled.
Shuffle Message	The messages will appear randomly if this function is enabled.
Save	Save the current settings.



6.5.10.3 Bulletin Items

This page is used for creating new message or modifying existing message.

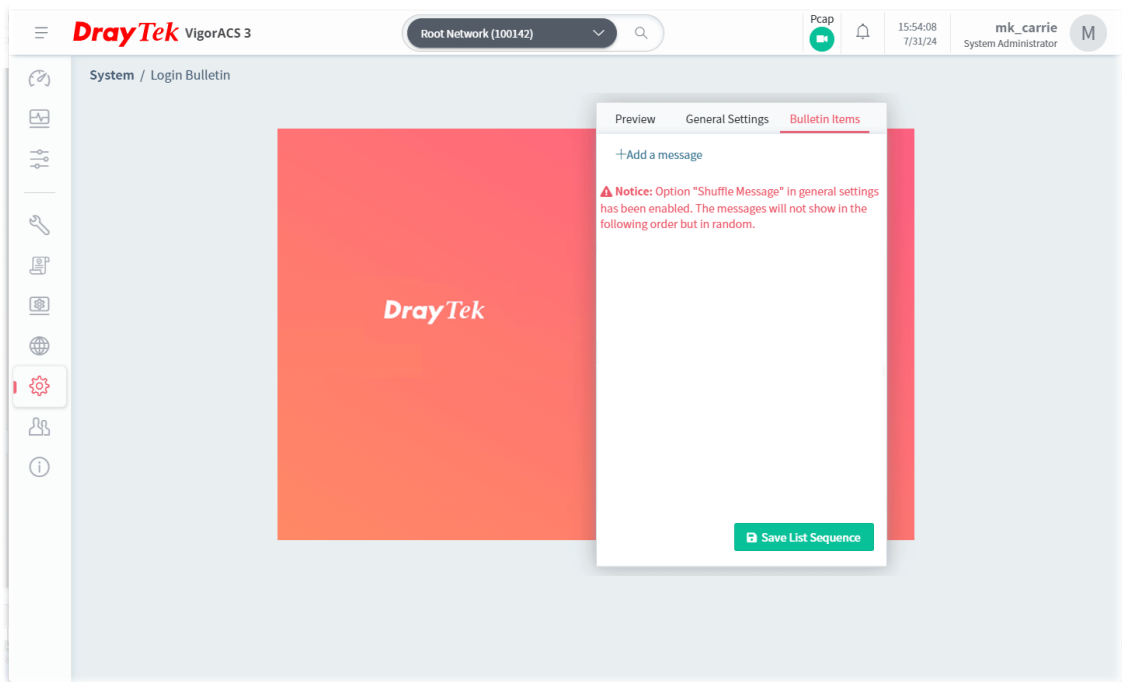

These parameters are explained as follows:

Item	Description
+Add a message	Create a new message. Icon – Specify one of the types as the icon in the front of the title. Title (Optional) – Enter a string as the heading for the message. Message – Enter the content of the message. Preview – The changes made above will be shown in this area immediately. Save – Save the message and exit the dialog. Refer to the following setting result.

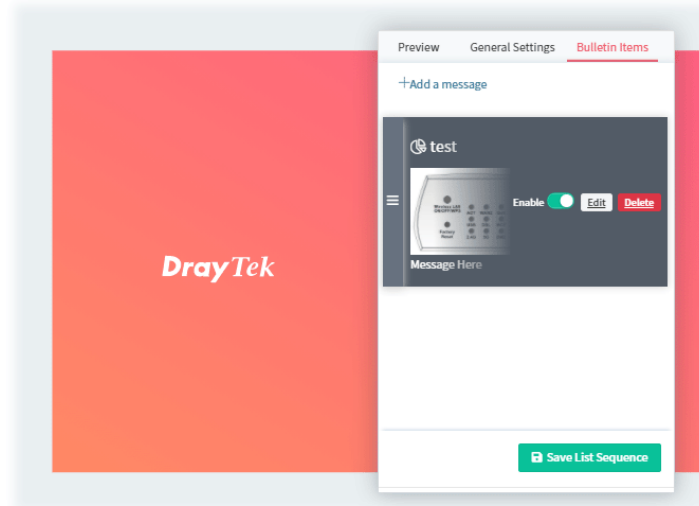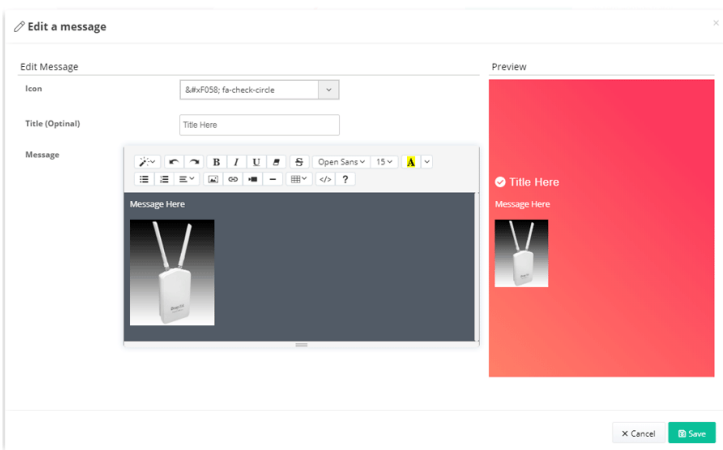	
Edit	Modify the selected message.  Icon – Specify one of the types as the icon in the front of the title. Title (Optional) – Enter a string as the heading for the message. Message – Enter the content (including text and/or image) of the message. Preview – The changes made above will be shown in this area immediately. Save – Save the message and exit the dialog.
	Drag this control item to change the sequence of the selected message on the list. After changing, click Save. If the option Shuffle Message in Login Bulletin >> General Settings is enabled, the messages will not be displayed in the order of the list, but will be displayed randomly.
Enable	If enabled, the message will be USED and shown in the login bulletin. If disabled, the message will NOT be used and shown in the login bulletin.
Delete	Remove the selected message.
Save List Sequence	Save the list sequence for all messages.

6.5.11 Adverts Carousel

VigorACS server operator can add adverts which will be shown on the banner of VigorACS login page or the dashboard of VigorACS server.

6.5.11.1 General Settings

This page determines if displaying the adverts on the login page or not, enabling the auto play carousel function, selecting cycling delay time and using the shuffle items.

System / Adverts Carousel

Adverts Carousel Preview

General Settings | Advert Item Settings

Show on Login Page ☒

Auto Play Carousel ☒

Cycling Delay (ms)

Shuffle Items ☒
When enable it, the advert items will showing in random order.


Save

These parameters are explained as follows:

Item	Description
Adverts Carousel Preview	Display a preview of the adverts carousel with specified images. When adding, deleting, enabling or disabling any advert item, or changing any setting configuration, this field will display the content of the modification.
Show on Login Page	If enabled, the adverts carousel will be SEEN on the login page. If disabled, the adverts carousel will NOT be seen on the login page.
Auto Play Carousel	If enabled, the adverts carousel will be PLAYED automatically. If disabled, the adverts carousel will NOT be played automatically. When the number of advert item is smaller than 1, the system will not perform the adverts carousel.
Cycling Delay (ms)	Set the time delay for every advert item. The available range is 1000 to 60000 ms.
Shuffle Items	If enabled, the advert items will be played randomly on the adverts carousel.

6.5.11.2 Advert Item Settings

This page is used to upload a selected image onto VigorACS server and enter words (title, message of the image and color specified) on the image for advertisement.

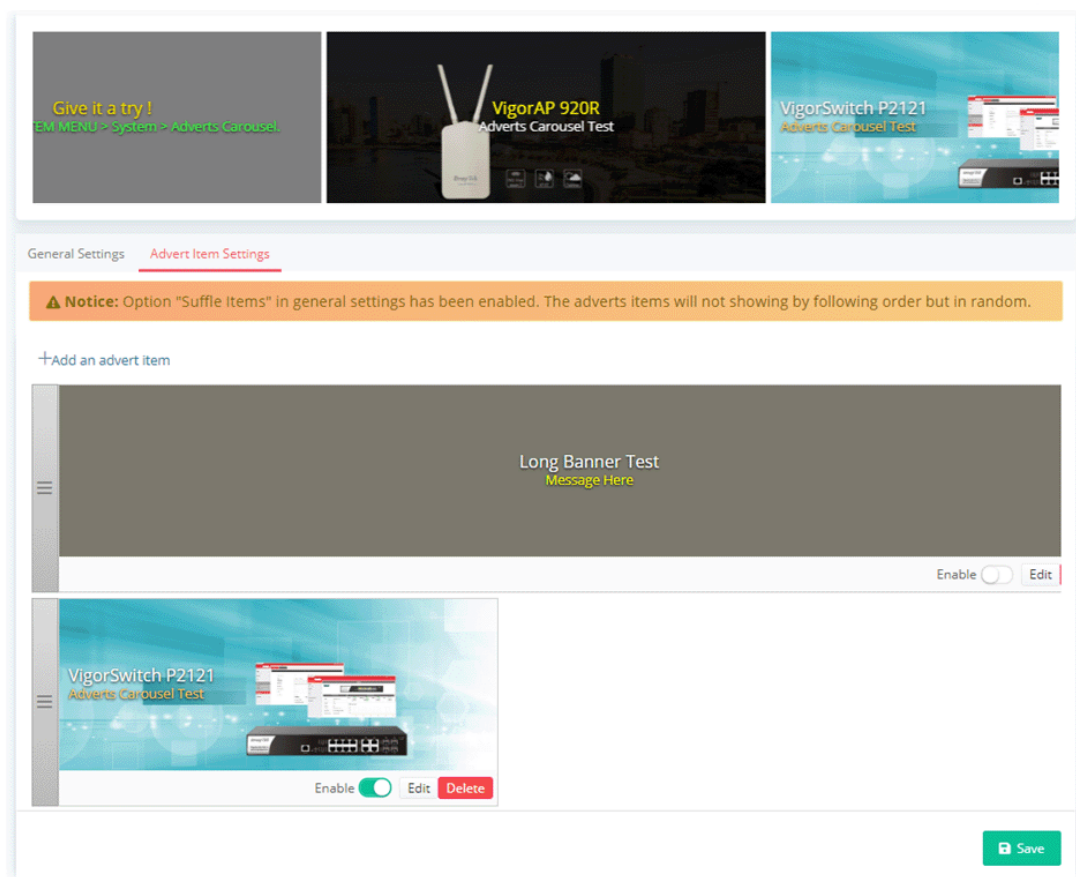

These parameters are explained as follows:

Item	Description
Adverts Carousel Preview	Display a preview of the adverts carousel with specified images. When adding, deleting, enabling or disabling any advert item, or changing any setting configuration, this field will display the content of the modification.
+Add an advert item	Create a new advert item to be used on adverts carousel.

To add an advert item, do the following steps.

1. Click **+Add an advert item** to display the following setting page.

+

Add an item

×

Upload Image

Please select an image.

Browse

Upload

Note:

- Height will automatically adjust to 180px.

Notice:

- Image width needs to be greater than or equal to height.

Preview

Upload an Advert Image

Please upload an image first.

Cancel

Save

These parameters are explained as follows:

Item	Description
Upload Image	Click Browse button to locate the image file (supporting .gif, .jpg, and .png format). After clicking Upload, the images will be stored to the ACS Server. Note that the height of the image will be automatically adjusted to 180 pixels. Image width needs to be greater than or equals to the height. Different adverts can use the same image which is uploaded to VigorACS 3 server.
Upload	Upload the selected image to ACS server as the advert image.

- After specifying an image file, click the **Upload** button. Later, a page with detailed settings will appear as follows:

The screenshot shows a modal window titled '+ Add an item' with a close button (X) in the top right corner. The window contains the following sections:

- Upload Image:** A text input field with the placeholder 'Please select an image.' and a 'Browse' button. Below it is a green 'Upload' button with a cloud icon.
- Title (Optional):** A text input field containing 'Title Here' with a '(Max. 60 characters)' limit note.
- Title Color:** A color picker circle followed by a text input field containing '#ffffff'.
- Message (Optional):** A text input field containing 'Message Here' with a '(Max. 250 characters)' limit note.
- Message Color:** A color picker circle followed by a text input field containing '#ffffff'.
- Enable Hyper Link:** A toggle switch that is currently turned on (green).
- Link Address:** A text input field containing 'http://www.draytek.com/'.
- Text Block Position:** A 3x3 grid of buttons numbered 0 through 8. Button 0 is highlighted with a blue background.
- Preview:** A section showing a visual representation of the advertisement. It features a large, stylized 'HIL' logo. Overlaid on the logo is a semi-transparent box containing the text 'Title Here' and 'Message Here'.


At the bottom right of the dialog are 'Cancel' and 'Save' buttons.

These parameters are explained as follows:

Item	Description
Upload Image	Click Browse button to locate the image file (supporting .gif, .jpg, and .png format). After clicking Upload, the images will be stored to the ACS Server. Note that the height of the image will be automatically adjusted to 180 pixel. Image width needs to be greater than or equals to the height. Different adverts can use the same image which is uploaded to VigorACS 3 server.
Title (Optional)	Enter a string as a title for this image.
Title Color	Assign a color to apply to the title. (Default color is #ffffff).
Message (Optional)	Enter a brief description for the advertisement.
Message Color	Assign a color to apply to the message. (Default color is #ffffff).
Enable Hyper Link	Choose Enable to activate hyper link for the advertisement.



Link Address	If Enable Hyper Link is enabled, enter the URL of the link.
Text Block Position	Determine the position of the title and message on the advert image.
Preview	Any changes on this setting page will be shown in this field. Preview  If the width of the advert image uploaded to VigorACS server is smaller than the advertisement area, the blank space will be filled with repeated advert image.
Cancel	Discard current modification.
Save	Save the current settings and exit the page.

3. Enter the value(s) required for the image, then click **Save**.
4. Now, the selected image has been added and shown on this setting page. If the image width is smaller than the banner width, the advert images will appear repeatedly.

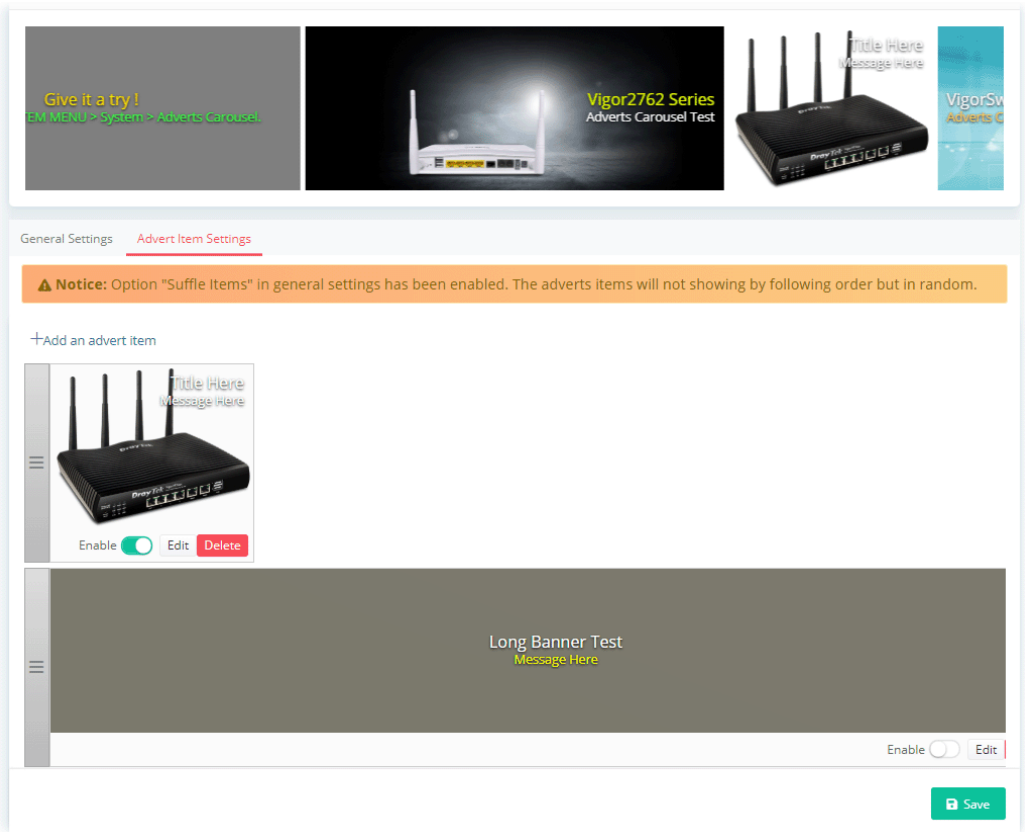


These parameters are explained as follows:

Item	Description
------	-------------

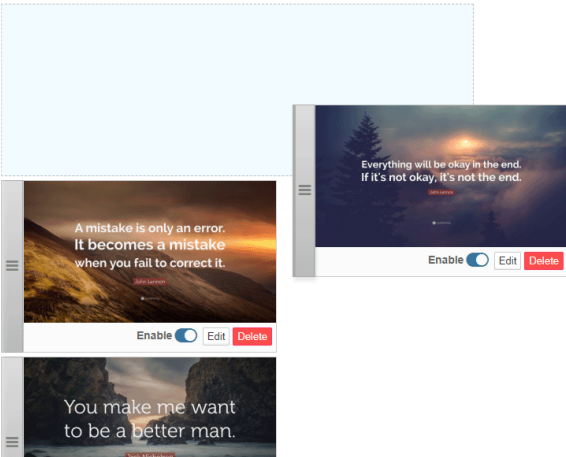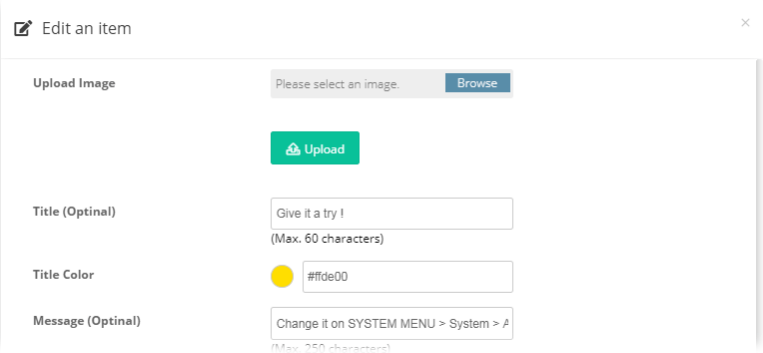	Drag this control item to change the sequence of the selected advert item on the list. After changing, click Save. If the option Shuffle Items in Adverts Carousel>>General Settings is enabled, the adverts items will not be displayed in the order of the list, but will be displayed randomly. 
Enable	If enabled, the advert item will be USED and shown in the adverts carousel. If disabled, the advert item will NOT be used and shown in the adverts carousel.
Edit	Click to modify settings for the selected image. 
Delete	Delete the selected advert item.
Save	Save the current settings.

6.5.12 Logs

Information displayed here shall be useful for the administration to viewing the status for user access.

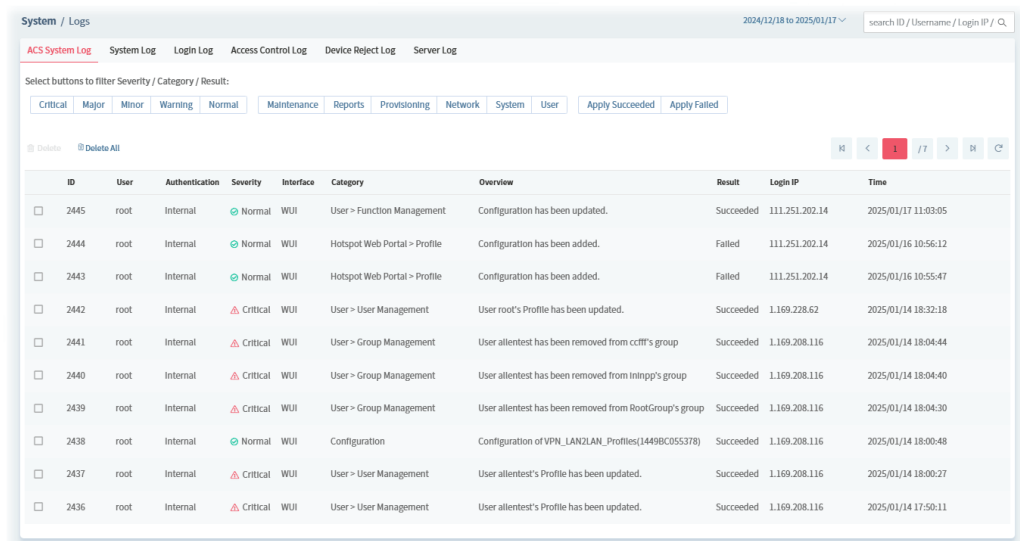

These parameters are explained as follows:

Item	Description
ACS System Log / System Log / Login Log / Access Control Log / Device Reject Log / Server Log	Click one of the types to display log of ACS System, System and Login.
Search ID / Username / Login IP / Overview	Specify the conditions (type the ID number, username, the IP address or overview) for log searching.
Time Setting	2021/01/26 to 2021/02/25 search ID / Username / Login IP Time Last 30 Days CancelSearch
ACS System Log	Display the ID, username, login IP, category, overview, severity and time for clients accessing into VigorACS. Select buttons to filter Severity / Category / Result - Click the one of the buttons (Critical, Major, Minor, Warning, Normal, Maintenance... and so on). The log related to the selected type will be displayed on

	the screen.
System Log	Display the ID number, model name with MAC address for the CPE, and the action executed in CPE. Export All - Log information can be exported as a file.
Login Log	Display the log information, including status, username, login IP, login time and logout time for clients accessing into VigorACS. Export All - Log information can be exported as a file.
Access Control Log	Display the log information, including ID, Source IP, Service Type, Access Control Policy, Overview and Time for clients based on ACL profile applied. Export All - Log information can be exported as a file.

6.5.13 XMPP Profile

This page is used for configure settings for XMPP (Extensible Messaging and Presence Protocol) server.

It is only available for VigorACS, Cluster version.

The screenshot shows the 'System / XMPP Profile' configuration page. It features a 'Status' dropdown set to 'Enabled', an 'Enable' toggle switch that is turned on, and several input fields: 'Server IP/Domain' with the value '141acs.duckdns.org', 'Server Port (default : 5222)' with the value '5222', 'Username' with the value 'acs_xmpp', and 'Password' with masked characters. A 'Save' button is located at the bottom right of the form.

These parameters are explained as follows:

Item	Description
Status	Display current status (Enabled/Disabled) of the XMPP server.
Enable	Switch the toggle to enable/disable the XMPP server. VigorACS will try to connect to the XMPP server. If failed, a button of Connect to XMPP Server will appear. Click the button to reconnect.
Server IP Address	Enter the IP address of the XMPP server.
Server Port	Enter a port number for the XMPP server.
Username	Enter a string as username for accessing the sever.
Password	Enter a string as password for accessing the server.
Save	Save the settings.

6.5.14 Server Support Settings

6.5.14.1 Support Settings

This page is used for configuring the settings of Terms of use and Privacy Policy on the Login page.

System / Server Support Settings

Support Settings Agreement Profile Agreement History

Support Service

Support Service Type: Email Website

Support Website: ✓

Support Email Format: HTML Format Plain Text

Agreement Settings

Enable Terms of use: ☒ 20260729_Terms_1

Enable Privacy Policy: ☒ Privacy Policy - ugroup -1

Enable EULA: ☒ 20260728_EULA_1

Re-acceptance Required: ☐

Note:

- Check "Re-acceptance Required" to prompt users to re-accept the agreement after the profile is updated or changed. If unchecked, the system will not require users to re-accept the agreement.

Save

These parameters are explained as follows:

Item	Description
Support Service	
Support Service Type	Specify the type of link that appears in the account activation notification letter. ● Email - The system will direct the user to write an e-mail after the user presses the link of Contact Us. ● Website - The system will direct the user to a website after the user presses the link of Contact Us.
Support Website	If Website is selected as the service type, enter the URL of the server website in this field.
Support Email Address	If Email is selected as the service type, enter the email address of the receiver in this field.
Support Email Format	If Email is selected as the service type, select the email format. HTML Format - The content of the email will be shown in HTML format. Plain Text - The content of the email will be shown in plain text.
Agreement Settings	

Enable Terms of use	Switch the toggle to enable/disable the terms of use display. Select a profile (defined under Server Support Settings>>Agreement Profile) from the drop-down list.
Enable Privacy Policy	Switch the toggle to enable/disable the privacy policy display. Select a profile (defined under Server Support Settings>>Agreement Profile) from the drop-down list.
Enable EULA	Switch the toggle to enable/disable the EULA (End User License Agreement) policy. Select a profile (defined under Server Support Settings>>Agreement Profile) from the drop-down list.
Re-acceptance Required	Switch the toggle to enable/disable this option. Enable this option to require users to accept the agreement again whenever their profile is updated. If disabled, users will not be asked to re-accept the agreement after profile changes.
Save	Save the settings.

6.5.14.2 Agreement Profile

Use this page to configure the agreement profiles for Support Settings.

System / Server Support Settings

Support Settings **Agreement Profile** Agreement History

+Add Delete


☐	Profile Name	Type	Status	Created At	Last Modified At	Action
☐	Terms of Use - ugroup -1	Terms of Use	Disabled	2026-07-17 5:13:44 PM	2026-07-17 5:13:44 PM	Edit Download TXT
☐	20260729_Terms_1	Terms of Use	Enabled	2026-07-29 1:09:47 PM	2026-07-31 2:07:41 PM	Edit Download TXT
☐	Privacy Policy - ugroup -1	Privacy Policy	Enabled	2026-07-17 5:13:44 PM	2026-07-17 5:13:44 PM	Edit Download TXT
☐	20260728_EULA_1	EULA	Enabled	2026-07-17 5:16:44 PM	2026-07-17 5:21:09 PM	Edit Download TXT

Show 10 entries 1

These parameters are explained as follows:

Item	Description
Edit	Click to modify the content of the selected profile.
Download TXT	Click to download the content of the profile as a .txt file.

Click **+Add** to create an agreement profile.

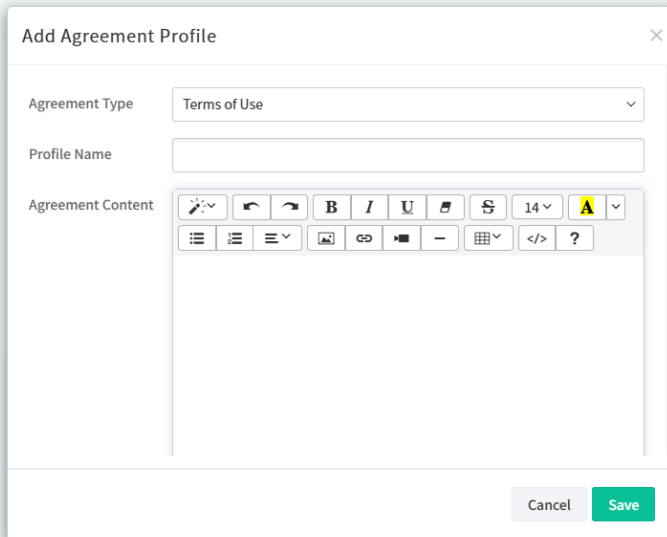

The 'Add Agreement Profile' dialog box contains the following fields and controls:


- Agreement Type:** A dropdown menu currently showing 'Terms of Use'.
- Profile Name:** An empty text input field.
- Agreement Content:** A rich text editor with a toolbar containing icons for undo, redo, bold, italic, underline, link, unlink, list, indent, outdent, image, table, code, and help. The font size is set to 14.
- Buttons:** 'Cancel' and 'Save' buttons at the bottom right.

These parameters are explained as follows:

Item	Description
Agreement Type	There are three types: ● Terms of Use ● Privacy Policy ● EULA (End User License Agreement)
Profile Name	Enter a name for the profile to help with identification.
Agreement Content	Enter the content.
Save	Save the settings.

6.5.14.3 Agreement History


This page records all agreement profiles that have been enabled, including the times when each profile was enabled or disabled and each user's consent status.

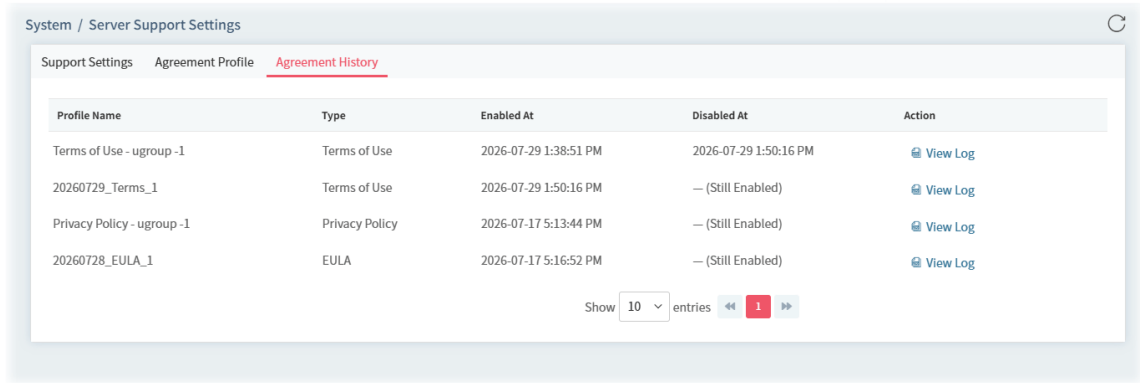

The 'Agreement History' table displays the following data:

Profile Name	Type	Enabled At	Disabled At	Action
Terms of Use - ugroup -1	Terms of Use	2026-07-29 1:38:51 PM	2026-07-29 1:50:16 PM	View Log
20260729_Terms_1	Terms of Use	2026-07-29 1:50:16 PM	— (Still Enabled)	View Log
Privacy Policy - ugroup -1	Privacy Policy	2026-07-17 5:13:44 PM	— (Still Enabled)	View Log
20260728_EULA_1	EULA	2026-07-17 5:16:52 PM	— (Still Enabled)	View Log


At the bottom of the table, there is a pagination control: 'Show 10 entries' with navigation arrows and a page indicator '1'.

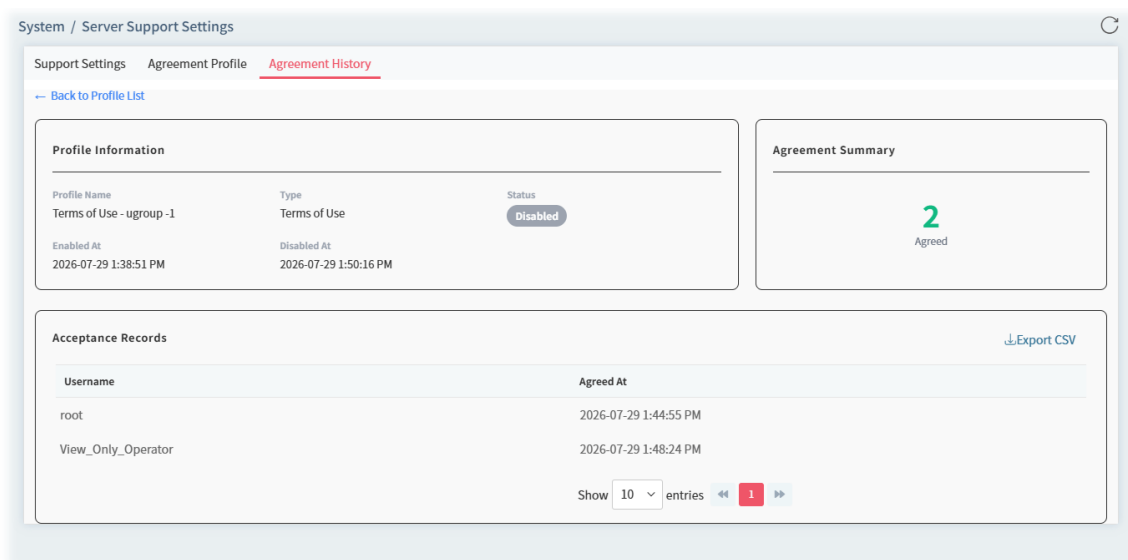

6.5.15 Delete Logs Actions

Information displayed here shall be deleted.

Delete Logs Actions is available only for the **Root** user and the user with the role of **Auditor**.

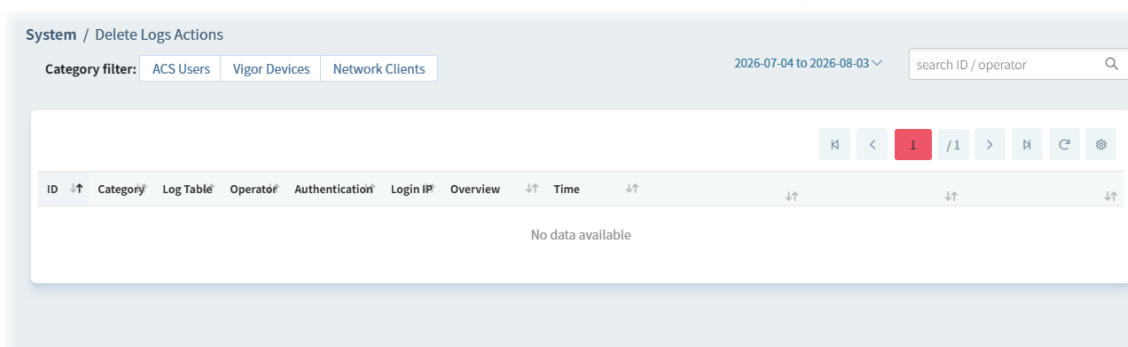

All logs with the Information including an ID number, category filter, log table, operator, authentication, login IP Deleted Object, Overview, and time will be displayed on this page. They will be kept forever until they are deleted from this page.

6.5.16 App Server

To use the push notification function, the App Server must be enabled first.

System / App Server

Enable App Server ☒

App API Key

Send App Notification Test

Note:

- An API key is required to use the push notification functions. Please log in [MyVigor](#) and then click 'App Server' to get the API Key.

Save


These parameters are explained as follows:

Item	Description
Enable App Server	Switch the toggle to enable/disable the function.
App API Key	Enter the API key assigned by MyVigor server.
Send App Notification Test	Click to send a notification to the CPE.
Save	Save the settings.


6.5.17 License Key Pools

The System Administrator can import DrayTek WCF license keys and assign them to or cancel the assignment of the keys to the managed user groups.

From the following page, click **Login with MyVigor**.

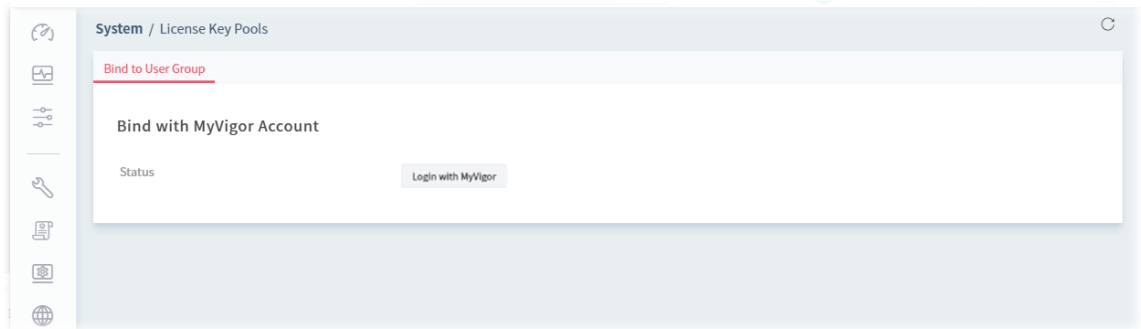


Later, a login page appears.

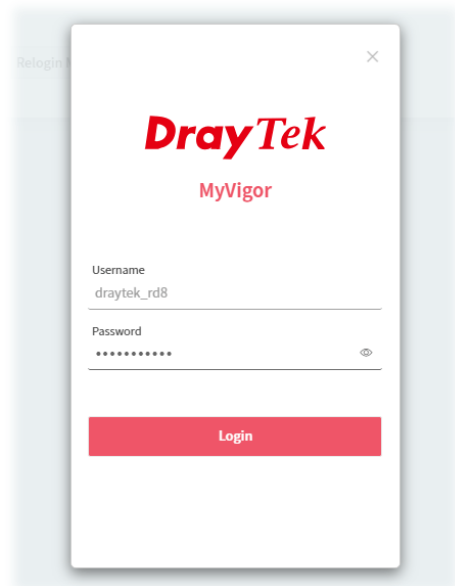

Please enter the username and password registered for the MyVigor server.

6.5.17.1 Bind to User Group

In this page, the System Administrator can assign the available license key(s) to the managed user groups.

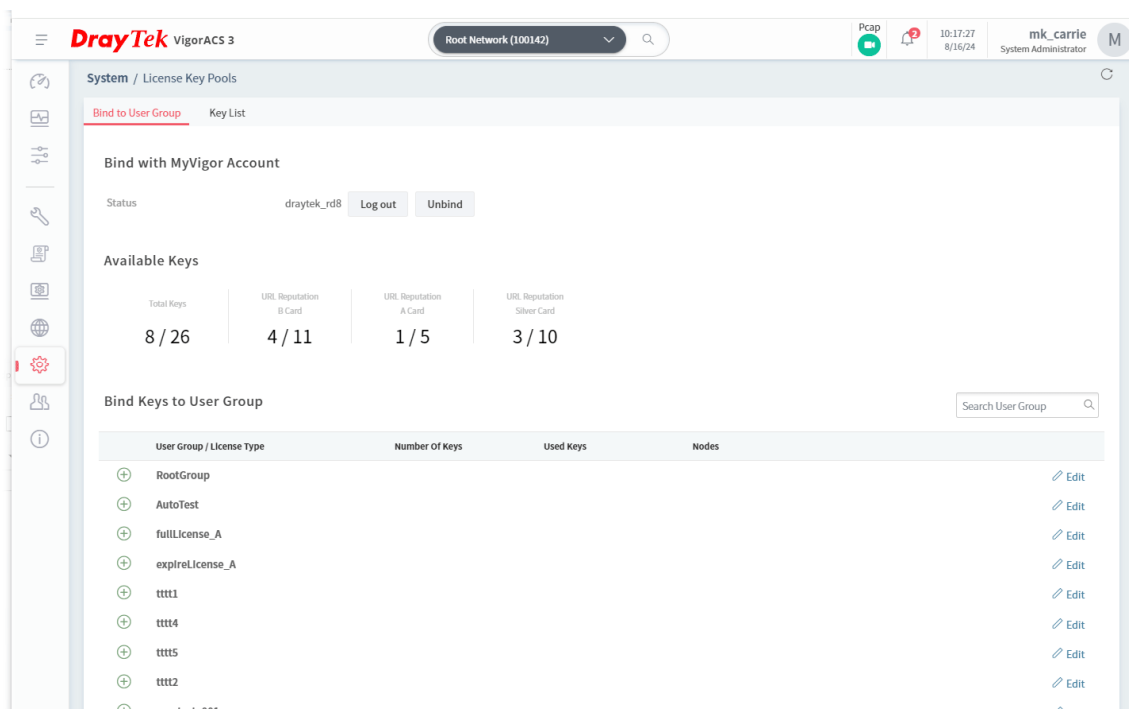

These parameters are explained as follows:

Item	Description
Bind with MyVigor Account	
Status	To bind with MyVigor Account, make sure you already have one set of user account and user password to login MyVigor website. If not, apply one account first. Login with MyVigor – Enter the user name and user password using MyVigor account to login MyVigor website. Relogin MyVigor – This button appears if you have login MyVigor website previously and successfully. Click to access MyVigor again. Log out – Log out MyVigor website but still bind with MyVigor server. Unbind – Unbind from MyVigor website.
Available Keys	
Total Keys x/y	Display current status (Unsubscribed or Subscribed) of all service (B, A, silver card). In which, x means the number of unsubscribed keys; y means the number of subscribed keys.
URL Reputation B card x/y	Display current status (Unsubscribed or Subscribed) of the service (B card). In which, x means the number of unsubscribed keys; y means the number of subscribed keys.
URL Reputation A card x/y	Display current status (Unsubscribed or Subscribed) of the service (A card). In which, x means the number of unsubscribed keys; y means the

	number of subscribed keys.
URL Reputation Silver Card x/y	Display current status (Unsubscribed or Subscribed) of the service silver card). In which, x means the number of unsubscribed keys; y means the number of subscribed keys.
Bind Keys to User Group	
User Group / License Type	Display the name of the user group and the license type used.
Number of Keys	Display the quantity of the service card purchased.
Used Keys	Display the quantity of the service card used.
Nodes	Display the number of nodes that have used this service card.
Edit	Click to bind another key used for the selected user group.

To bind a key or keys to an existed user group,

1. Click **Edit** of a selected user group to open the following dialog.

Edit Key

Group Name

RootGroup

Action

Assign New Keys

Cancel Assigned Keys

License Type	Remaining Keys in Pool	Add Keys To Current User Group
URL Reputation - B Card	4	0
URL Reputation - A Card	1	0
URL Reputation - Silver Card	3	0

Cancel

Next

2. Use the drop-down menu to specify the number of key(s) for binding with the user group. Then click **Next**.

The 'Edit Key' dialog box shows the 'Group Name' as 'RootGroup'. Under 'Action', there are buttons for 'Assign New Keys' and 'Cancel Assigned Keys'. A table lists license types and their remaining keys in the pool, with input fields to specify how many keys to add to the current user group.

License Type	Remaining Keys in Pool	Add Keys To Current User Group
URL Reputation - B Card	4	0
URL Reputation - A Card	1	1
URL Reputation - Silver Card	3	0

Buttons at the bottom: Cancel, Next.

3. A summary of the key additions will be displayed in the dialog. Click **Apply**.

The 'Edit Key' dialog box now shows a 'Confirm Key Assignment' section. It contains a table summarizing the added keys and the remaining keys after the assignment.

License Type	Added Keys	Remaining Keys After Key Assignment
URL Reputation - A Card	1	0

Buttons at the bottom: Cancel, Previous, Apply.

Now the available keys will be changed as follows:


The 'Key List' interface shows the 'Bind to User Group' tab. It includes a 'Bind with MyVigor Account' section with status 'draytek_rdB' and buttons for 'Log out' and 'Unbind'. Below is a table of 'Available Keys' showing total and used counts for different license types. At the bottom, there's a 'Bind Keys to User Group' section with a search bar and a table listing user groups and their associated keys.

User Group / License Type	Number Of Keys	Used Keys	Nodes
RootGroup			
AutoTest			

6.5.17.2 Key List


This page displays the binding record of CPE and WCF license. In addition, the system administrator can import more license keys to VigorACS server.

Moreover, the "Sync License" button is used to ensure consistency in the number of license keys between the MyVigor server and the VigorACS server. Click "Sync License" whenever you want to avoid inconsistent license keys.

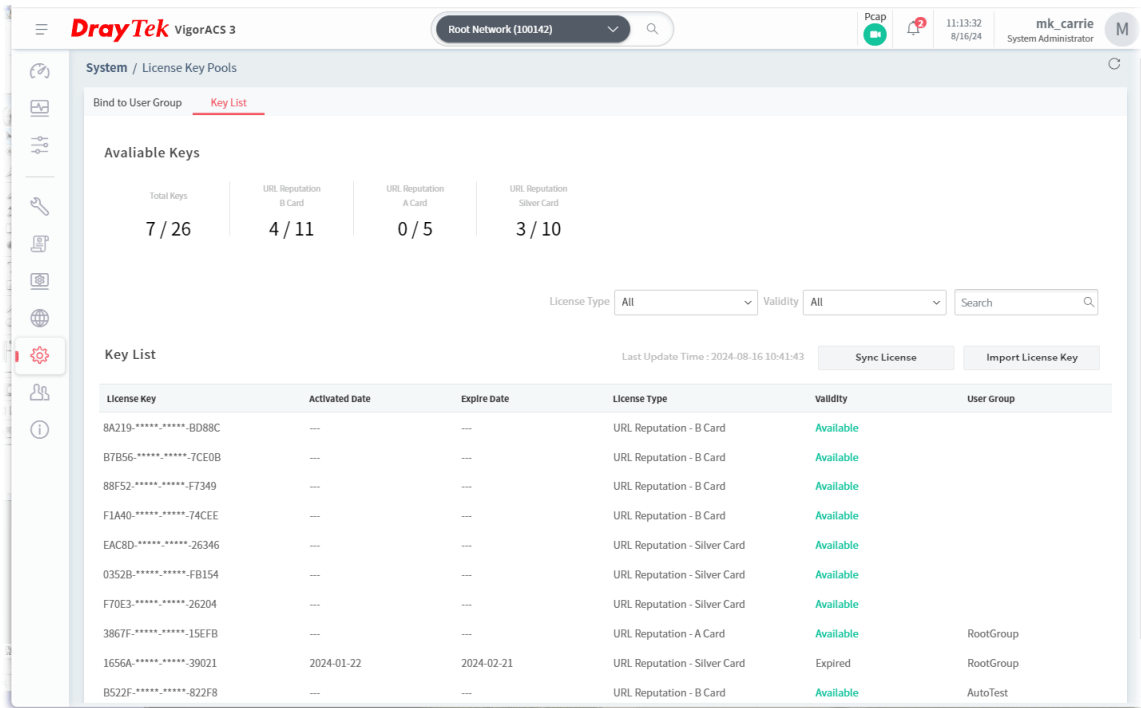


To import the license key to VigorACS,


1. Click the **Import License Key** button.

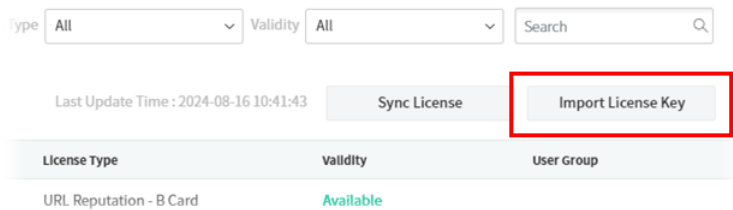


A dialog will be shown as follows:

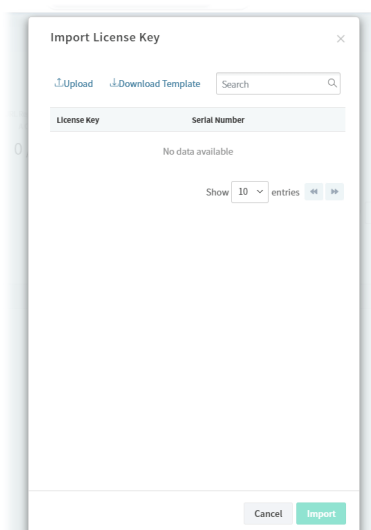


2. Click the **Upload** link to open another dialog for selecting a license key. Then, click **Browse** to locate the license key file. Next, click **Apply**.

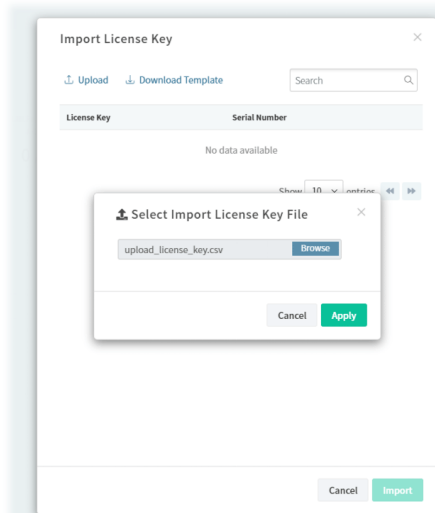

3. The license key(s) under the profile will be shown on the screen. Click **Import**.

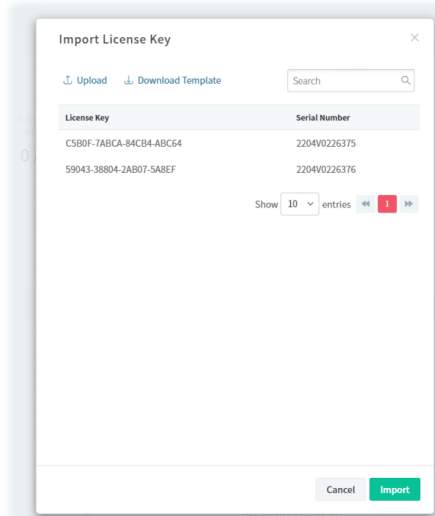


4. Later, the status of the license key(s) will be shown as “License imports success”. Click **Finish** to apply the license to VigorACS and exit the dialog.

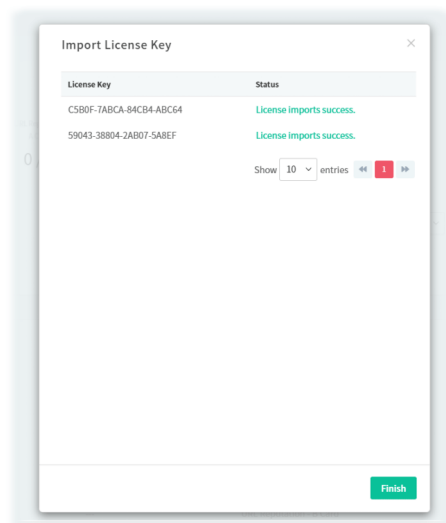

6.6 User

VigorACS allows a user to manage CPE/AP devices through VigorACS server. However, the user has to type specific name and password defined in this page. Different users must use different names and passwords for accessing VigorACS.

This chapter will guide you to define users. It can be set with different roles (such as System Administrator, Administrator, Group Administrator, Operator, and etc.); each role has different administration authority.

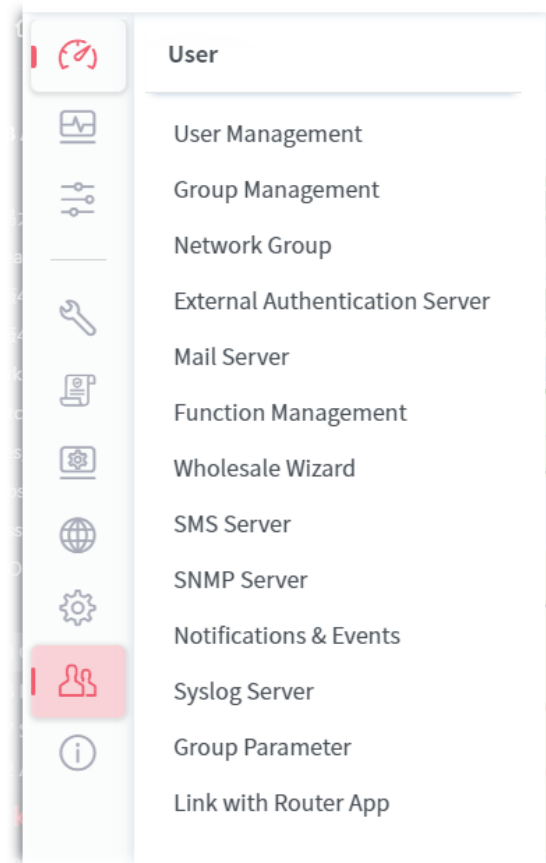

 User menu is available only for the role of **System Administrator**, and **Group Administrator**.

6.6.1 User Management

The user management function allows a user to set name, password, and e-mail address as identification in VigorACS system.

To add, delete a user or check information for a user, open **User** and choose **User Management**. This page displays basic information including username, role (system administrator, administrator, group administrator, operator, view only operator), status (active, inactive), mail notify (yes or no), SMS notify (yes or no), email address, telephone number, other description for the user.

User / User Management

+Add

Delete

User Batch Settings

Search...

Showing 1 to 10 of 133 entries

Show

10

entries

1

2

3

4

5

...

14

	Username	Authentication	Role	Status	Email Notification	SMS Notification	Email
☐	root	Internal	System Administrator	Active	Enabled	Disabled	tim_yang@draytek.com
☐	tim_radius	External - AutoTest	Group Administrator	Active	Enabled	Disabled	tim_yang@draytek.com
☐	kc_radius	External - RootGroup,f...	System Administrator	Active	Disabled	Disabled	
☐	auto_test	Internal	System Administrator	Active	Disabled	Disabled	auto_test@draytek.com
☐	AutoTestGroup_GA	Internal	Group Administrator	Active	Disabled	Disabled	AutoTestGroup_GA@test.com
☐	aries	Internal	System Administrator	Active	Disabled	Disabled	aries_chen@draytek.com
☐	fullLicense_A	Internal	Group Administrator	Active	Disabled	Disabled	fullLicense_A@test.email
☐	expireLicense_A	Internal	Group Administrator	Active	Disabled	Disabled	expireLicense_A@test.email
☐	tim_yang	Internal	Group Administrator	Active	Disabled	Disabled	
☐	eric_lai	External - tttt1,ttt4,tt...	System Administrator	Active	Disabled	Disabled	eric_lai@draytek.com

These parameters are explained as follows:

Item	Description
+Add	Click to add a user.
Delete	Click to remove the selected user.
User Batch Setting	Click to configure user batch settings (for Out-of-box experience). User Batch Settings Apply to Users Operator (Internal) Enable OOB feature OOBE pages to display Read the Agreements Enable Auto Logout Note: When select multiple users includes "View Only Operator", "Auto Logout" will not apply to "View Only Operator", only to other users. Cancel Apply Apply to Users – Select the user type (root, admin, operator) to apply the batch settings. Enable OOB feature – Switch the toggle to enable/disable the function. If enabled, the user will be guided to OOBE pages to modify settings (e.g., password, e-mail, notification, etc) for the next time to login VigorACS. OOBE pages to display – Select the pages to display on the screen. Disable Auto Logout – Switch the toggle to enable/disable the function. If disabled, the user has to logout the screen manually.

The following setting page appears when **+Add** is clicked.

User / User Management

Add User Profile

Enable

Username

carrient

Password

.....

Role

System Administrator

Note:

This account will be added to all user group if the role is a system administrator.

Enable WUI Login

Enable API Service

Disable Auto Logout

Enable OOB feature

OOBE pages to display

Read the Agreements, Set new pass

Email Notification

Email

carrie_ni@draytek.com

SMS Notification

Telephone


carrie_ni

Cancel

Create

These parameters are explained as follows:

Item	Description
Enable	Click to enable the user profile.
Username	Enter a name for the new user.
Password	Enter the password for the user.
Role	Choose the role for the selected user. Different role represents different authority that the user group will have. The great the authority is, the more functions the user can have. System Administrator System Administrator Group Administrator Administrator Commissioning Operator Customized Operator View Only Operator Customized View Only Operator Auditor System Administrator Have the highest authority. If it is

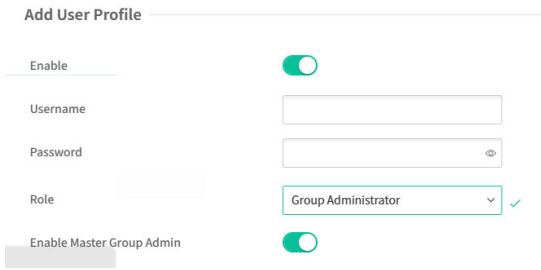	selected, the corresponding settings configured in this page will be added to all user groups listed below. ● Group Administrator – Have the middle authority high than “Administrator”. ● Administrator – Have the middle authority. ● Commissioning – Have the authority to add a new network and view SD-WAN settings. ● Operator – Have the low authority higher than View Only Operator. ● Customized Operator – Have the low authority higher than View Only Operator, with restricted widget and Menu items. ● View Only Operator – Have the lowest authority. ● Customized View Only Operator – Have the lowest authority. In addition, with restricted widget and Menu items. ● Auditor – Have limited authority different from other roles. It is available for choosing only when the system administrator accesses into VigorACS with the role of Root (default account). The only action allowed is to view the deleted log information (on the page of System>>Delete Logs Action).
Enable Master Group Admin	This option is available if Group Administrator is selected as the Role setting. The master group admin is the same as group admin, except it can create other group admin account. Switch the toggle to enable / disable the function of master group admin. 
Enable WUI Login	Switch the toggle to enable / disable the function. If enabled, this user account is allowed to access the web user interface of VigorACS.
Enable API Service	Switch the toggle to enable / disable the function. If enabled, this user account is allowed to access the API service. Confirm API Password – Enter the password for access the API service.
Disable Auto Logout	Switch the toggle to enable / disable the function. If enabled, the user must logout VigorACS manually.
Enable OOB feature	Switch the toggle to enable / disable the function.

	When it is enabled, the user is allowed to access into the web user interface of VigorACS and allowed to view the OOBE page(s). OOBE pages to display - If the OOBE feature is enabled, select the page(s) to display on the screen.
Email Notification	Switch the toggle to enable / disable the function. When it is enabled, an email will be sent to the user as a notification when the connected device gets alarms. Email - Enter the email for communication between the user and VigorACS server.
SMS Notification	Switch the toggle to enable / disable the function. When it is enabled, an SMS will be sent to the one listed here as a notification when the device gets alarms. Telephone - Enter the telephone number for receiving the SMS notification.
Chatbot Notification	Switch the toggle to enable / disable the function. When it is enabled, a notification will be sent to the user with a pop-up message when the device gets alarms, events, notifications and information related to VigorACS. If enabled, this user account can check general information of VigorACS server through specific mobile phone device and/or PC.
APP Notification	Only the login user has the right to enable the function of APP Notification. The System Administrator of VigorACS is allowed to disable this feature only. To enable/disable the function of DrayTek APP Notification, go to the APP Notification setting page. When it is enabled, a notification will be sent to the user with a pop-up message when the device gets alarms, events, notifications, and information related to VigorACS.
Two-factor authentication	Only the login user has the right to enable the function of 2FA authentication. The System Administrator of VigorACS is allowed to disable this feature only. To enable/disable the function of 2FA authentication, go to the Two-factor authentication setting page.
Description	Enter a brief description for the user.
Cancel	Discard current modification.
Create	Save the current settings and exit the page.

After finished the above settings, click **Create** to add a new user account.

To edit an existing user account, select the one (e.g., mk_carrie) and click it.

User / User Management

+Add

Delete

User Batch Settings

Search...

Q

Showing 111 to 120 of 123 entries

Show

10

entries

1

9

10

11

12

13

	Username	Authentication	Role	Status	Email Notification	SMS Notification	Email
☐	zzz_test_094	Internal	Group Administrator	Active	Disabled	Disabled	
☐	zzz_test_095	Internal	Group Administrator	Active	Disabled	Disabled	
☐	zzz_test_096	Internal	Group Administrator	Active	Disabled	Disabled	
☐	zzz_test_097	Internal	Group Administrator	Active	Disabled	Disabled	
☐	zzz_test_098	Internal	Group Administrator	Active	Disabled	Disabled	
☐	zzz_test_099	Internal	Group Administrator	Active	Disabled	Disabled	
☐	zzz_test_100	Internal	Group Administrator	Active	Disabled	Disabled	
☐	mk_carrie	Internal	System Administrator	Active	Disabled	Disabled	
☐	T_2022-12-12_addUser_E	Internal	Group Administrator	Active	Enabled	Enabled	
☐	T_2022-12-12_addUser_D	Internal	View Only Operator	Active	Disabled	Disabled	

The following shows the Edit User Profile page.

User / User Management

Edit User Profile

Enable

☒

Authentication

Internal

Username

mk_carrie

Password

Confirm Password

Role

System Administrator

Note:

This account will be added to all user group if the role is a system administrator.

Enable WUI Login

☒

Enable API Service

☐

Disable Auto Logout

☐

Enable OOB feature

☐

Email Notification

☐

Email

mn20200331@gmail.com

SMS Notification


☐

Cancel

Save

These parameters are explained as follows:

Item	Description
Enable	Click to enable the user profile.
Username	Enter a name for the new user.
Password	Enter the password for the user.
Confirm Password	Enter the password again.

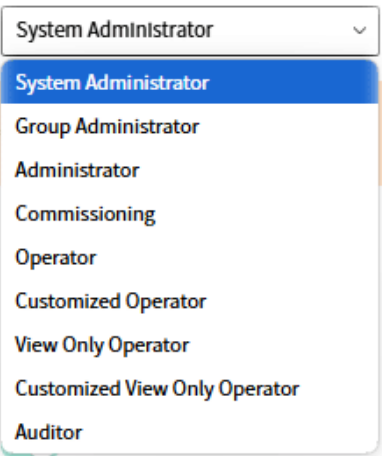Role	Choose the role for the selected user. Different role represents different authority that the user group will have. The great the authority is, the more functions the user can have.  ● System Administrator – Have the highest authority. ● Group Administrator – Have the middle authority high than “Administrator”. ● Administrator – Have the middle authority. ● Commissioning – Have the authority to add a new network and view SD-WAN settings. ● Operator – Have the low authority higher than View Only Operator. ● Customized Operator – Have the low authority higher than View Only Operator, with restricted widget and Menu items. ● View Only Operator – Have the lowest authority. ● Customized View Only Operator – Have the lowest authority. In addition, with restricted widget and Menu items. ● Auditor – Have limited authority different from other roles. It is available for choosing only when the system administrator accesses into VigorACS with the role of Root (default account). The only action allowed is to view the deleted log information (on the page of System>>Delete Logs Action).
Enable WUI Login	Switch the toggle to enable / disable the function. If enabled, this user account is allowed to access the web user interface of VigorACS.
Enable API Service	Switch the toggle to enable / disable the function. If enabled, this user account is allowed to access the API service. Confirm API Password – Enter the password for access the API service.
Disable Auto Logout	Switch the toggle to enable / disable the function.

	If enabled, the user must logout VigorACS manually.
Enable OOB feature	Switch the toggle to enable / disable the function. When it is enabled, the user is allowed to access into the web user interface of VigorACS and allowed to view the OOB page(s). OOB pages to display - If the OOB feature is enabled, select the page(s) to display on the screen.
Email Notification	Switch the toggle to enable / disable the function. When it is enabled, an email will be sent to the user as a notification when the connected device gets alarms. Email - Enter the email for communication between the user and VigorACS server.
SMS Notification	Switch the toggle to enable / disable the function. When it is enabled, an SMS will be sent to the one listed here as a notification when the device gets alarms. Telephone - Enter the telephone number for receiving the SMS notification.
Chatbot Notification	Switch the toggle to enable / disable the function. When it is enabled, a notification will be sent to the user with a pop-up message when the device gets alarms, events, notifications and information related to VigorACS. If enabled, this user account can check general information of VigorACS server through specific mobile phone device and/or PC.
APP Notification	Only the login user has the right to enable the function of APP Notification. The System Administrator of VigorACS is allowed to disable this feature only. To enable/disable the function of DrayTek APP Notification, go to the APP Notification setting page. When it is enabled, a notification will be sent to the user with a pop-up message when the device gets alarms, events, notifications, and information related to VigorACS.
Two-factor authentication	Only the login user has the right to enable the function of 2FA authentication. The System Administrator of VigorACS is allowed to disable this feature only. To enable/disable the function of 2FA authentication, go to the Two-factor authentication setting page.
Description	Enter a brief description for the user.
Cancel	Discard current modification.
Create	Save the current settings and exit the page.

6.6.2 Group Management

This page allows you to add a new user group containing with many users (with different roles or authorities). To add, delete a user group or check information for a user group, open **SYSTEM MENU>>User** and choose **Group Management**.

6.6.2.1 Setting

RootGroup is defined in factory and owns the highest authority. You can define new user group(s) to fit your requirement.

The screenshot displays the 'User / Group Management' interface. It features a top navigation bar with 'Setting', 'Management', and 'UI Customization' tabs. Below the navigation bar, there are action buttons: '+Add', 'Delete', 'Export', and 'Delete with wholesale'. A search bar is located on the right. The main area contains a table with columns: Group ID, Group Name, Max Nodes, Used Nodes, Enable Expire Date, Expire Date, Enable Global Mail Server, and Enable Global SNMP Server. The table lists several groups, including 'ccfff', 'RootGroup', 'Ininpp', 'AllenGroup', 'FR_APP_Group', 'CPE_Install_Group', and 'RD5_Henry'. Below the table, there is a 'Nodes Information' section with a table showing 'Current Nodes In Used' (58), 'Configured Max Nodes' (5), and 'Purchased License Nodes' (1000).

Group ID	Group Name	Max Nodes	Used Nodes	Enable Expire Date	Expire Date	Enable Global Mail Server	Enable Global SNMP Server
5	ccfff	5	1	Disabled		Disabled	Disabled
1	RootGroup	No Limit Nodes	48	Disabled		Enabled	Enabled
2	Ininpp	No Limit Nodes	1	Disabled		Enabled	Disabled
4	AllenGroup	No Limit Nodes	7	Disabled		Disabled	Disabled
6	FR_APP_Group	No Limit Nodes	0	Disabled		Disabled	Disabled
7	CPE_Install_Group	No Limit Nodes	0	Disabled		Disabled	Disabled
9	RD5_Henry	No Limit Nodes	1	Disabled		Disabled	Disabled

Nodes Information		
Current Nodes In Used	Configured Max Nodes	Purchased License Nodes
58	5	1000

These parameters are explained as follows:

Item	Description
+Add	Click to add a user group.
Delete	Click to clear the selected group. Before using such function, check if the group is blank or not by switching to the Management tab. If the selected group still contains any user in it, such group is unable to be deleted. In this case, use Delete with Whole Sale instead.
Export	Click to open a dialog for typing SQL syntax to export the settings.
Delete with Whole Sale	Click to delete the selected user group.

Click any one of the existed entries to access into the configuration page for making modifications. Or, click **+Add** to create a new group.

User / Group Management

Setting Management UI Customization

Add Group

Group name: Marketing2025 ✓

Nodes: -1
(-1: No Limit Nodes)

Enable CPE Notify Mail/SMS/SNMP: ☒

Enable Global Mail Server: ☒

Enable Global SNMP Server: ☒

Enable Expire Date: ☒

Expire Date: select a date

Nodes Information

Current Nodes In Used	Configured Max Nodes
58	5

Calendar: Jan 2025


Cancel Save

These parameters are explained as follows:

Item	Description
Group Name	Enter the name (e.g., Marketing) that can represent the user group.
Nodes	Display the number of license nodes for this group. Change the number by using the scroll box.
Enable CPE Notify Mail/SMS/SNMP	If it is enabled, this group will be allowed to use CPE's notify server / mail server / SNMP server.
Enable Global Mail Server	If it is enabled, this group will be allowed to use global mail server.
Enable Global SNMP Server	If it is enabled, this group will be allowed to use global SNMP server.
Enable Expire Date	Click to enable / disable the expire date setting. If enabled, set the expire date. Expire Date - Display the valid date of the license for this group. To change the date, move the mouse cursor on the box to display a calendar. Next click the date you want.
Cancel	Discard current modification.
Save	Save the current settings and exit the page.

6.6.2.2 Management

This page allows you to specify users who want to access VigorACS into different user groups.

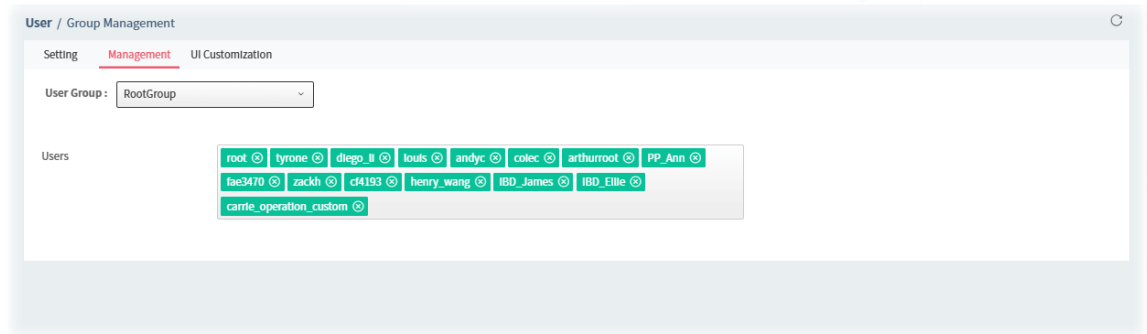


These parameters are explained as follows:

Item	Description
User Group	Use the drop down list to specify a user group. In which, RootGroup contains all of the users with the role of system administrator in default.
Users	Display all of the users belonging to the selected user group. Basically, the user(s) with the highest authority (e.g., system administrator defined as user role) will be shown in this area automatically as selection items. To remove any selection item that you don't want to put in this group, simply click the "x" to delete it.

6.6.2.3 UI Customization

The administrators can set the required WUI components for the Customized Operator and the Customized View Only Operator profiles.

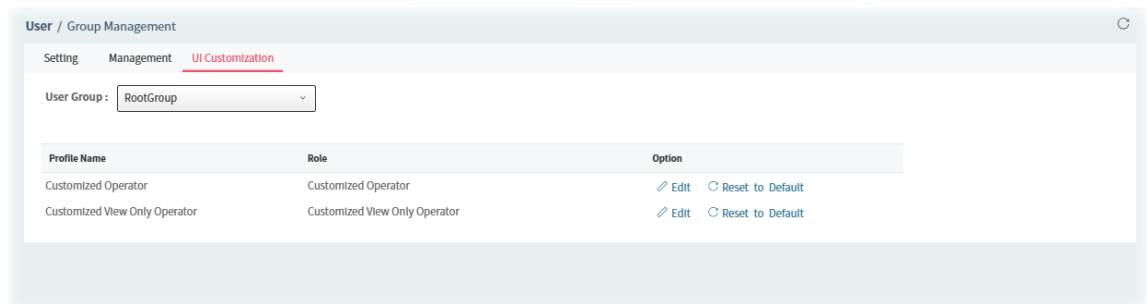

These parameters are explained as follows:

Item	Description
User Group	Use the drop down list to specify a user group. In which, RootGroup contains all of the users with the role of system administrator in default.
Option	Edit – Click to modify the UI for the Customized Operator and the Customized View Only Operator.

Click **Edit** to open the following page.

User / Group Management

Setting Management **UI Customization**

Edit UI Customization Profile

Profile Name Customized Operator

Role Customized Operator

UI Customization

Allowed Dashboard Widgets Map Overview, Network/Device Ove
Note: Select which widgets to display on Dashboard page.

Statistics ☒

Allowed Statistics Widgets Usage Overview, Clients, Wireless Cl
Note: Select which widgets to display on Statistics page.

Monitoring ☒

Allowed Monitoring Menu (Device) Alarm, Logs, GPS, WAN (SD-WAN), VI

Allowed Monitoring Menu (Network) Alarm, Logs, Devices, Clients, Cellul
Note: Select which Monitoring menu to display for Network and CPE page.

Configuration ☒

Allowed Configuration Menu (Device) Port Setup, WAN, LAN, Hotspot Web

Allowed Configuration Menu (Network) VPN Wizard
Note: Select which Configuration menu to display for Network and CPE page.

Advanced ☒

Allowed Advanced Menu Parameter Tree, Exclude Parameters
Note: Select which Advanced menu to display for CPE page.

Reports ☒

Privacy Settings

Hide IP In Network Tree ☐

Hide IP In Device Dashboard ☐

Cancel Save

These parameters are explained as follows:

Item	Description
Edit UI Customization Profile	Profile Name – Display the name of the profile. Role – Display the role of the profile is associated with.
UI Customization	Allowed Dashboard Widgets – Select the widget (s) (e.g., Map Overview, Network/Device Overview, Active Clients and etc.) which will be shown on the dashboard. Statistics – Switch the toggle to enable/disable this feature. - Allowed Statistics Widgets – Select the widget (s) (e.g., Usage Overview, Clients, Wireless, and etc.) which will be shown on the dashboard. Monitoring – Switch the toggle to enable/disable the feature of monitoring. - Allowed Monitoring Menu (Device) – Select the item(s) (e.g.,

Alarm, Logs, GPS, and etc.) which will be shown for monitoring.

- Allowed Monitoring Menu (Network) – Select the item (s) (e.g., Alarm, Devices, Cellular Data Usage and etc.) which will be shown for monitoring.


Configuration – Switch the toggle to enable/disable the menu selections for the web configuration.

- Allowed Configuration Menu (Device) – Select the item (s) (e.g., Port Setup, WAN, LAN and etc.) which will be shown on the web user interface.
- Allowed Configuration Menu (Network) – Select the item (s) (e.g., VPN Wizard) which will be shown on the web user interface.


Advanced – Switch the toggle to enable/disable the advanced menu functions.

- Allowed Advanced Menu – Select the item (s) (e.g., Parameter Tree, Exclude Parameter, Common UI Status, and etc.) which will be shown on the web user interface.

Reports – In general, the Reports menu will appear for any login user (including Customized View Only Operator and View Only Operator).

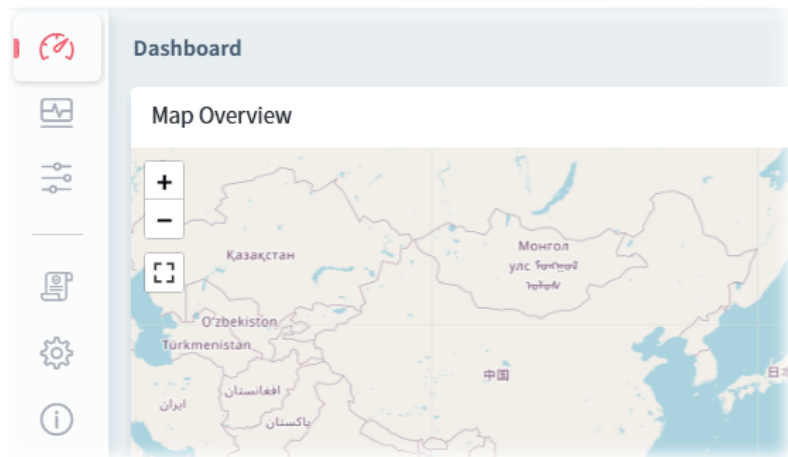

Sometimes, it may be hidden for certain reasons from logged-in users. For this request, switch the toggle to enable/disable the function of Reports.

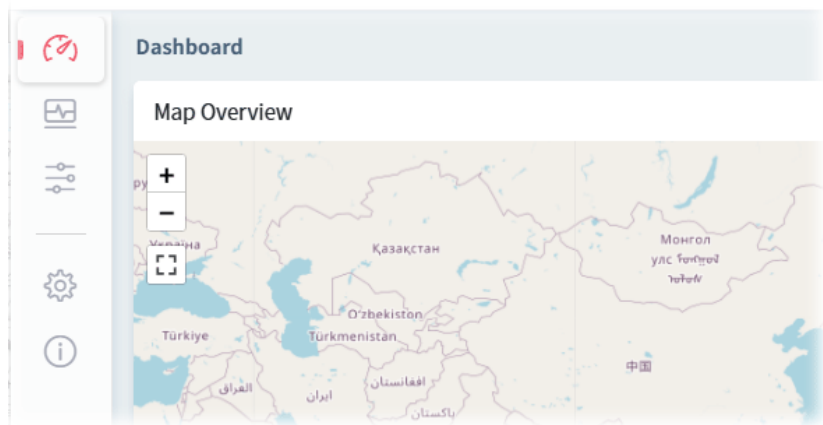

	To achieve this, follow these steps: 1. Set up a user and select either "Customized View Only Operator" or "Customized Operator" as the role, then assign it to a user group. 2. Next, open the UI Customization page and edit the profiles mentioned above by disabling the Reports option. When you log in to VigorACS with this user later, you will notice that the original report menu has been removed.
Privacy Settings	Hide IP in Network Tree – If enabled, the IP address of the user account will be hidden in the Network Tree. Hide IP in Device Dashboard – If enabled, the IP address of the user account will be hidden in the Device Dashboard.
Cancel	Discard current modification.
Save	Save the current settings and exit the page.

6.6.3 Network Group

Though the VigorACS server allows the administrator to create several user groups in the database, yet each device can be assigned to one user group only. Therefore, if the device has been specified in certain user group, it will not be accessed by other users in different user group.

User / Network Group

Name	User Group
Root Network(100142)	RootGroup
AutoTestNetwork(1)	AutoTest
AutoTest_Dev(9)	AutoTest_Dev
AutoTest_SD-WAN(2)	(As Parent)
AutoTest_VPN(1)	AutoTest_VPN
Hotspot_Web_Portal(2)	Hotspot_Web_Portal
Router_App_Network(2)	Router_App_Group
T_2024-08-01_Wholesale_GA_D(0)	T_2024-08-01_Wholesale_GA_D
T_2024-08-01_Wholesale_GA_E(0)	T_2024-08-01_Wholesale_GA_E
T_2024-08-01_Wholesale_GA_OOBE(0)	T_2024-08-01_Wholesale_GA_OOBE
T_2024-08-01_addNetwork_A(0)	T_2024-08-01_addGroup_E
T_2024-08-01_addNetwork_B(0)	(As Parent)
U_2133_100(100)	(As Parent)
U_2865_5(2)	AutoTest
U_2866_5(4)	AutoTest
U_2927_5(5)	AutoTest
VigorSwitch(2)	(As Parent)
aaa(5)	(As Parent)
expireLicense_A(0)	expireLicense_A
fullLicense_A(1)	fullLicense_A

Cancel Save

These parameters are explained as follows:

Item	Description
User Group	As Parent – Choose the same setting as the previous layer.
Cancel	Discard current modification.
Save	Save the current settings and exit the page.

6.6.4 External Authentication Server

The external authentication server includes LDAP and RADIUS server. It is used to authentication the client whenever he/she wants to login VigorACS.

User / External Authentication Server

User Group: All User Group

Enable ☒

Choose User Role at Registration: View Only Operator

Authentication Server Type: Active Directory / LDAP

Server IP Address:

Destination Port: 636

Use SSL ☒

Bind Type: Simple Anonymous Regular

Regular DN:

Regular Password:


+ Add

Profile Number Limit: 0/5

Id	Profile Name	Common Name	Base Distinguished Name	Additional Filter	Group Distinguished Name	Action
No data available						

Save

These parameters are explained as follows:

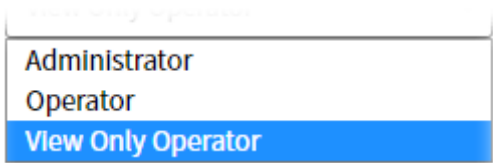Item	Description
User Group	Select a group to configure authentication settings.
Enable	Click to enable this function.
Choose User Role at Registration	The default setting for the role of the LDAP user is Operator. Usually, the role of the LDAP user can be changed by the System Administrator after it is registered to VigorACS. This option can specify/change the role of the LDAP user as Administrator, Operator or View Only Operator previously before registration to VigorACS. 
Authentication Server Type	Active Directory / LDAP – ● Server IP Address – Enter the IP address of LDAP server. ● Destination Port – Enter a port number as the destination port for LDAP server. ● Use SSL – Enable it to use the port number specified for SSL. ● Bind Type – There are three types of bind type supported: - Simple Mode – Just simply do the bind authentication without any search action. - Anonymous – Perform a search action first with Anonymous account then do the bind authentication. - Regular Mode – Mostly it is the same with anonymous mode.

	The different is that, the server will firstly check if you have the search authority. For the regular mode, you'll need to type in the Regular DN and Regular Password. ● Regular DN – Type this setting if Regular Mode is selected as Bind Type. ● Regular Password – Specify a password if Regular Mode is selected as Bind Type. RADIUS – ● Server IP Address – Enter the IP address of LDAP server. ● Destination Port – Enter a port number as the destination port for LDAP server. ● Shared Secret – The RADIUS server and client share a secret that is used to authenticate the messages sent between them. Both sides must be configured to use the same shared secret. The maximum length of the shared secret you can set is 36 characters. ● Confirm Shared Secret – Re-type the Shared Secret for confirmation. TACACS+ – ● Server IP Address – Enter the IP address of TACACS+ server. ● Destination Port – Enter a port number as the destination port for LDAP server. ● Authentication Protocol – Select PAP or CHAP. ● Shared Secret – Enter the Shared Secret for confirmation. ● Confirmed Shared Secret – Re-enter the Shared Secret for confirmation. Single Sign-On (SSO) – Single sign-on (SSO) is an authentication method that enables a user to log in to multiple independent but related software systems using a single SSO ID. If this type is selected, the system administrator can access VigorACS via Microsoft Azure SAML (Security Assertion Markup Language). To use Azure Single Sign-On to access VigorACS, please configure the ACS SSO on Azure first to get the following settings. ● Protocol – Display the default setting. ● Identifier (Entity ID) – Enter the ID value applied from the service provider. ● Reply URL (ACS URL) – Enter the ACS URL. ● Certificate – Use the Browser button to locate the certificate (Base 64) generated by VigorACS and SAML. ● Login URL – It is optional. Copy the login URL generated by ACS SSO.
--	--

	● Logout URL – Copy the logout URL generated by ACS SSO.
+Add	It is available for Active Directory / LDAP server type. After finished the general settings for the authentication server type, click Save to activate the +Add link. +Add – Click to create a profile related to LDAP.
Save	Save the current settings and exit the page.

Click **+Add** to create an Active Directory / LDAP profile.

These parameters are explained as follows:

Item	Description
Profile Name	Enter a name for such profile.
Common Name Identifier	Enter or edit the common name identifier for the LDAP server. The common name identifier for most LDAP server is "cn".
Additional Filter	Enter the condition for additional filter.
Base Distinguished Name / Group Distinguished Name	Enter or edit the distinguished name used to look up entries on the LDAP server.
Cancel	Discard current modification.
Save	Save the current settings and exit the page.

After finished the above settings, click **Save** to save the change and return to previous page. A new Active Directory / LDAP profile will be listed on the bottom of the web page as shown as below.

Id	Profile Name	Common Name	Base Distinguished Name	Additional Filter	Group Distinguished Name	Action
1	ldap	uid	ou=People,dc=ms,dc=draytek,dc=com			Delete
2	LD_1	UID	MARKET		GROUP	Delete

6.6.5 Mail Server

It is used to configure the mail server for sending e-mail. All of the user groups can apply the mail server settings configured in this page.

User / Mail Server

User Group : All User Group

Send Test Email

Enable Server ☒

Authentication Method: No Authentication Basic OAuth2

Security: None SSL TLS

Host: ms.draytek.com

Port: 465

Sender Email: tim_yang@draytek.com

Username: tim_yang

Password:

Subject: VigorACS Alarm Level Network Name Device Name Model Name MAC Address Device IP Alarm Message User Name

Reset To Default Save

These parameters are explained as follows:

Item	Description
Send Test Email	Click to make a simple test if the user (receiver) can get the mail or not. Notification mail can be sent to multiple mail addresses after clicking Send Test Email.
Enable Server	Switch the toggle to enable /disable the SMTP server.
Authentication Method	Select the authentication method to authenticate the mail server. ● No Authentication ● Basic ● OAuth2
When No Authentication is selected as the Authentication Method	
Security	Choose None / SSL / TLS for the security of the mail transferring.
Host	Enter the IP address of the SMTP server.
Port	Type the port number of the SMTP server.
Sender Email	Enter the e-mail address which will be used to send a notification e-mail to the recipients under the selected user group or all user groups.
Subject	At present, there are several objects to be selected for the subject of the email.
When Basic is selected as the Authentication Method	

Security	Choose None / SSL / TLS for the security of the mail transferring.
Host	Enter the IP address of the SMTP server.
Port	Type the port number of the SMTP server.
Sender Email	Enter the e-mail address which will be used to send a notification e-mail to the recipients under the selected user group or all user groups.
Username	Enter the user name for authentication.
Password	Enter the password for authentication.
Subject	At present, there are several objects to be selected for the subject of the email.
When OAuth2 is selected as the Authentication Method	
OAuth2 API	There are three options to select. ● Google ● Microsoft ● Others
When Google is selected as the OAuth2 API	Host – Enter the IP address of the SMTP server. Port – Enter the port number of the SMTP server. Sender Email – Enter the e-mail address which will be used to send a notification e-mail to the recipients under the selected user group or all user groups. Client ID – Enter the ID number which can identify a single APP to Google's OAuth servers. Please obtain the number created by https://console.developers.google.com/projectcreate. Client Secret – Enter the secret information which can identify a single APP to Google's OAuth servers. Please obtain the secret created by https://console.developers.google.com/projectcreate. Authorize URL – Enter https://accounts.google.com/o/oauth2/auth in this field. Token URL – Enter https://oauth2.googleapis.com/token in this field. Redirect URI – Enter VigorACS server URL with callback path (e.g., https://acs.example.com/ACSServer/oauth2/callback). Authentication Code – Click the Get Authentication Code icon to open the API service login page. The page will ask for agreement. Click Continue. Later, if the credentials are correct, the authentication code will be provided. Copy the authentication code and paste it into the Authentication Code entry box. Click the Exchange authorization code for tokens button to get

	tokens. Refresh Token and Access Token – If the authentication code is correct, you will get the Refresh Token and Access Token from the system. Subject – At present, there are several objects to be selected for the subject of the email.
When Microsoft is selected as the OAuth2 API	Host – Enter the IP address of the SMTP server. Port – Enter the port number of the SMTP server. Sender Email – Enter the e-mail address which will be used to send a notification e-mail to the recipients under the selected user group or all user groups. Tenant ID – Enter the tenant (Directory) ID obtained while registered to the server (e.g., Microsoft Azure) providing OAuth2 authentication. Client ID – Enter the application (client) ID obtained while registered to the server (e.g., Microsoft Azure) providing OAuth2 authentication. Client Secret – Enter the secret obtained from the remote client. Authorize URL – Enter https://accounts.google.com/o/oauth2/auth in this field. Token URL – Enter https://oauth2.googleapis.com/token in this field. Redirect URI – Enter VigorACS server URL with callback path (e.g., https://acs.example.com/ACSServer/oauth2/callback). Authentication Code – Click the Get Authentication Code icon to open the API service login page. The page will ask for agreement. Click Continue. Later, if the credentials are correct, the authentication code will be provided. Copy the authentication code and paste it into the Authentication Code entry box. Click the Exchange authorization code for tokens button to get tokens. Refresh Token and Access Token – If the authentication code is correct, you will get the Refresh Token and Access Token from the system. Subject – At present, there are several objects to be selected for the subject of the email.
When Others is selected as the OAuth2 API	Host – Enter the IP address of the SMTP server. Port – Enter the port number of the SMTP server. Sender Email – Enter the e-mail address which will be used to send a notification e-mail to the recipients under the selected user group or all user groups. Client ID – Enter the ID number obtained from the remote client.

	Client Secret – Enter the secret obtained from the remote client. Authorize URL – Enter https://accounts.google.com/o/oauth2/auth in this field. Token URL – Enter https://oauth2.googleapis.com/token in this field. Redirect URI – Enter VigorACS server URL with callback path (e.g., https://acs.example.com/ACSServer/oauth2/callback). Authentication Code – Click the Get Authentication Code icon to open the API service login page. The page will ask for agreement. Click Continue. Later, if the credentials are correct, the authentication code will be provided. Copy the authentication code and paste it into the Authentication Code entry box. Exchange authorization code for tokens – Click the Exchange authorization code for tokens button to get tokens. Refresh Token and Access Token – If the authentication code is correct, you will get the Refresh Token and Access Token from the system. Subject – At present, there are several objects to be selected for the subject of the email.
Reset To Default	Click to reset the mail server to default settings.
Save	Save the current settings.

Click **Save** to save the change.

6.6.6 Function Management

In addition to specifying the authority for the user, what functions that the user can have also can be specified.




The screenshot shows a web interface titled "User / Function Management". It contains a table with 9 columns representing different functions and 9 rows representing different user roles. Each cell in the table contains a toggle switch to enable or disable the function for that role.

Role	Show Unknown Device	Wireless Is Writable	Show About Menu	Show Version Number	Show Maps	Can Reboot Device	Manage Public Area Files	Can Delete Logs
System Administrator	☒	☒	☒	☒	☒	☒	☒	☒
Group Administrator	☒	☒	☒	☒	☒	☒	☒	☒
Administrator	☒	☒	☒	☒	☒	☒	☒	☒
Commissioning	☒	☒	☒	☒	☒	☒	☒	
Operator	☐	☐	☒	☒	☒	☐		
Customized Operator	☐	☒	☒	☒	☒	☒		
View Only Operator	☒	☐	☒	☒	☒	☐		
Customized View Only Operator	☐	☐	☒	☒	☒	☐		
Auditor	☒		☒	☒	☒			

A "Save" button is located at the bottom right of the table.

These parameters are explained as follows:

Item	Description
Show Unknown Device	Unknown device can be seen / hidden if it is enabled / disabled.
Wireless is Writable	When it is enabled, settings related to wireless connection are allowed to be configured.
Show About Menu	The About menu with information of VigorACS can be seen if it is enabled for the role.
Show Version Number	The version number can be displayed/hidden separately for various roles of users. Switch this toggle to display (enable) or hide (disable) the version number. By default, the version number of VigorACS will be shown for System Administrator and displayed on the page of About VigorACS.
Show Maps	Google Maps/ Leaflet Maps can be displayed/hidden for various role of user accounts. Switch this toggle to display (enable) or hide (disable) the version number.
Can Reboot Device	Determine if the logged-in user can reboot the CPE device directly from the dashboard of the CPE. Switch this toggle to enable the function (with a 'Reboot Now' link) or disable it (without a 'Reboot Now' link).

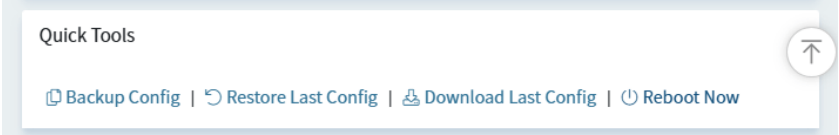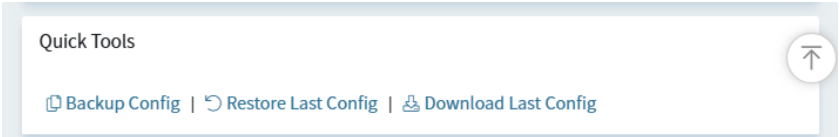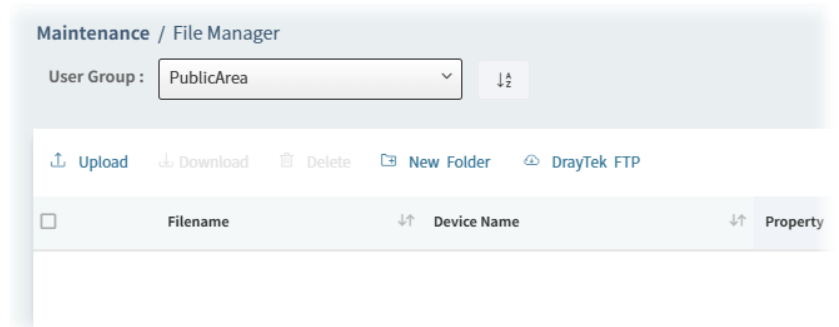	 
Manage Public Area Files	Determine if the logged-in user (limited to the user role of System Administrator, Group Administrator, Administrator, and Commissioning) can manage the files in the Public Area. If enabled, on Maintenance>>File Manager, the PublicArea will be available for choosing as the User Group. Corresponding information will be shown on the page and allowed to be uploaded or downloaded.  The PublicArea is designed for sharing firmware files. It allows users to upload and delete files.
Can Delete Logs	If enabled, logs can be deleted by the user with the role of System Administrator, Group Administrator and Administrator.

6.6.7 Wholesale Wizard

This section can guide the administrator to a create user, user group and network profile via a wizard.

1. Open **User >> Wholesale Wizard**.

User / Wholesale Wizard

1 Create user 2 Create user group 3 Create network 4 Summary 5 Finished

Step 1- Create user

Username * Carrie003

Password * medium

Telephone 5972727

Email carrie@draytek.com

Role Group Administrator

Enable Master Group Admin ☒

Enable Auto Logout ☒

Enable OOB feature ☒

OOB pages to display Read the Agreements, Set new password, Verify

Status Active

Mail Notification ☐

SMS Notification ☐

Next

These parameters are explained as follows:

Item	Description
Username	Enter a new name for a new user.
Password	Enter a new password.
Telephone	Enter the telephone number of such user for receiving the SMS notification.
Email	Enter the email address of such user for receiving the mail notification.
Role	Assign a Role for such user.
Enable Master Group Admin	Switch the toggle to enable / disable the function of master group admin.
Enable Master Group Admin	This option is available if Group Administrator is selected as the Role setting. The master group admin is the same as group admin, except it can create other group admin account. Switch the toggle to enable / disable the function of master group admin.
Enable Auto Logout	Switch the toggle to enable / disable the function of auto logout.
Enable OOB feature	Switch the toggle to enable / disable the function of OOB feature.

	OBE pages to display – Select the pages to display on the screen.
Status	Choose Active to make this user being seen on the network.
Mail Notification	When this function is enabled, an e-mail will be sent to the user as a notification when the device gets alarms.
SMS Notification	When this function is enabled, an SMS will be sent to the user as a notification when the device gets alarms.
Description	Give a brief introduction of such user.
Next	Go to next configuration page.

- When you finished tying the above settings, click **Next** to create a new group or specify an existing user group for such user.

These parameters are explained as follows:

Item	Description
Select group	Determine the group source by choosing Existing group or New group .
Existing group	It is available when Existing group is selected as Select group . User group – Use the drop down list to choose the group you want.
New group	It is available when New group is selected as Select group . Group Name – Type the name (e.g., Marketing) that can represent the user group. Nodes – Set the number of Nodes for such group. The default number “-1” means there is no limit of the number. Global Mail Server – Switch the toggle to enable /disable the

	global mail server. Enable Expire Data – Switch the toggle to enable /disable the expire date setting. Expire Date – Use to pop-up calendar to specify the expire date.
Previous	Back to previous configuration page.
Next	Go to next configuration page.

- When you finished entering the above settings, click **Next** to create or specify an existing network for such user.

These parameters are explained as follows:

Item	Description
Select network	Determine the group source by choosing Existing network or New network.
Existing network	It is available when Existing network is selected as Select network. Network – Use the drop down list to choose the network you want.
New network	It is available when New network is selected as Select network. Parent Network – Choose one of the existing networks as the Parent Network. Network Name – Enter a name for the new network. User Name – Enter a name (e.g., market) for the new network. Password – Enter a password (e.g., market) for such new network. Location – Enter a brief description for the new network.
Previous	Back to previous configuration page.
Next	Go to next configuration page.

- When you finished tying the above settings, click **Next** to review the settings. A summary for the new user and network will be displayed as the following figure.

User / Wholesale Wizard

1 Create user 2 Create user group 3 Create network 4 Summary 5 Finished

Step 4- Summary

User	
Username	Carrie003
Enable Master Group Admin	Enable
Status	Active
SMS Notification	Disable
Email	carrie@draytek.com
OOBE pages to display	Read the Agreements, Set new password, Verify email address, Notification settings, Default auto logout behavior, Two Factor Authentication, Website Theme
Role	
Group Administrator	
Enable Auto Logout	Enable
Mail Notification	Disable
Telephone	5972727
Enable OOBE feature	Enable
User Group	
Group Name	
Global Mail Server	

Previous Next

5. If nothing shall be modified, click **Next** to get the following page.

User / Wholesale Wizard

1 Create user 2 Create user group 3 Create network 4 Summary 5 Finished

Step 5- Finished

✓ Completed

Finish

6. Click **Finish** to save the settings.

6.6.8 SMS Server

It is used to configure the SMS server for sending notification. When a CPE in a group encounters an event which can be classified as the level defined in this page, a SMS will be sent out for notification.

User / SMS Server

User Group : RootGroup

Enable SMS Server ☒

SMS API SMS_VigorRouter_GW

Connection URL http://192.168.106.144

Username 11111111

Password *****

Send SMS Test

Save

These parameters are explained as follows:

Item	Description
User Group	Specify a user group to apply the SMS server settings.
Enable SMS Server	Switch the toggle to enable /disable the SMS server.
SMS API	Use the drop down list to choose an ISP for sending SMS.
Connection URL	Enter the CPE's URL (WAN or LAN IP, e.g., 192.168.1.1).
User Name	Type the user name for authentication.
Password	Type the password for authentication.
From Telephone	Type the phone number of the sender.
Save	Save the current settings.

6.6.9 SNMP Server

It is used to configure the SNMP server for sending notification. All of the user groups can apply the SNMP server settings configured in this page.

User / SNMP Server

User Group : All User Group

Enable SNMP server ☐

SNMP server address

Port

Community

SNMP version

SNMP API

Alarm Level

☒ Critical ☒ Major

☒ Minor ☒ Warning

☒ Normal

Save

These parameters are explained as follows:

Item	Description
User Group	Specify a user group to apply the SNMP server settings.
Enable SNMP Server	Switch the toggle to enable /disable the SNMP server.
SNMP server address	Enter the IP address of SNMP server.
Port	Enter the port number of SNMP server.
Community	Set the name for getting community by typing a proper character. In general, it depends on the setting that SNMP service provider offers. The default setting is public .
SNMP version	Choose the version of the SNMP server that you apply to.
SNMP API	Choose SNMP API from the drop down list.
Alarm Level	There are five alarm levels (Critical, Major, Minor, Warning and Normal) which determine the timing that VigorACS mail server sends e-mail to the recipient. Specify the severity level of the mail.
Save	Save the current settings.

6.6.10 Notifications & Events

This menu is available only when the role of the user account accessing to VigorACS server is **System Administrator** or **Group Administrator**.

6.6.10.1 Recipients

Define the ways (email, SMS, or App) that the recipient will get the alarm messages.

User / Notifications & Events

User Group : AutoTestNetwork

Recipients Severity Definition

Notified User Role : System Administrator

Recipient Settings

Severity	Email Notification	SMS Notification	App Notification
Critical	☒	☒	☒
Major	☒	☒	☒
Minor	☒	☒	☒
Warning	☒	☒	☒
Normal	☒	☒	☒

Save

These parameters are explained as follows:

Item	Description
Notified User Role	Select a user role. Each role can be configured with different notifications and alarm levels.
Email Notification SMS Notification App Notification	While encountering events with alarm degrees in critical, major, minor, warning, and normal, the recipient will receive the alarms from the VigorACS server via email, SMS, or App.
Save	Click to save the configuration.

6.6.10.2 Severity Definition

Define the alarm levels for various events under each user group.

User / Notifications & Events

User Group : RootGroup

Recipients **Severity Definition**

Search Events...

Router Events

Events	Severity
WAN Lost Connection	Minor
VPN Lost Connection	Warning
Cellular Data Usage	Normal

Device Network & Maintenance Events

Events	Severity
Device Lost Connection	Major
Firmware Recovered	Minor
New Firmware Release	Warning

Save

Click **Save** to save the configuration.

6.6.11 Syslog Server

Except for DrayTek SysLog server, VigorACS syslog can be stored at specified host.

User / Syslog Server

User Group : All User Group

Enable Syslog server ☒

Host

Port

Token

SysLog API Syslog_OVHcloud

Save

These parameters are explained as follows:

Item	Description
Enable Syslog server	Switch the toggle to enable/disable the Syslog server.
Host	Enter the IP address of the host where ACS logs will be sent.
Port	Enter the port number for the host.
Token	Enter the content of the token obtained from OVH website.

SysLog API	Select the API required to store the Syslog records. At present, only OVHcloud is available for use.
Save	Click to save the configuration.

6.6.12 Group Parameter

Differing from the settings configured on the page of System >> System Parameter which will influence all user accounts and the whole system settings (e.g., CPE configuration, HTTPS connection, security), the parameters listed on this page can be configured for different user groups separately.

Open **User >> Group Parameter** to get the following web page:

User / Group Parameter

User Group : AutoTestNetwork

Name	Value
Automatically detects Router name	default (false)

Reset to default Save

6.6.13 Link with Router App

The engineer sent by an ISP will be able to conveniently carry out the hardware installation and software configuration using the router app on a mobile device. Once the installation is complete, VigorACS will automatically manage the router/modem/access point remotely.

6.6.13.1 Settings

Configure the general settings related to VigorACS.

These parameters are explained as follows:


Item	Description
General Setup	
Enable Access from Router App	Switch the toggle to enable/disable the function. To complete the router installation by connecting VigorACS using the Vigor router APP, this feature must be enabled.
Authorized User	Only the users profiles(with Enabled API Service) listed here are allowed to connect VigorACS using the Vigor router APP.
Profile Name	Display the name of VigorACS server.
URL / Port	URL – Enter the URL representing VigorACS server. Port – Enter a port value. The default is 443 (for ACS server).
QR Code	The QR Code is generated according to the profile name, URL and port value defined above.
Onboard Information	
Enabled	Switch the toggle to enable/disable the function. The onboard information will be shown on the mobile APP if enabled.
Onboard Information List	A table lists all onboard information. +Add Question Type Regex Validation Action ⋮ Text ⋮ Delete +Add – Click to create a new entry for customized required information when first logging in. Up to 8 entries can be added here.

	Question – Enter a name for a question which will be shown on the APP. Type – Options are Text and Dropdown. Default is Text. Regex Validation – The default value is empty if the Type is set as Text. Action – Click Delete to remove the selected entry.																														
Steps before Provisioning																															
Validate Site Configuration before Provisioning	Switch the toggle to enable/disable the function. Enabled – Write the parameters to the CPE device via the mobile phone. Disabled – The behavior of set parameter is the same as present.																														
Site Configuration	Determine which site (AP, router, switch) settings will be configured in the installation process. Site Configuration +Add Limit: 4/10 <table><tr><th>Enabled</th><th>Name</th><th>Type</th><th>Required</th><th>Regex validation</th><th>Action</th></tr><tr><td>Enabled</td><td>MAC Address</td><td>Claim Device Method/ Provisioning Identifier</td><td></td><td></td><td></td></tr><tr><td></td><td> Site Type </td><td>Status Checking Profile</td><td></td><td></td><td></td></tr><tr><td></td><td> Location </td><td>CPE Installed Location</td><td></td><td></td><td></td></tr><tr><td></td><td> Upload Photo </td><td>Photograph</td><td></td><td></td><td></td></tr></table> +Add – Click to create a new entry for customized required information when first logging in. Up to 10 entries can be added here. Enabled – Switch the toggle to enable/disable the entry. Name – Enter the item name that will be shown on the router APP. Type – Options are Text and Dropdown. Default is Text. If Dropdown is selected, click the Edit Option List to define available option name(s). Then use the drop-down list to select one from the option list. Required – If the entry is required for the router APP, switch the toggle to enable the entry of the site configuration. Regex Validation – The default value is empty if the Type is set as Text. Action – Click Delete to remove the selected entry.	Enabled	Name	Type	Required	Regex validation	Action	Enabled	MAC Address	Claim Device Method/ Provisioning Identifier					Site Type	Status Checking Profile					Location	CPE Installed Location					Upload Photo	Photograph			
Enabled	Name	Type	Required	Regex validation	Action																										
Enabled	MAC Address	Claim Device Method/ Provisioning Identifier																													
	Site Type	Status Checking Profile																													
	Location	CPE Installed Location																													
	Upload Photo	Photograph																													
Reset to default	Click to return to default settings.																														
Save	Click to save the configuration.																														

6.6.13.2 Status Checking Profile

The system administrator can customize the status checking profile including the parameters to be monitored and displayed on the status page.

Up to five profiles can be created.

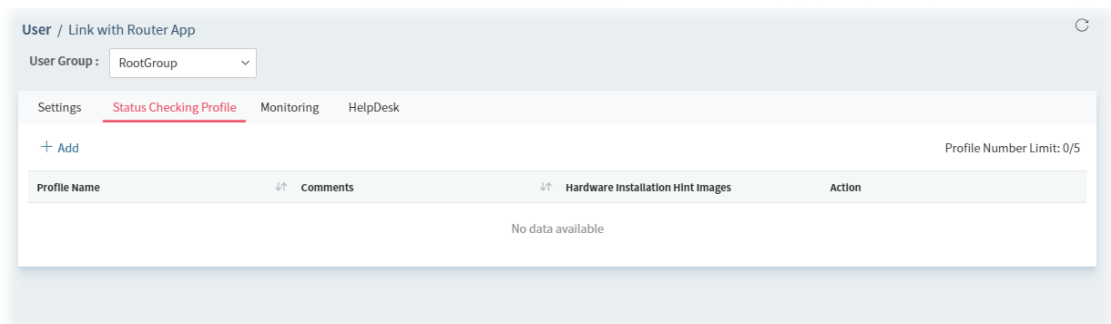

Click **+Add** to create a new checking profile.


These parameters are explained as follows:

Item	Description
General Setup	
Profile Name	Define the name that will be shown on the Name field of Site Configuration (Steps before Provisioning on User>>Link with Router App>>Settings).
Comments	Enter a brief description for identifying the profile.
Hardware Installation Hint Images	Specify the interface (DSL, Ethernet, SIM \$ LTE) to use during the router APP installation.
Parameter Group	
Import XML	Import an existing XML file and upload it to VigorACS.
+Add Parameter Group	Up to five parameter groups can be created. Group Name – Define a new name for a parameter group. Delete Group – Remove the selected parameter group. +Add Parameter – Up to 15 parameters can be added to a parameter group.

	● Index – Display the index number of the parameter entry. ● Name – Enter the item name that will be shown on the router APP. ● Parameter – Enter the TR-069 parameter name to be monitored by VigorACS. Refer to System >> System Parameter for detailed parameter name. ● Status Colour – Switch the toggle to enable/disable the conditional control status color. If enabled, configure the following settings. - Priority – Set the priority for the specified condition and value. - Condition – Select Equals to (=), Less Than (<), Greater Than (>) as a comparison condition. - Value – A value corresponding to the parameter specified above will be shown in this field. Please note the value type (String or Integer) should match the parameter's type. - Colour – Currently, there are three colors to choose from: red, green, or orange. - +Add – Create a new entry for setting color. - Delete – Remove the selected entry.
Cancel	Discard current settings and return to previous page.
Save	Click to save the configuration.

6.6.13.3 Monitoring

This page displays the information of CPEs monitored by VigorACS.

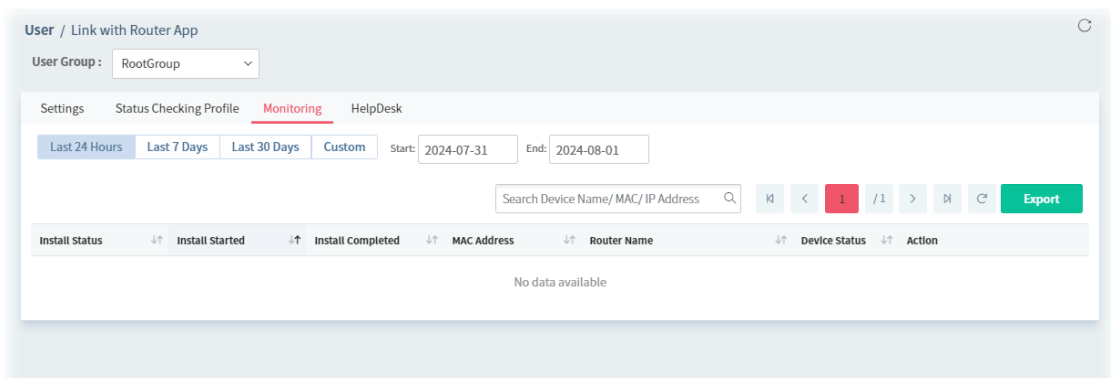

These parameters are explained as follows:

Item	Description
Install Status	Information Submitted – It means VigorACS receives the install command.

	Installation Completed – It means VigorACS receives the logout API command.
Install Started	Display the time that VigorACS receives the install API command.
Install Completed	Display the time that VigorACS receives the logout API command.
MAC Address	Display the MAC address of the CPE monitored by VigorACS.
Router Name	Display the device name of the CPE monitored by VigorACS.
Device Status	Display the online/offline status of the CPE monitored by VigorACS.
Action	Go to Dashboard – A link is available to access to the dashboard of the device. View Status – A link is available to display the parameter information configured at the Status Checking Profile. View Information – A link is available to access onboard information, site information, and other details for the CPE.

6.6.13.4 HelpDesk


Some ISP engineers may not be able to use the mobile APP to connect to VigorACS at the installation site. In this case, they can use HelpDesk to assist with the installation.

These parameters are explained as follows:

Item	Description
Device Information	
MAC Address	Enter the MAC address of the CPE device.
Configuration for Installation	

Site Type	Select one of the Status Checking Profiles.
Location	Enter either address or the latitude and longitude coordinates of the CPE device with the following format: Latitude; Longitude (e.g., 24.868162980491277;121.006106339836)
Save	Click to save the configuration.


6.7 About VigorACS

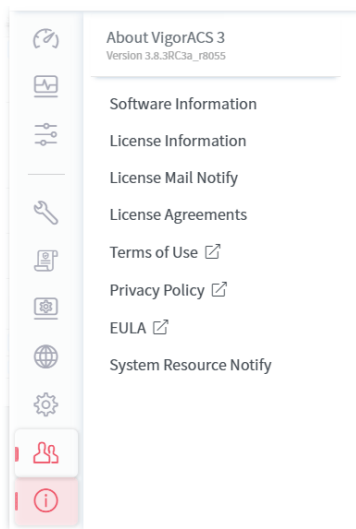

 About VigorACS menu varies according to the role (**System Administrator, Group Administrator, Administrator, Operator, View Only Operator, Auditor, and Standard** (limited in VigorACS cloud version)) used for login into VigorACS. Here we take System Administrator as an example.


Android APP and software version information for VigorACS will be displayed as follows:

If your mobile phone is supported by Android system, you can use it to scan Android APP or Server Address QR code to connect to VigorACS system.

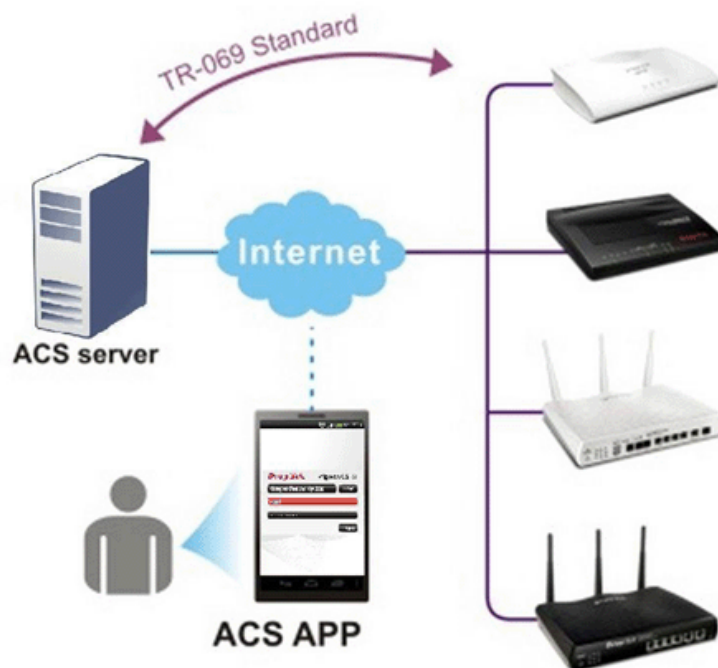

6.7.1 Software Information


This page displays relational information for software installed for VigorACS 3.

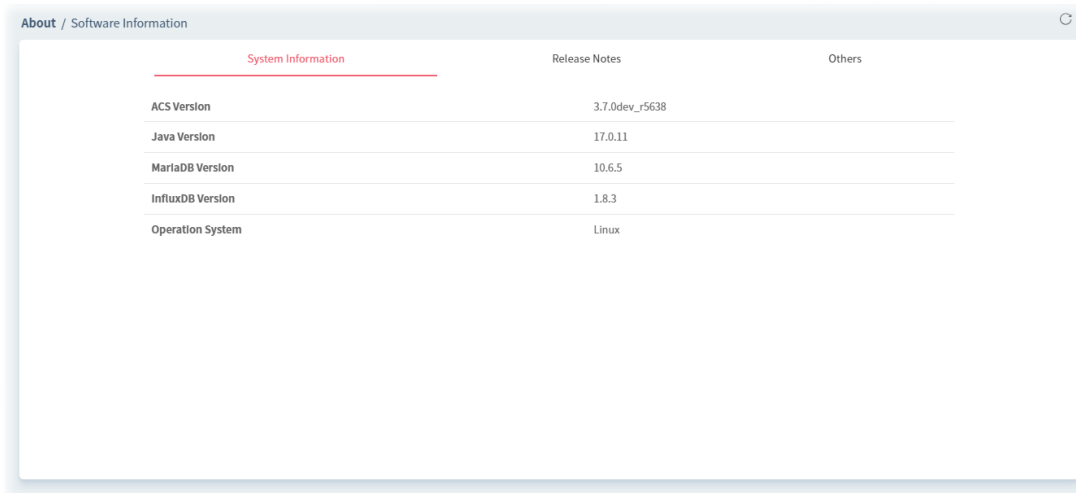

System Information	Release Notes	Others
ACS Version	3.7.0dev_r5638	
Java Version	17.0.11	
MariaDB Version	10.6.5	
InfluxDB Version	1.8.3	
Operation System	Linux	

6.7.2 License Information

This page displays relational information for license key current used by VigorACS 3. In addition, it offers a channel to renew the license key for VigorACS 3 when it is going to be expired.

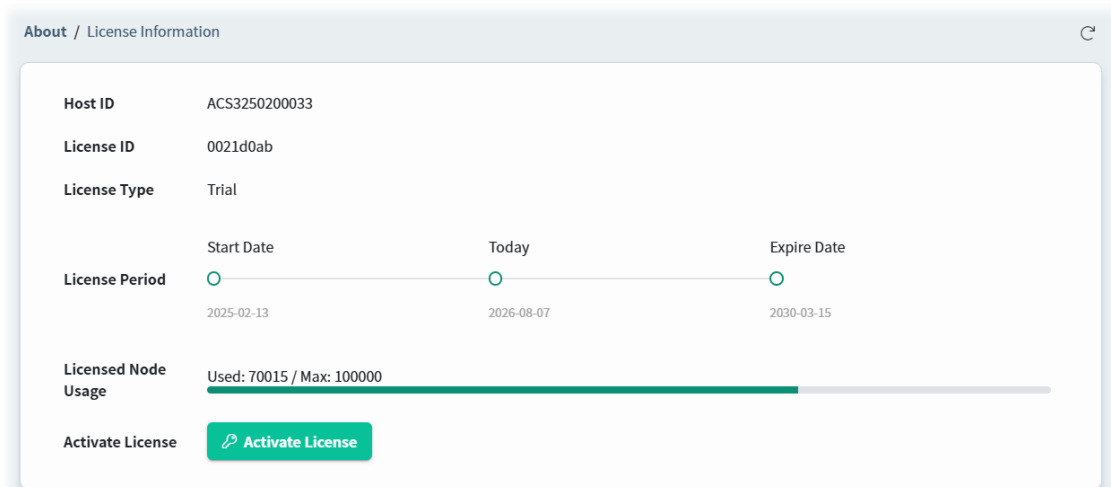

Click **Activate License** to update the status of licenses on the MyVigor server. After that, all users will be logged out, and the system administrator will need to log in to MyVigor to update the license. The updated license information will then be displayed on the page above.

6.7.3 License Mail Notify

When the ACS license synchronization fails and VigorACS cannot work, the VigorACS server system will send an email to the system administrator to notify the abnormal situation.

6.7.3.1 Sync License Info Failed

VigorACS will delete the license record from the system if it cannot get the license information three times. At this time, you will need to log in to MyVigor and activate the license manually.

VigorACS server will send a notification e-mail when failing to get the license. Please set the content of the notification e-mail in this page.

About / License Mail Notify

Sync License Info Failed License Expired License Capacity

Enable ☒

About failure to sync license info
ACS will delete the license record on the system if ACS cannot get the license info for 3 times. At this time, you will need to login to MyVigor and activate the license manually.

Configure Mail Server
You can enable this feature to receive a notification mail. Please go to User > Mail Server to configure the email server setting for All_UserGroup.

Subject ACS cannot get the license info from V

Content

Normal Sans Serif B I U A [color] [background color] [link] [unlink] [list] [ul style] [indent] [outdent] [undo] [redo]

[Get License Failed] ACS cannot get the license info from MyVigor.
ACS cannot get the license info from MyVigor server for 3 times.
ACS removed the license.
You can try again to activate the license from MyVigor server.

Recipients + Add Recipient 1/10

Save

These parameters are explained as follows:

Item	Description
Enable	Switch the toggle to enable /disable the mail notification function. You can enable this feature to receive a notification mail. Please go to User >> Mail Server to configure the email server setting for all user groups.
Subject	Enter the subject of the mail.
Content	Enter the actual text for informing the recipient.
Recipients	Enter the e-mail address of the one to receive the mail.
+Add Recipient	Click to enter a new e-mail address.
Delete	Click to remove the selected e-mail address.
Save	Save the current settings.

6.7.3.2 License Expired

VigorACS server will send a notification e-mail when the VigorACS license expires soon. Please set the content of the notification e-mail in this page.

The screenshot shows the 'License Mail Notify' configuration page. It includes tabs for 'Sync License Info Failed', 'License Expired', and 'License Capacity'. The 'License Expired' tab is active. The 'Enable' toggle is turned on. A yellow warning box prompts the user to configure the mail server. The 'Subject' field is set to 'Service License Expires Soon'. The 'Content' field contains a message about the license expiration. The 'Recipients' section has a '+ Add Recipient' button and a 'Recipient' input field with an 'Invalid email format' error. A 'Save' button is located at the bottom right.

These parameters are explained as follows:

Item	Description
Enable	Switch the toggle to enable /disable the mail notification function. You can enable this feature to receive a notification mail. Please go to User >> Mail Server to configure the email server setting for all user groups.
Subject	Enter the subject of the mail.
Content	Enter the actual text for informing the recipient.
Recipients	Enter the e-mail address of the one to receive the mail.
+Add Recipient	Click to enter a new e-mail address.
Delete	Click to remove the selected e-mail address.
Save	Save the current settings.

6.7.3.3 License Capacity

In general, the system administrator will purchase licenses for future node assignments.

This page is used to set the threshold for node usage. When the licensed node usage reaches the percentage set here, the VigorACS system will send a notification e-mail to the recipient, informing the administrator that the license capacity is about to be used up, which can facilitate the system administrator to proceed with the next step (such as purchasing new licenses to expand CPE management).

These parameters are explained as follows:

Item	Description
Enable	Switch the toggle to enable /disable the mail notification function. You can enable this feature to receive a notification mail. Please go to User >> Mail Server to configure the email server setting for all user groups.
Subject	Enter the subject of the mail.
Capacity	Specify the percentage of the current node. For example, the default is 80. That means if there are 2000 nodes in total, once 1600 nodes are used, VigorACS will notify the listed recipients.
Content	Enter the actual text for informing the recipient.
Recipients	Enter the e-mail address of the one to receive the mail.
+Add Recipient	Click to enter a new e-mail address.
Delete	Click to remove the selected e-mail address.
Save	Save the current settings.

6.7.4 License Agreements

This page displays relational license information required by VigorACS 3.

About / License Agreements

Q Search Keyword


Package Name ↴	License Type ↴	Author ↴	Website	Modified Source Codes
Ant	Apache License, Version 2.0		Link ↗	
Apache POI	Apache License, Version 2.0		Link ↗	
Axis	Apache License, Version 2.0		Link ↗	
Castor	Apache License, Version 2.0		Link ↗	
Commons FileUpload	Apache License, Version 2.0		Link ↗	
Dashboard	Apache License, Version 2.0	Google Inc.	Link ↗	
EasySSL	Apache License, Version 2.0	olamy	Link ↗	
Jakarta common tool	Apache License, Version 2.0		Link ↗	
jCasbin	Apache License, Version 2.0		Link ↗	
JDBC Adapter	Apache License, Version 2.0		Link ↗	
JSTUN	Apache License, Version 2.0		Link ↗	

6.7.5 System Resource Notify

VigorACS server can regularly inspect hardware usage under the directories of EMS, ACS & Maria database & influx database every day if this function is enabled. When the hard disk (file size) reaches the upper limit percentage, the VigorACS server will send a notification mail to a specified person. With this feature,

- Users can enable the notification settings for EMS, ACS & Maria database & influx database separately.
- Users can understand the percentage of the hard disk capacity occupied by each file through the pie chart on this page.

Only the users with the authority of the System Admin/Auditor can view this page. Only the user with the authority of the System Admin can modify/edit this page.

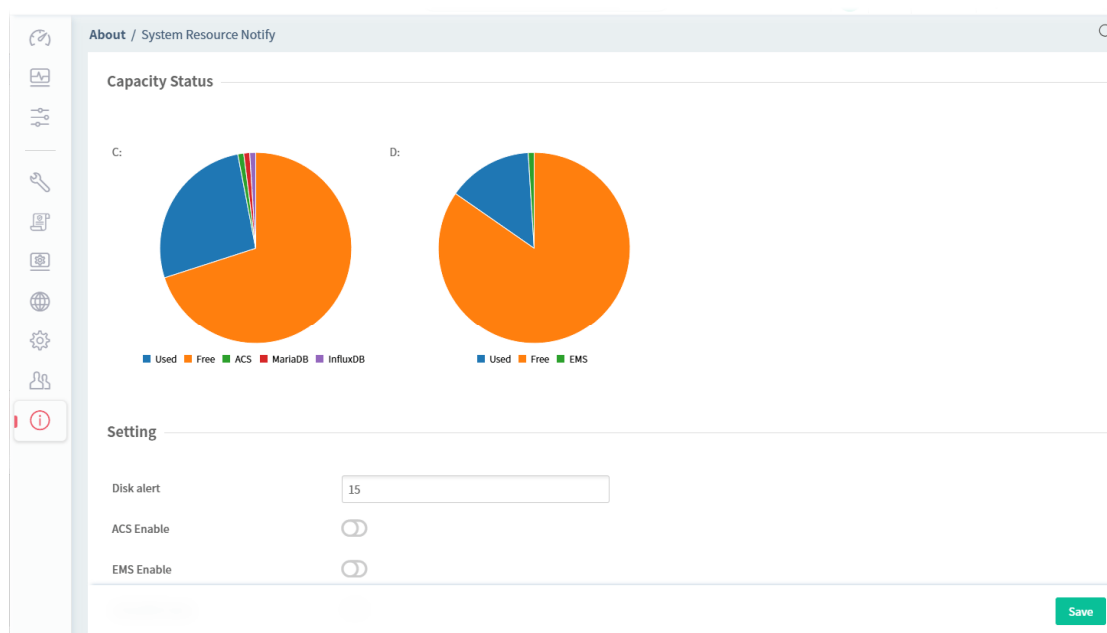

These parameters are explained as follows:

Item	Description
Disk alert	Set the upper limit percentage (by default, 1) of the total hard disk space. If the hard disk reaches the threshold, VigorACS will send a notification mail to the recipients listed below.
ACS Enable	Switch the toggle to enable/disable the function of checking ACS database.
Capacity alert(%)	Set the upper limit percentage (by default, 1) of the disk space for the ACS database. If the hard disk reaches the threshold, VigorACS will send a notification mail to the recipients listed below.
EMS Enable	Switch the toggle to enable/disable the function of checking the EMS


	database.
Capacity alert(%)	Set the upper limit percentage (by default, 1) of the disk space for the EMS database. If the hard disk reaches the threshold, VigorACS will send a notification mail to the recipients listed below.
InfluxDB Enable	Switch the toggle to enable/disable the function of checking Influx Database.
Capacity alert(%)	Set the upper limit percentage (by default, 1) of the disk space for the Influx database. If the hard disk reaches the threshold, VigorACS will send a notification mail to the recipients listed below.
MariaDB Enable	Switch the toggle to enable/disable the function of checking Maria Database.
Capacity alert(%)	Set the upper limit percentage (by default, 1) of the disk space for the Maria database. If the hard disk reaches the threshold, VigorACS will send a notification mail to the recipients listed below.
Recipient	Up to 10 mail addresses can be listed. +Add new Recipient - Click to enter a new e-mail address.
Delete	Click to remove the selected e-mail address.
Save	Save the current settings.

Applications


A.1 How to Create a Provision Profile with Global Parameters?

This section briefly shows a simple way to register a CPE onto VigorACS 3 with few steps.


1. Open **Provisioning**>> **Global Parameters**.

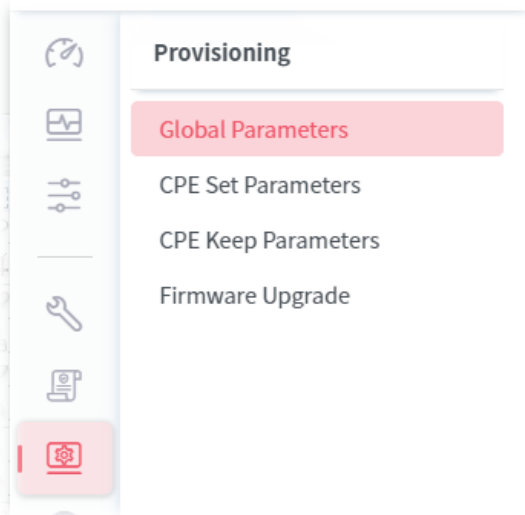

2. Select the **Global Profile** tab and click **+Add**.

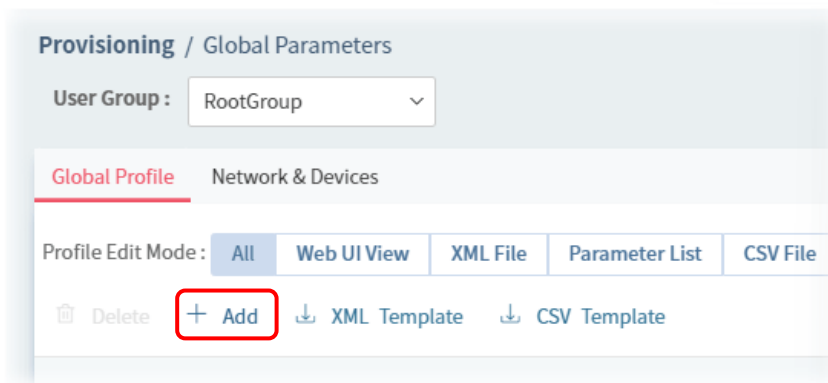

3. From the following window, select Creating a New Parameter List, enter the Profile Name, enable the function of keeping the parameters and set the Provisioning Time.

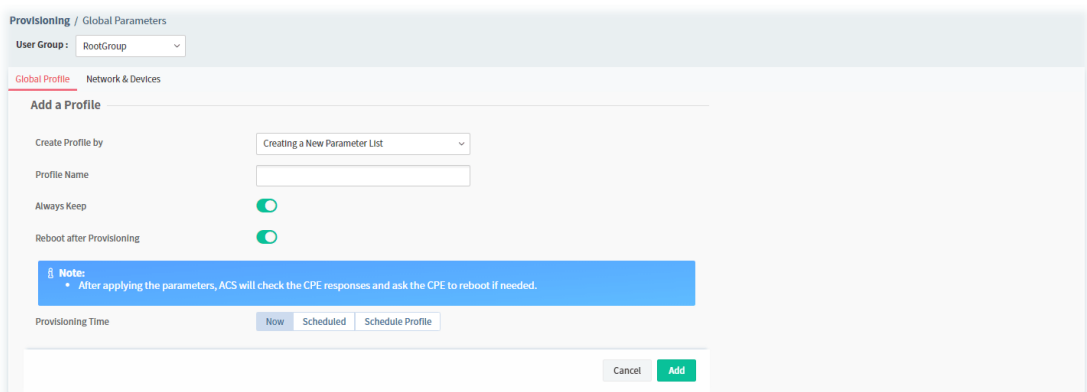

- After finished the settings, click **Add**. The new profile will be displayed on the web page.

Global Profile

Network & Devices

Profile Edit Mode :

All

Web UI View

XML File

Parameter List


+ Add

XML Template

Profile Name	Profile Edit Mode	Model	Always Keep	Revision	Last Modification At	Action
8888888	Parameter List		No	3	2018/11/28 04:43:07 PM	Edit Delete Copy To View Log
angela test	Parameter List		No	1	2018/11/12 02:48:25 PM	Edit Delete Copy To View Log
tt	Parameter List		Yes	0	2018/11/08 02:38:05 PM	Edit Delete Copy To View Log
Global_parameter_Example_Parameter_List	Parameter List		No	0	2018/11/08 03:13:55 PM	Edit Delete Copy To View Log
66667	Parameter List		No	2	2019/05/31 08:47:36 AM	Edit Delete Copy To View Log
Marketing	Parameter List		Yes	0	2020/11/03 02:18:29 PM	Edit Delete Copy To View Log

A.2 How to Modify Provision Profile with Global Parameters?

1. Open **Provisioning**>> **Global Parameters**.

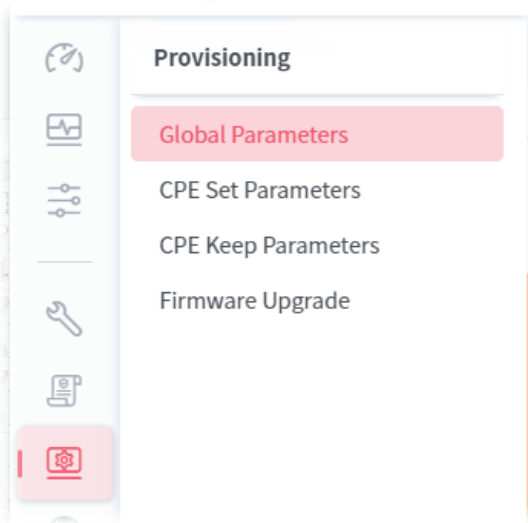

2. Choose the profile (e.g., Marketing) you want to modify and click **Edit**.

[illegible]

3. Click the **Add** link in this page.

Provisioning

Profile Name: Marketing

+ Add Edit Copy Delete

Parameter

4. Modify the **Value**, **Keep**, **Order** and **Applied Model** if you are not satisfied with the configuration above and want to make change. After finished the changes, click **Save**.

+ Add Edit Copy Delete


☒	Parameter	Value	Keep	Order	Applied Model	Source Model
☐			☒	0	All models	

Cancel Save


For the detailed information of parameters definition, refer to User's Guide of each device if required.

A.3 How to Create a Network for Managing Devices?


1. Open **Network Management**.

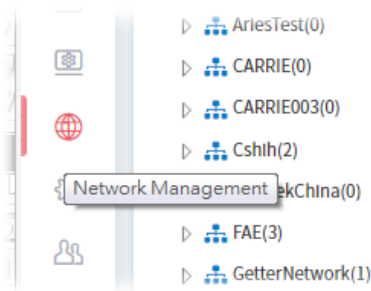


2. Click **+Add New Network** on the **Setting** page.

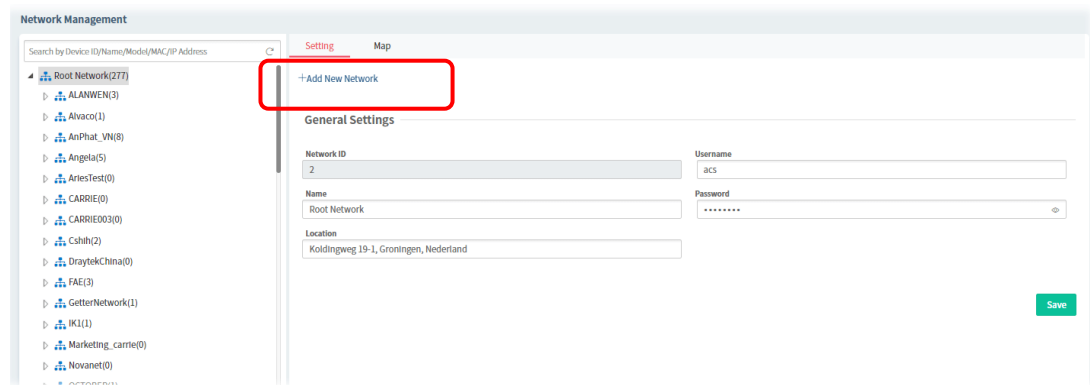

3. In the following page, type required information for the new network.

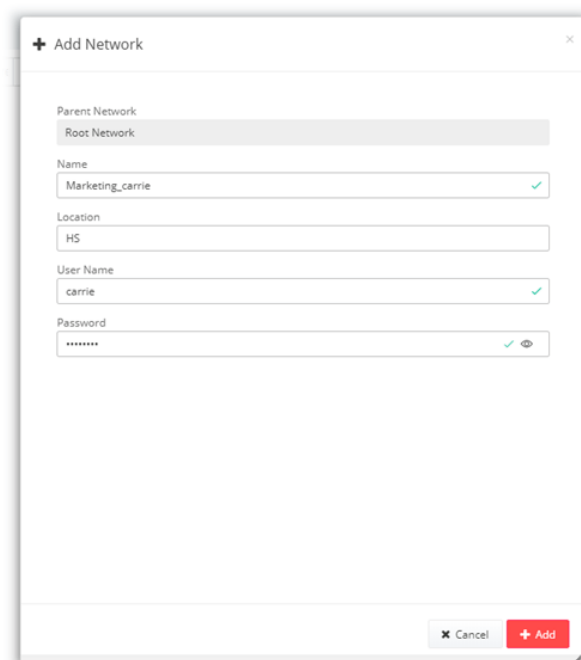


4. Click **Add**.
5. The new network has been created and displayed on the tree view.

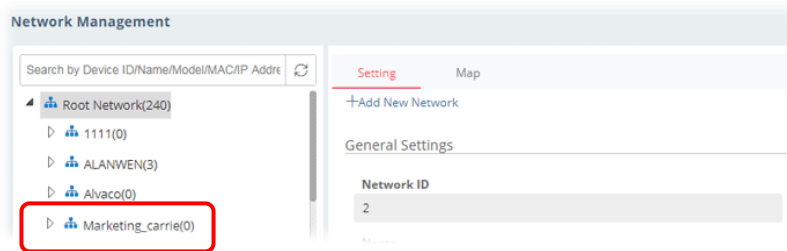


A.4 How to Change the Network of a Device?


1. Open **Network Management**.

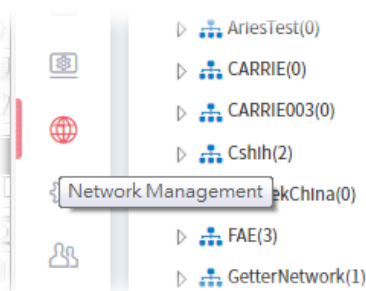

2. Choose and click a CPE displayed on **Root Network** tree view.

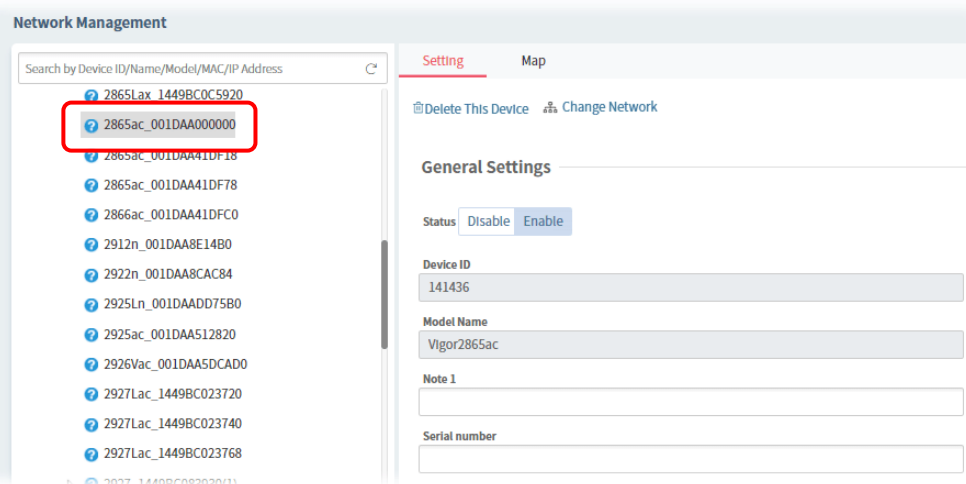

3. Click **Change Network**.

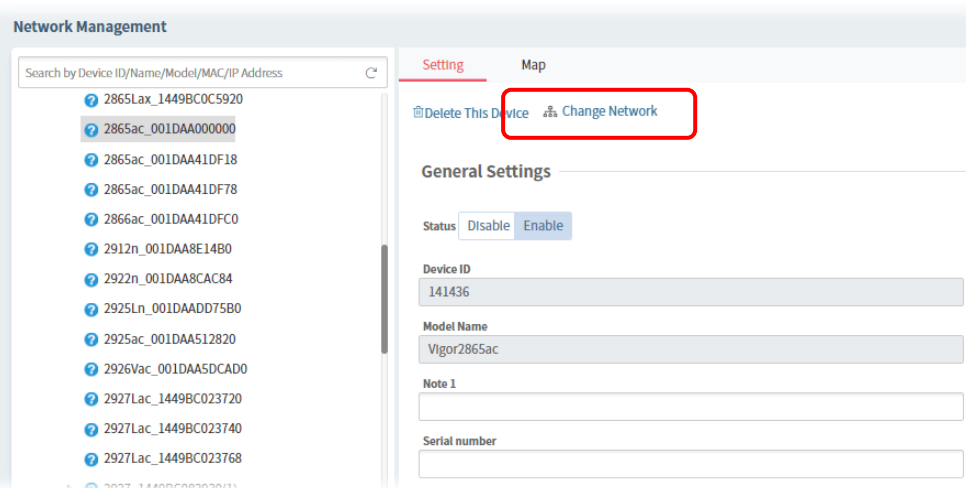

4. Click the network you want from **Root Network** and click **Apply**.

+Change Network

Name

2865ac_001DAA000000

Add to network

Root Network

ALANWEN

Alvaco

AnPhat_VN

Angela

ArlesTest

CARRIE

CARRIE003

Cshih

DraytekChina

FAE

GetterNetwork

IK1

Marketing_carrie

Novanet

OCTOBER

RD1

RD2

RD3

RD4

Cancel

Apply

100%

All operations have been completed.

The status of each device is as follows.

Succeed: 1

Processing: 0

Waiting: 0

Failed: 0

Device Name	Model	Retry	Progress	Status
2865ac_001DAA000000	Vigor2865ac	0	100%	Device is offline. Settings will be applied when device is online.


Hide Details

Close

VigorACS3 User's Guide


317

5. The selected device has been grouped under the specified network (CARRIE, in this case).

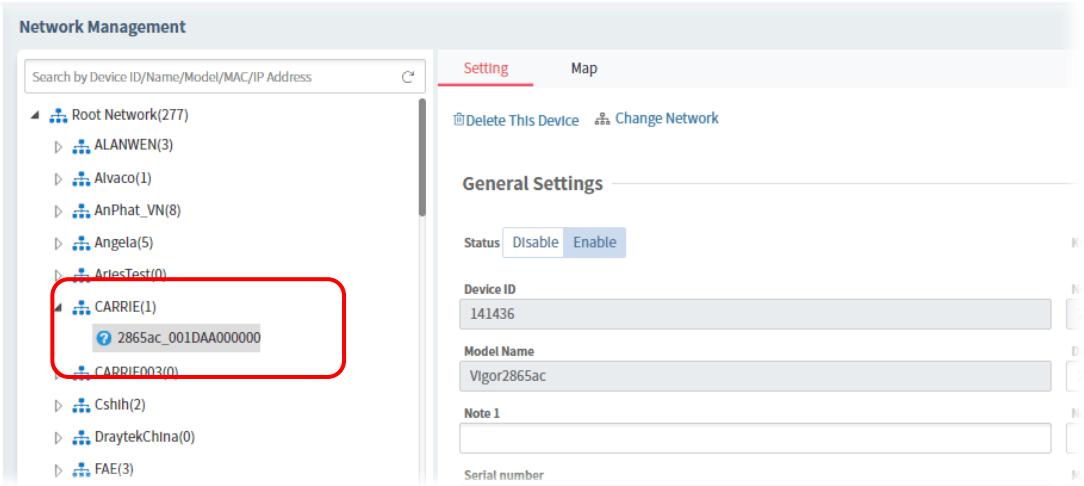


A.5 How to Add a User?

1. Open **User>>User Management**.

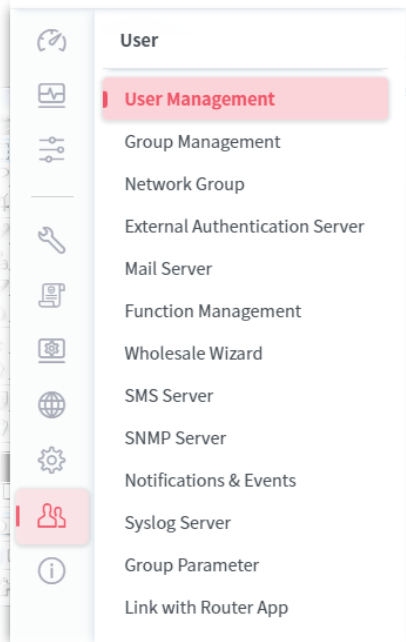

2. Click **+Add**.

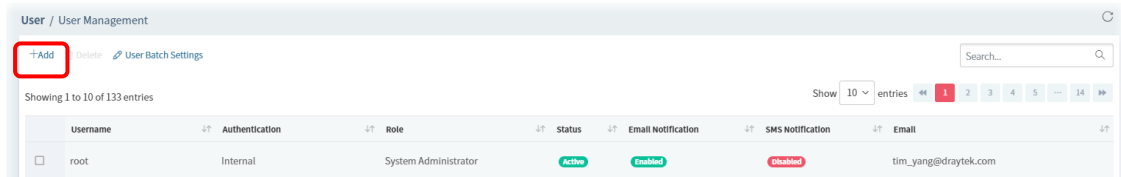

3. In the following page, type required information for the new user.

A screenshot of the 'Add User Profile' form. The form has several fields: 'Enable' (toggle), 'Username' (text field with 'CNIII' entered), 'Password' (password field with 'medium' strength indicator), 'Role' (dropdown menu with 'Operator' selected), 'Enable Auto Logout' (toggle), 'Enable OBE feature' (toggle), 'OBE pages to display' (dropdown menu with 'Read the Agreements, Set new pass' selected), 'Email Notification' (toggle), 'Email' (text field with 'carrie@draytek.com' entered), 'SMS Notification' (toggle), 'Telephone' (text field), and 'Description' (text field). At the bottom right, there are 'Cancel' and 'Create' buttons.

4. Click **Create**.

User / User Management

+Add Delete User Batch Settings


Showing 131 to 134 of 134 entries

Show 10 entries

	Username	Authentication	Role	Status	Email Notification	SMS Notification	Email
☐	T_2024-08-04_Wholesale_GA_E	Internal	Group Administrator	Active	Enabled	Enabled	T_2024-08-04_Wholesale_GA_E@testEmail
☐	T_2024-08-04_Wholesale_GA_D	Internal	Group Administrator	Active	Disabled	Disabled	T_2024-08-04_Wholesale_GA_D@testEmail
☐	T_2024-08-04_Wholesale_GA_OOBE	Internal	Group Administrator	Active	Enabled	Enabled	T_2024-08-04_Wholesale_GA_OOBE@testEmail
☐	CNII	Internal	Operator	Active	Enabled	Disabled	carrie@draytek.com

A.6 How to Add a Group?

1. Open **User>>Group Management**.

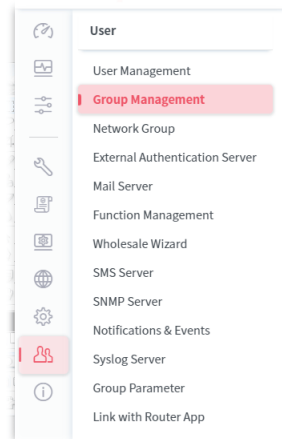

2. Click **+Add**.

User / Group Management

Setting Management UI Customization

+Add Delete Export Delete with wholesale

	Group ID	Group Name	Max Nodes	Used Nodes
☐	4239	tttt7	200000	0
☐	4240	tttt8	200000	0

3. In the following page, type required information for the new user group.

User / Group Management

Setting Management UI Customization

Add Group

Group name ✓

Nodes
(-1: No Limit Nodes)

Enable CPE Notify Mail/SMS/SNMP ☒

Enable Global Mail Server ☐

Enable Global SNMP Server ☒

Enable Expire Date ☒

Expire Date

Cancel Save

- Group Name – Enter a new name of the user group.
- Nodes – Define number of node.
- Enable CPE Notify Mail/SMS/SNMP Server – Switch the toggle to enable /disable global mail server.
- Enable Global Mail Server – Switch the toggle to enable /disable global mail server.
- Enable Global SNMP Server – Switch the toggle to enable /disable global SNMP server.
- Enable Expire Date – Click to enable/disable the expire date.
- Expire Date – Choose the expire date for such user group.

4. Click **Save**.

☐	5063	Router_App_Group	No Limit Nodes	2	Disabled	Disabled	Disabled
☐	5395	AutoTest_Dev	No Limit Nodes	7	Disabled	Disabled	Disabled
☐	6611	yfnts	No Limit Nodes	0	Enabled	2024/08/31	Enabled

Nodes Information		
Current Nodes In Used	Configured Max Nodes	Purchased License Nodes
50142.5	500263	200000

This page is left blank.

Part IV


Network Menu




Chapter 7 Root Network Menu

Network contains two types, Root Network and User-defined Network (e.g., RD8). For the user-defined network group, refer to Chapter 5.

Use the drop-down menu on the top of the left side to select a network group.

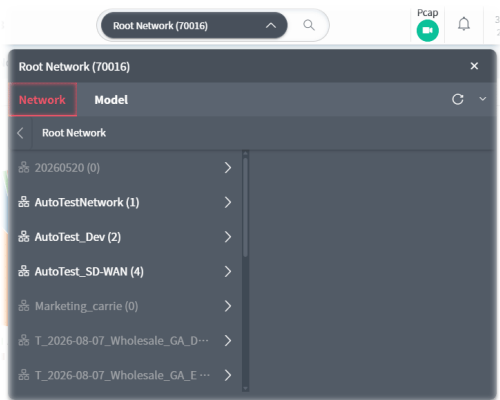


On the dashboard for root network, the Network menu contains:

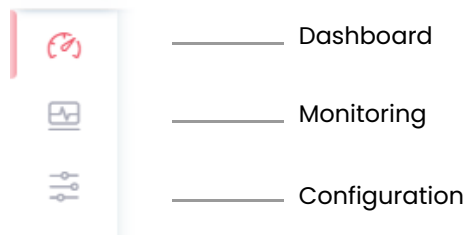


7.1 Dashboard for the Root Network

For more detailed information, refer to [3.2 Dashboard](#).

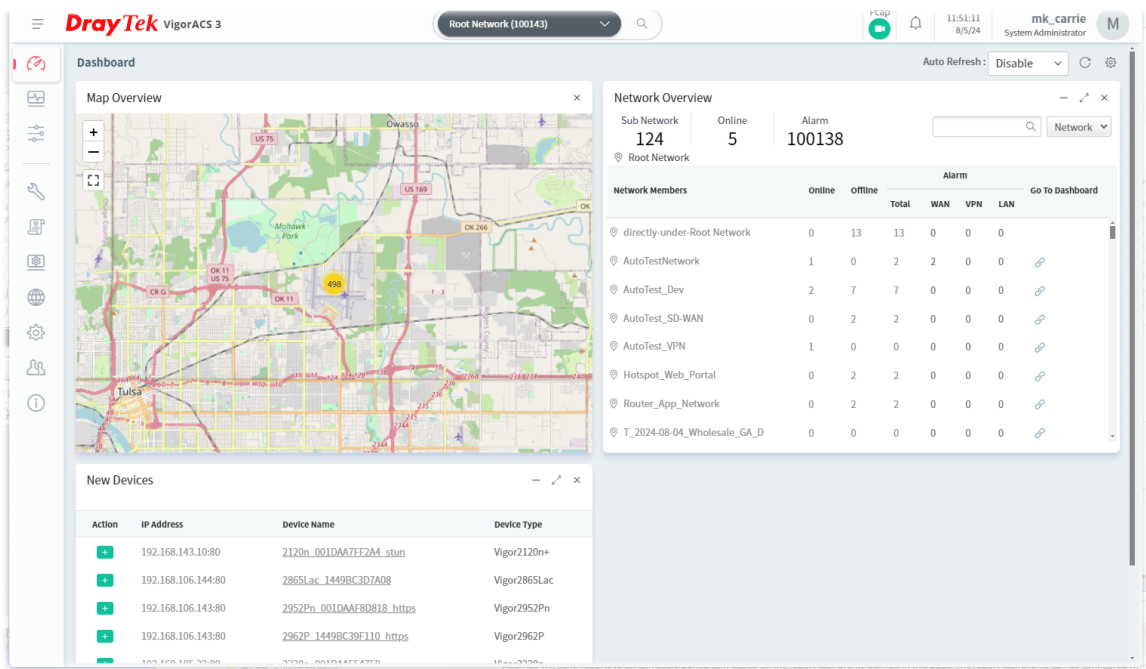

7.2 Monitoring

Monitoring menu offers options for monitoring the normal and abnormal actions for root network, network group and CPE. This section offers Monitoring menu items for the root network.

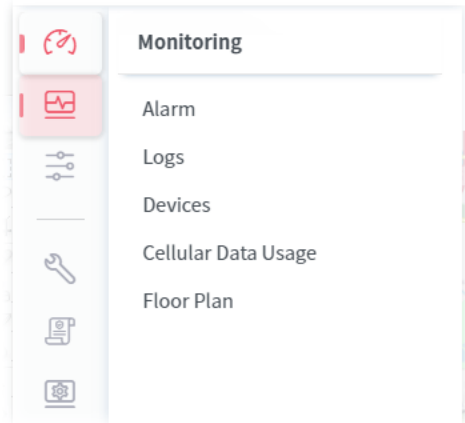

7.2.1 Alarm

Alarm message will be recorded on VigorACS 3 server when there is a trouble happened to the device (CPE). Only the users within the same user group will be notified for the message.

No.	Ack Status	Time	Device Name	Network Name	MAC Address	Alarm Level	Alarm Message	Alarm Type	Ack Time	Ack User
☐	38517749	Not Ack	2024/08/05 05:19:53	Q2121x_1449BC506A44	Root Network	14:49:BC:50:6A:44	Major	Device Loss Connection	Device Lost Connection	
☐	38517748	Not Ack	2024/08/05 05:19:53	P1282_1449BC43CD19	Root Network	14:49:BC:43:CD:19	Major	Device Loss Connection	Device Lost Connection	
☐	38517747	Not Ack	2024/08/05 05:19:53	P1280_001DAA4E6C33	Root Network	00:1D:AA:4E:6C:33	Major	Device Loss Connection	Device Lost Connection	
☐	38517746	Not Ack	2024/08/05 05:19:53	39125_1449BC3072A0	Root Network	14:49:BC:30:72:A0	Major	Device Loss Connection	Device Lost Connection	
☐	38517745	Not Ack	2024/08/05 05:19:53	3910_1449BC6B9178	Root Network	14:49:BC:6B:91:78	Major	Device Loss Connection	Device Lost Connection	
☐	38517744	Not Ack	2024/08/05 05:19:53	3910_1449BC1CA218	Root Network	14:49:BC:1C:A2:18	Major	Device Loss Connection	Device Lost Connection	
☐	38517743	Not Ack	2024/08/05 05:19:53	2962_1449BC0D2040	Root Network	14:49:BC:0D:20:40	Major	Device Loss Connection	Device Lost Connection	
☐	38517742	Not Ack	2024/08/05 05:19:53	2865ac_1449BC143DA0	Root Network	14:49:BC:14:3D:A0	Major	Device Loss Connection	Device Lost Connection	
☐	38517740	Not Ack	2024/08/05 05:19:53	2865ac_001DAA4ACFB0	Root Network	00:1D:AA:4A:CF:B0	Major	Device Loss Connection	Device Lost Connection	
☐	38517737	Not Ack	2024/08/05 05:19:53	2850V_001DAA7D9CC8	Root Network	00:1D:AA:7D:9C:C8	Major	Device Loss Connection	Device Lost Connection	
☐	38517735	Not Ack	2024/08/05 05:19:53	2765Vac_1449BC2C42E8	Root Network	14:49:BC:2C:42:E8	Major	Device Loss Connection	Device Lost Connection	
☐	38517733	Not Ack	2024/08/05 05:19:53	2762Vac_001DAA653308	Root Network	00:1D:AA:65:33:08	Major	Device Loss Connection	Device Lost Connection	
☐	38517732	Not Ack	2024/08/05 05:19:53	2133Vac_001DAA66E020	Root Network	00:1D:AA:66:E0:20	Major	Device Loss Connection	Device Lost Connection	

These parameters are explained as follows:

Item	Description
Alarm / History	Alarm – Display the alarm records recently. History – Display all the alarm records that have been solved and cleared.
Delete	Clear the alarm record which has been solved by VigorACS 3.

Delete All	Clear all of the alarm records which have been solved by VigorACS 3.
Download	Click this button to save alarm log as a XLS file.
No.	Display the index number of the alarm. It is offered by VigorACS 3 automatically.
Ack Status	Display the status of the records with the type specified here (Not Ack or Acked).
Time	Display the time of the device to be monitored.
Device Name	Display the name of the monitored device.
Network Name	Display the name of the network that the monitored device belongs to.
MAC Address	Display the MAC address of the monitored device.
Alarm Level	Display the alarm message with the severity (e.g., Critical) specified.
Alarm Message	Display a brief explanation for the alarm sent by VigorACS 3 automatically.
Alarm Type	Display the alarm message with the type specified.

7.2.2 Logs

Log provides administrator records for action executed, device name, MAC address, Device IP, CommandKey, and Current Time for CPE device managed and monitored by VigorACS.

ID	Device Name	Device ID	MAC Address	Device IP	Action	Action ID	Time
4248	2927Lac_1449BC023720	154	1449BC023720	192.168.27.1	Set Parameter Values	2287	2020/03/09 09:53:57 AM
4247	2927Lac_1449BC023720	154	1449BC023720	192.168.27.1	Set Parameter Values	2286	2020/03/09 09:53:55 AM
4246	2927Lac_1449BC023720	154	1449BC023720	192.168.27.1	Set Parameter Values	2285	2020/03/09 09:53:41 AM
4245	2927Lac_1449BC023720	154	1449BC023720	192.168.27.1	Set Parameter Values	2284	2020/03/09 09:53:39 AM
4244	2865ac_001DAA000000	4339	001DAA000000	172.16.3.134	Inform	---	2020/03/09 09:41:04 AM
4243	2926Vac_001DAA7033E0	129	001DAA7033E0	172.16.3.136	Inform	---	2020/03/09 09:39:49 AM
4242	G2280x_001DAA43AB4B	4342	001DAA43AB4B	192.168.1.159	Set Parameter Values	2283	2020/03/06 02:57:58 PM
4241	G2280x_001DAA43AB4B	4342	001DAA43AB4B	192.168.1.159	Inform	---	2020/03/06 02:57:43 PM
4240	G2280x_001DAA43AB4B	4342	001DAA43AB4B	192.168.1.159	Inform	---	2020/03/06 02:57:42 PM
4239	G2280x_001DAA43AB4B	4342	001DAA43AB4B	192.168.1.159	Set Parameter Values	2282	2020/03/06 02:47:23 PM
4238	G2280x_001DAA43AB4B	4342	001DAA43AB4B	192.168.1.159	Inform	---	2020/03/06 02:46:48 PM
4237	G2280x_001DAA43AB4B	4342	001DAA43AB4B	192.168.1.159	Inform	---	2020/03/06 02:46:48 PM
4236	G2280x_001DAA43AB4B	4342	001DAA43AB4B	192.168.1.159	Inform	---	2020/03/06 02:41:43 PM
4235	G2280x_001DAA43AB4B	4342	001DAA43AB4B	192.168.1.159	Inform	---	2020/03/06 02:41:42 PM

These parameters are explained as follows:

Item	Description
Log Type	Click one of the tabs (e.g., All CPE Actions, Device Reboot, Reboot By CPE, Reset System Password, Set Parameter, File Transfer, Setting

	Profile, Device SysLog, CPE Notify, Device Register, Device Operate and etc.) to display related log on this page.
search ID / Device Name / Di	Enter the condition for VigorACS to search and display relational information.
Delete	Clear the alarm record which has been solved by VigorACS.
Delete All	Clear all of the alarm records which have been solved by VigorACS.
Download	Click this button to save the log as an XLS file.

7.2.3 Devices

The administrator (user) can check information (such as Device name, IP address, MAC address, model name, network, status, up time, firmware version, number of current connected client, data traffic, and so on) of CPE under the selected network group by this page. The network group (e.g., Root Network in this case) selected above is the group to be monitored and information related to this selected network group will be shown below.

Simply open **Monitoring>>Devices** to get the following page.

The screenshot shows the 'Monitoring / Devices' page in VigorACS. At the top, there's a search bar for 'Search Device Name / IP / MAC'. Below it, filters for 'Model' (Vigor C510Vax, Vigor2120n+, Vigo), 'Status' (All), and 'SSID' (All) are visible. A 'Download' button is on the left. The main table has columns: Device, IP Address, MAC Address, Model, Network, Status, Up Time, and F/W Version. The table lists 10 devices, with the first one highlighted in red. The status of the devices is either 'Online' or 'Offline'. The page also includes a 'Rows' dropdown set to 10 and a 'Page' indicator showing 1 / 7002.

These parameters are explained as follows:

Item	Description
Search Device Name / IP / MAC	Enter the condition for VigorACS to search and display relational information.
Model	This area lists all of the devices that monitored by VigorACS. Check Select all to display information for all of the devices; or check the name of the device to display the information related to the selected device.
Status	Online – This page displays information for the device which is online

	currently. Offline – This page displays information for the device which is offline currently. All – This page displays information for all of the devices no matter it is online or offline.
SSID	This area lists information for CPE with wireless features monitored by VigorACS. Check All to display all of the devices; or check the name of the device to display the information related to the selected device. SSID – SSIDs for CPE with wireless features will be displayed in this drop down list. Choose one of the SSIDs. Information related to the selected SSID will be displayed on this page.
General / Wireless	General – List the general information for the CPE under the selected group. Wireless – List only the wireless information for the CPE under the selected group.
Download	Click this button to save information for monitored devices as an XLS file.

7.2.4 Cellular Data Usage

This page displays traffic information including data used, data cycle, status, percentage, downloaded data, uploaded data for device equipped with LTE features (e.g., Vigor2925Ln, Vigor2860Ln and etc). The values defined in **Quota Settings** indicate total amount of quota for all LTE devices managed by VigorACS.

The screenshot displays the DrayTek VigorACS 3 web interface. The top navigation bar includes the DrayTek logo, 'VigorACS 3', a dropdown menu for 'Root Network (70016)', a search icon, and user information for 'root System Administrator' with a profile icon 'R'. The main content area is titled 'Monitoring / Cellular Data Usage'.

On the left, the 'LTE Data Usage Overview' section shows 'Data Used' as '0 Byte', 'Data Cycle' as '2026-08-02 - 2026-08-08', and 'Status: WARNING' with a progress bar at '0% of OMB'. Below this is a table listing devices and their data usage:

Device	Total	Download	Upload
2865Lac_1449BC37E740	0 Byte		
2927Lac_1449BC3E3C18	0 Byte		
2865Lac_1449BC3D7A08_STD_4522	0 Byte		
2927Lac_1449BC023768	0 Byte		
2927Lac_1449BC40D9E0	0 Byte		


On the right, the 'Quota Settings' panel is shown. It includes a 'Data Usage Alarm' toggle (turned on), 'Data Quota' set to '0 MB', 'Trigger Alarm When Usage Reached' set to '0 % of Quota (0 Byte)', 'Data Usage Cycle' set to 'Weekly', and 'Weekly Reset Day' set to 'Sunday'. 'Cancel' and 'Save' buttons are at the bottom right.

These parameters are explained as follows:



Item	Description
LTE Data Usage Overview	Status – The bar chart displays the data usage in yellow, green and grey based on values defined in Quota Settings. If data usage for the LTE model exceeds the percentage of quota configured in the field of Trigger Alarm When Usage Reached in Quota Settings, the amount of used data will be shown in Yellow; if not, it will be displayed in Green. The rest quota will be shown in gray. In addition, device name, throughput, downloaded data and uploaded data for each LTE can be seen on the table below this page.
Quota Settings	
Data Usage Alarm	When it is enabled, a warning message will be shown in the page of DEVICE MENU>>Monitoring>>Alarm once the data usage reaches the threshold defined in Trigger Alarm When Usage Reached .
Data Quota	The value (unit is MB/GB) defined here means total amount of data quota available for all LTE devices managed by VigorACS.
Trigger Alarm When Usage Reached	Set a threshold for triggering alarm mechanism.
Data Usage Cycle	Select one of the options (Weekly, Monthly, Custom) as data usage cycle. Cycle Duration(days) – When Custom is selected, please specify the cycle duration. The data quota for LTE model will be reset after the days configured here. Cycle Starts On –When Custom is selected, specify one date as a starting point to reset the data quota for LTE model. Weekly Reset Day – When Weekly is selected as Data Usage Cycle, please use the drop down list to choose one day (Monday to Sunday) for VigorACS to reset the data quota for LTE model. Monthly Reset Day – When Monthly is selected as Data Usage Cycle, please use the drop down list to choose a date for VigorACS to reset the data quota for LTE model.
Cancel	Discard current modification.
Save	Save the current settings.

7.2.5 Floor Plan

This function is helpful to determine the best location for VigorAP in a room. A floor plan of a room is required to be uploaded first. By dragging and dropping available VigorAP icon from the list to the floor plan, the placement with the best wireless coverage will be clearly indicated through simulated signal strength.

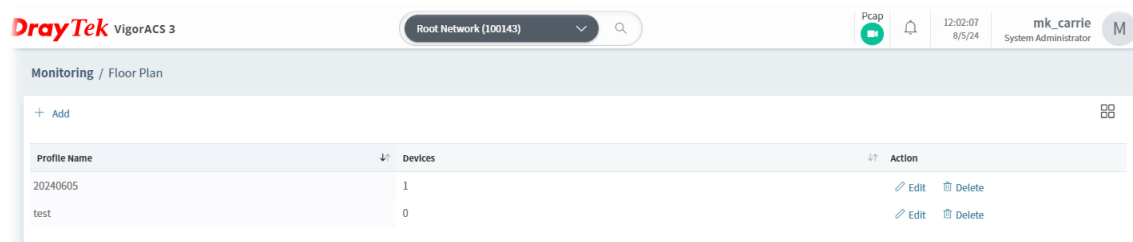


These parameters are explained as follows:

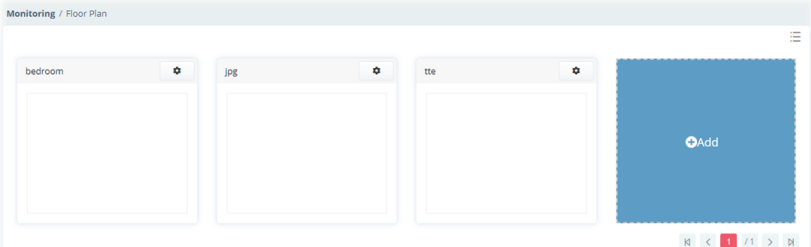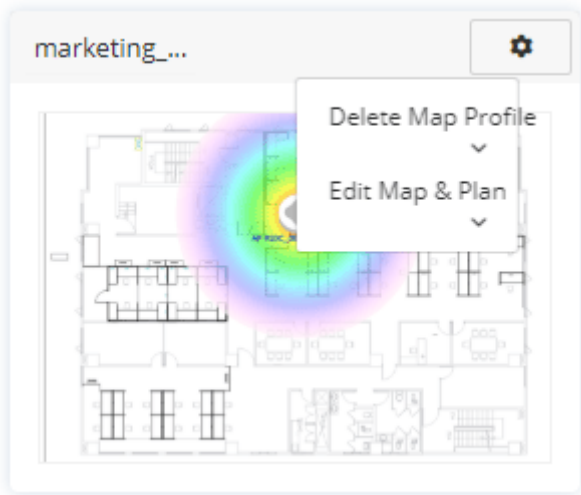Item	Description
+Add	Creates a new profile.
	Click to change to browse view. It displays all of the floor plan profiles with the map used.  You can click Add on this page to create a new profile. To modify the existed profile, click the icon on the right-top to display a drop down menu. Then click Edit Map & Plan to perform the modification, or click Delete Map Profile to remove the selected floor plan profile. 
Profile Name	Display the name of the floor plan profile.
Device	Display the number of AP devices placed on the plan profile.
Action	Edit – Click to modify the profile. Delete – Click to remove the selected profile.

To create a new profile:

1. Click **+Add**.
2. From the following page, enter profile name (e.g., marketing_carrie) and click Browse to upload a map (e.g., Floor_MAP.png). Click **Continue**.

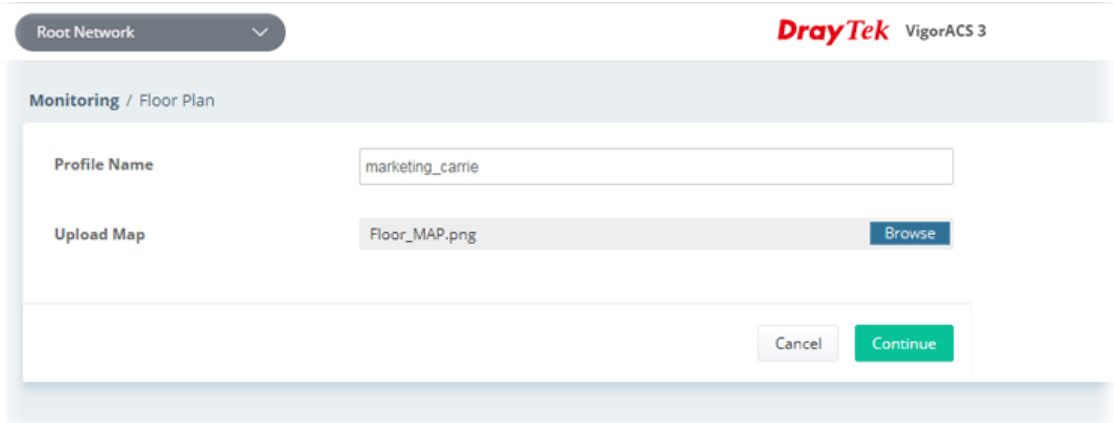

Root Network ▼

DrayTek VigorACS 3


Monitoring / Floor Plan

Profile Name: marketing_carrie

Upload Map: Floor_MAP.png Browse

Cancel Continue

3. Click **Edit** to display the following figure.

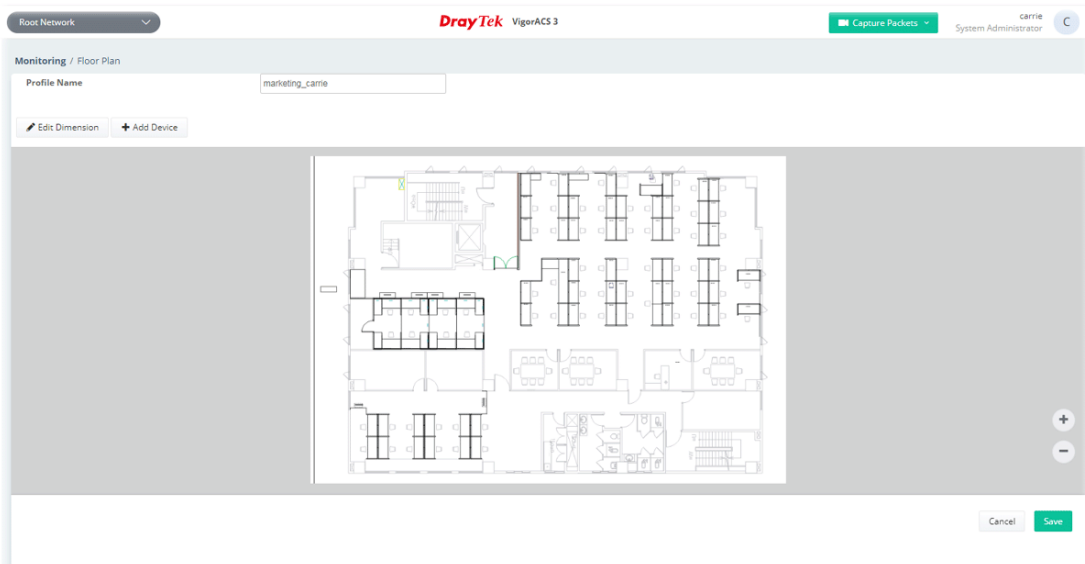

Root Network ▼

DrayTek VigorACS 3

Capture Packets ▼

carrie
System Administrator

Monitoring / Floor Plan

Profile Name: marketing_carrie


Edit Dimension + Add Device

Cancel Save


Edit Dimension – Draw a line and enter the distance of length / width of the map.

Add Device – Click to display available VigorAP to apply it on to the map.


4. Click **+Add Device**. Available VigorAP icons and name list will be displayed on the right side of this page.

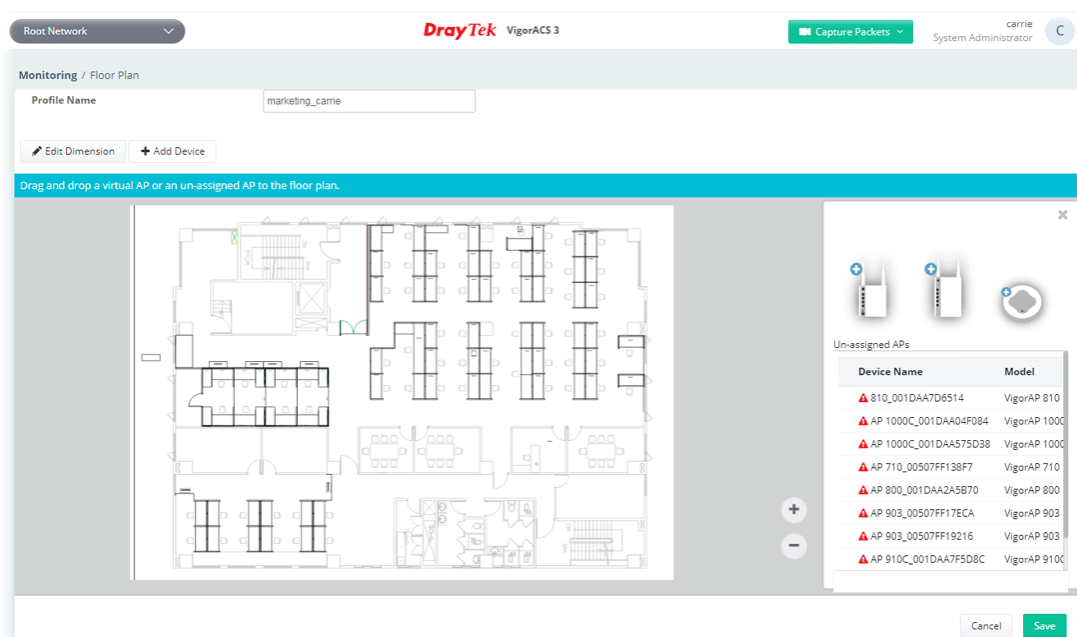

5. Select the AP you want from right side of this page. Drag and drop the icon on the map. Later, an icon with effective signal range will be seen on the screen.

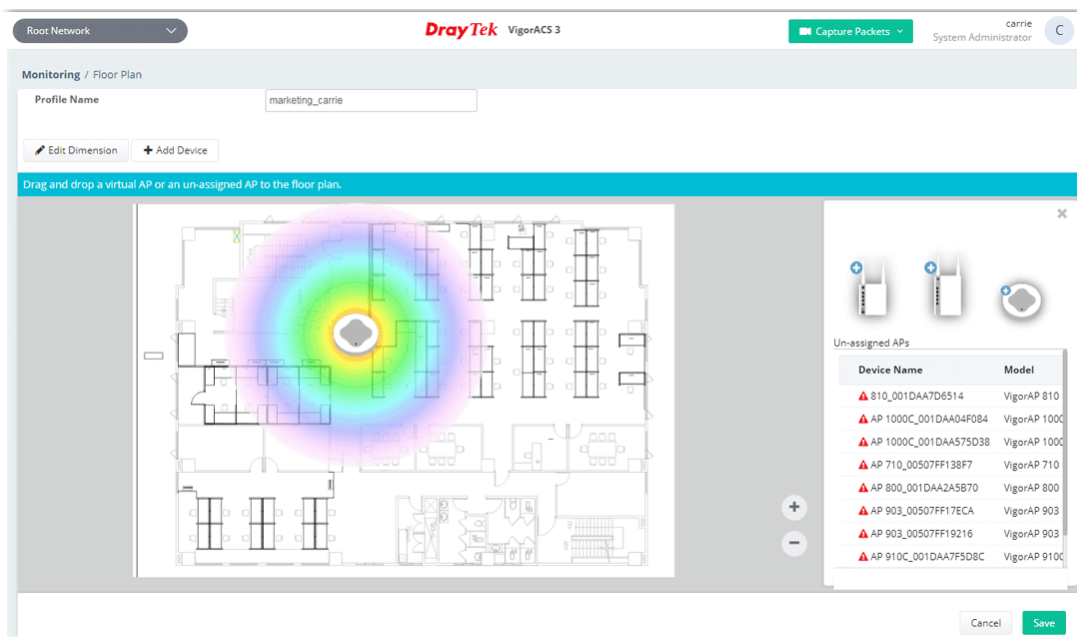

6. Slightly click the AP icon on the map. Two links of **Link to an AP** and **Remove Device** will be shown on the right side.

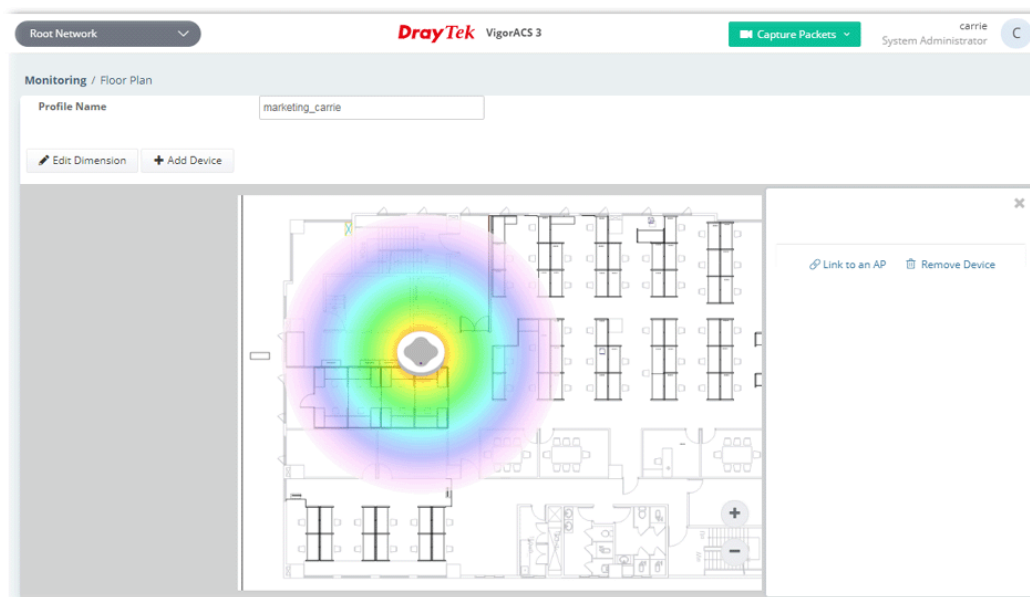


- **Remove Device** – If you do not satisfy the location of AP icon, click this link to remove the AP icon from the map.
- **Link to an AP** – If you satisfy the location of AP icon, click this link to select VigorAP. All of un-assigned AP names will be shown on the list. Choose the one you want and click Apply. Then such map has been connected with the specified AP.

7. Click **Link to an AP** to select the AP you want. After clicking **Apply**, the name of the VigorAP will be displayed below the icon on the map.




8. Click **Save**. The new created profile will be shown on the page.

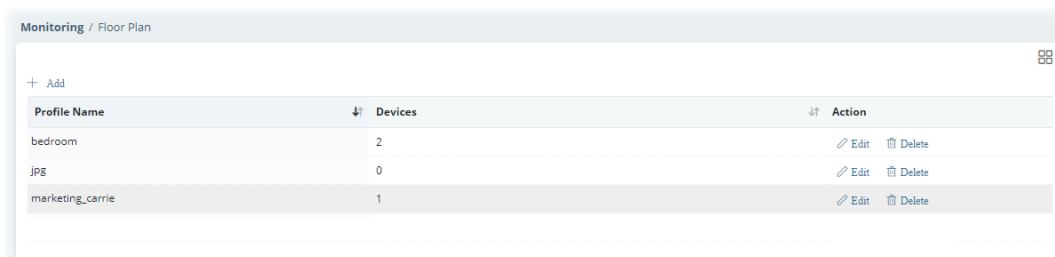

7.3 Configuration


Configuration menu will vary for root network, group network and specified CPE.

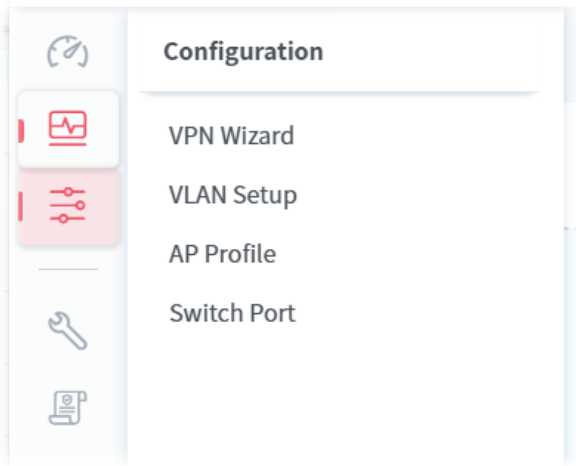

7.3.1 VPN Wizard

VigorACS offers an easy method, VPN Wizard, to configure VPN settings for building VPN connection between two CPEs.

This page displays all the VPN connection status globally for Root Network or the VPN connection status for the network group selected.

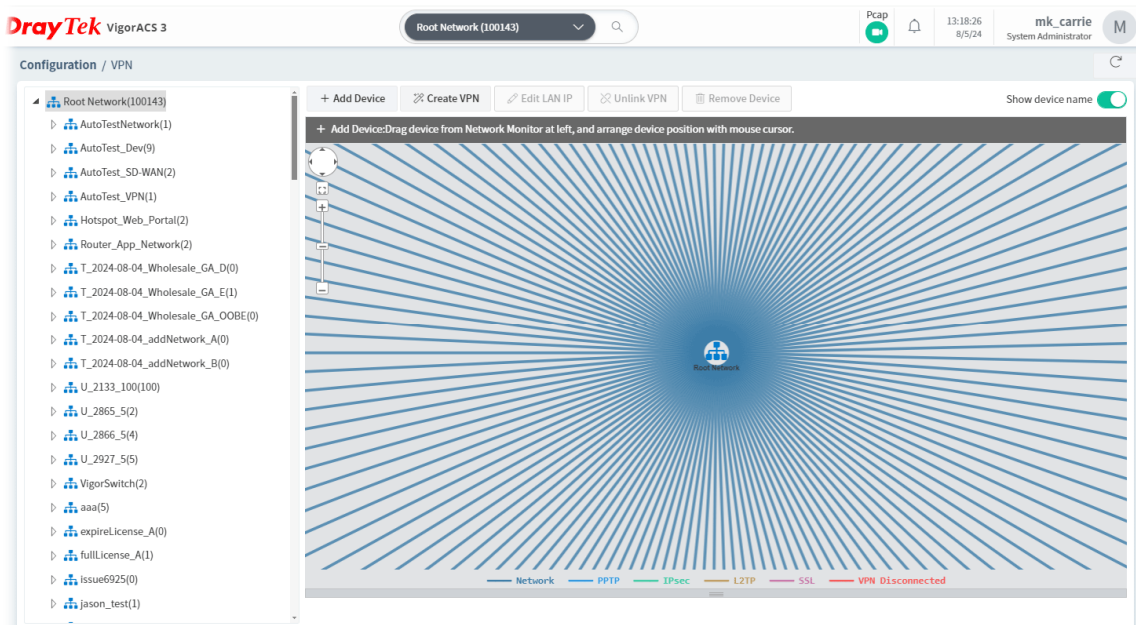


Different colors for arrows represent different protocols used in VPN connections. For example, Purple means Network Group; Green means PPTP mode; Blue means IPsec mode; and Red means the VPN connection is failed.

For detailed, refer to section 8.4.1.


7.3.2 AP Profile

AP profile is used to apply to a selected access point. It is very convenient for the administrator to configure the setting for access point without opening the web user interface of the access point. The functions listed in the AP profile in VigorACS contain settings for all of models of VigorAP. When an AP profile is created, it can be used to apply onto any access point managed by VigorACS. If the access point does not have the functions defined in the AP profile, after being applied, only the functions that the selected access point supports will be overwritten by the selected AP profile.

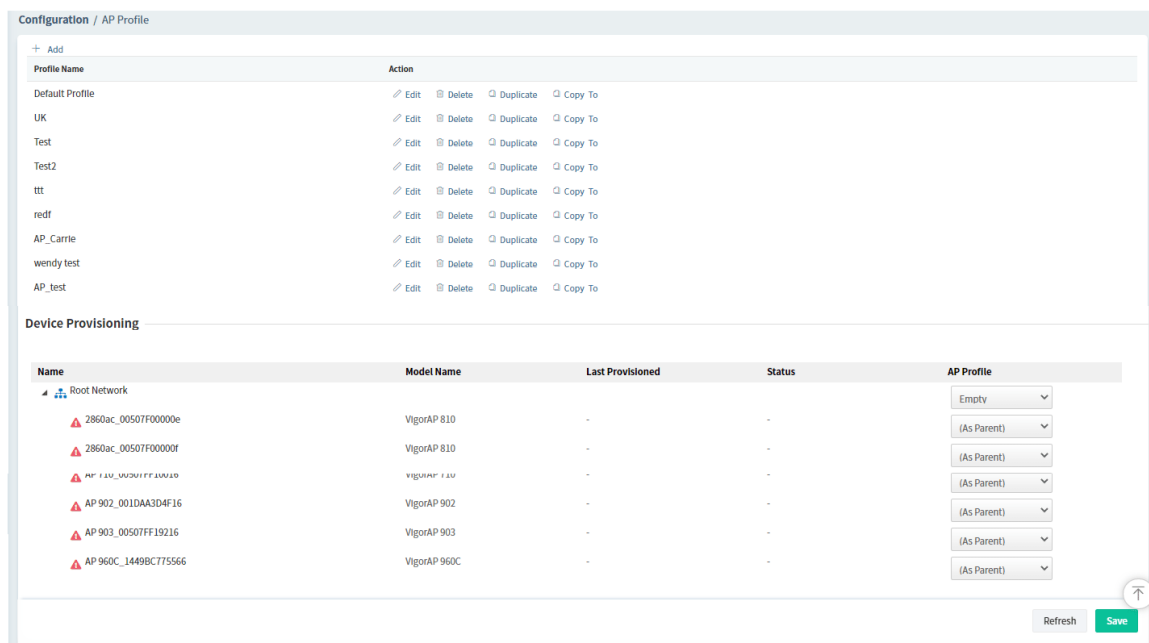

These parameters are explained as follows:

Item	Description
+Add	Create a new AP profile with basic settings.
Profile Name	Display the name of AP profile.
Action	Edit – Configure detailed settings for the selected AP profile. Delete –Delete the selected AP profile. Duplicate – Click to duplicate a new profile (e.g., aaa(1)) based on the selected profile (e.g., aaa). Copy To – Click to open the following page. Then select a network (e.g., Marketing_carrie in this case) from the tree view of Root Network. After clicking the Copy To button, the configuration of selected AP profile will be applied to the selected network (e.g., Marketing_carrie).

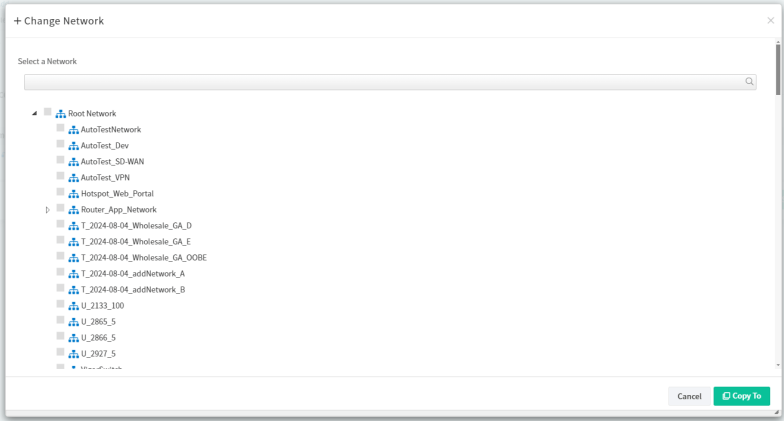	
Device Provisioning	Locate the access points for applying suitable AP profile. Name – Display a tree view for model managed by VigorACS. Model Name – Display the name of the model. Last Provisioned – Display the time that AP profile was applied to the selected device. Status – Display the status (updating, complete and “–”) of the AP. AP Profile – Choose an AP profile for applying to the selected AP. In which, “As Parent” means to apply the profile listed on the top to the selected AP.
Refresh	Click to refresh current page.
Save	Click to save the changes in this page.

7.3.2.1 Add an AP Profile

Click **+Add** to create a new AP profile.


The screenshot shows the 'Add a Profile' configuration page in the DrayTek VigorACS 3 web interface. The page has a header with the DrayTek logo, 'VigorACS 3', and a search bar. The main content area is titled 'Add a Profile' and contains four input fields: 'Profile Type' (with radio buttons for 'DrayOS 4 AP' and 'DrayOS 5 AP'), 'Profile Name' (text input with 'AP_Carrie'), 'AP Login Username' (text input with 'admin'), and 'AP Login Password' (password input with masked characters). Each field has a green checkmark to its right. At the bottom left is a link '↑ Back to profile list' and at the bottom right is a green 'Save' button.

These parameters are explained as follows:

Item	Description																									
Profile Type	Recognize and confirm your AP belongs to DrayOS 4 or DrayOS 5 and select the correct version. DrayOS 4 AP – Representative models such as AP903, AP802, AP912C, etc. DrayOS 5 AP – Representative models such as AP1062C.																									
Profile Name	Enter a name of the profile.																									
AP Login Username	Enter a username for login the access point.																									
AP Login Password	Enter a password for login the access point.																									
Back to profile list	Return to previous page, AP profile list.																									
Save	Save the settings and display the new profile on the AP profile list. + Add New Profile <table><tr><td>Test</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr><tr><td>Test2</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr><tr><td>ttt</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr><tr><td>redf</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr><tr><td>AP_Carrie</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr></table>	Test	Edit	Delete	Duplicate	Copy To	Test2	Edit	Delete	Duplicate	Copy To	ttt	Edit	Delete	Duplicate	Copy To	redf	Edit	Delete	Duplicate	Copy To	AP_Carrie	Edit	Delete	Duplicate	Copy To
Test	Edit	Delete	Duplicate	Copy To																						
Test2	Edit	Delete	Duplicate	Copy To																						
ttt	Edit	Delete	Duplicate	Copy To																						
redf	Edit	Delete	Duplicate	Copy To																						
AP_Carrie	Edit	Delete	Duplicate	Copy To																						

7.3.2.2 Edit an AP Profile

To configure detailed settings for each AP profile, click the **Edit** button for the selected profile. The setting page appears as follows:

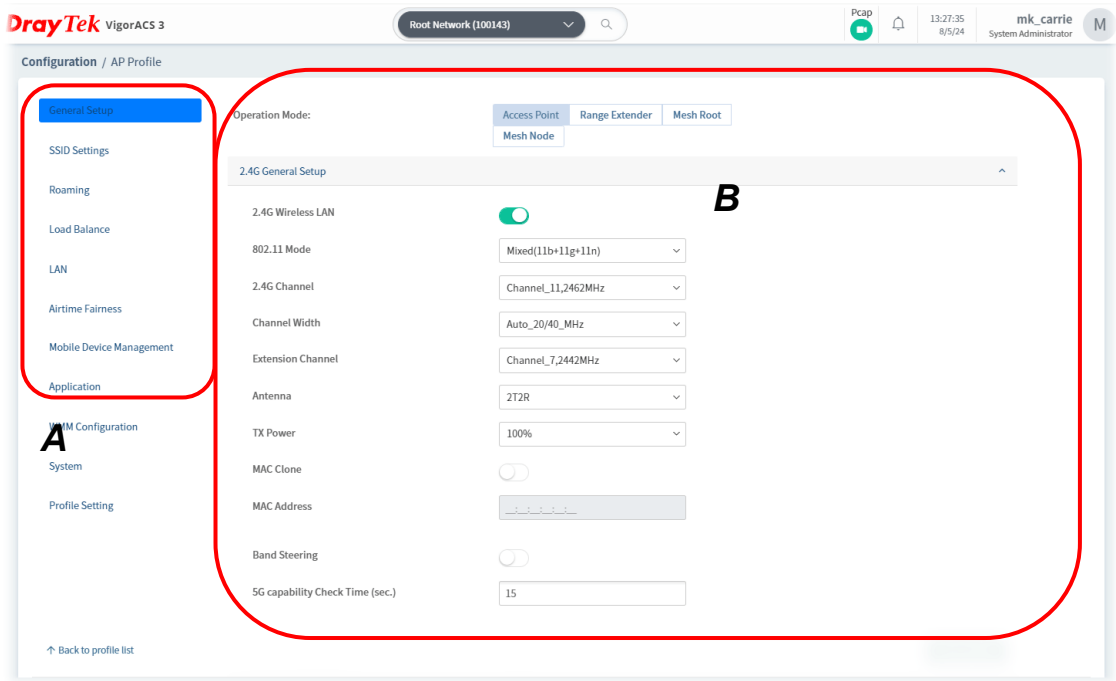

These parameters are explained as follows:

Item	Description
Area A - Menu Item	At present, the available menu items contain, ● General Setup ● SSID Settings ● Roaming ● Load Balance ● LAN ● Airtime Fairness ● Mobile Device Management ● Application ● WMM Configuration ● System ● Profile Setting
Area B - Settings	This area will vary according to the item selected in Area A - Menu Item.

 Refer to User's Guide of VigorAP for the detailed information of settings definition.

This page is left blank.


Chapter 8 Network Group Menu

The menu items related to the network group:


-  Dashboard
-  Statistics
-  Monitoring
-  Configuration
-  Hotspot Web Portal

8.1 Dashboard for the Network Group

To display the network group dashboard, select a network group first. Find the one you want from the Network list under the Root Network. In this case, we choose FAE as an example.

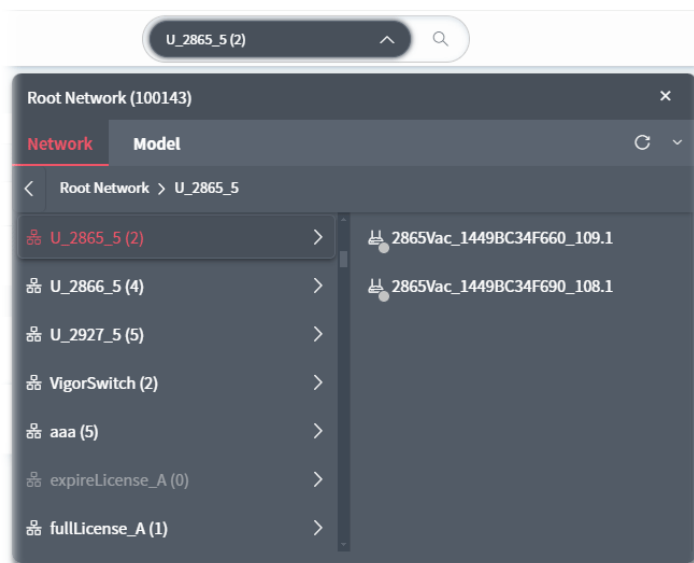


Click the **Summary** tab to display the page of dashboard (for monitoring).

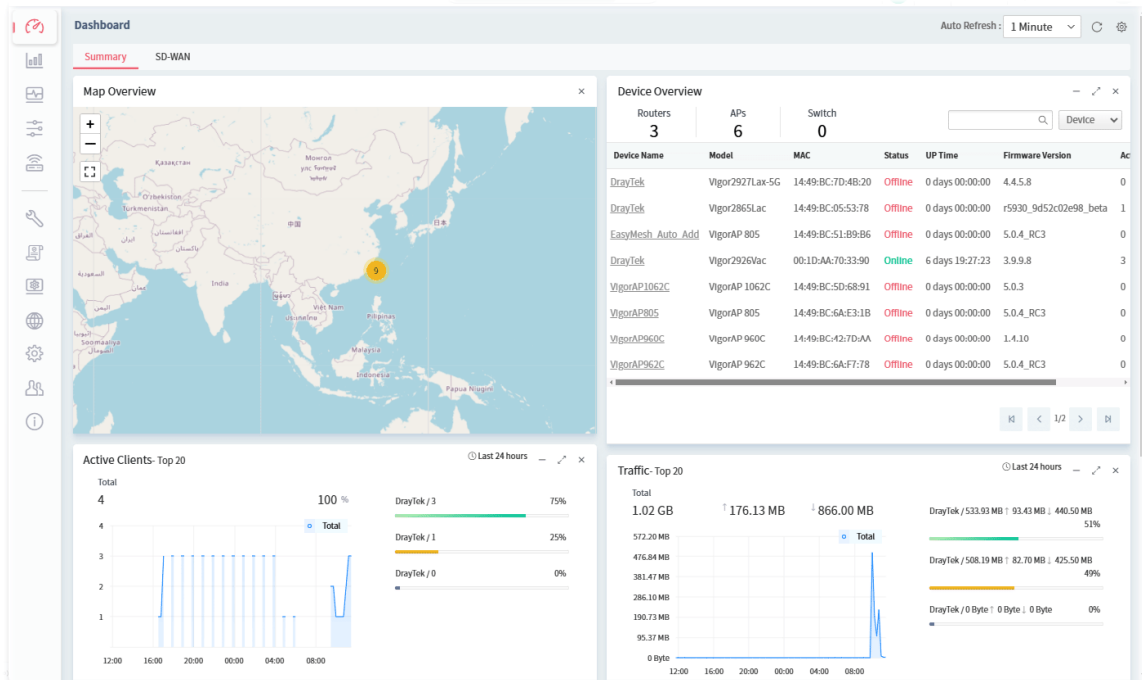

8.2 Statistics for Network Group


The page offers statistics for all the devices listed under root networks, including usage overview, wireless clients Overview, data traffic, device ranking, and client ranking. By clicking Last 24 Hours, Last 7 Days, Last 30 Days or Custom setting (define the period), the administrator can obtain various statistics within the time period.

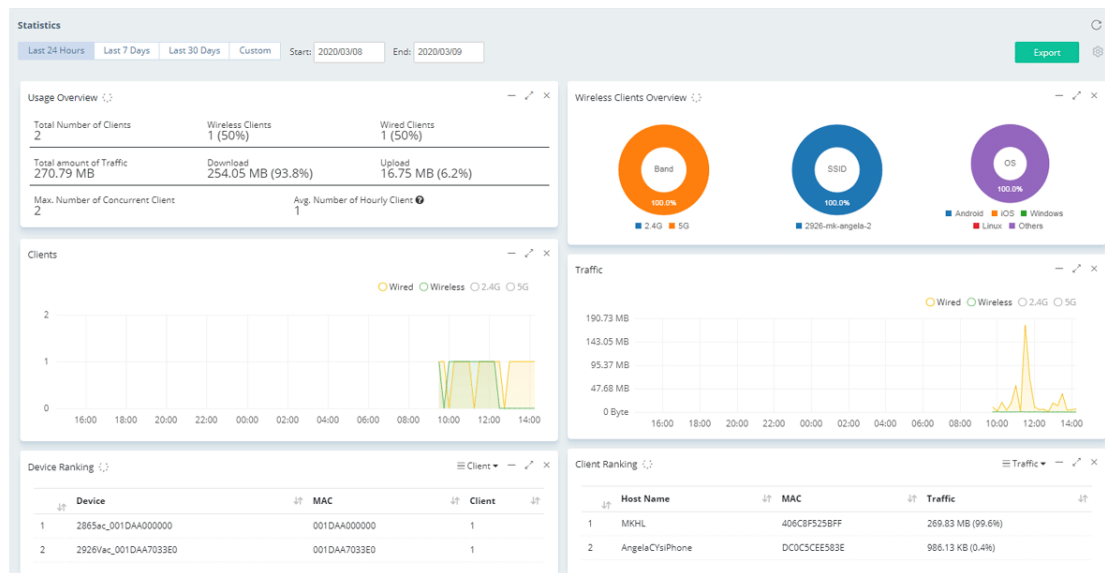

In addition, the statistics can be exported as ".XLS" file if you click the **Export** button on the top side.

8.3 Monitoring for Network Group


Monitoring menu offers options for monitoring the normal and abnormal actions for network group and CPE.

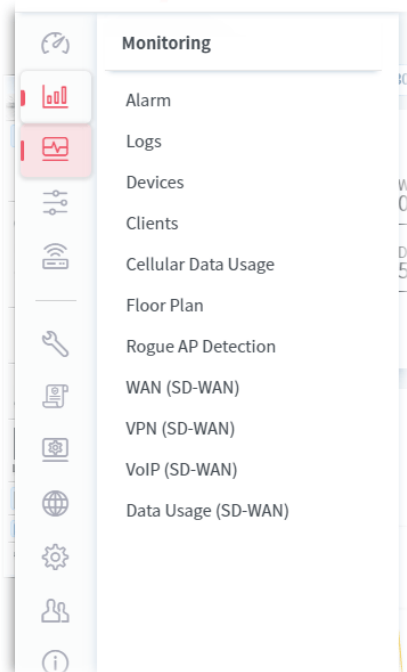

In this case, we choose RD8 as an example.

8.3.1 Alarm

Alarm message will be recorded on VigorACS 3 server when there is a trouble happened to the device (CPE). Only the users within the same user group will be notified for the message.

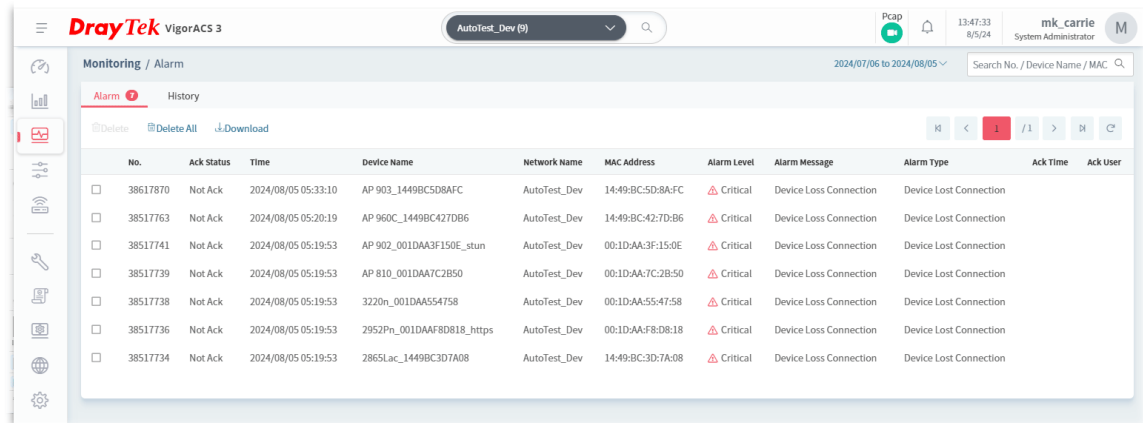

These parameters are explained as follows:

Item	Description
Alarm / History	Alarm – Display the alarm records recently. History – Display all the alarm records that have been solved and cleared.
Delete	Clear the alarm record which has been solved by VigorACS 3.
Ack Alarm/UnAck Alarm	Ack Alarm – Click to mark the selected alarm as acknowledged. This indicates that an administrator has reviewed the alarm and is handling it. UnAck Alarm – Click to mark the selected alarm as unacknowledged. This indicates that no administrator has acknowledged the alarm.
Delete All	Clear all of the alarm records which have been solved by VigorACS 3.
Download	Click to save alarm log as a XLS file.
No.	Display the index number of the alarm. It is offered by VigorACS 3 automatically.
Ack Status	Display the status of the records with the type specified here (Not Ack or Aacked).
Time	Display the time of the device to be monitored.
Device Name	Display the name of the monitored device.
MAC Address	Display the MAC address of the monitored device.
Alarm Level	Display the alarm message with the severity (e.g., Critical) specified.
Alarm Message	Display a brief explanation for the alarm sent by VigorACS 3 automatically.


Alarm Type	Display the alarm message with the type specified.
Alarm Type	Display the type of the alarm (e.g., Device Lost Connection).
Ack Time	Display the time when the alarm was acknowledged.
Ack User	Display the administrator who acknowledged the alarm.

8.3.2 Logs

Log provides administrator records for action executed, device name, MAC address, Device IP, CommandKey, and Current Time for CPE device managed and monitored by VigorACS.


The screenshot shows the 'Monitoring / Logs' section of the VigorACS interface. The 'All CPE Actions' tab is active, displaying a table of log entries. The table columns are: ID, Device Name, Device ID, MAC Address, Current IP, Logged IP, Action, Action ID, and Time. The table contains 16 rows of data, all from DrayTek devices. Above the table are buttons for 'Delete Object', 'Delete All', and 'Download'. A search bar is located at the top right of the interface.

These parameters are explained as follows:

Item	Description
Log Type	Click one of the tabs (e.g., All CPE Actions, Device Reboot, Reboot By CPE, Reset System Password, Set Parameter, File Transfer, Setting Profile, Device SysLog, CPE Notify, Device Register, Device Operate, Device Reject, Add Object, Delete Object and etc.) to display related log on this page.
	Enter the condition for VigorACS to search and display relational information.
Delete	Clear the alarm record which has been solved by VigorACS.
Delete All	Clear all of the alarm records which have been solved by VigorACS.
Download	Click this button to save log as a XLS file.

8.3.3 Devices

The administrator (user) can check information (such as Device name, IP address, MAC address, model name, network, status, up time, firmware version, number of current connected client, data traffic, and so on) of CPE under the selected network group by this page. The network group (e.g., Root Network in this case) selected above is the group to be monitored and information related to this selected network group will be shown below. This page shows all the devices (e.g., router, access points and switches) under the selected network group.

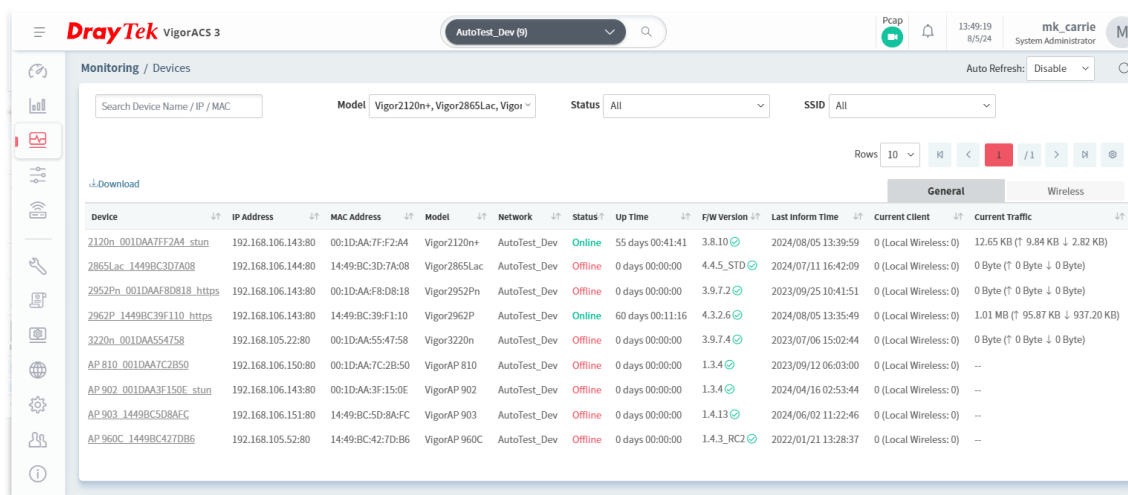


These parameters are explained as follows:

Item	Description
Search Device Name / IP / MAC	Enter the condition for VigorACS to search and display relational information.
Model	This area lists all of the devices that monitored by VigorACS. Check Select all to display information for all of the devices; or check the name of the device to display the information related to the selected device.
Status	Online – This page displays information for the device which is online currently. Offline – This page displays information for the device which is offline currently. All – This page displays information for all of the devices no matter it is online or offline.
SSID	This area lists information for CPE with wireless features monitored by VigorACS. Check All to display all of the devices; or check the name of the device to display the information related to the selected device. SSID – SSIDs for CPE with wireless features will be displayed in this drop down list. Choose one of the SSIDs. Information related to the selected SSID will be displayed on this page.

General / Wireless	General – List the general information for the CPE under the selected group. Wireless – List only the wireless information for the CPE under the selected group.
Download	Click this button to save information for monitored devices as a XLS file.


8.3.4 Clients

This page displays general information (such as hostname, MAC address, IP address, name of connected device, type, SSID, connection time, and etc.) for wireless / wired clients which connect to CPEs under the selected network group by this page. The network group (e.g., rd8 in this case) selected above is the group to be monitored and information related to this selected network group will be shown below.

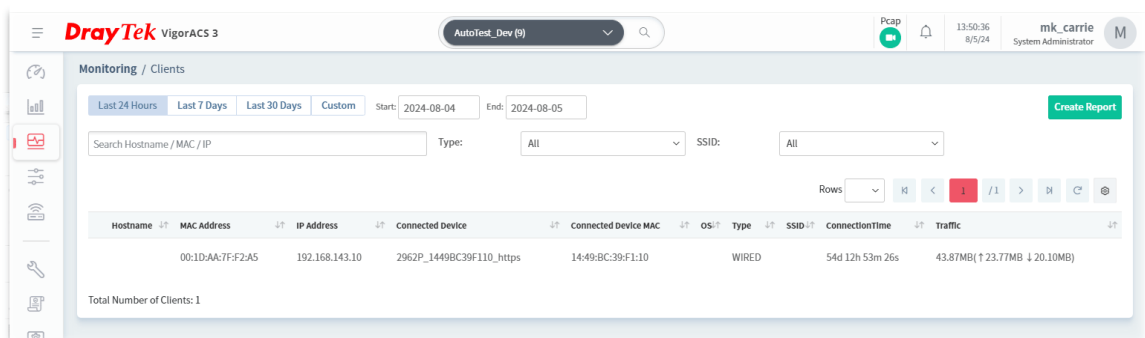


These parameters are explained as follows:

Item	Description
Last 24 Hours / Last 7 Days / Last 30 Days / Custom	Display the clients detected within 24 hours, 7 days, 30 days or user defined days.
Search Hostname / MAC / IP	Enter the condition for VigorACS to search and display relational information.
Type All WIRED WIRELESS_2.4g WIRELESS_5g	Check All to display information for all of the devices (including wired and wireless devices). Wired – This page displays information for the device without wireless feature. Wireless_2.4g – This page displays information for the device with 2.4GHz wireless feature. Wireless_5g – This page displays information for the devices with 5GHz wireless feature.
SSID	This area lists information for CPE with wireless features monitored by VigorACS.

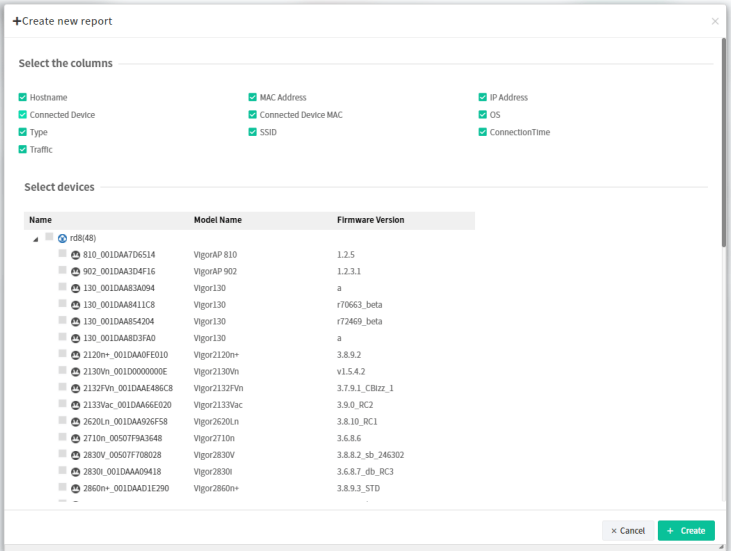	Check All to display all of the devices; or check the name of the device to display the information related to the selected device. SSID – SSIDs for CPE with wireless features will be displayed in this drop down list. Choose one of the SSIDs. Information related to the selected SSID will be displayed on this page.
Create Report	Click this button to save client's information as a "XLS" file. After clicking the button, the following page will appear.  Set the conditions and choose the devices, then click +Create.

8.3.5 Cellular Data Usage

This page displays traffic information including data used, data cycle, status, percentage, downloaded data, uploaded data for device equipped with LTE features (e.g., Vigor2927Lac). The values defined in **Quota Settings** indicate total amount of quota for all LTE devices managed by VigorACS.

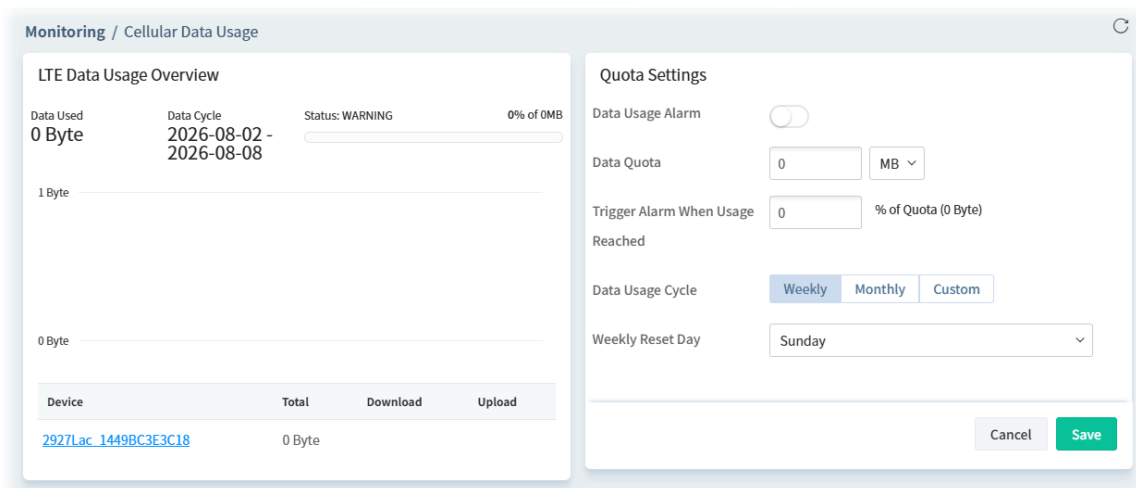


These parameters are explained as follows:




Item	Description
LTE Data Usage Overview	Status – The bar chart displays the data usage in yellow, green and grey based on values defined in Quota Settings. If data usage for the LTE model exceeds the percentage of quota configured in the field of Trigger Alarm When Usage Reached in Quota Settings, the amount of used data will be shown in Yellow; if not, it will be displayed in Green. The rest quota will be shown in gray. In addition, device name, throughput, downloaded data and uploaded data for each LTE can be seen on the table below this page.
Quota Settings	
Data Usage Alarm	When it is enabled, a warning message will be shown in the page of DEVICE MENU>>Monitoring>>Alarm once the data usage reaches the threshold defined in Trigger Alarm When Usage Reached .
Data Quota	The value (unit is MB/GB) defined here means total amount of data quota available for all LTE devices managed by VigorACS.
Trigger Alarm When Usage Reached	Set a threshold for triggering alarm mechanism.
Alarm Severity Level	Set the alarm severity (critical, major, minor, warning and normal). Such severity will be shown on DEVICE MENU>>Monitoring>>Alarm when the data usage for LTE model(s) reaches the threshold.
Data Usage Cycle	Select one of the options (Weekly, Monthly, Custom) as data usage cycle. Cycle Duration(days) – When Custom is selected, please specify the cycle duration. The data quota for LTE model will be reset after the days configured here. Cycle Starts On –When Custom is selected, specify one date as a starting point to reset the data quota for LTE model. Weekly Reset Day – When Weekly is selected as Data Usage Cycle, please use the drop down list to choose one day (Monday to Sunday) for VigorACS to reset the data quota for LTE model. Monthly Reset Day – When Monthly is selected as Data Usage Cycle, please use the drop down list to choose a date for VigorACS to reset the data quota for LTE model.
Cancel	Discard current modification.
Save	Save the current settings.

8.3.6 Floor Plan

This function is helpful to determine the best location for VigorAP in a room. A floor plan of a room is required to be uploaded first. By dragging and dropping available VigorAP icon from the list to the floor plan, the placement with the best wireless coverage will be clearly indicated through simulated signal strength.

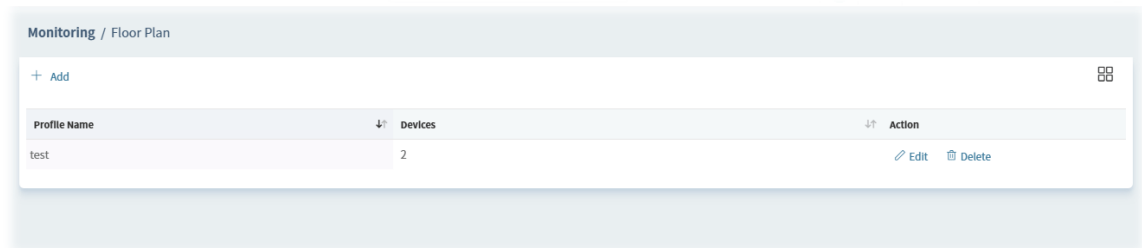

These parameters are explained as follows:

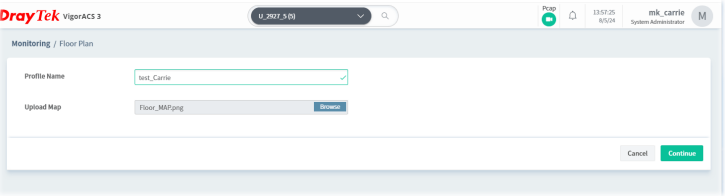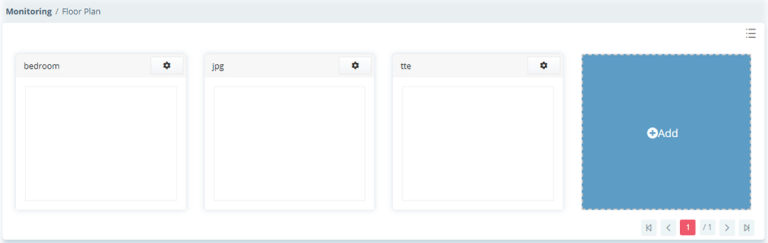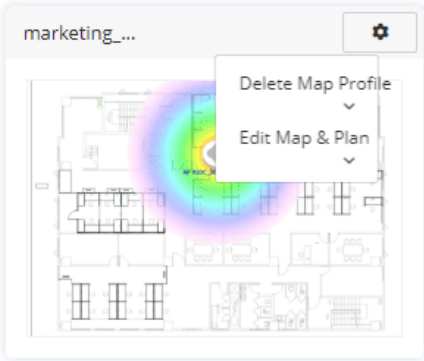Item	Description
+Add	Creates a new profile. 
	Click to change to browse view. It displays all of the floor plan profiles with the map used.  You can click Add on this page to create a new profile. To modify the existed profile, click the icon on the right-top to display a drop down menu. Then click Edit Map & Plan to perform the modification, or click Delete Map Profile to remove the selected floor plan profile. 

Profile Name	Display the name of the floor plan profile.
Device	Display the number of AP devices placed on the plan profile.
Action	Edit – Click to modify the profile. Delete – Click to remove the selected profile.

To create a new profile:

1. Click **+Add**.
2. From the following page, enter profile name (e.g., test_Carrie) and click Browse to upload a map (e.g., Floor_MAP.png). Click **Continue**.

DrayTek VigorACS 3

U_2927_5 (5)

Pcap 13:57:25 8/5/24 mk_carrie System Administrator M

Monitoring / Floor Plan

Profile Name test_Carrie

Upload Map Floor_MAP.png Browse

Cancel Continue

3. A floor map will be displayed on the screen.

Monitoring / Floor Plan

Profile Name test_Carrie


Edit Dimension + Add Device

Cancel Save


Edit Dimension – Draw a line and enter the distance of length / width of the map.

Add Device – Click to display available VigorAP to apply it on to the map.


- Click **+Add Device**. Available VigorAP icons and name list will be displayed on the right side of this page.

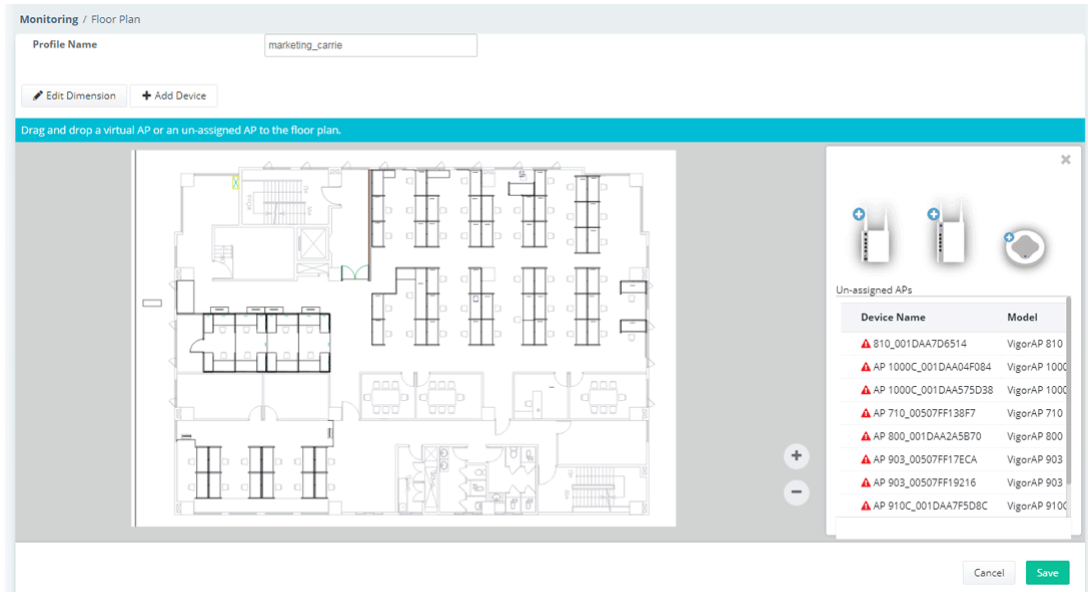



- Select the AP you want (e.g., VigorAP910C icon, in this case) from right side of this page. Drag and drop the icon on the map. Later, an icon with effective signal range will be seen on the screen.

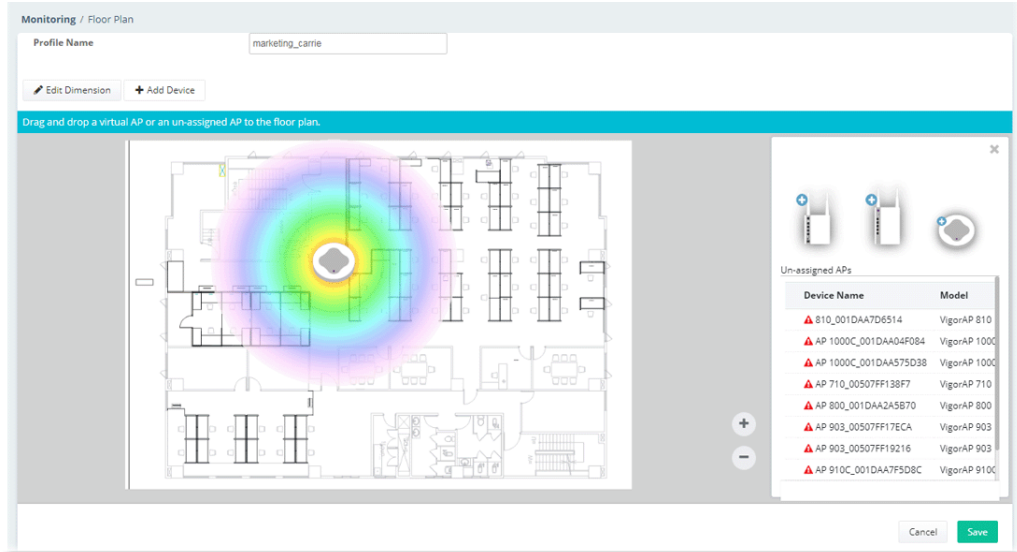


6. Slightly click the AP icon on the map. Two links of **Link to an AP** and **Remove Device** will be shown on the right side.

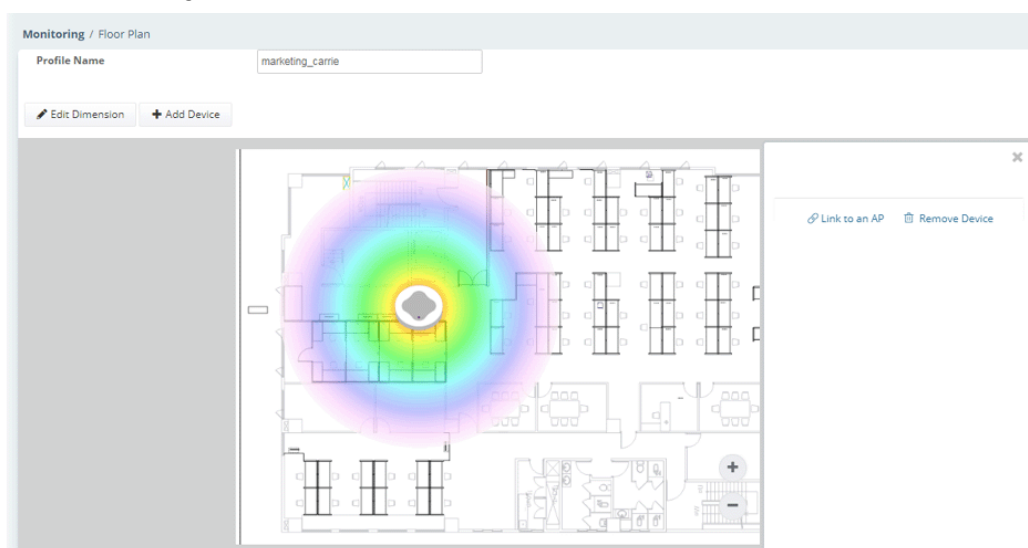

- **Remove Device** – If you do not satisfy the location of AP icon, click this link to remove the AP icon from the map.
 - **Link to an AP** – If you satisfy the location of AP icon, click this link to select VigorAP. All of un-assigned AP names will be shown on the list. Choose the one you want and click Apply. Then such map has been connected with the specified AP.
7. Click **Link to an AP** to select the AP you want. After clicking **Apply**, the name of the VigorAP will be displayed below the icon on the map.

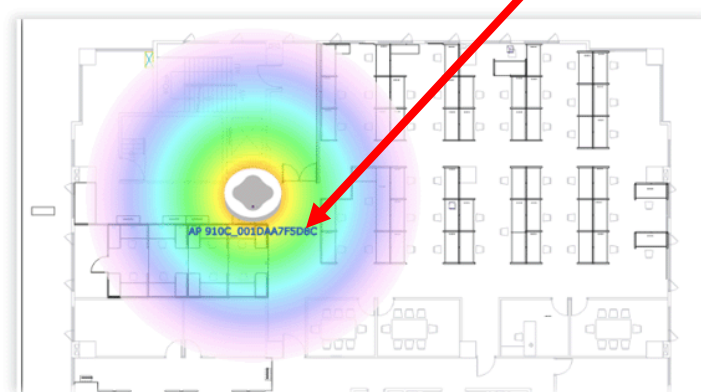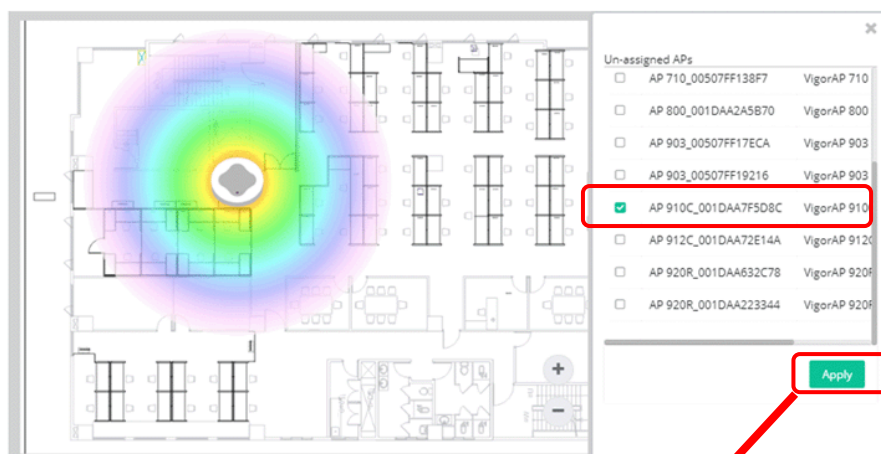


8. Click **Save**. The new created profile will be shown on the page.

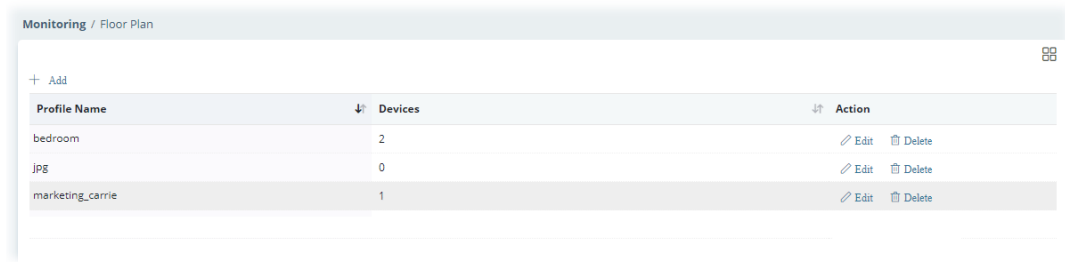

8.3.7 Rouge AP Detection

Information detected by VigorAP can be displayed in this page. In which, the APs will be classified with rogue AP and known AP in different colors.

Click the **Rogue AP** tab to display the following page. All the APs detected will be treated as Rogue AP.

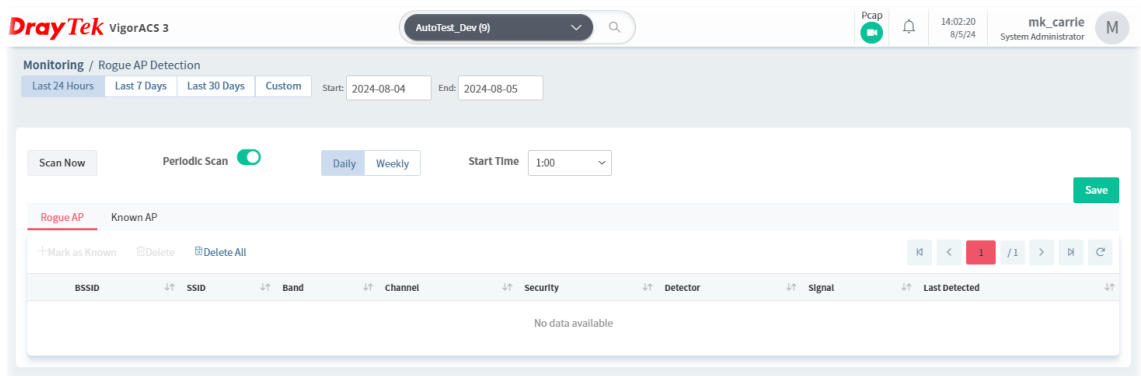


These parameters are explained as follows:

Item	Description
Last 24 Hours / Last 7 Days / Last 30 Days / Custom	Display the access point(s) detected within 24 hours, 7 days, 30 days or user defined days.
Scan Now	Perform device detection immediately.
Periodic Scan	After enabling this feature, access points will be detected periodically based on the setting configured here. Daily –VigorACS will detect access point on certain time every day. Start Time – Specify a time point as starting time for device detection. Weekly – VigorACS will detect access point on certain time every week. On – Choose the day to perform device detection. Start Time – Specify a time point as starting time for device detection.
+Mark as Known	Vigor access points can be detected and be shown in the table under Rogue AP. However, some of them might be known to you and should


	not be listed here. To solve this problem, simply click the access point and then click Mark as Known . The selected access point will be transferred and listed under Known AP.
Delete	Remove the selected access point from the list.
Delete All	Remove all of the access points from the list.

Click **Known AP** to display the following page. All the access points listed under this page will be treated as friendly AP.

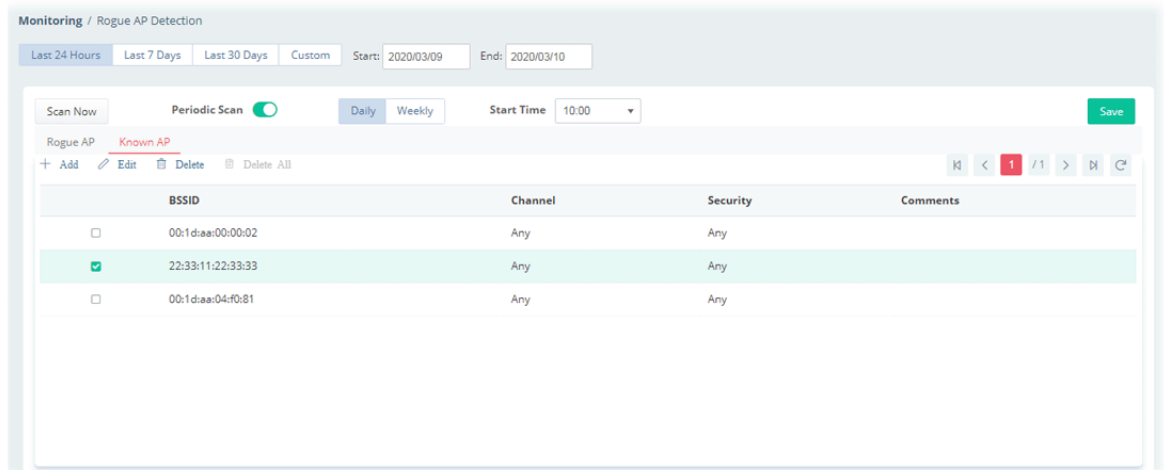

These parameters are explained as follows:


Item	Description
Add	Click to create a new entry for entering information for access point.
Edit	Change the settings for a selected access point. Select one of the access points. The Edit link will be available for clicking, then. After clicking it, channel, security and comments will be allowed to be modified with different values.

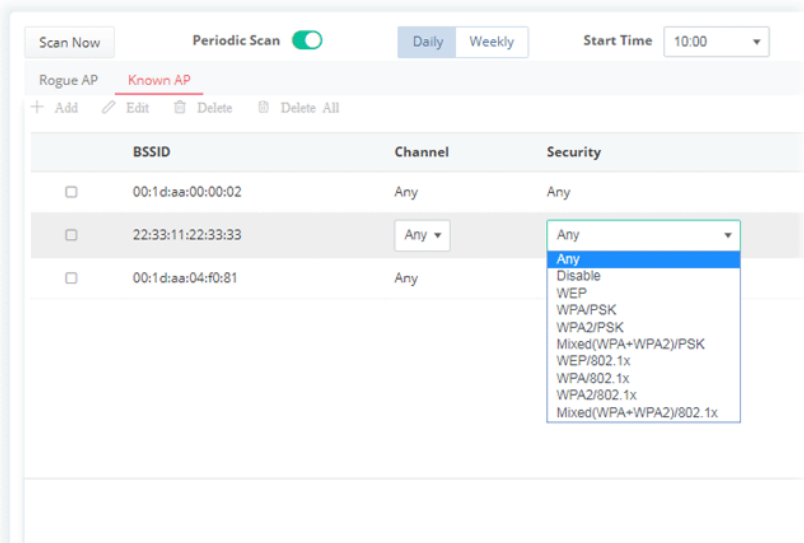


Delete	Remove the selected access point from the list.
Delete All	Remove all of the access points from the list.
BSSID	Display the MAC address of the detected access point.
Channel	Display the channel used by the access point. Check the box of the selected access point and click Edit .
Security	Display the security mode used by the access point. It can be changed.
Comments	Display a brief explanation for the access point. It can be changed.
Save	Save the settings.

8.3.8 WAN (SD-WAN), VPN (SD-WAN), VoIP (SD-WAN), Data Usage (SD-WAN)

These pages (WAN (SD-WAN), VPN (SD-WAN), VoIP (SD-WAN), Data Usage (SD-WAN)) are only available when SD-WAN feature for the selected network group has been enabled. If not, after accessing into these page, the following dialog will appear.

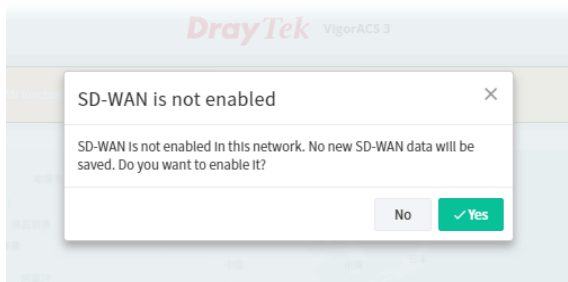

If you click **Yes**, the system will open the Network Management web page and pop-up the following dialog.

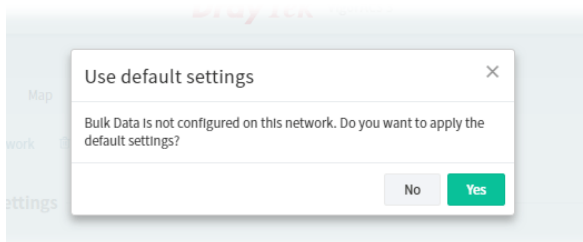

Click **Yes** to use the default settings.

When the SD-WAN is enabled, refer to **4.4 Monitoring for SD-WAN Network Group** for detailed information of corresponding configuration pages.

Setting Map

+ Add New Network - Delete This Network - Change Network

General Settings

Network ID: 254 Username: fae ✓

Name: FAE ✓ Password: ...

Location:

Advanced Settings

Enable SD-WAN: ☒


Bulk Data Settings

Set the category of data to be collected for statistical analysis. You can freely select the data you want to count, use drag and drop to place each category in the corresponding profile, and specify the report interval at which the profile returns a bulk data to the ACS. If you disable bulk data categories, it will affect the SD-WAN operation.

Profile #1	Enable	Profile #2	Enable	Available / Disabled Bulk Data Categories
Report Interval (sec): 120 ✓	☒	Report Interval (sec): 300 ✓	☒	
Bulk Data Categories:		Bulk Data Categories:		
WAN and VPN (Size: 8)		Users and Apps (Size: 4)		
VoIP (Size: 1)				

8.4 Configuration Menu for Network Group,


Configuration settings will vary for root network, group network and specified CPE.
This section introduces the menu item used for the network group with SD-WAN feature.

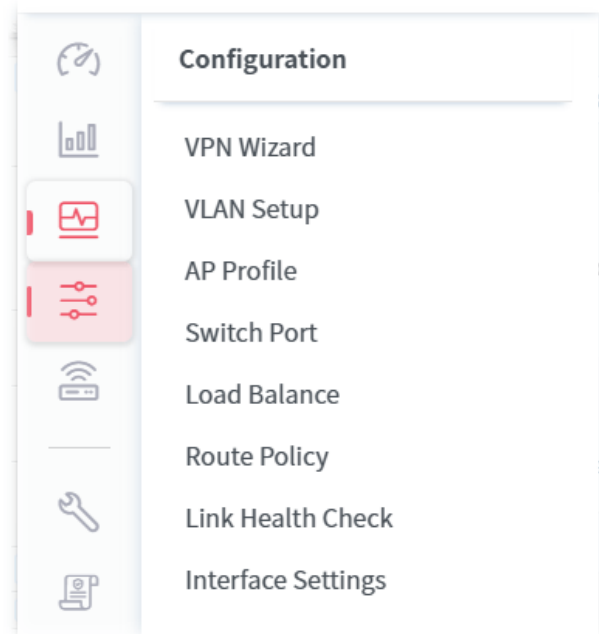

8.4.1 VPN Wizard

VigorACS offers an easy method, VPN Wizard, to configure VPN settings for building VPN connection between two CPEs.


This page displays all the VPN connection status globally for Root Network or the VPN connection status for the network group selected.

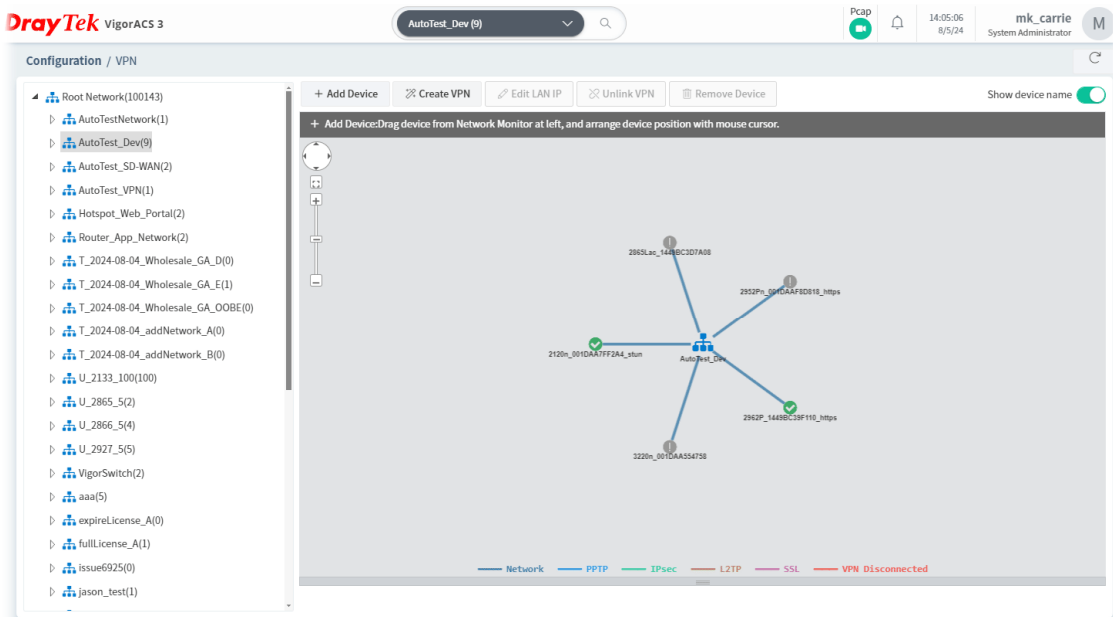


Different colors for arrows represent different protocols used in VPN connections. For example, Purple means Network Group; Green means PPTP mode; Blue means IPsec mode; and Red means the VPN connection is failed.

8.4.2 AP Profile

AP profile is used to apply to a selected access point. It is very convenient for the administrator to configure the setting for access point without opening the web user interface of the access point. The functions listed in the AP profile in VigorACS contain settings for all of models of VigorAP. When an AP profile is created, it can be used to apply onto any access point managed by VigorACS. If the access point does not have the functions defined in the AP profile, after being applied, only the functions that the selected access point supports will be overwritten by the selected AP profile.

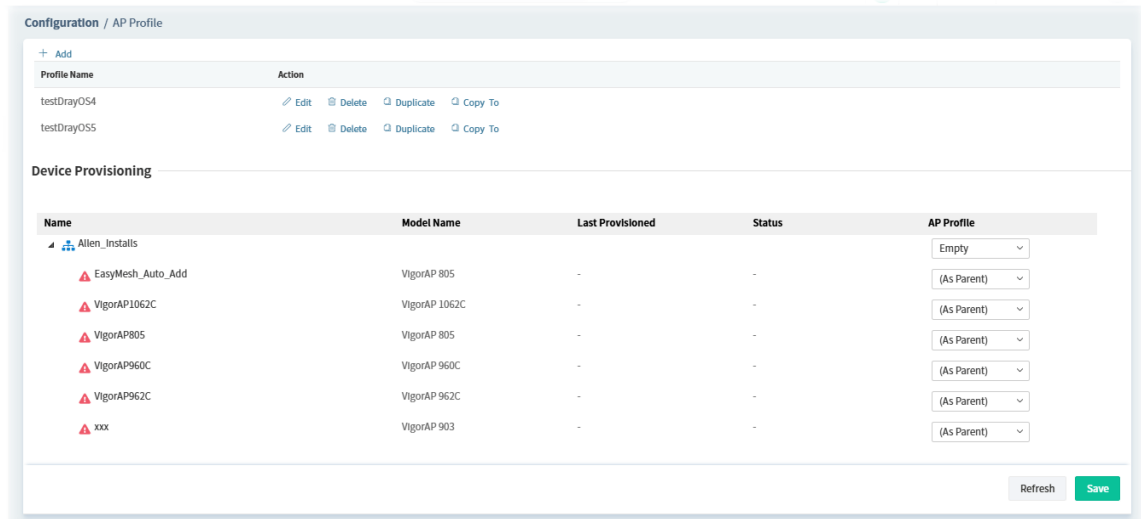

These parameters are explained as follows:

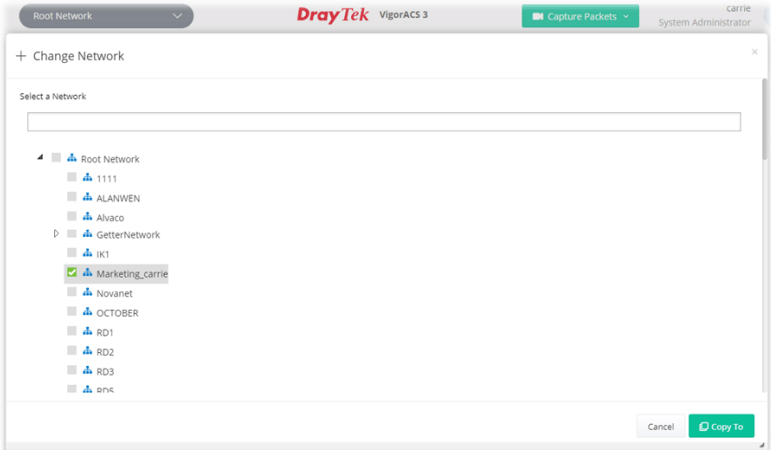Item	Description
+Add	Create a new AP profile with basic settings.
Profile Name	Display the name of the AP profile.
Action	Edit – Configure detailed settings for the selected AP profile. Delete –Delete the selected AP profile. Duplicate – Click to duplicate a new profile (e.g., aaa(1)) based on the selected profile (e.g., aaa). Copy To – Click to open the following page. Then select a network (e.g., Marketing_carrie in this case) from the tree view of Root Network. After clicking the Copy To button, the configuration of selected AP profile will be applied to the selected network (e.g., Marketing_carrie). 
Device Provisioning	Locate the access points for applying suitable AP profile. Name – Display a tree view for model managed by VigorACS. Model Name – Display the name of the model. Last Provisioned – Display the time that AP profile was applied to the selected device. Status – Display the status (updating, complete and “–”) of the AP. AP Profile – Choose an AP profile for applying to the selected AP. In which, “As Parent” means to apply the profile listed on the top to the selected AP.
Refresh	Click to refresh current page.
Save	Click to save the changes in this page.

8.4.2.1 Add an AP Profile


Click **+Add** to create a new AP profile.

These parameters are explained as follows:

Item	Description																									
Profile Type	Recognize and confirm your AP belongs to DrayOS 4 or DrayOS 5 and select the correct version. DrayOS 4 AP – Representative models such as AP903, AP802, AP912C, etc. DrayOS 5 AP – Representative models such as AP1062C.																									
Profile Name	Enter a name of the profile.																									
AP Login Username	Enter a username for login the access point.																									
AP Login Password	Enter a password for login the access point.																									
Back to profile list	Return to previous page, AP profile list.																									
Save	Save the settings and display the new profile on the AP profile list. + Add New Profile <table><tr><td>Test</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr><tr><td>Test2</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr><tr><td>ttt</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr><tr><td>redf</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr><tr><td>AP_Carrie</td><td>Edit</td><td>Delete</td><td>Duplicate</td><td>Copy To</td></tr></table>	Test	Edit	Delete	Duplicate	Copy To	Test2	Edit	Delete	Duplicate	Copy To	ttt	Edit	Delete	Duplicate	Copy To	redf	Edit	Delete	Duplicate	Copy To	AP_Carrie	Edit	Delete	Duplicate	Copy To
Test	Edit	Delete	Duplicate	Copy To																						
Test2	Edit	Delete	Duplicate	Copy To																						
ttt	Edit	Delete	Duplicate	Copy To																						
redf	Edit	Delete	Duplicate	Copy To																						
AP_Carrie	Edit	Delete	Duplicate	Copy To																						

8.4.2.2 Edit an AP Profile

To configure detailed settings for each AP profile, click the **Edit** button for the selected profile. The setting page appears as follows:

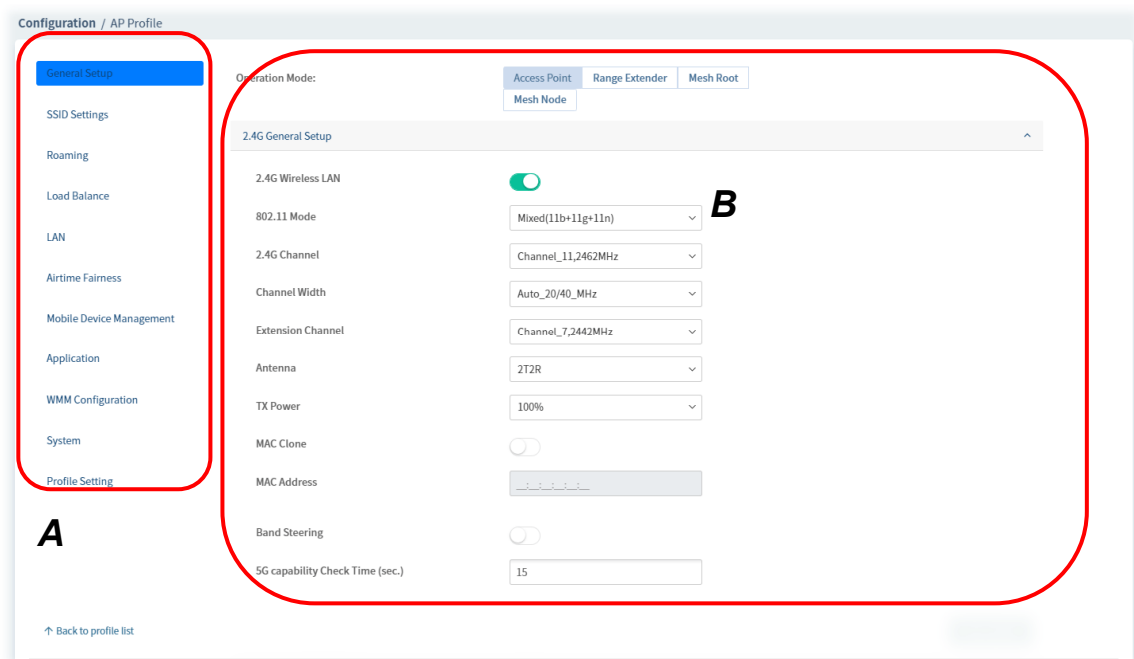

These parameters are explained as follows:

Item	Description
Area A - Menu Item	At present, the available menu items contain, ● General Setup ● SSID Settings ● Roaming ● Load Balance ● LAN ● Airtime Fairness ● Mobile Device Management ● Application ● WMM Configuration ● System ● Profile Setting
Area B - Settings	This area will vary according to the item selected in Area A - Menu Item.

 If required, refer to User's Guide of VigorAP for the detailed information of settings definition.

8.4.3 Load Balance

While detecting the connection quality for the whole network group, the ACS server will consider the values of latency, loss, and jitter to get load balance for packets.

This page allows you to configure the weight for latency, jitter and packets loss.

Configuration / Load Balance

Load Balance Mode: **IP Based** | Session Based

Line Speed: **Auto Detect** | According To Line Speed

Load Balance Weights: Custom ✓

Upload Bandwidth Weight: Low — High

Download Bandwidth Weight: Low — High

Low Latency Weight: Low — High

Low Jitter Weight: Low — High

Less Packet Loss Weight: Low — High

[Clear](#) [Save and Apply to CPEs](#)


These parameters are explained as follows:

Item	Description
Load Balance Mode	IP Based – The same source / destination IP pair will select the same WAN interface as policy. It is the default setting. Session Based – All of the WAN interfaces will be used (as out-going WAN) for passing through new sessions to get better transmission speed.
Line Speed	Auto Detect – Select to let the CPE reach the best load balance. It is the default setting. According to Line Speed – Select it if you know the practical bandwidth for your WAN interface.
Load Balance Weights	There are four weight types for choosing to meet your request. Bandwidth-Based – The load balance weight for each WAN will be executed according to line speed setting (DownLink/UpLink Rate). Quality-Based – The load balance weight for each WAN will be executed according to the transmission rate, latency time and the jitter time. Reliability-Based – The load balance weight for each WAN will be executed according to line speed and packet loss value. Usually, the WAN interface with low packet loss will have the higher ratio to be used. Custom – You can distribute the usage ratio for each WAN interface by setting weights for bandwidth, latency, jitter, and packet loss respectively. ● Upload /Download Bandwidth Weight – The higher the weight


	is, the WAN interface with higher bandwidth will get higher usage. ● Low Latency Weight – It defines the time taken by Vigor router when sending the packets to the IP set in Link Condition Detection. The higher the weight is, the WAN interface with lower latency will get higher usage. ● Low Jitter Weight – It defines the change rate of latency. For stable session, small jitter value will be better. The higher the weight is, the WAN interface with lower jitter will get higher usage. ● Less Packet Loss Weight – It defines the proportion that packets will be discarded before arriving at the IP set in Link Condition Detection. The higher the weight is, the WAN interface with lower packet loss will get higher usage.
Clear	Click to return to factory default setting.
Save and Apply to CPE's	Click to save the settings and apply them to all the CPE devices under the selected network group.

8.4.4 Route Policy

The Route Policy feature gives you control over how different types of outbound traffic are routed, through any of the LANs, WANs or VPNs.

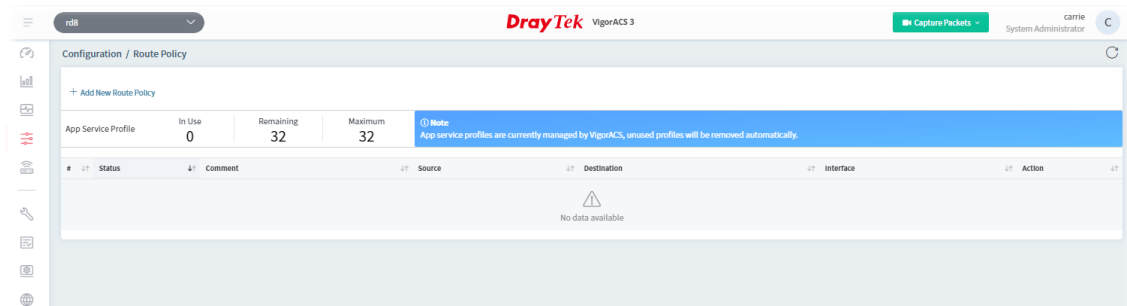

- It is available only when SD-WAN feature is enabled for current used network group. If not enabled, a notification will appear to ask for SD-WAN activation.



8.4.4.1 Creating a Route Policy with Basic Mode

1. Click **+Add New Route Policy** to create a new profile. In default, the settings based on Basic Mode will be shown as follows.

+ Add a New Route Policy

Enable

☒

Comment

Marketing_Carrie

Source

Any

✓

Destination

App Services

✓

App Service Profile

Create a new profile

From an existing profile

Selected App Service

FTP

DNS

Wikipedia

✓

Send via Interface

WAN 1

Note

If you want to send via VPN (to the Hub), please dial VPN Hub and Spoke connection first.
Go to SD-WAN VPN Settings


+ Advanced Mode

Cancel


Save and set to CPEs

These parameters for Basic Mode are explained as follows:


Item	Description
Enable	Click the icon to enable / disable the policy profile.
Comment	Enter a name of the route policy profile.
Source	Set the source IP addresses to which this rule is to be applied. Any – This rule applies to all source IP addresses. IP Range – This rule applies to the specified range of source IP addresses. If there is only one source IP address, enter the address in both the Start and End fields.
Destination	Set the destination IP addresses to which this rule is to be applied. Any – This rule applies to all destination IP addresses. IP Range – This rule applies to the specified range of destination IP addresses. If there is only one destination IP address, enter the address in both the Start and End fields. VoIP – This rule applies to VoIP packets. App Services – This rule applies to App services. Create a new profile – Click this tab to create a new App Service Profile. Selected App Service – Specify required App services (e.g., CNN, FTP, DNS, SMTP/SMTP STARTTLS, Wikipedia). From an existing profile – If an App service profile has been created previously, click this tab to choose an existing route policy profile. Selected an AP Service Profile – From the drop-down list,

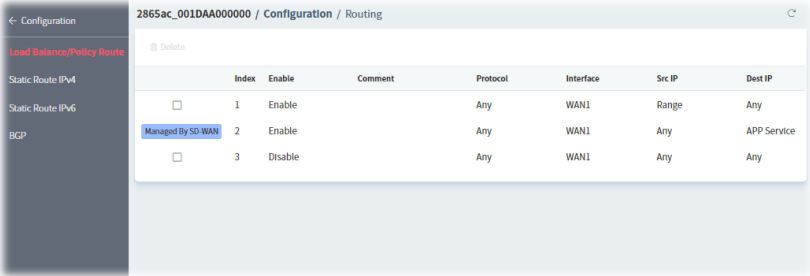	choose the one you want. Note that, when a route policy is set with App services, it will be applied to the router at the same time. Open Configuration>>Routing>>Load Balance / Policy Route. The routing rule with APP service will be highlighted and marked as "Managed By SD-WAN". It means the policy was created by ACS SD-WAN, and can be edited or deleted by ACS SD-WAN only. 
Send via Interface	WAN#/LAN#/DMZ/IP Routed Subnet – Select an interface from the list. The traffic will be sent to the designated interface.
+Advanced Mode	Click to open the configuration page with more options.
Save and Set to CPEs	Save the above configuration and set to CPE devices.

- Click **Save and set to CPEs**.

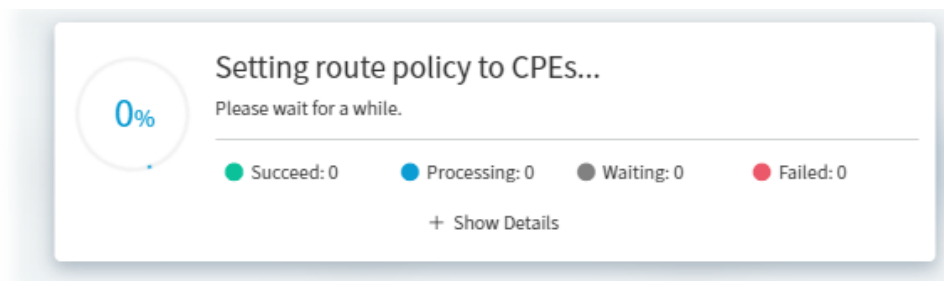

- A route policy has been set successfully.

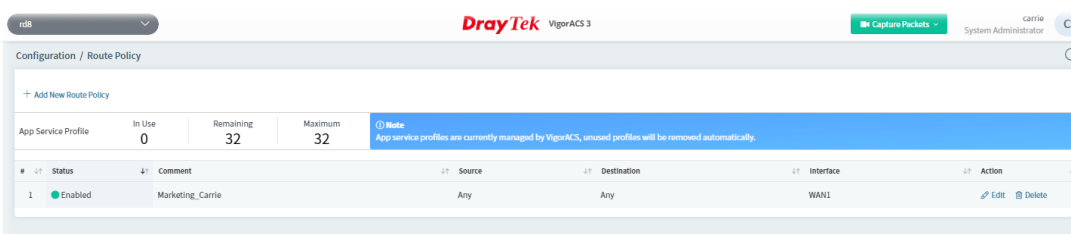

8.4.4.2 Creating a Route Policy with Advanced Mode

- Click **+Add New Route Policy** to create a new profile. In default, the settings based on Basic Mode will be shown as follows.

+ Add a New Route Policy

Enable
☒

Comment

Source

Destination

Send via Interface

Note
If you want to send via VPN (to the Hub), please dial VPN Hub and Spoke connection first.
Go to SD-WAN VPN Settings

+ Advanced Mode

Cancel

Save and set to CPEs

- Click **+Advanced Mode** to get the following page.

Note
If you want to send via VPN (to the Hub), please dial VPN Hub and Spoke connection first.
Go to SD-WAN VPN Settings

Send via Gateway

☒ Default Gateway
☐ Specific Gateway

Packet Forwarding to WAN/LAN via

☒ Force NAT
☐ Force Routing

Failover

☐

Failback

☐

Basic Mode


Cancel

Save and set to CPEs


Item	Description
Send via Gateway	Default Gateway - Traffic will be sent to the default gateway address of the specified interface. Specific Gateway - Traffic will be sent to the specified gateway address instead of the default gateway address. Specific Gateway - Enter an IP address.
Packet Forwarding to WAN/LAN	Force NAT - The source IP address will not be used to connect to the remote destination. Network Address Translation (NAT) will be used, where a common IP address will be used. Force Routing - The source IP address will be preserved when connecting to the remote destination.
Failover	Click the icon to enable / disable the failover function.

	Failover  ☒ Failover to Default WAN when interface offline. Failover to Gateway Default Gateway Specific Gateway Failover to - If the interface specified above loses connection, traffic can be forwarded to an alternate interface or be scrutinized by an alternate route policy. Use the drop down list to choose an interface as an auto failover interface. Failover to Gateway - The failed-over traffic can be sent to the gateway. Default Gateway - Click to use the default gateway. Specific Gateway - Click to use a specific gateway. Failover to Specify Gateway - Enter an IP address. Failback - Click the icon to enable / disable the failback function.
Basic Mode	Click to return to configuration page with less options.
Save and set to CPEs	Save the above configuration and set to CPE devices.

- Click **Save and set to CPEs**.

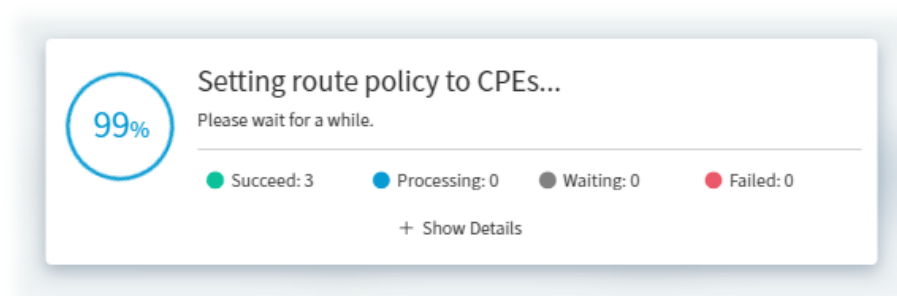


- A route policy has been set successfully.

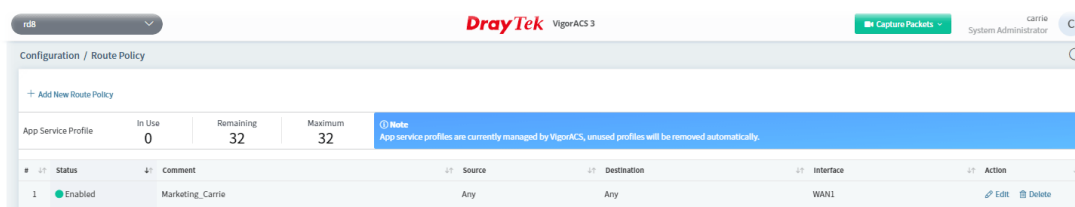


8.4.5 Link Health Check

This page enables the system administrator to set up various profiles for quality monitoring. This allows the VigorACS server to conduct quality monitoring on the WAN interface of each CPE using different profiles.

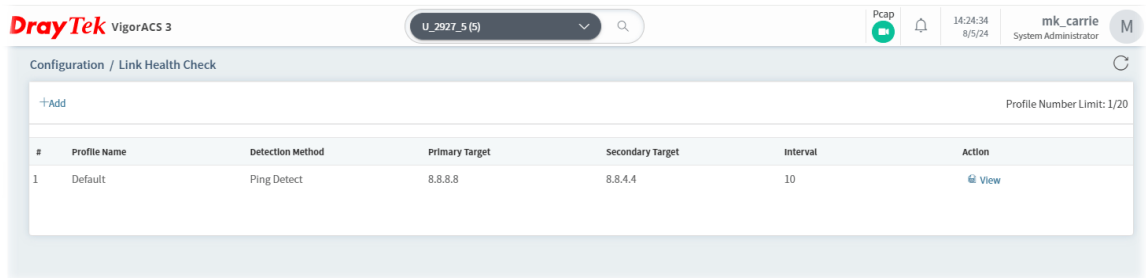

Click **+Add** to create a new link health check profile.

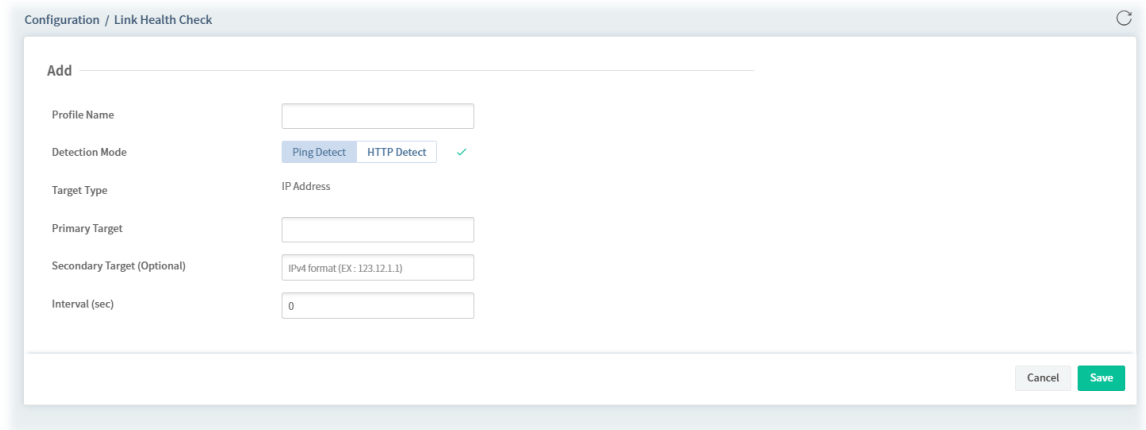

These parameters are explained as follows:


Item	Description
Profile Name	Enter the profile name.
Detection Mode	Select Ping Detect or HTTP Detect.
Target Type	Display the target type of this profile.
Primary Target	Enter the IP address to be monitored by VigorACS.
Secondary Target (Optional)	Enter the secondary IP address to be monitored by VigorACS. If the IP address is the same as the Primary Target, only that specific IP address will be monitored.
Interval(sec)	Set the interval for monitoring the interface.
Save	Click to save the changes in this page.

8.4.6 Interface Settings

This page enables the system administrator to set interface settings (WAN) for quality monitoring. This allows the VigorACS server to conduct quality monitoring on the WAN interface of each CPE using different profiles.


8.4.6.1 Performance Probe

The default performance probe includes profiles of the Wired WAN and Wireless WAN.

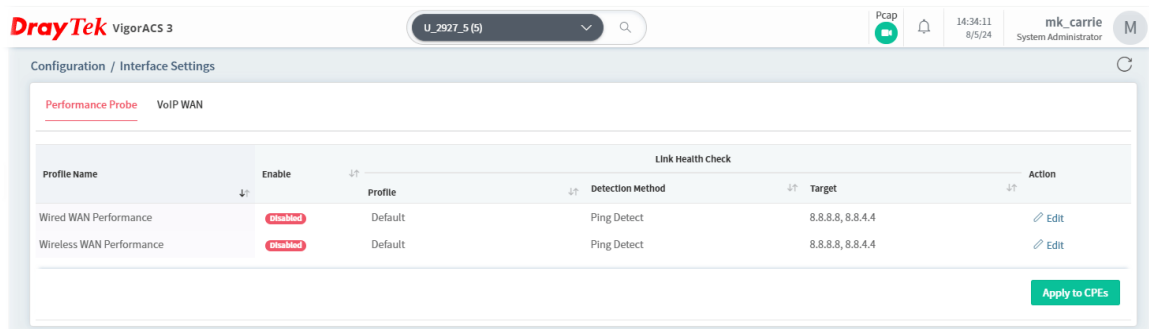

Click **Apply to CPEs** to apply the configuration in this page to all the CPEs managed by VigorACS server.

Click **Edit** of the selected profile (Wired WAN Performance or Wireless WAN Performance) to make modifications.

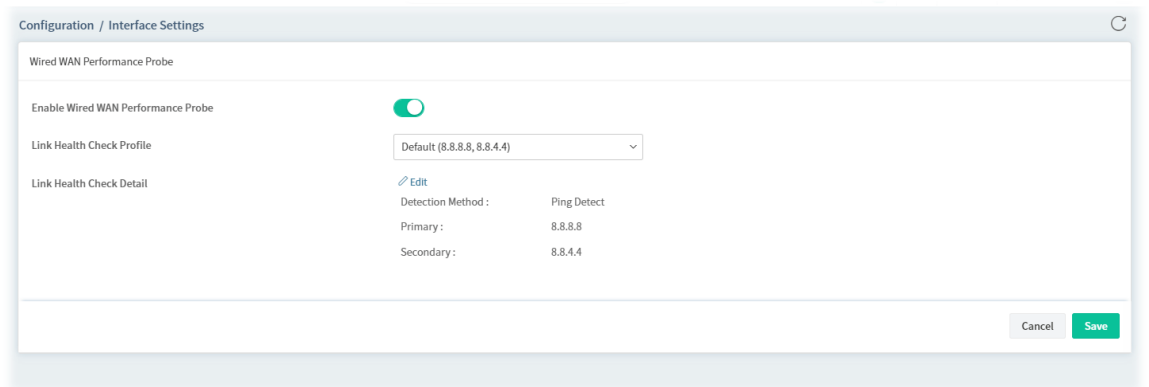

These parameters are explained as follows:

Item	Description
Enable Wired WAN Performance Probe	Switch the toggle to enable or disable this profile.
Link Health Check Profile	Use the drop-down list to specify a link health check profile.
Link Health Check Detail	Display the detailed information of the link health check.

Click **Save** to save the settings and return to previous page.

8.4.6.2 VoIP WAN

At present, the routers which support VoIP WAN (SD-WAN) are Vigor2927, Vigor2865 and Vigor2866.

WAN1 : mos 4.3 ● VoIP WAN

WAN2 : mos 4.0 ●

WAN3 : mos 3.6 ●




Digital phones can be connected to any router via Ethernet interface (no need to support VoIP function). With the VoIP WAN function, we can set a range. As long as the signal strength falls within this range, you can use digital phones to communicate with the remote end.

These parameters are explained as follows:


Item	Description
Enable VoIP WAN	Switch the toggle to enable or disable the VoIP WAN connection. If enabled, set a range for detecting the VoIP packets to pass through VigorACS server.
Change VoIP WAN when current WAN MOS score is less than	Specify a MOS number as the starting point. MOS, the abbreviation of "Mean opinion score", represents overall quality of a system. The rating for MOS is from 3.0(bad) to 4.0 (excellent).
And another WAN is better by	Specify a MOS number as the ending point. The rating for MOS is from 0.1(bad) to 0.9 (excellent).
Clear	Click to return to factory default setting.
Save and Apply to CPEs	Click to save the settings and apply to all of the CPE devices managed by VigorACS server.

i It is available only when SD-WAN feature is enabled for current used network group. If not enabled, a notification will appear to ask for SD-WAN activation.




8.5 Hotspot Web Portal for SD-WAN Network Group

Configuration settings of Hotspot Web Portal will vary for group network and specified CPE.

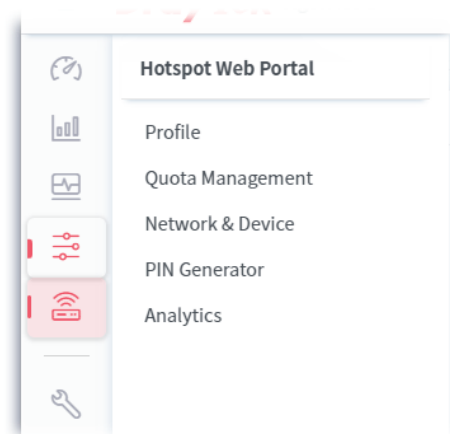



8.5.1 Profile

Profile is used to create or modify Hotspot Web Portal profiles. Up to 20 profiles can be created to meet different requirements according to LAN subnets, WLAN SSIDs, origin and destination IP addresses, etc.

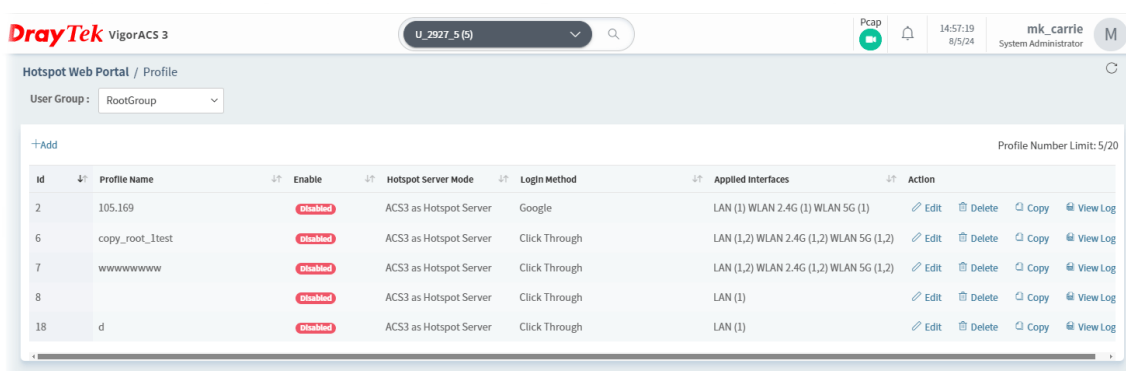


These parameters are explained as follows:

Item	Description
+Add	Click to create a new hotspot web portal profile.
Index	Display the index number of the profile.
Profile Name	Display the name of the profile.
Enable	Display if this profile is enabled or disabled.
Hotspot Sever Mode	Display the hotspot server mode. ● ACS3 as Hotspot Server ● The 3rd Party Hotspot Server
Login Method	Display the login method used by this profile.

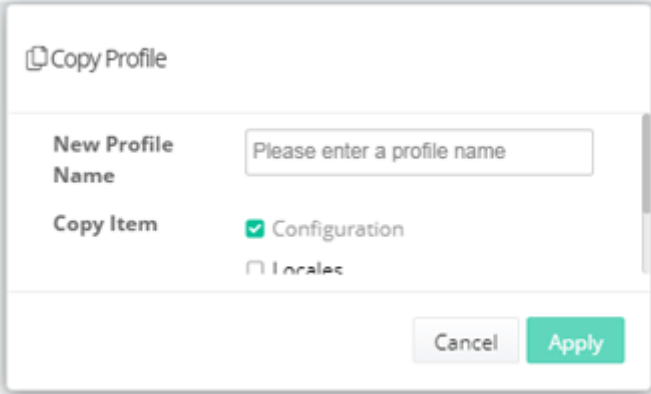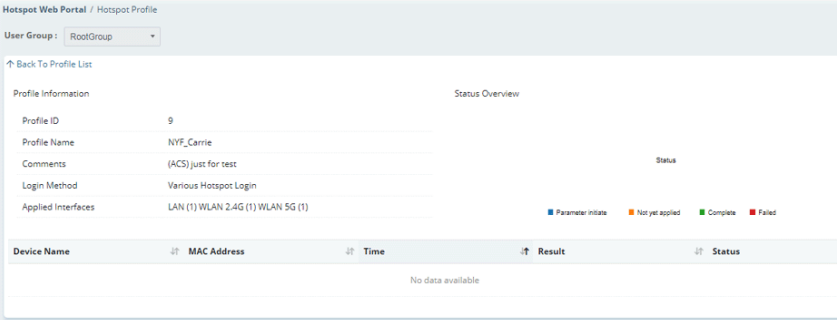Applied Interfaces	Display the interfaces specified by this profile.
Action	Edit – Click to configure settings for the selected profile. Delete – Click to delete the profile. Copy – The hotspot profile can be copied to another hotspot profile. Enter the profile name and select items to be copied. Then click Apply.  View Log – Click to review detailed information for the selected profile. 

To create a new hotspot web portal profile:

1. Click **+Add**.
2. From the following page, enter profile name (e.g., NYF_carrie) and click **Create**.

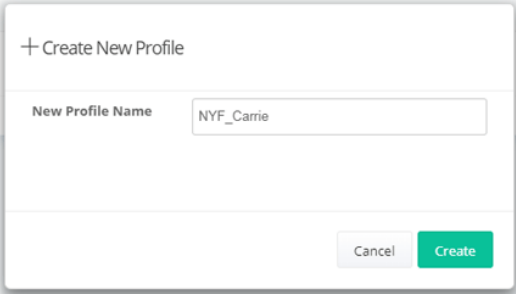

3. A new profile will be shown on the screen.

Hotspot Web Portal / Profile

User Group :

RootGroup

+Add

Profile Number Limit: 3/20

Index	Profile Name	Enable	Hotspot Server Mode	Login Method	Applied Interfaces	Action
1	NYF_Carrie	Disabled	ACS3 as Hotspot Server	Click Through	LAN (1) WLAN 2.4G (1) WLAN 5G (1)	<a>Edit <a>Delete <a>Copy <a>View Log
2	dsadas	Disabled	ACS3 as Hotspot Server	Click Through	LAN (1)	<a>Edit <a>Delete <a>Copy <a>View Log
3	NYF_carrie	Disabled	ACS3 as Hotspot Server	Click Through	LAN (1)	<a>Edit <a>Delete <a>Copy <a>View Log

4. Click **Edit** for modifying the detailed settings.

Hotspot Web Portal / Hotspot Profile

User Group : RootGroup

1 Profile Setup
2 Splash Page Customization (Optional)
3 Whitelist Setup (Optional)

Basic Settings

Enable Profile

NYF_Carrie

just for test

ACS3 as Hotspot Server

Applied Interfaces

Subnet

WLAN 2.4G

WLAN 5G

External RADIUS Server

Portal Server

Redirection URL

HTTPS Redirection

Captive Portal Detection

Landing Page Method

Landing Page URL

Quote Policy

Quote Profile

Expired Time After 1st Login

Idle Timeout

Bandwidth Limit

Example:https://Your VigorACS Server/ACSServer/HotspotPortal/home

Http:// portal.draytek.com

Note: Landing Page may not be shown correctly when using OS built-in Captive Portal Detection.

Default

0d 6h 0m

Disabled


Unlimited

Cancel

Continue

These parameters are explained as follows:

Item	Description
Basic Settings	
Enable Profile	Check to enable this profile.
Profile Name	Enter a name for hotspot profile.
Comments	Enter a brief description to identify this profile.
Hotspot Server Mode	Specify the hotspot server. - ACS3 as Hotspot Server – VigorACS server will be used as the server for authentication. - The 3rd Party Hotspot Server – The third party server will be used

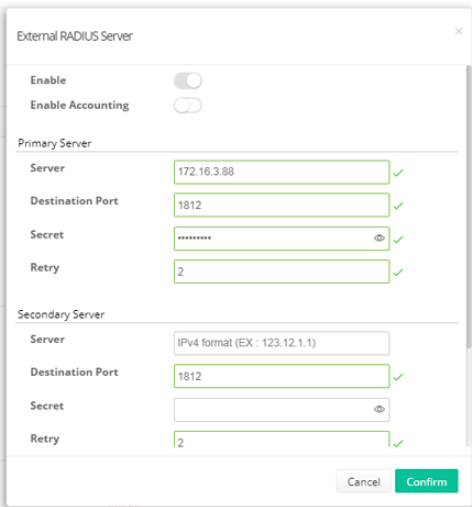	as the server for authentication.
Applied Interfaces	
Subnet	The current Hotspot Web Portal profile will be in effect for the selected subnets.
WLAN 2.4G/5G	The current Hotspot Web Portal profile will be in effect for the selected WLAN SSIDs.
External RADIUS Server	
External RADIUS Server	Display the IP address of the external RADIUS Server. Edit - If required, Click to modify the RADIUS Server. 
RADIUS MAC Authentication	If the RADIUS server supports authentication by MAC address, enable RADIUS MAC Authentication and select the MAC address format that is used by the RADIUS server.
RADIUS MAC Format	Select the MAC address format.
RADIUS NAS-Identifier	Enter the server's ID.
Portal Server	
Login Method	There are several methods to be selected as for portal server. ● Click Through - ● Facebook - ● Google - ● RADIUS Account - ● Leave Info -
Captive Portal URL	Enter the captive portal URL.
Redirection URL	Enter the URL to which the client will be redirected.



HTTPS Redirection	If this option is selected, unauthenticated clients accessing HTTPS websites will be redirected to the login page, but the browser may alert the user of certificate errors. If this option is not selected, attempts to access to HTTPS website will time out without redirection.
Captive Portal Detection	If this option is selected, the web portal page is triggered automatically when an unauthenticated client tries to access the Internet.
Landing Page Method	Specify the landing page for the client after passing the authentication. ● Fixed URL – Specify a landing page URL. ● User Request – The user will be redirected to the URL they initially requested. ● Bulletin Message – Show a message on Bulletin.
Landing Page URL	It is available when Fixed URL is selected as Landing Page Method . Specifies the webpage that will be displayed after the user has successfully authenticated. The user will be redirected to the specified URL. This could be used for displaying advertisements to users, such as guests requesting wireless Internet access in a hotel.
HTML/Image for Bulletin Message	HTML/Image is available when Bulletin Message is selected as Landing Page Method . The message configured here will be briefly shown for a few seconds to the user.
Facebook ID	It is available when Facebook is selected as Landing Page Method . Enter a valid Facebook developer app ID.
Facebook Secret	It is available when Facebook is selected as Landing Page Method . Enter the secret configured for the APP ID entered above.
Google ID	It is available when Google is selected as Landing Page Method . Enter a valid Google app ID.
Google Secret	It is available when Google is selected as Landing Page Method . Enter the secret configured for the APP ID entered above.
Quota Policy	
Quota Profile	Choose a policy profile to apply to web portal clients. Refer to 8.5.2 Quota Management to define more profiles if required.
Cancel	Click to Discard current modification.
Continue	Click to get into next page.




- Choose **Click Through** as Login Method. Then, click **Continue** for Splash Page Customization. Splash Page Customization is available for **ACS3 as Hotspot Server** only.

These parameters are explained as follows:

Item	Description
Layout	
Background Layout	Select either Color or Image as the login page background scheme.
Background 1 / 2 Color	Select the background color of the login window (up and down layer) from the predefined color list, or enter the RGB value (with the format of HEX).
Login Method Background Color	Select the background color of the login panel from the predefined color list, or enter the RGB value (with the format of HEX).
Login Method Opacity	Adjust the opacity (1-100) of the login panel.
Browser Tab Title	Enter the text to be shown as the webpage title in the browser.
Enable Browser Tab Icon	Click to enable / disable the browser tab icon for VigorACS WUI.
Browser Tab Icon	DrayTek – It is default setting. Image Upload – Select an image by using Browse and upload to VigorACS. It will be used as the browser tab icon for VigorACS WUI.
Enable Logo	Click to enable / disable the logo display on the login window.
Splash Page Logo	DrayTek Red – It is default setting. Image Upload – Select an image by using Browse and upload to VigorACS. It will be used as the logo display on the login window.


Components	
Layout Components Login Method Splash Page Components ☒ Welcome Message ☒ Terms & Conditions ☒ Marketing ☒ Language Option Welcome Message ☐ Welcome! Please log in to enjoy Wi-Fi. Terms & Conditions Text ☒ I have read and accept the Terms and Conditions. Content For information on the data Draytek collects and how it is used please see the Draytek Privacy Policy. ☐ User must tick to get the Internet access English (UK) Welcome! Please log in to enjoy Wi-Fi. Connect Terms Marketing For information on the data Draytek collects and how it is used please see the Draytek Privacy Policy. ☐ I have read and accept the Terms and Conditions. ☐ I would like to receive emails about the latest events, products, and services from you. Reject Accept	
Splash Page Components	Defines the content of the splash page. Select the one(s) to show on the login page. ● Welcome Message ● Terms & Conditions ● Marketing ● Language Option
Welcome Message	Enter the text to be displayed as the welcome message.
Terms & Conditions Text	If it is enabled, it will be shown on the second page after clicking the Connect / Submit button on the login page. Enter the text which will be shown after the checkbox for Terms and Conditions.
Content	If it is enabled, it will be shown on the second page after clicking the Connect / Submit button on the login page. Enter the text to be displayed in the Terms and Conditions window.
Marketing Text	If it is enabled, it will be shown on the second page after clicking the Connect / Submit button on the login page.

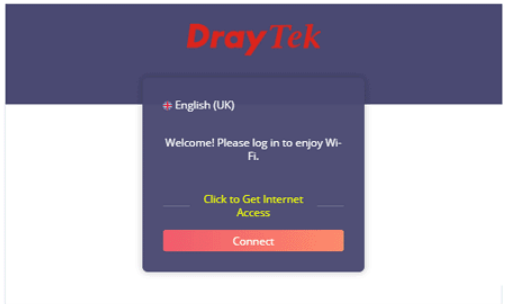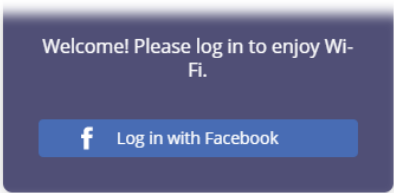	Enter the text which will be shown after the checkbox for marketing information.
Marketing Content	If it is enabled, it will be shown on the second page after clicking the Connect / Submit button on the login page. Enter the text to be displayed in the Terms and Conditions window.
Language	Use the drop down menu to select a language. Browse – Select a properties file from your host. Upload – Click to upload a language file. Download – Click to download a language file.
Layout Connect Button Color Connect Button Text Enable Hint Message Components linear-gradient(to right, #ef5568) Connect Click to Get Internet Access #ef5568 HEX Login Method  Cancel Previous Continue	
Connect ...	It is available when Click Through is selected as Landing Page Method. Connect Button Color – Select the color of the connect button from the predefined color list, or using the RGB value (entered with the format of HEX). Connect Button Text – Enter the text to be displayed on the connect button. The color of the text can be set from the predefined color list or using the RGB value (entered with the format of HEX). Connect Button Color linear-gradient(to right, #ef5568 0%) Connect Button Text Connect Enable Hint Message Click to Get Internet Access
Facebook ...	It is available when Facebook is selected as Landing Page Method.  Facebook Login (Login with Facebook) – Enter the text to be

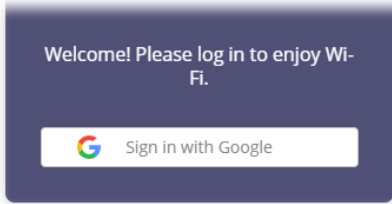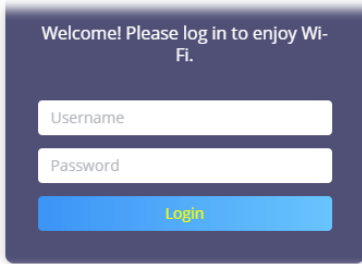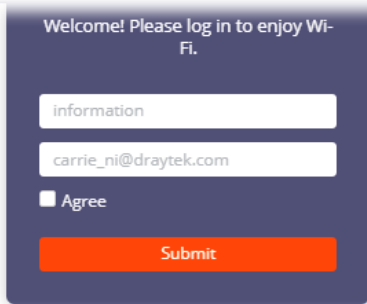	displayed on the login button. The color of the text can be set from the predefined color list or using the RGB value (entered with the format of HEX).
Google ...	It is available when Google is selected as Landing Page Method.  Google Login (Sign in with Google) - Enter the text to be displayed on the login button. The color of the text can be set from the predefined color list or using the RGB value (entered with the format of HEX).
RADIUS ...	It is available when RADIUS Account is selected as Landing Page Method.  RADIUS Username - Enter the account name for passing the RADIUS authentication. RADIUS Password - Enter the password for passing the RADIUS authentication. RADIUS Login Button Color - Select the color of the login button from the predefined color list, or using the RGB value (entered with the format of HEX). RADIUS Login Button Text - Enter the text to be displayed on the login button. The color of the text can be set from the predefined color list or using the RGB value (entered with the format of HEX).
Submit ...	It is available when Leave Info is selected as Landing Page Method. 


Item	Description
+Add	Click to add a new whitelist profile.
Clear All	Click to remove all of the whitelist profiles.
Type	Use the drop-down list to specify the type of the whitelist profile. ● NAT Rules ● Destination Domain ● Destination IP ● Destination Port ● Source IP
Enable	Click to enable / disable the whitelist profile.
Content	Enter the value if required. It varies according to the type selected.
Action	Delete - Click to remove the selected whitelist profile.
Cancel	Click to Discard current modification.
Previous	Click to return to the previous page.
Save	Click to save the changes in this page.

7. Click **Save** to finish and save the configuration.

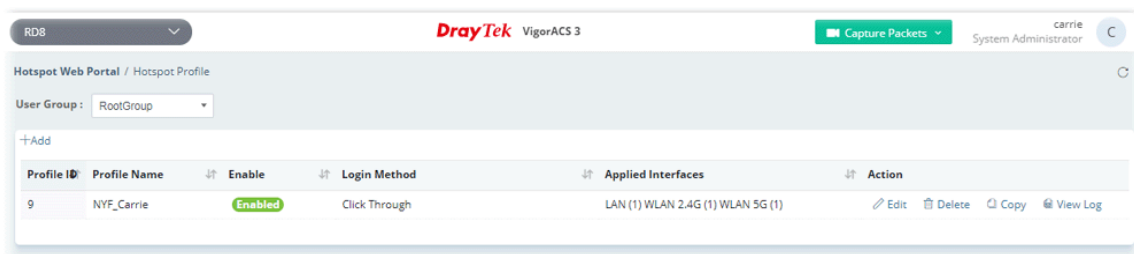

8.5.2 Quota Management

Quota management integrates bandwidth limit, session limit, applicable device number and validity period into one profile. This profile is prepared for a hotspot web portal profile.

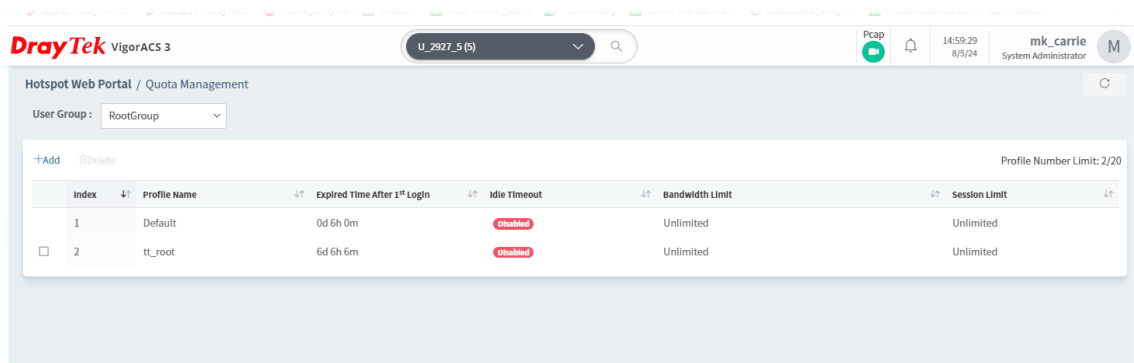

These parameters are explained as follows:

Item	Description
User Group	Specify a user group to display the quota management profiles under that group.
+Add	Create a new profile.
Delete	Click to delete the profile.
Index	Display the index number of the profile.
Profile Name	Display the name of the profile.
Expired Time After 1st Login	Display the time remained for use after the first login.
Idle Timeout	Display if the function is enabled or disabled.
Bandwidth Limit	Display the number of bandwidth limit.
Session Limit	Display the number of session limit.

The following setting page appears when **+Add** is clicked.

Hotspot Web Portal / Quota Management

User Group : RootGroup

Add Quota Policy Profile

Profile Name ✓

Account Validity

Expired Time After 1st Login days hours minutes

Enable Idle Timeout ☒

Idle Timeout

Device Control

Devices Allowed / account

Enable Reconnection Restriction ☒

Restriction Type

hours mins

Block the same user from reconnecting for the set period


These parameters are explained as follows:

Item	Description
Add Quota Policy Profile	
Profile Name	Enter a name for this profile.
Account Validity	
Expired Time After	Enter the time (days, hours and minutes) remained for use after the

1st Login	first login.
Enable Idle Timeout	Click to enable the function of idle timeout. Idle Timeout – Set the timeout for breaking down the Internet after passing through the time without any action.
Device Control	
Devices Allowed	Enter a number (1-100) of devices applied with this profile. "Unlimited" means no number limitation.
Enable Reconnection Restriction	Click to block the same client reconnecting to Internet. Restriction Type – There are two types to set the time period. ● Set Particular Time – The same user is unable to connect to Internet before the time setting. ● Set Time Period – The same user is unable to connect to Internet before the time period.
Bandwidth and Session Limit	
Enable Bandwidth Limit	Click to enable the function of bandwidth limit. Download Limit – Enter a value to define the maximum data traffic (downloading) for each client connecting to Vigor device. Upload Limit – Enter a value to define the maximum data traffic (uploading) for each client connecting to Vigor device.
Enable Session Limit	Click to enable and set session limit. Session Limit – Enter a value to define the maximum sessions for each client connecting to Vigor device.
Cancel	Discard current modification.
Save	Save the current settings.

8.5.3 Network & Devices

Each network group and / or device can be assigned with different hotspot profile.

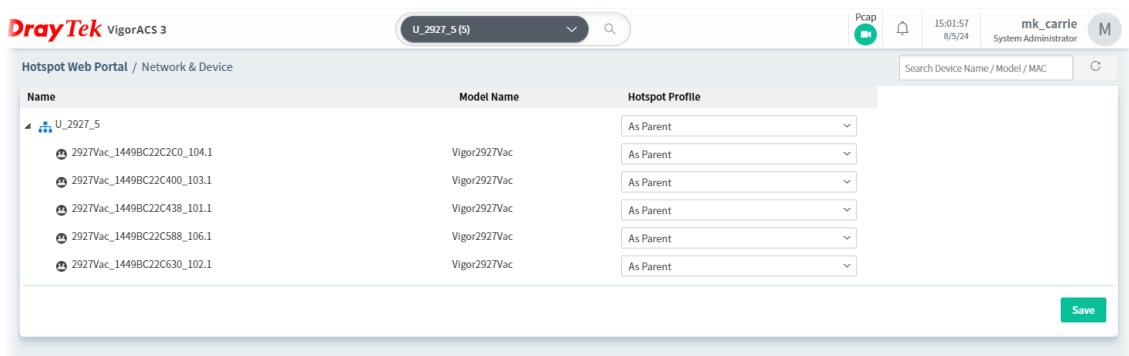

These parameters are explained as follows:

Item	Description
------	-------------

User Group	Specify a network group. Specify the hotspot profile(s) for the device under the selected network group.
Hotspot Profile	Select a hotspot profile for the selected group / device. As Parent - Use the same setting as the previous layer.
Save	Save the current settings.

8.5.4 PIN Generator

The system administrator can generate multiple PIN codes for various uses. Before generating PIN codes, please make sure a **USB** has been inserted onto your Vigor device.

8.5.4.1 PIN Generator

The system administrator can generate multiple PIN codes in response to the user's (e.g., enterprise) demand.

These parameters are explained as follows:

Item	Description
User Group	Specify a network group. Specify the hotspot profile(s) for the device under the selected network group.
+Generate new PIN	Click to generate a new PIN profile.
Delete Expired Profiles automatically	If enabled, the expired profile will be automatically removed at 12:00 AM every night. Switch the toggle to enable or disable this function.

Click **Generate new PIN** to create a new profile.

The screenshot shows a web browser window with a tab labeled 'U_2927_5 (5)'. A dialog box titled 'Generate new PIN' is open. It contains a 'PIN Generator Profile' section with the following fields:

- Profile Name:** An empty text input field with a red border and a red 'x' icon to its right.
- PIN Digits:** A dropdown menu set to '6'.
- Quantity:** A dropdown menu set to '1'.
- PIN Validity:** A dropdown menu set to '1 Day'.
- Bind PIN Code to Router:** A dropdown menu set to 'Nothing selected'.
- Hotspot Profile:** A dropdown menu set to '105.169'.
- Quota Management Policy:** A text field with the value 'Default'.
- Expired Time after 1st Login:** A text field with the value '0d 6h 0m'.
- Device(s) Allowed per PIN:** A text field with the value 'Unlimited'.
- Speed Limit:** A text field with the value 'Unlimited (Upload) Unlimited (Download)'.

At the bottom right of the dialog are 'Cancel' and 'Apply' buttons.

These parameters are explained as follows:

Item	Description
PIN Generator Profile	
Profile Name	Enter a name for the profile.
PIN Digits	Specify the length (6/7/8/9) of PIN code.
Quantity	Set the quantity (1~20) of the PIN code.
PIN Validity	Set the period of time that the PIN will be kept in the database.
Bind PIN Code to Router	Select a router (under the selected network group).
Hotspot Profile	Select a hotspot profile. If there is no profile to be selected, please open Hotspot Web Portal>>Profile to create a new profile. In which, "ACS3 as Hotspot Server" must be selected as the Hotspot Server Mode. Quota Management Policy - Display the name of the management policy. Expired Time after 1st Login - Display the expired time. Device(s) Allowed per PIN - At present, no limitation. Speed Limit - At present, no limitation.
Print PIN Code	

Show Quota Policy	Select this item to display the quota policy on the voucher.
Show PIN Expire Date	Select this item to display the expiration date (according to the date on PIN Validity) of the PIN on the voucher.
Router Name	Select this item to display the router's name selected on the Bind PIN Code to Router on the voucher.
Router Note	Select this item to show the brief description for the selected device (also displayed on router's note 1, Network & Service Management>>Network Management) on the voucher.
Voucher Title	Set the title (up to 30 characters) of the voucher.
Custom Message	Set a message (up to 50 characters) displayed on the voucher.
Apply	Click it to generate a PIN code as a voucher.

Click **Apply** to save the settings. A new profile (in this case, PIN_Carrie) will be shown on the web page.

Hotspot Web Portal / PIN Generator

User Group: RootGroup

PIN Generator PIN Status

+Generate new PIN

Profile Number Limit: 1/600

Show 10 entries

Id	Profile Name	Create Time	Hotspot Profile/ Quota Management			Quantity			Action
			Hotspot Profile	Quota	Expired Time after 1st Login	Generated	Used	Unused	
1	PIN_Carrie	2024/08/19 09:27:48	105.169	Default	0d 6h 0m	1	0	1	Print Unused PIN Delete

Delete Expired Profiles automatically ☒

These parameters are explained as follows:

Item	Description
Print Unused PIN	Open a page to display the unused PIN number.
Delete	Remove the selected PIN profile.
Delete Expired Profiles	If enabled, the expired profile will be automatically removed at 12:00 AM every night.

automatically

Switch the toggle to enable or disable this function.

8.5.4.2 PIN Status

This page displays the PIN codes generated by PIN Generator.

Hotspot Web Portal / PIN Generator

User Group: RootGroup

PIN Generator **PIN Status**

Status: **ALL** Used Unused

Generator Profile: Show All

Hotspot Router: Search Device MAC or Device Name

Client Device: Search Client MAC

Show 10 entries


#	PIN Code	Status	Generator Profile	Quota Profile	Create Time	PIN Expire Date	Hotspot Router	Action
1	458560	UNUSED	PIN_Carrie	Default	2024/08/19 09:27:48	2024/08/20 09:27:48	2927_1449BC13E640	Revoke

These parameters are explained as follows:

Item	Description
Status	All – Select to show all the PIN codes on this page. Unused – Select to show unused PIN codes on this page. Used – Select to show used PIN codes on this page.
Generator Profile	Use the drop down menu to display all the profiles or the selected profile.
Hotspot Router	Enter the MAC address or the name of the device (hotspot router) to display the PIN status related to the device.
Client Device	Enter the MAC address of the client to display the PIN status related to the client device.
Action	Revoke – Remove the selected entry.

8.5.5 Analytics

This page displays the locations of the routers on the map, top 10 busiest hotspot routers and a list of clients accessing into the Internet via the hotspot web portal.

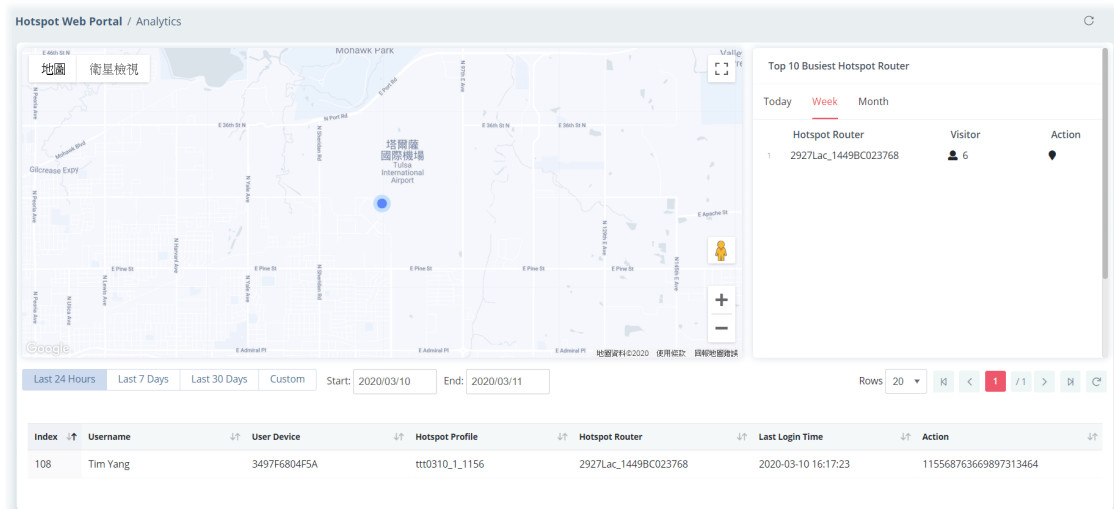


These parameters are explained as follows:

Item	Description
Map	Display the location of the client.
Top 10 Busiest Hotspot Router	Display the top 10 busiest routers. Today - Display the name of the router, number of clients and performed action at the present day. Week - Display the name of the router, number of clients and performed action within one week. Month - Display the name of the router, number of clients and performed action within one month.
Last 24 Hours, Last 7 Days, Last 30 Days, Custom	Choose the time period, last 24 hours, 7 days or 30 days. Or click Custom to specify a certain period, for displaying the router location.
Index	Display the index number of the router.
Username	Display the username of the client.
User Device	Display the MAC address of the router.
Hotspot Profile	Display the name of the hotspot profile used.
Hotspot Router	Display the name of the router used by the client to access into Internet.
Last Login Time	Display the last login time.


Applications

A.1 How to apply an AP profile to AP device(s)?

1. Choose a group containing with access points (e.g., "RD8" in this case) from Root Network.

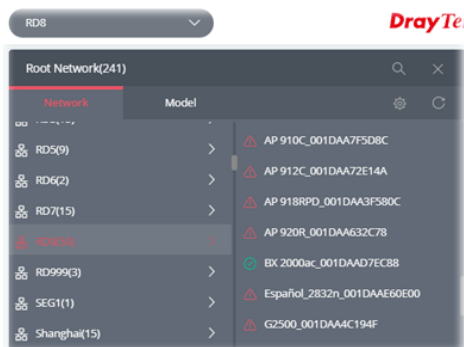


2. Open **Configuration>>AP Profile**.

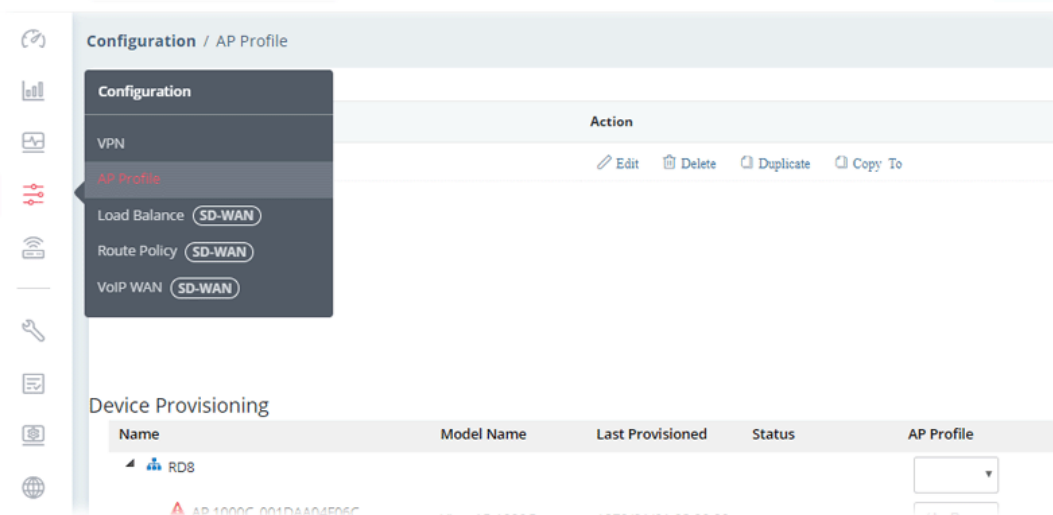

In the **Device Provisioning**, all of the access points grouped under "RD8" are displayed under the field of Name.

3. Select the AP (e.g., AP 920R in this case) required to apply new AP profile; and use the drop down list of **AP Profile** to specify a profile (e.g., Marketing_carrie in this case).

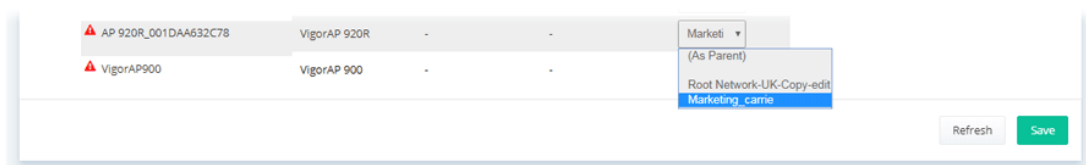

 You can click **+Add New Profile** to create a new AP profile if there is no AP profile to be chosen or the existed AP profile is not suitable for the AP model.

Click **Save**. The settings in web user interface of the selected VigorAP will be overwritten with the settings configured in AP profile immediately.


Part V

Device Menu




Chapter 9 Device Menu

On the dashboard for CPE, the Device menu contains:

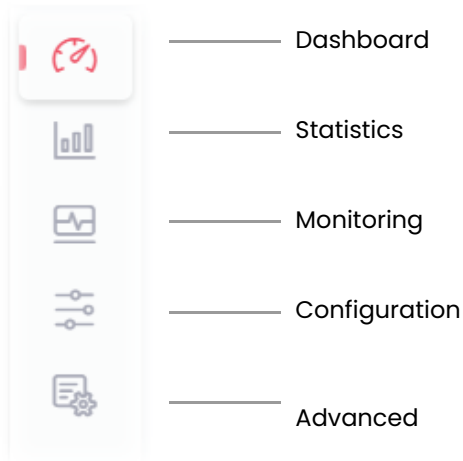

9.1 Dashboard for CPE


Use the drop-down menu on the top of the left side to select a CPE (e.g., Vigor2927 series).

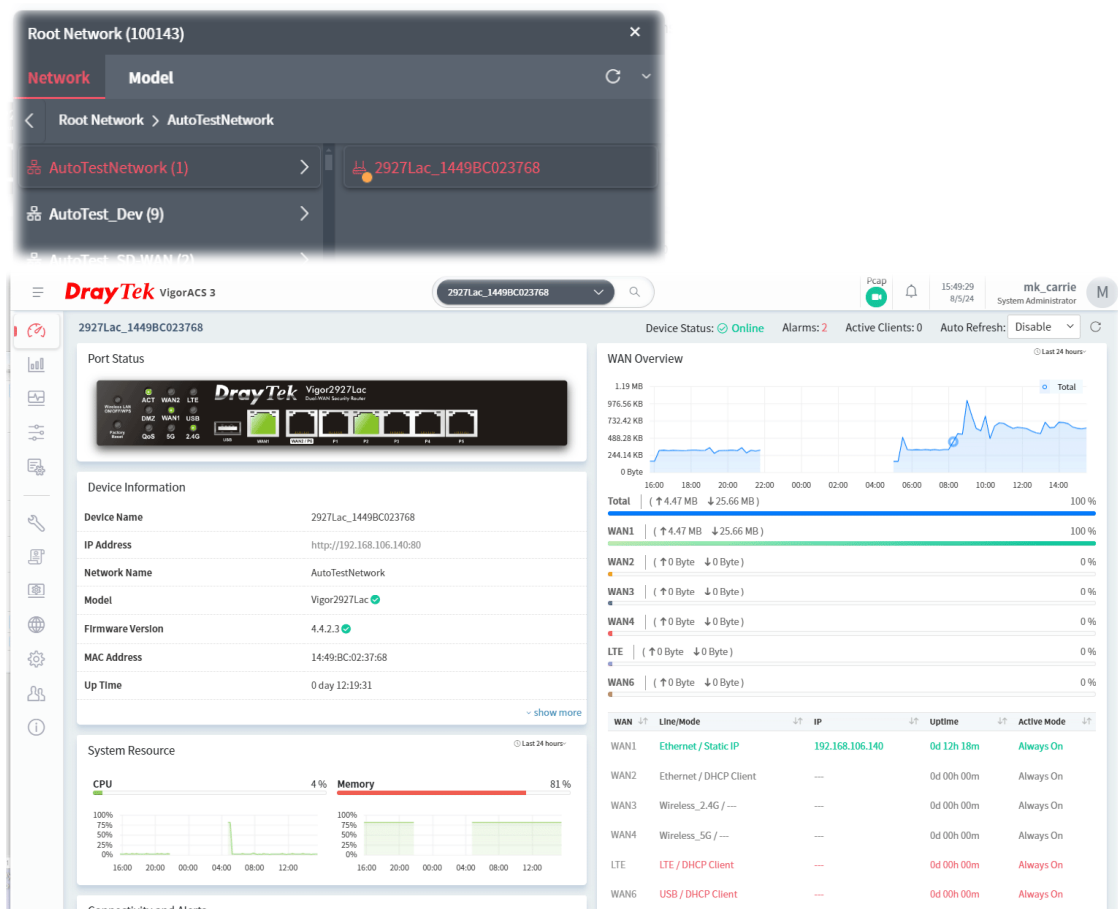

9.2 Statistics for CPE


Statistics is available for a selected group network or CPE.

The page offers statistics for the selected device listed under root networks, including usage overview, wireless clients Overview, data traffic, device ranking, and client ranking. By clicking Last 24 Hours, Last 7 Days, Last 30 Days or Custom setting (define the period), the administrator can obtain various statistics within the time period.

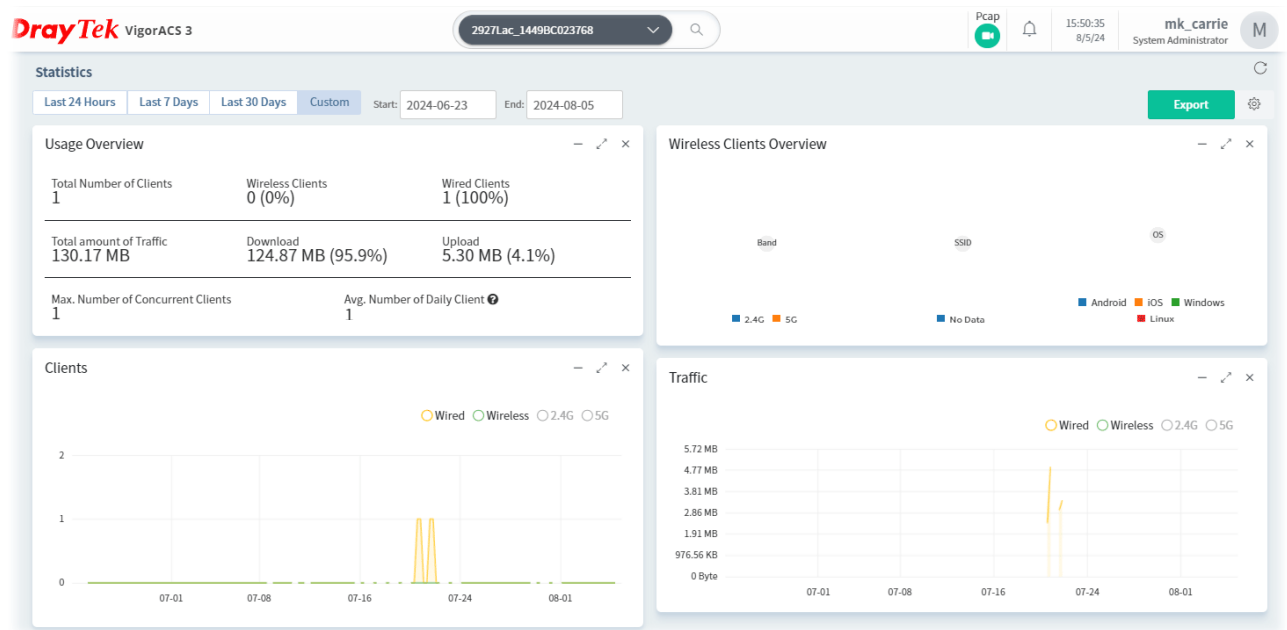


9.3 Monitoring

Monitoring menu offers options for monitoring the normal and abnormal actions for network, group and CPE. This section offers Monitoring menu items for a selected CPE (in this case, Vigor2135 series is used as an example).

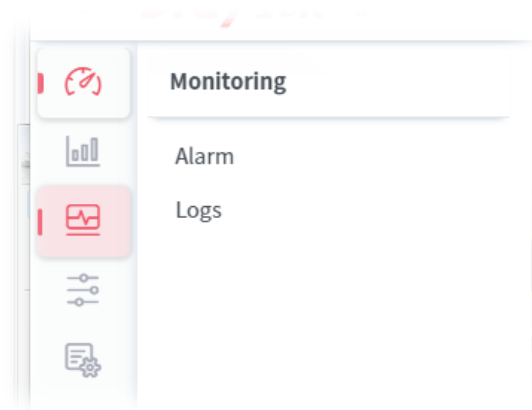

9.3.1 Alarm

Alarm message will be recorded on VigorACS 3 server when there is a trouble happened to the device (CPE). Only the users within the same user group will be notified for the message.

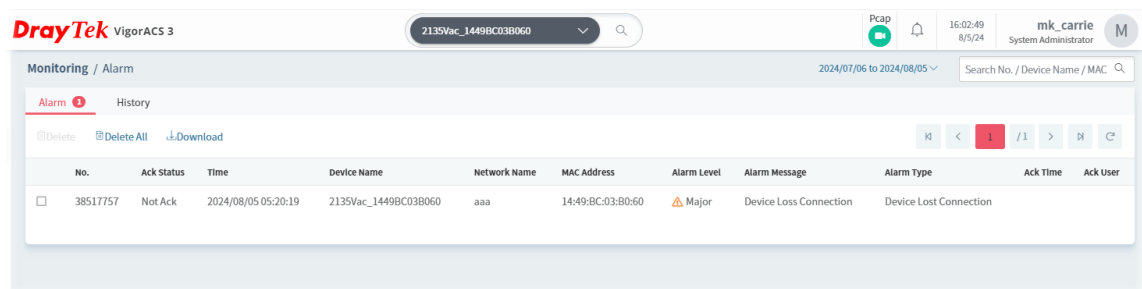

These parameters are explained as follows:

Item	Description
Alarm / History	Alarm – Display the alarm records recently. History – Display all the alarm records that have been solved and cleared.
Delete	Clear the alarm record which has been solved by VigorACS 3.
Delete All	Clear all of the alarm records which have been solved by VigorACS 3.
Download	Click this button to save alarm log as a XLS file.
No.	Display the index number of the alarm. It is offered by VigorACS 3 automatically.
Ack Status	Display the status of the records with the type specified here (Not Ack or Acked).

Time	Display the time of the device to be monitored.
Device Name	Display the name of the monitored device.
Network Name	Display the name of the network that the managed device belongs to.
MAC Address	Display the MAC address of the monitored device.
Alarm Level	Display the alarm message with the severity (e.g., Critical) specified.
Alarm Message	Display a brief explanation for the alarm sent by VigorACS 3 automatically.
Alarm Type	Display the alarm message with the type specified.

9.3.2 Logs

It provides records of action executed, name of the selected device, MAC address, Device IP, and Current Time for CPE device managed and monitored by VigorACS.

ID	Device Name	Device ID	MAC Address	Device IP	Action	Action ID	Time
2968439	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Set Parameter Values	13923	2020/03/06 05:18:11 PM
2968051	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Set Parameter Values	13788	2020/02/24 05:25:40 PM
2968049	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Set Parameter Values	13786	2020/02/24 02:42:06 PM
2968041	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Set Parameter Values	13783	2020/02/24 02:37:23 PM
2968040	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Add Object	42	2020/02/24 02:37:21 PM
2968039	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Add Object	41	2020/02/24 02:37:20 PM
2968038	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Add Object	40	2020/02/24 02:37:19 PM
2968037	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Add Object	39	2020/02/24 02:37:18 PM
2968035	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Add Object	38	2020/02/24 02:37:16 PM
2968033	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Add Object	37	2020/02/24 02:37:15 PM
2968031	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Add Object	36	2020/02/24 02:37:13 PM
2968029	2865ac_001DAA41DF78	141326	001DAA41DF78	192.168.105.67	Add Object	35	2020/02/24 02:37:12 PM


These parameters are explained as follows:

Item	Description
Log Type	Click one of the tabs (e.g., All CPE Actions, Device Reboot, Reboot By CPE, Reset System Password, Set Parameter, File Transfer, Setting Profile, Device SysLog, CPE Notify, Device Register, Device Operate and etc.) to display related log on this page.
search ID / Device Name / Dev	Enter the condition for VigorACS to search and display relational information.
Delete	Clear the alarm record which has been solved by VigorACS.
Delete All	Clear all of the alarm records which have been solved by VigorACS.
Download	Click this button to save the log as an XLS file.

9.4 Configuration

-  This section introduces the menu item used for the selected CPE (AP or router) briefly. For more detailed information on each menu item, refer to User's Guide of the selected CPE device.

Available configuration settings will vary for root network, group network and specified CPE.

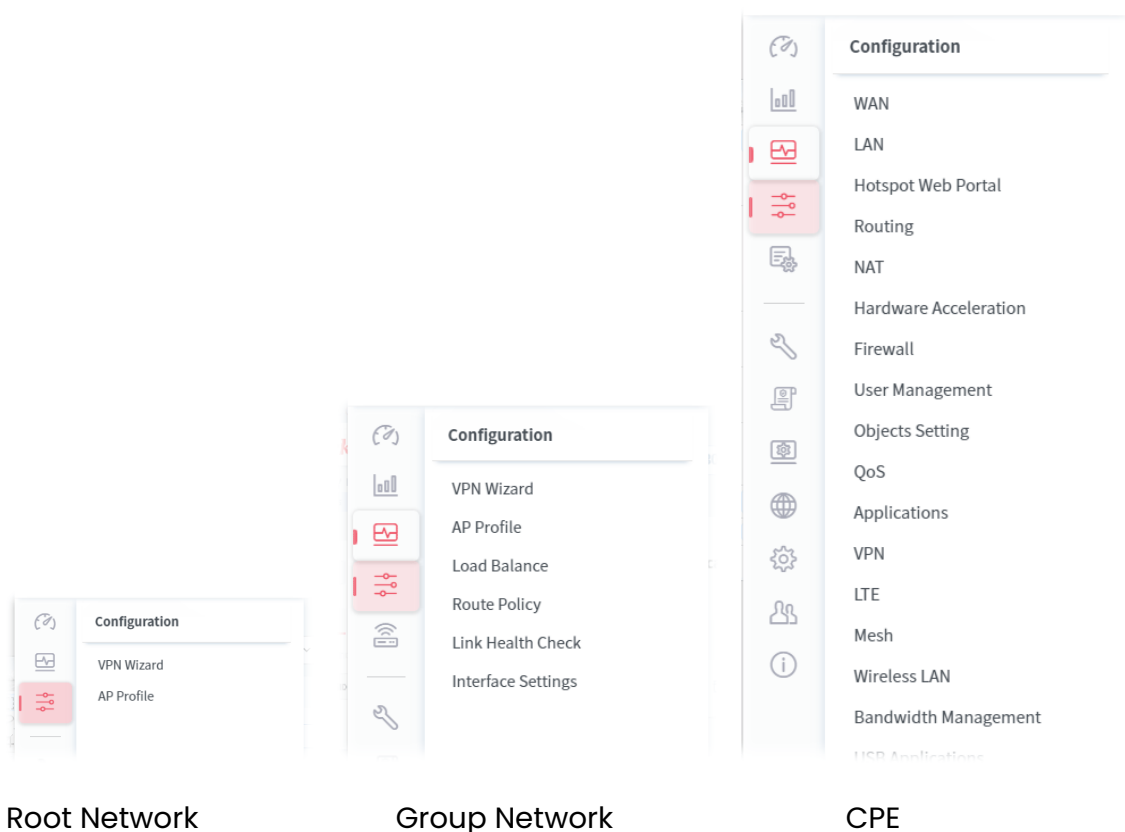


The menu items for a selected CPE device, generally, are the same as the settings on web user interface of the selected device (CPE, AP and etc.).


It is not necessary for the administrator to access into the web user interface of the selected CPE to make setting changes. If required, the administrator can modify the settings for the selected device through the options displayed under Configuration. The modifications will be applied to the selected device immediately.

How to select a CPE? On the left-top side of the home page of VigorACS 3, click the Network tab and find out the CPE you want. Then, click the CPE. A dashboard of the selected CPE will be shown on the screen.

The menu items under Configuration will vary based on the CPE selected.

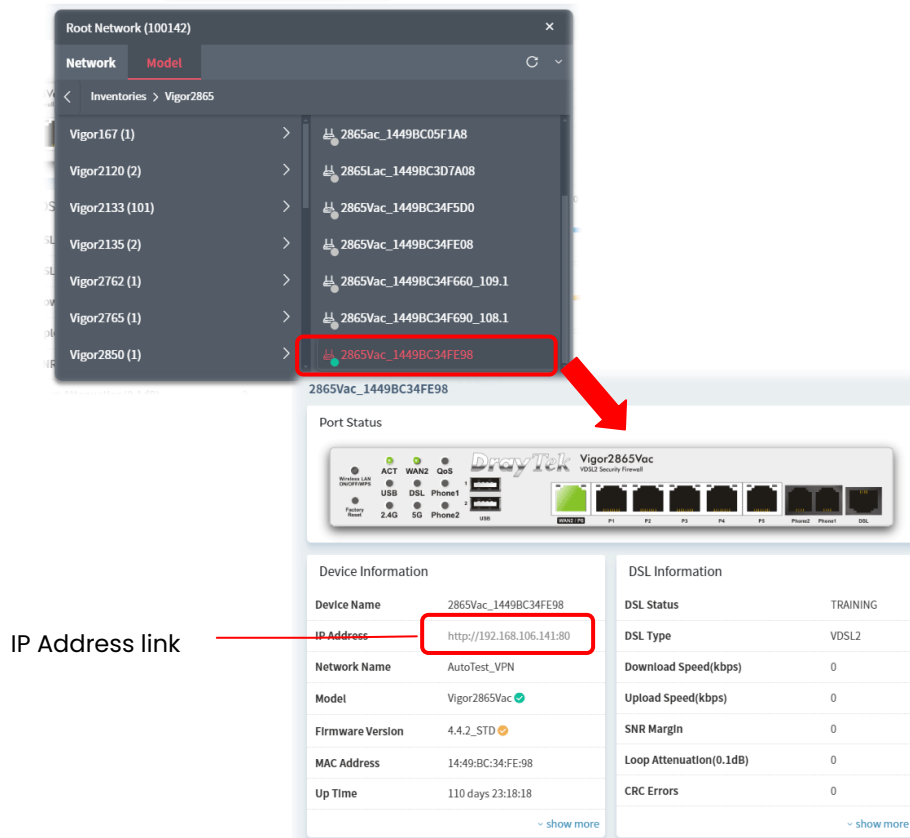

The menu items for Configuration will vary based on the selected CPE (AP / router).

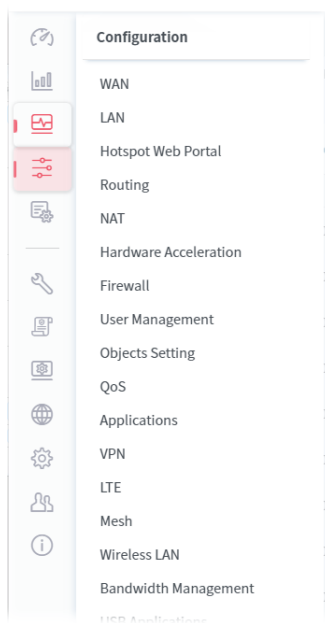

 If the administrator wants to access into the web user interface of the selected CPE, click the IP address link of the selected CPE on the CPE dashboard.

9.4.1 WAN

WAN settings relate to access Internet for CPEs. For more detailed information, please refer to the user guide for the CPE.

9.4.1.1 Internet Access

The screenshot shows the 'Internet Access' configuration page for device 2927Lac_1449BC023768. The left sidebar contains navigation options: Connection Detection, Multi-VLAN, WAN IPv6, WAN Budget, DHCP Client Option IPv4, and DHCP Client Option IPv6. The main content area displays a table of WAN interfaces and a Load Balance Setup section.

Alarm	Index	Display Name	Physical Mode	Access Mode	Status	Bandwidth(Kbps) DownLink/UpLink	Ping Latency	Ping Jitter	Ping Pkt Loss
Enable	WAN1		Ethernet	Static or Dynamic IP	Enable	9 / 7	8.8 ms	2.9 ms	0%
Disable	WAN2		Ethernet	Static or Dynamic IP	Disable	0 / 0	0 ms	0 ms	0%
Disable	WAN3		Wireless 2.4G	None	Disable	0 / 0	0 ms	0 ms	0%
Disable	WAN4		Wireless 5G	None	Disable	0 / 0	0 ms	0 ms	0%
Enable	LTE	4G Connection	USB	3G/4G USB Modem(DHCP mode)	Enable	0 / 0	0 ms	0 ms	0%
Enable	WAN6		USB	3G/4G USB Modem(DHCP mode)	Enable	0 / 0	0 ms	0 ms	0%

Load Balance Setup

Mode:

Line Speed:

Weight Type:

Note:
• Latency, jitter, and packet-loss require setting Link Condition Detection in each WAN setting page.

[Save](#)

These parameters are explained as follows:

Item	Description
Table	Alarm - Display if the alarm function is enabled or disabled. Index - Display the index number of the WAN interface. Display Name - Display the description for the WAN interface. Physical Mode - Display the physical mode (e.g., Wireless 2.4G / Wireless 5G) of the interface. Access Mode - Display the access mode for the WAN interface. Status - Display if the WAN interface is enabled or disabled. Bandwidth(Kbps)DownLink/UpLink - Display the downlink / uplink bandwidth ratio. Ping Latency / Ping Jitter / Ping Pkt Loss - Display the latency / jitter / packet loss value.
Load Balance Setup	Mode - The default is IP Based. Choose Session Based to get better transmission speed. Line Speed - Choose Auto Weight to let the router reach the best load balance. According to Line Speed to let the router reach the best load balance based on line speed. Weight Type - Choose Bandwidth-Based / Quality-Based / Reliability-Based as the weight type. Or choose Custom to define

	Upload Weight, Download Weight, Latency Weight, Jitter Weight, Pkt Loss Weight respectively. ● Upload / Download Weight- The higher the weight is, the WAN interface with higher bandwidth will get higher usage. ● Latency Weight - It defines the time taken by Vigor router when sending the packets to the IP set in Link Condition Detection. The higher the weight is, the WAN interface with lower latency will get higher usage. ● Jitter Weight - It defines the change rate of latency. For stable session, small jitter value will be better. The higher the weight is, the WAN interface with lower jitter will get higher usage. ● Pkt Loss Weight - It defines the proportion that packets will be discarded before arriving at the IP set in Link Condition Detection. The higher the weight is, the WAN interface with lower packet loss will get higher usage.
Save	Save the current settings.

To modify the general setup settings for each WAN, move the mouse cursor on the WAN# under Index and click to open the following page.

DrayTek / Configuration / WAN

General Setup

Alarm ☐ Show an alarm message when this WAN interface disconnects.
Alarm option will follow WAN Alarm Setting in Network management. If you change Alarm option on Configuration > WAN, you need to set WAN Alarm again for all enabled WAN interfaces on this CPE.

Enable ☒

Display Name

Physical Mode

Enable Load Balance ☒

Active Mode

Physical Type(Ethernet)

Customer VLAN Tag Insertion ☐

Service VLAN Tag Insertion ☐

Internet Access

Access Mode

MTU

PPPoE MTU

These parameters are explained as follows:

Item	Description
General Setup	
Alarm	Click to show/hide an alarm message.
Enable	Click to enable/disable settings of the WAN interface.

Display Name	Enter the description for the interface.
Physical Mode	Display the physical mode (e.g., DSL) of the interface.
DSL Mode (DSL model only)	Specify the physical mode (Auto, VDSL or ADSL) for the router manually.
DSL Modem Code (DSL model only)	Choose the correct DSL modem code for ensuring the network connection. If you have no idea about the selection, simply choose Default or contact the dealer for assistance.
Enable Load Balance	Click to enable auto load balance function for this WAN interface.
Active Mode	Always On – Make the WAN connection being activated always. Failover – Make the WAN connection as a backup connection.
Failover	It is available when Failover is selected as Active Mode. Backup WAN – When the active WAN failed, such WAN will be activated as the main network connection. Active When – It is available when Failover is selected as Active Mode. ● Any – The backup WAN will be activated when any master WAN interface disconnects. ● All – The backup WAN will be activated only when all master WAN interfaces disconnect. Backup Type – Choose Fails to connect or Meet Any/all of the following condition. When Meet Any/all of the following condition is selected: ● Meet of the following conditions – If the packet meets any one of the conditions, the failover WAN will be enabled; if the packet meets All of the conditions, the failover WAN will be enabled. ● Upload traffic / Download traffic – Set the values for upload and download respectively. ● Latency – After selecting Check Latency, enter a value as a threshold. ● Jitter – After selecting Check Jitter, enter a value as a threshold. ● Packet loss After selecting Check Packet loss, enter a value as a threshold. When the data traffic of active WAN reaches the traffic threshold (specified here), the failover WAN will be enabled automatically to share the overloaded data traffic.
VLAN Tag Insertion / Customer VLAN Tag Insertion / VDSL2 VLAN Tag Insertion /	Click to enable the function of VLAN with tag. Tag Value –Enter the value as the VLAN ID number. The range is form 0 to 4095.

VDSL2 Service VLAN Tag Insertion	Priority – Enter the packet priority number for such VLAN. The range is from 0 to 7.
Interne Access	
Access Mode	Set the access mode for this WAN. None – No mode used. PPPoE – Click to select PPPoE as the accessing protocol of the Internet. PPPoE MTU – Set a number as the Max Transmit Unit for packet. Static or Dynamic IP – Click to select a static IP or use dynamic IP as the accessing protocol of the Internet. Static IP MTU – Set a number as the Max Transmit Unit for packet.
Modem Settings (for ADSL only)	
Multi-PVC channel	The selections displayed here are determined by the setting page of Multi-PVC/VLAN. Select M-PVCs Channel means no selection will be chosen.
VPI/VCI	Enter the value provided by ISP.
Encapsulating Type	Choose the type provided by ISP.
Protocol	Choose the one (PPPoE or PPPoA) provided by ISP.
Modulation Type	Default setting is Multimode. Choose the one that fits the requirement of your router.
PPPoE (available when PPPoE is selected as the Protocol)	
For Wired LAN / For Wireless LAN	For Wired LAN – If you check this box, PCs on the same network can use another set of PPPoE session (different with the Host PC) to access into Internet. For Wireless LAN – It is available for <i>n</i> model. If you check this box, PCs on the same wireless network can use another set of PPPoE session (different with the Host PC) to access into Internet.
PPP Service Name / PPP User Name / PPP Password	Enter the service name, username and password provided by ISP.
Schedule Setup(1-15)	Enter four sets of time schedule for your request.
PPP Authentication	Select PAP only or PAP or CHAP for PPP.
Fixed IP Enable	Click Yes to enable the fixed IP setting. Or, click No to disable the fixed IP setting.
Fixed IP Address	Enter a fixed IP address in the box.

MTU	
Static IP MTU	It means Max Transmit Unit for packet. The default is 1500.
Path MTU Discovery	Click to enable the path MTU discovery function for this WAN interface.
Path MTU Discovery	
Path MTU to	Select Host / IP, for an IPv4 address or Host / IPv6, for an IPv6 address, and then enter the IP address in the textbox.
MTU size start from	Determine the starting point value of the packet.
MTU reduce size by	Number of octets by which to decrease the 1500-byte MTU. Start with a 0 value for the reduce size and click the Detect button. If the message Fail is returned, increase the MTU reduce size and try again. Repeat until you see the message Success, indicating that the optimal MTU size has been reached.
TTL	
Change the TTL value	Enable/disable the function of changing the TTL value.
Keep WAN Connection	
Enable PING to keep alive	Some ISPs will drop connections if there is no traffic within certain periods of time. Switch the toggle to enable/disable this function.
PING to the IP	If you enable the PING function, please specify the IP address for the system to PING it for keeping alive.
PING Interval	Enter the interval for the system to execute the PING operation.
RIP Protocol	
Enable RIP	Click to enable the RIP function.
Bridge Mode	
Enable Bridge Mode	Enable – Click to make the router work as a bridge modem. Yet, the incoming packets with VLAN tags will be discarded. ● Enable Firewall – If enabled, all of the filter rules defined and enabled in Firewall menu will be activated.
Enable Full Bridge Mode	Click to make the router work as a bridge modem which is able to forward incoming packets with VLAN tags.
Bridge Subnet	Make a bridge between the selected LAN subnet and such WAN interface.
WAN IP Network Settings	
Connection Type	Static or Dynamic IP (available when Static or Dynamic IP is selected)

	as the Connection Mode) DHCP – Click to obtain the IP address automatically. ● Router Name – Enter the router name provided by ISP. ● Domain Name – Enter the domain name that you have assigned. ● DHCP Client Identifier – Click to enable and specify username and password as the DHCP client identifier for some ISP. Static – Click to specify some data. ● IP Address – Enter the private IP address. ● Subnet Mask – Enter the subnet mask. ● Gateway IP Address – Enter gateway IP address.
Primary DNS Server / Secondary DNS Server	Enter the primary IP address for the router. If necessary, Enter secondary IP address for necessity in the future.
WAN IP Alias (Multi-NAT)	
Index	Display the index number of the WAN IP alias.
Enable	Click to enable the selected WAN IP alias.
Aux. WAN IP	Display the IP address of the WAN IP alias.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.1.2 Connection Detection

This page displays physical mode and access mode for each WAN interface.

Index	Physical Mode	Access Mode
WAN1	Ethernet	Static or Dynamic IP
WAN2	Ethernet	Static or Dynamic IP
WAN3	Wireless 2.4G	None
WAN4	Wireless 5G	None
LTE	USB	3G/4G USB Modem(DHCP mode)
WAN6	USB	3G/4G USB Modem(DHCP mode)

These parameters are explained as follows:

Item	Description
Index	Display the index number of the WAN interface.

Physical Mode	Display the physical connection for WAN interfaces according to the real network connection.
Access Mode	Display the accessing mode of the Internet.


To modify the setting, move the mouse cursor to any entry and click to open the setting page.

Item	Description
WAN Connection Detection	
Index	Display the index number of the WAN interface.
Mode	Choose PPP Detect or Ping Detect or Always for the system to execute for WAN detection. If you choose Ping Detect as the detection mode, you have to enter required settings for the following items. ● Primary / Secondary Ping IP – Enter the Primary or Secondary IP address in this field for pinging. ● Ping Gateway IP – Use the WAN gateway IP address for pinging. Vigor router can check if the WAN connection is on or off. ● TTL – Set TTL value of PING operation. ● Ping Interval – Enter the interval for the system to execute the PING operation. ● Ping Retry – Enter the number of times that the system is allowed to execute the PING operation before WAN disconnection is judged.
Link Condition Detection	
Mode	In order for the system to detect the latency, jitter, and packet-loss status for each WAN interface, you have to specify the IP transmitting data through the interface. Choose Ping Detect, Http Detect, or Disable as detection mode. If Ping Detect or Http Detect is selected, you have to configure the following option.


Primary Ping IP	Enter an IP address.
Secondary Ping IP	Enter an IP address.
Ping Interval	Set a time interval (unit: second) for the system to ping the IP address specified above.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.1.3 Multi-VLAN

This page allows you to configure multiple permanent virtual circuits (PVCs).

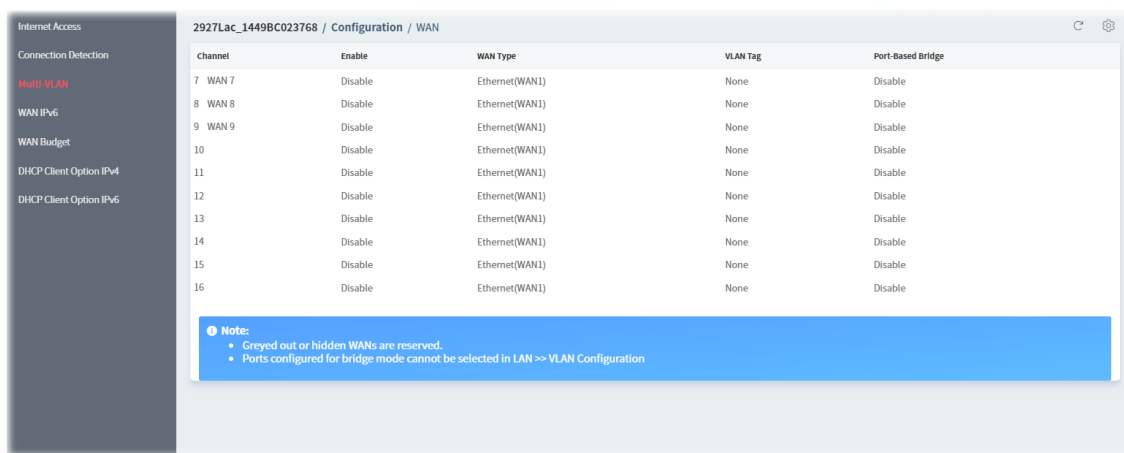

To modify the setting, move the mouse cursor to any entry and click to open the setting page.

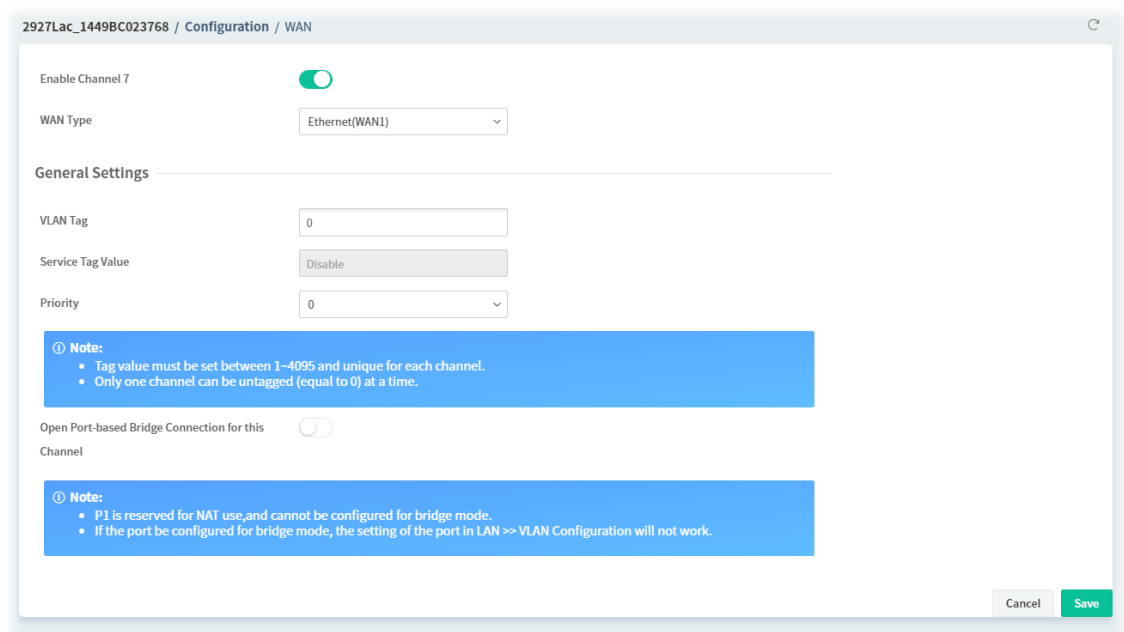

These parameters are explained as follows:

Item	Description
------	-------------

Enable Channel #	Click to enable or disable the channel.
General Settings	
VLAN Tag	Enter the value as the VLAN ID number.
Priority	Choose the number to determine the packet priority for this VLAN. The range is from 0 to 7.
Open Port-based Bridge Connection for this channel	Click to enable or disable the function. If enabled, you have to enter required settings for the following items. Physical Members - Group the physical ports by checking the corresponding check box(es) for applying the port-based bridge connection.
Open WAN Interface for this Channel	Click to enable or disable the function. If enabled, you have to enter required settings for the following items. WAN Application - ● Management - The configuration for this VLAN will be effective for Web configuration/telnet/TR069. ● IPTV - The IPTV configuration will allow the WAN interface to send IGMP packets to IPTV servers. Mode - Select ARP Detect or Ping Detect. If Ping Detect is selected, you have to set the following options. ● Primary Ping IP / Secondary Ping IP - Enter Primary or Secondary IP address in this field for pinging. ● Ping Gateway IP - Enable this setting to use current WAN gateway IP address for pinging. With the IP address(es) pinging, Vigor router can check if the WAN connection is on or off. ● TTL - Time To Live, the maximum allowed number of hops to the ping destination. Valid values range from 1 to 255. ● Ping Interval - Set a time interval (unit: second) for the system to ping the IP address specified above. ● Ping Retry - Enter the number of times that the system is allowed to execute the PING operation before WAN disconnection is judged. WAN Setup - Choose Static or Dynamic IP or PPPoE/PPPoA.
WAN IP Network Settings	It is available when Static_or_Dynamic_IP is selected as WAN Setup. Auto IP - Click to enable / disable the settings. If Auto IP is enabled, you have to enter required settings for the following items. ● Router Name - Enter the router name provided by ISP. ● Domain Name - Enter the domain name provided by ISP.

	If Auto IP is disabled, you have to enter required settings for the following items. ● IP Address – Enter the IP address. ● Subnet Mask – Enter the subnet mask. ● Gateway – Enter gateway IP address. Primary DNS IP – Enter the primary IP address for the router if you want to use Static IP mode. Secondary DNS IP – If necessary, Enter secondary IP address for necessity in the future.
ISP Access Setup	It is available when PPPoE/PPPoA is selected as WAN Setup. ISP Name – PPP Service Name. Enter if your ISP requires this setting; otherwise leave blank. Username – Name provided by the ISP for PPPoE/PPPoA authentication. Password – Password provided by the ISP for PPPoE/PPPoA authentication. Authentication – Choose the protocol used for PPP authentication. Always On – The router will maintain the PPPoE/PPPoA connection. Fixed IP – If enabled, the IP address entered in the Fixed IP Address field will be used as the IP address of the virtual WAN. Fixed IP Address – Enter an IP address.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.1.4 WAN IPv6

This page allows to configure IPv6 settings for each WAN interface.

Index	Physical Mode	Connection Type
WAN1	DSL	Offline
WAN2	Ethernet	PPP
WAN5	USB	Offline
WAN6	USB	Offline

These parameters are explained as follows:

Item	Description
Index	Display the index number of the WAN interface.
Physical Mode	Display the physical connection for WAN interfaces according to the real network connection.
Access Mode	Display the accessing mode of the Internet.

To modify the IPv6 setting, move the mouse cursor to any entry (WAN1/WAN2/WAN5/WAN6) and click to open the setting page.

2865ac_001DAA151EB8 / Configuration / WAN

Basic

Connection Type

Offline

PPP

TSPC

AICCU

DHCPv6 Client

Static IPv6

6in4 Static Tunnel

6rd

Cancel Save

Offline

When Offline is selected, the IPv6 connection will be disabled.

PPP

2865Lac_1449BC0D8F00 / Configuration / WAN

Basic

Connection Type

PPP

RIPng Protocol

WAN Connection Detection

Mode

Ping Detect

Ping IP/Hostname

TTL(1-255,0:Auto)

0

Cancel Save

TSPC

2865Lac_1449BC0D8F00 / Configuration / WAN

Basic

Connection Type

TSPC

TSPC

Username

Password

Tunnel Broker

WAN Connection Detection

Mode

Ping Detect

Ping IP/Hostname

TTL(1-255,0:Auto)

0

Cancel Save

AICCU

2865Lac_1449BC0D8F00 / Configuration / WAN

Basic

Connection Type

AICCU

AICCU

Always On

☐

Username

Password

Tunnel Broker

fr:shws.net

Tunnel ID

Subnet Prefix

/ 0

WAN Connection Detection

Mode

Ping Detect

Ping IP/Hostname

TTL(1-255,0:Auto)

0

Cancel

Save

DHCPv6 Client

2865Lac_1449BC0D8F00 / Configuration / WAN

Basic

Connection Type

DHCPv6 Client

IAID

0

DUID

000300011449bc0d8f01

Authentication Protocol

None

RIPng Protocol

☐

Enable Bridge Mode

☒

Enable Firewall

☐

Bridge Subnet

LAN1

WAN Connection Detection

Mode

Ping Detect

Ping IP/Hostname

TTL(1-255,0:Auto)

0

Cancel

Save

Static IPv6

2865Lac_1449BC0D8F00 / Configuration / WAN

Basic

Connection Type

Static IPv6

Static IPv6

Current IPv6 Address Table

Index	IPv6 Address	Prefix Length	Action
1			+ Add

IPv6 Gateway Address

RIPng Protocol

☐

Enable Bridge Mode

☒

Enable Firewall

☐

Bridge Subnet

LAN1

WAN Connection Detection

Mode

Ping Detect

Ping IP/Hostname

TTL(1-255,0:Auto)

0

Cancel

Save

6in4 Static Tunnel

2865Lac_1449BC0D8F00 / Configuration / WAN

Basic

Connection Type

6in4 Static Tunnel

Remote Endpoint IPv4 Address

IPv4 format (EX: 123.12.1.1)

6in4 IPv6 Address / 64

LAN Routed Prefix / 64

Tunnel TTL

255

WAN Connection Detection

Mode

Ping Detect

Ping IP/Hostname

TTL(1-255,0:Auto)

0

Cancel

Save

6rd

The parameters for connection type (PPP to 6rd) are explained as follows:

Item	Description
PPP	
RIPng Protocol	RIPng (RIP next generation) offers the same functions and benefits as IPv4 RIP v2.
WAN Connection Detection	Such function allows you to verify whether network connection is alive or not through Ping Detect. Mode – Choose Always On or Ping Detect for the system to execute for WAN detection. Always On means no detection will be executed. The network connection will be on always. ● Ping IP/Hostname – If you choose Ping Detect as detection mode, you have to type IP address in this field for pinging. ● TTL (Time to Live) – If you choose Ping Detect as detection mode, you have to type TTL value.
RIPng Protocol	RIPng (RIP next generation) offers the same functions and benefits as IPv4 RIP v2.
TSPC	
TSPC	Username – Enter the name obtained from the broker. Password – Enter the password assigned with the user name. Tunnel Broker – Enter the address for the tunnel broker IP, FQDN or an optional port number.
WAN Connection Detection	Such function allows you to verify whether network connection is alive or not through Ping Detect.

	Mode – Choose Always On or Ping Detect for the system to execute for WAN detection. Always On means no detection will be executed. The network connection will be on always. ● Ping IP/Hostname – If you choose Ping Detect as detection mode, you have to type IP address in this field for pinging. ● TTL (Time to Live) –If you choose Ping Detect as detection mode, you have to type TTL value.
AICCU	
AICCU	Always On – Check this box to keep the network connection always. Username – Enter the name obtained from the broker. Please apply new account at http://www.sixxs.net/. It is suggested for you to apply another username and password. Password – Enter the password assigned with the user name. Tunnel Broker – It means a server of AICCU. The server can provide IPv6 tunnels to sites or end users over IPv4. Tunnel ID – One user account may have several tunnels. And, each tunnel shall have one specified tunnel ID (e.g., T115394). Enter the ID offered by Tunnel Broker. Subnet Prefix – Enter the subnet prefix address obtained from service provider.
WAN Connection Detection	Such function allows you to verify whether network connection is alive or not through Ping Detect. Mode – Choose Always On or Ping Detect for the system to execute for WAN detection. Always On means no detection will be executed. The network connection will be on always. ● Ping IP/Hostname – If you choose Ping Detect as detection mode, you have to type IP address in this field for pinging. ● TTL (Time to Live) –If you choose Ping Detect as detection mode, you have to type TTL value.
DHCPv6 Client	
DHCPv6 Client	IAID – Enter a number as IAID. Authentication Protocol – This protocol will be used for the client to be authenticated by DHCPv6 server before accessing into Internet. There are three types can be specified, Reconfigure Key, Delayed and None. In general, the default setting is None. ● Key ID – Enter a value (range from 1 to 65535) which will be used to generate HMAC-MD5 value. ● Realm – The name (1 to 31 characters) typed here will identify the key which generates HMAC-MD5 value. ● Secret –Enter a text (1 to 31 characters) as a unique identifier

	for each client on each DHCP server. RIPng Protocol – RIPng (RIP next generation) offers the same functions and benefits as IPv4 RIP v2. Enable Bridge Mode – If the function is enabled, the router will work as a bridge modem. ● Enable Firewall – It is available when Bridge Mode is enabled. When both Bridge Mode and Firewall check boxes are enabled, the settings configured (user profiles) under User Management will be ignored. And all of the filter rules defined and enabled in Firewall menu will be activated. Bridge Subnet – Make a bridge between the selected LAN subnet and such WAN interface.
WAN Connection Detection	Such function allows you to verify whether network connection is alive or not through Ping Detect. Mode – Choose Always On or Ping Detect for the system to execute for WAN detection. Always On means no detection will be executed. The network connection will be on always. ● Ping IP/Hostname – If you choose Ping Detect as detection mode, you have to type IP address in this field for pinging. ● TTL (Time to Live) – If you choose Ping Detect as detection mode, you have to type TTL value.
Static IPv6	
Current IPv6 Address Table	IPv6 Address – Enter the IPv6 Static IP Address. Prefix Length – Enter the fixed value for prefix length. Add – Click it to add a new entry. IPv6 Gateway Address – Type your IPv6 gateway address here.
WAN Connection Detection	Such function allows you to verify whether network connection is alive or not through Ping Detect. Mode – Choose Always On or Ping Detect for the system to execute for WAN detection. Always On means no detection will be executed. The network connection will be on always. ● Ping IP/Hostname – If you choose Ping Detect as detection mode, you have to type IP address in this field for pinging. ● TTL (Time to Live) – If you choose Ping Detect as detection mode, you have to type TTL value.
RIPng Protocol	RIPng (RIP next generation) offers the same functions and benefits as IPv4 RIP v2.
Bridge Mode	Enable Bridge Mode – If the function is enabled, the router will work as a bridge modem.


	Enable Firewall – It is available when Bridge Mode is enabled. When both Bridge Mode and Firewall check boxes are enabled, the settings configured (user profiles) under User Management will be ignored. And all of the filter rules defined and enabled in Firewall menu will be activated. Bridge Subnet – Make a bridge between the selected LAN subnet and such WAN interface.
6in4 Static Tunnel	
6in4 Static Tunnel	Remote Endpoint IPv4 Address – Enter the static IPv4 address for the remote server. 6in4 IPv6 Address – Enter the static IPv6 address for IPv4 tunnel with the value for prefix length. LAN Routed Prefix – Enter the static IPv6 address for LAN routing with the value for prefix length. Tunnel TTL – Enter the number for the data lifetime in tunnel.
WAN Connection Detection	Such function allows you to verify whether network connection is alive or not through Ping Detect. Mode – Choose Always On or Ping Detect for the system to execute for WAN detection. Always On means no detection will be executed. The network connection will be on always. ● Ping IP/Hostname – If you choose Ping Detect as detection mode, you have to type IP address in this field for pinging. ● TTL (Time to Live) – If you choose Ping Detect as detection mode, you have to type TTL value.
6rd	
6rd Mode	Auto_6rd – Retrieve 6rd prefix automatically from 6rd service provider. The IPv4 WAN must be set as "DHCP". Static_6rd – Set 6rd options manually. If Static_6rd is selected as the 6rd Mode: IPv4 Border Relay – Enter the IPv4 addresses of the 6rd Border Relay for a given 6rd domain. IPv4 Mask Length – Type a number of high-order bits that are identical across all CE IPv4 addresses within a given 6rd domain. It may be any value between 0 and 32. 6rd Prefix – Enter the 6rd IPv6 address. 6rd Prefix Length – Enter the IPv6 prefix length for the 6rd IPv6 prefix in number of bits.
WAN Connection Detection	Such function allows you to verify whether network connection is alive or not through Ping Detect.

	Mode – Choose Always On or Ping Detect for the system to execute for WAN detection. Always On means no detection will be executed. The network connection will be on always. ● Ping IP/Hostname – If you choose Ping Detect as detection mode, you have to type IP address in this field for pinging. ● TTL (Time to Live) –If you choose Ping Detect as detection mode, you have to type TTL value.
Cancel	Discard current modification.
Save	Save the current settings.

After finished the above settings, click **Save** to save the settings.

9.4.1.5 WAN Budget

WAN Budget determines the data *traffic volume* for each WAN interface respectively to prevent overcharges for data transmission by the ISP.

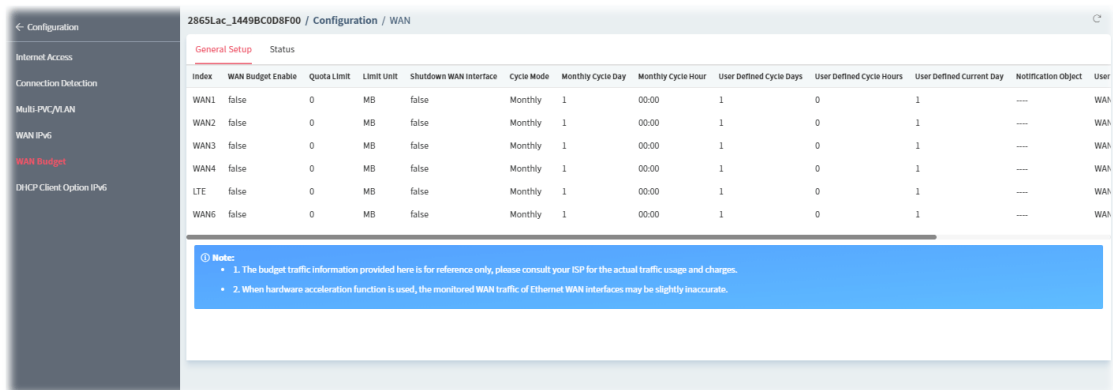


Index	WAN Budget Enable	Quota Limit	Limit Unit	Shutdown WAN Interface	Cycle Mode	Monthly Cycle Day	Monthly Cycle Hour	User Defined Cycle Days	User Defined Cycle Hours	User Defined Current Day	Notification Object	User
WAN1	false	0	MB	false	Monthly	1	00:00	1	0	1	---	WAN
WAN2	false	0	MB	false	Monthly	1	00:00	1	0	1	---	WAN
WAN3	false	0	MB	false	Monthly	1	00:00	1	0	1	---	WAN
WAN4	false	0	MB	false	Monthly	1	00:00	1	0	1	---	WAN
LTE	false	0	MB	false	Monthly	1	00:00	1	0	1	---	WAN
WAN5	false	0	MB	false	Monthly	1	00:00	1	0	1	---	WAN

Note:

- 1. The budget traffic information provided here is for reference only, please consult your ISP for the actual traffic usage and charges.
- 2. When hardware acceleration function is used, the monitored WAN traffic of Ethernet WAN interfaces may be slightly inaccurate.

To modify the budget profile setting, move the mouse cursor to any entry (index 1 to index 6) and click to open the setting page.

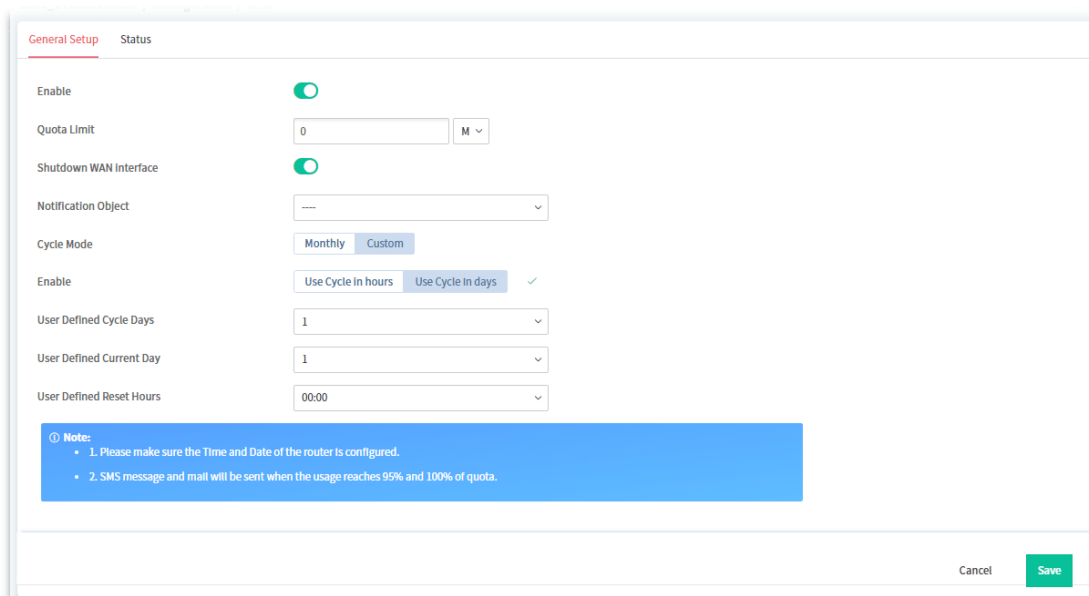

General Setup Status

Enable ☒

Quota Limit M

Shutdown WAN Interface ☒

Notification Object

Cycle Mode ☒ Monthly ☐ Custom

Enable ☒ Use Cycle In hours Use Cycle In days ✓

User Defined Cycle Days

User Defined Current Day

User Defined Reset Hours

Note:

- 1. Please make sure the Time and Date of the router is configured.
- 2. SMS message and mail will be sent when the usage reaches 95% and 100% of quota.

Cancel Save

The parameters are explained as follows:

Item	Description
Enable	Click to enable the budget function.
Quota Limit	Enter the data traffic quota allowed for such WAN interface. There are two unit (MB and GB) offered for you to specify.
Shutdown WAN Interface	Click to let all the outgoing traffic through such WAN interface be terminated.
Notification Object	The system will send out a notification based on the content of the notification object.
Cycle Mode	Choose Monthly or Custom to define the billing cycle according to request. Monthly is default setting. If long period or a short period is required, use Custom. The period of cycle duration is between 1 day and 60 days. You can determine the cycle duration by specifying the days and the hours. In addition, you can specify which day of today is in a cycle.
Monthly Cycle Day / Monthly Cycle Hour	It is available when Monthly is selected as Cycle Mode. Set the day and time in a month.
Enable	It is available when Custom is selected as Cycle Mode. Use Cycle in hours - Set a time cycle (including days and hours) for Vigor CPE to reset the data record automatically. ● User Defined Cycle Days - Select a number (1~60) of the days for a cycle. For example, 7 means 7 days. ● User Defined Cycle Hours - Select a number (0~23) of the hours for a cycle. For example, 12 means 12 hours. Based on the cycle days and cycle hours settings, Vigor CPE will reset the data record once reaching 7 days and 12 hours. ● User Defined Current Day - Select the day in the cycle as the starting point in which the Vigor router will reset the traffic record. For example, "3" means current day is the third day, within a cycle. Use Cycle in days - Set a cycle (with days) for Vigor CPE to reset the data record on a particular hour automatically. ● User Defined Cycle Days - Select a number (1~60) of the days for a cycle. For example, 7 means 7 days. ● User Defined Current Day - Select the day in the cycle as the starting point in which the Vigor router will reset the traffic record. For example, "3" means current day is the third day, within a cycle. ● User Defined Reset Hours - Select a particular time

	(00:00~23:00). For example, choose 15:00. Later, the CPE will reset the data record at 15:00 for every cycle.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.1.6 DHCP Client Option IPv4/IPv6

DHCP packets can be processed by adding option number and data information when it is enabled.

The top screenshot shows the 'DHCP Client Option IPv4' configuration page. It features a table with columns: Enable, Interface, Option, Type, and Data. The 'Enable' column has a value of 'false'. A note box states: 'Note: 1. Option 12 is reserved. You cannot configure it here, but you can configure it in "Router Name" field of "WAN >> Internet Access >> Details Page". 2. Option 55 is reserved and configured with values 1, 3, 6, 15, 212, also 33 and 121 for some models. 3. Configuring option 61 here will override the setting in "WAN >> Internet Access" page's DHCP Client Identifier field. 4. Hexadecimal Digit: Input the hexadecimal representation of ASCII Character data. EX: Option:18, Data:2f70617468 (/path)'. The bottom screenshot shows the 'DHCP Client Option IPv6' configuration page with a similar table and note box.

To modify the setting, move the mouse cursor to the entry and click to open the setting page.

The screenshot shows the 'DHCP Client Option IPv4' configuration page. It displays fields for Index (1), Enable (checked), Interface (WAN1), Option Number (0), Type (ASCII), and Data. The page includes 'Clear', 'Cancel', and 'Save' buttons.

The parameters are explained as follows:

Item	Description
Index	Display the index number for the DHCP option.
Enable	If selected, DHCP option entry is enabled. If unselected, DHCP option entry is disabled.

Interface	The interface(s) to which this entry is applicable.
Option Number	DHCP option number (e.g., 100).
Type	Type of data in the Data field: ASCII Character - A text string. Example: /path. Hexadecimal Digit - A hexadecimal string. Valid characters are from 0 to 9 and from a to f. Example: 2f70617468. Address List - One or more IPv4 addresses, delimited by commas.
Data	Data of this DHCP option.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.2 LAN

9.4.2.1 General Setup

This page provides you the general settings for LAN.

2865_1449BC080090 / Configuration / LAN

Index	Status	DHCP	IP Address
LAN1	Enable	Enable	192.168.1.1
LAN2	Disable	Enable	192.168.2.1
LAN3	Disable	Enable	192.168.3.1
LAN4	Disable	Enable	192.168.4.1
LAN5	Disable	Enable	192.168.5.1
LAN6	Disable	Enable	192.168.6.1
LAN7	Disable	Enable	192.168.7.1
LAN8	Disable	Enable	192.168.8.1
DMZ Port	Disable	Enable	192.168.254.1

Force router to use "DNS server IP address" Disable

Save

To modify the LAN or DMZ Port setting, move the mouse cursor to any entry and click to open the setting page.

2865_1449BC080090 / Configuration / LAN

General Setup

Index: 1

IP Address: 192.168.1.1

Subnet Mask: 255.255.255.0

RIP Protocol Control: Disable

DHCP Server Setup

DHCP Server Enable: ☒

IP Pool Start: 192.168.1.10

IP Pool End: 192.168.1.209

Gateway IP Address: 192.168.1.1

DHCP Lease Time: 86400

Clear DHCP lease for inactive clients periodically: ☒

DHCP Relay: ☐

DNS Server IP Address

Primary IP Address: IPv4 format (EX: 123.12.1.1)

Secondary IP Address: IPv4 format (EX: 123.12.1.1)

Cancel Save

The parameters are explained as follows:

Item	Description
General Setup	
Index	Display the index number of LAN item.
IP Address	Display the IP address of the router.
Subnet Mask	The subnet mask, together with the IP Address field, indicates the maximum number of clients allowed on the subnet.
RIP Protocol Control	It is available for LAN Port only. Click to enable / disable the function. If enabled, the router will attempt to exchange routing information with neighbouring routers using the Routing Information Protocol.
Usage	It is available for DMZ Port only. NAT - Click to invoke NAT function. Routing - Click to invoke routing function.
DHCP Server Setup	
DHCP Server Enable	Click to enable / disable the DHCP server settings. If enabled: IP Pool Start - Enter an IP address. The beginning LAN IP address that is given out to LAN DHCP clients. IP Pool End - Enter an IP address. The ending LAN IP address that is given out to LAN DHCP clients. Gateway IP Address - The IP address of the gateway, which is the

	host on the LAN that relays all traffic coming into and going out of the LAN. DHCP Lease Time – The maximum duration DHCP-issued IP addresses can be used before they have to be renewed. Clear DHCP lease for inactive clients periodically – If enabled, the router sends ARP requests recycles IP addresses previously assigned to inactive DHCP clients to prevent exhaustion of the IP address pool.
DHCP Relay	Click to enable / disable the DHCP Relay settings. If enabled: DHCP Relay IP Address – Set the IP address of the DHCP server you are going to use so the Relay Agent can help to forward the DHCP request to the DHCP server. DHCP 2nd Relay IP Address – Set the second IP address for the DHCP server.
DNS Server IP Address	
Primary IP Address	Specify a DNS server IP address.
Secondary IP Address	Specify secondary DNS server IP address.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.2.2 IP Routed Subnet

The parameters are explained as follows:

Item	Description
General Setup	
Enable	Click to enable / disable the IP routed subnet configuration.

IP Address	It is the IP address of the router.
Subnet Mask	The subnet mask, together with the IP Address field, indicates the maximum number of clients allowed on the subnet. (Default: 255.255.255.0)
RIP Protocol Control	Enable – The router will attempt to exchange routing information with neighbouring routers using the Routing Information Protocol.
DHCP Server Setup	
IP Pool Start	Enter a value of the IP address pool for the DHCP server to start with when issuing IP addresses.
IP Pool Counts	Enter the maximum number of PCs that you want the DHCP server to assign IP addresses to.
DHCP Lease Time	Enter the time to determine how long the IP address assigned by DHCP server can be used.
Use LAN Port / Use LAN Port 1 /2	Specify an IP for IP Route Subnet. If Use LAN Port is enabled, DHCP server will assign IP address automatically for the clients coming from P1 and/or P2. Please check the box of Use LAN Port 1 and Use LAN Port 2 .
Use MAC Address	Click to specify MAC address.
MAC Address Table	It displays the a list of MAC addresses. +Add – Enter the MAC address in the boxes and click this button to add. +Edit – Click to modify the address of the selected entry. Delete – Click to remove the selected entry.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.2.3 VLAN

VLAN Configuration

VLAN Enable ☒

Permit untagged device in P1 to access router ☒

Name	Subnet	VLAN Tag Enable	VLAN Tag ID	VLAN Tag Priority
VLAN0	LAN1	☐	0	0
VLAN1	LAN1	☐	0	0
VLAN2	LAN1	☐	0	0
VLAN3	LAN1	☐	0	0
VLAN4	LAN1	☐	0	0
VLAN5	LAN1	☐	0	0
VLAN6	LAN1	☐	0	0
VLAN7	LAN1	☐	0	0
VLAN8	LAN1	☐	0	0
VLAN9	LAN1	☐	0	0
VLAN10	LAN1	☐	0	0
VLAN11	LAN1	☐	0	0
VLAN12	LAN1	☐	0	0

[Clear VLAN setup](#) Cancel Save

The parameters are explained as follows:

Item	Description
VLAN Configuration	
VLAN Enable	Click to enable / disable the VLAN configuration.
Permit untagged device P1 to access router	Click to enable / disable the function. If enabled, it allows untagged hosts connected to LAN port P1 to access the router.
Subnet	Choose one of them to make the selected VLAN mapping to the specified subnet only.
VLAN Tag Enable	Check to enable the function of VLAN with tag.
VLAN Tag ID	Enter the value as the VLAN ID number. The range is form 0 to 4095. VIDs must be unique.
VLAN Tag Priority	Valid values are from 0 to 7, where 1 has the lowest priority, followed by 0, and finally from 2 to 7 in increasing order of priority.
VLAN Member(LAN)	
P1 ~ P5	Check the LAN port(s) to group them under the selected VLAN.
VLAN Member(Wireless 2.4G/5G)	
SSID1~SSID4	Check the SSID boxes to group them under the selected VLAN.

Clear VLAN Setup	Discard the modification and return to the original configuration of this page.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.2.4 Bind IP to MAC

This function is used to bind the IP and MAC address in LAN to have a strengthening control in network.

The parameters are explained as follows:

Item	Description
Bind IP to MAC	
Enable	Click to enable or disable the function.
Strict Bind	Click to enable or disable the function. If enabled, the router will block the connection of the IP/MAC which is not listed in IP Bind List.
Strict Bind Interface	Choose the interface(s) for applying the rules of Bind IP to MAC.
Cancel	Discard current modification.
Save	Save the current settings.
IP Bind List	
Delete All	Delete all entries in IP Bind List.
+Add	After entering the IP address, MAC address and comment for a new entry, click +Add to create a new IP bind.
Edit	If IP address, MAC address and comment have been modified, click

	the Edit button to save the change.
Delete	Click the button to remove the selected index entry.
ARP Table	
+Add to Bind List	ARP table is the LAN ARP table of this router. Click to add the ARP table onto the Bind List.

9.4.2.5 DHCP Server Option IPv4/IPv6

DHCP packets can be processed by adding option number and data information when such function is enabled.

Enable	Interface	Option	Type	Data
false		0	ASCII	

Note:

- 1.Those options are reserved by OS which are not allowed to configure in this page: Option 1, 2, 3, 4, 5, 6, 8, 11, 13, 20, 23, 25 and 26.
- 2.Option 23 could be configured from DNS server field of LAN >> General Setup >> LAN (x) IPv6 Setup page.
- 3.Option 11, 25, 26 could be configured from LAN >> General Setup >> LAN (x) IPv6 Setup >> DHCPv6 Server >> Advance setting page.

Item	Description
+Add	Click to add a new option profile.
Delete	Click to remove a selected option profile.

To modify the option setting, move the mouse cursor on the entry and click to open the setting page.

2865Lac_1449BC0D8F00 / Configuration / LAN
Set to Factory Default

Index

Enable

☒

Interface

Nothing selected

Data Type

ASCII

Hex

Address

SIAddr

Option Number

Data

Clear
Cancel Save

The parameters are explained as follows:

Item	Description
Index	Display the index number of the profile.
Enable	Click to enable or disable the DHCP option entry.
Interface	Select the LAN interface(s) to which this entry is applicable. Select All – Select all LAN interfaces.
Data Type	Select the type of data in the Data field. ASCII – A text string. Example: /path. Hex – A hexadecimal string. Valid characters are from 0 to 9 and from

	a to f. Example: 2f70617468. Address – One or more IPv4/IPv6 addresses, delimited by commas. SIAddr – It is available for DHCP Server Option IPv4 only. Overrides the DHCP Next Server IP address (DHCP Option 66) supplied by the DHCP server.
Option Number	Enter a DHCP option number (e.g., 100).
Data	Enter the data for this DHCP option based on the data type selected.
Next Server IPAddress/SIAddr	Enter the DHCP next server IP address. It is available for DHCP Server Option IPv4 only.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.2.6 InterLAN Routing

Inter-LAN Routing allows different LAN subnets to be interconnected or isolated. It is only available when the VLAN functionality is enabled. In the Inter-LAN Routing matrix, a selected checkbox means that the 2 intersecting LANs can communicate with each other.

Subnet	LAN 1	LAN 2	LAN 3	LAN 4	LAN 5	LAN 6	LAN 7	LAN 8	DMZ Port
LAN 1	☐	☐	☐	☐	☐	☐	☐	☐	☐
LAN 2	☒	☐	☐	☐	☐	☐	☐	☐	☐
LAN 3	☒	☒	☐	☐	☐	☐	☐	☐	☐
LAN 4	☐	☐	☐	☐	☐	☐	☐	☐	☐
LAN 5	☐	☐	☐	☐	☐	☐	☐	☐	☐
LAN 6	☐	☐	☐	☐	☐	☐	☐	☐	☐
LAN 7	☐	☐	☐	☐	☐	☐	☐	☐	☐
LAN 8	☐	☐	☐	☐	☐	☐	☐	☐	☐
DMZ Port	☐	☐	☐	☐	☐	☐	☐	☐	☐

The parameters are explained as follows:

Item	Description
LAN1 to DMZ Port	Check the box(es) to let the 2 intersecting LANs can communicate with each other.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.2.7 LAN IPv6

This page allows to configure IPv6 settings for each LAN.

Index	Status	DHCPv6 Enable	DNS Enable
LAN1	Enable	true	Deploy_when_WAN_is_up
LAN2	Enable	true	Deploy_when_WAN_is_up
LAN3	Enable	true	Deploy_when_WAN_is_up
LAN4	Enable	true	Deploy_when_WAN_is_up
LAN5	Enable	true	Deploy_when_WAN_is_up
LAN6	Enable	true	Deploy_when_WAN_is_up
LAN7	Enable	true	Deploy_when_WAN_is_up
LAN8	Enable	true	Deploy_when_WAN_is_up
DMZ	Enable	true	Deploy_when_WAN_is_up

To modify the IPv6 setting for each LAN, move the mouse cursor on the entry and click to open the setting page.

Basic Setup

LAN Name

LAN1

Enable

WAN Primary Interface

WAN1

Static IPv6

ULA Config

Off

ULA Config Address

::

Prefix Length: 64

IPv6 Address Table

Index	IPv6 Address	Prefix Length	Action
1	FE80::B9A1:14C0:2AB4:900B	64	Delete
2			Add

DNS Server IPv6

DNS Enable

Deploy_when_WAN_is_up

Primary DNS

2001:4860:4860::8888

Secondary DNS

2001:4860:4860::8844

Management

Cancel

Save

The parameters are explained as follows:

Item	Description
Basic Setup	
LAN Name	Display the name of the LAN interface.
Enable	Click to enable or disable the configuration of LAN IPv6 Setup.
WAN Primary Interface	Specify a WAN interface for IPv6.
Static IPv6	
ULA Config	Select the ULA mode (off, Auto_ ULA_Prefix, Manually_ ULA_Prefix).

ULA Config Address	LAN clients will be assigned ULAs generated based on the prefix manually entered.
IPv6 Address Table	Display current used IPv6 addresses.
DNS Server IPv6	
DNS Enable	Select Deploy_when_WAN_is_up, disable or enable. Deploy when WAN is up – The RA (router advertisement) packets will be sent to LAN PC with DNS server information only when network connection by any one of WAN interfaces is up. Enable – The RA (router advertisement) packets will be sent to LAN PC with DNS server information no matter WAN connection is up or not. Disable – DNS server will not be used.
Primary DNS	Enter the IPv6 address for Primary DNS server.
Secondary DNS	Enter another IPv6 address for DNS server if required.
Management	
Management	Configures the Managed Address Configuration flag (M-bit) in Route Advertisements. Off – No configuration information is sent using Route Advertisements. SLAAC(stateless) – M-bit is unset. DHCPv6(stateful) – M-bit is set, which indicates to LAN clients that they should acquire all IPv6 configuration information from a DHCPv6 server. The DHCPv6 server can either be the one built into the Vigor2865, or a separate DHCPv6 server.
Other Option (O-bit)	Click to enable or disable the function. If enabled, the O-bit will be enabled for obtaining additional information (e.g., DNS) from DHCPv6.
DHCPv6 Server	
DHCPv6 Server Enable	Click to enable DHCPv6 server.
Auto IPv6 Range	If enabled, Vigor router will assign the IPv6 range automatically.
Start Address	Enter the start address for IPv6 server.
End Address	Enter the end address for IPv6 server.
Router Advertisement	
Enable	Click to enable or disable the router advertisement server.
Hop Limit	The value is required for the device behind the router when IPv6 is in use.
Min/Max Interval Time(sec)	It defines the interval (between minimum time and maximum time) for sending RA (Router Advertisement) packets.

Default Lifetime(sec)	Within the period of time, Vigor router can be treated as the default gateway.
Default Preference	It determines the priority of the host behind the router when RA (Router Advertisement) packets are transmitted.
MTU Auto	If enabled, the router will determine the MTU value for LAN.
RIPng Protocol	
Enable	If enabled, RIPng (RIP next generation) offers the same functions and benefits as IPv4 RIP v2.
Extension WAN	
Selected WAN	Additional WANs selected to carry IPv6 traffic.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.2.8 Port Mirror

The LAN Port Mirror function allows network traffic of select LAN ports to be forwarded to another LAN port for analysis.

The screenshot shows the 'Bind IP to MAC' configuration interface. It includes an 'Enable' toggle switch which is currently turned on. Below it, the 'MirrorPort' is set to 'Port3' via a dropdown menu. There are two sections for selecting mirrored ports: 'Mirrored Tx Port' and 'Mirrored Rx Port'. Each section has a grid of checkboxes for Port1, Port2, Port3, Port4, DMZ, WAN1, and WAN2. In both sections, 'WAN2' is the only option that is checked. At the bottom right of the window, there are 'Cancel' and 'Save' buttons.

The parameters are explained as follows:

Item	Description
Enable	Enables or disables LAN Port Mirroring.
Mirror Port	One and only one port is selected as the mirror port, to which traffic is to be forwarded.
Mirrored Tx Port	Port(s) whose outbound traffic will be forwarded to the mirror port.
Mirrored Rx Port	Port(s) whose inbound traffic will be forwarded to the mirror port.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.2.9 Wired 802.1X

Wired 802.1X provides authentication for clients wishing to connect to the LAN by Ethernet.

2927ac_1449BC30C3F0 / Configuration / LAN

Enable LAN 802.1X ☒

Authentication Type: External RADIUS

802.1X Ports: ☒ P1 ☒ P2 ☐ P3 ☐ P4 ☐ P5

Note:

- 1. 802.1X enabled LAN ports only support a single attached device using EAPOL authentication. To authenticate multiple devices through a LAN port you need an 802.1X capable switch. Then configure 802.1X on the attached switch instead.
- 2. Please configure External RADIUS or Local 802.1X for authentication.
- 3. Authentication by External RADIUS supports PEAP, EAP-TLS and EAP-TTLS.

Cancel Save

The parameters are explained as follows:

Item	Description
Enable LAN 802.1x	Check the box to enable LAN 802.1x function.
Authentication Type	External RADIUS – An external RADIUS server is to be used for 802.1X authentication. Local 802.1X – Use the user database on the router to authenticate clients.
802.1X ports	802.1X authentication will be available for the selected LAN ports.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.2.10 Link Aggregation

LAG means Link Aggregation Group which groups some physical ports together to make a single high-bandwidth data path. Thus it can implement traffic load sharing among the member ports in a group to enhance the connection reliability.

2927ac_1449BC30C3F0 / Configuration / LAN

Index	Enable	Aggregation Ports				Link Status	
		P2	P3	P4	P5		
LAG1	☐	☐	☐			●	●

Note:

- Only Support Static (Balance-xor) mode.
- Ports in LAG can not be mirror port.

The parameters are explained as follows:

Item	Description
Enable	Check the box to enable LAN 802.1x function.
Aggregation Ports	Select the port number (at least two ports) to make a high-bandwidth data path. At present, the available ports to be selected include P2 and P3.
Link Status	Green light means the LAG port is connected by Ethernet cable(s).
Cancel	Discard current modification.
Save	Save the current settings.

9.4.3 Hotspot Web Portal

The Hotspot Web Portal feature allows you to set up profiles so that LAN users could either be redirected to specific URLs, or be shown messages when they first connect to the Internet through the router. Users could be required to read and agree to terms and conditions, or authenticate themselves, prior to gaining access to the Internet. Other potential uses include the serving of advertisements and promotional materials, and broadcast of public service announcements.

9.4.3.1 Profile Setup

Profile Setup is used to create or modify Portal profiles. Up to 4 profiles can be created to meet different requirements according to LAN subnets, WLAN SSIDs, origin and destination IP addresses, etc.

Index	Enable	Comments	Login Mode	Applied Interface
1	Disable		Click-through	None
2	Disable		Click-through	None
3	Disable		Click-through	None
4	Disable		Click-through	None

Preview hotspot from WAN and VPN ☒

[Save](#)

Note:

- 1. The router must connect to the Internet before webpage redirection will work.
- 2. If the LAN clients are using another DNS server on LAN, please make sure the DNS query for domain name "portal.draytek.com" will be resolved by the router.
- 3. If you want to enable Preview hotspot from WAN and VPN, please set up [Internet Access Control](#).

To configure the profile, move the mouse cursor to any entry and click to open the setting page. Follow the on-screen steps to set the profile.

Step (1) Login Method

The parameters are explained as follows:

Item	Description
Enable	Check to enable this profile.
Comments	Enter a brief description to identify this profile.
Portal Server	
Portal Method	There are four methods to be selected as for portal server. ● Skip Login, landing page only ● Click Through ● Various Hospot Login ● Leave Info Login ● External Portal Server
	<i>When Skip Logging, landing page only or Click through is selected as Portal Method</i>
Captive Portal URL	Enter the captive portal URL.
	<i>When Various Hotspot Login is selected as Portal Method</i>
Captive Portal URL	Enter the captive portal URL.
Login Methods	This setting is available when Various Hotspot Login is selected as the portal method. Choose Login Method – Select one or more desired login methods. ● Login with Facebook ● Login with Google

	● Receive PIN via SMS ● Receive PIN via Mail ● PIN with Voucher ● Login with RADIUS ● Leave Info Login
Facebook (Login with Facebook)	This setting is available when Login with Facebook is selected as the login method. Facebook APP ID – Enter a valid Facebook developer app ID. Facebook APP Secret – Enter the secret configured for the APP ID entered above.
Google (Login with Google)	This setting is available when Login with Google is selected as the login method. Google App ID – Enter a valid Google app ID. Google App Secret – Enter the secret configured for the APP ID entered above.
SMS Provider (Receive PIN via SMS)	This setting is available when Receive PIN via SMS is selected as the login method. Receiving PIN via SMS Provider – Select the SMS Provider used to send PIN notifications SMS providers.
Mail Server (Receive PIN via Mail Server)	This setting is available when Receive PIN via Mail is selected as the login method. Receiving PIN via Mail – Select the SMS Provider used to send PIN notifications SMS providers.
Radius Server (Login with RADIUS)	This setting is available when Login with RADIUS is selected as the login method. Authentication Method – Click link to configure the external RADIUS server for authenticating web portal clients. RADIUS MAC Authentication – Check Enable to activate user authentication by MAC address. MAC Address Format – Select the MAC address format that is used by the RADIUS server.
<i>When External Portal Server is selected as Portal Method</i>	
Redirection URL	Enter the URL to which the client will be redirected.
RADIUS Server	Authentication Method – To configure the RADIUS server, click the External RADIUS Server link and you will be presented with the configuration page. RADIUS MAC Authentication – If the RADIUS server supports authentication by MAC address, enable RADIUS MAC Authentication

	and select the MAC address format that is used by the RADIUS server. MAC Address Format – Select the MAC address format. RADIUS NAS-Identifier – Enter the ID (string) for RADIUS NAS-Identifier.
Cancel	Discard current modification.
Previous	Return to previous page.
Save and Next	Save the current settings and get into next page.

If you have chosen **Skip Login, landing page only** or **External Portal Server** as the portal method, skip to step 4 *Whitelisting* below.

Otherwise, proceed to configure the login page by following steps 2 and 3.

Step (2) Background

Select a background for the login page.

The parameters are explained as follows:

Item	Description
Choose Login Background	Select either Color Background or Image Background as the login page background scheme.
Browser Tab Title	Enter the text to be shown as the webpage title in the browser.
Logo Image	The DrayTek Logo will be displayed by default. However, you can enter HTML text or upload an image to replace the default logo.
Login Method Background Color	Select the background color of the login panel from the predefined color list, or select Customize Color and enter the RGB value. Click Preview to preview the selected color.

Opacity (10 ~ 100)	Available when Image Background is selected. Set the opacity of the background image.
Background Image	Available when Image Background is selected. Click Browse... to select an image file (.JPG or .PNG format), then click Upload to upload it to the router.
Cancel	Discard current modification.
Previous	Return to previous page.
Save and Next	Save the current settings and get into next page.

If you have selected **Skip Login, landing page only** or **External Portal Server** as the portal method, proceed to Step 4 *Whitelist Setting*; otherwise, continue to Step 3 *Login Page Setup*.

Step (3) Login Page Setup

The parameters are explained as follows:

Item	Description
	if you have selected Click Through as the Portal Method.
Welcome Message	Enter the text to be displayed as the welcome message.
Terms and Conditions	Click to enable/disable the function. User must tick to get the internet access - Click to ask the user ticking the box for getting the Internet access.
Description	Enter the text to be displayed in the Terms and Conditions pop-up window.
Content	If enabled, a check box with a description will be shown on the web

	portal login page. Internal Content – Click it for displaying the message that you want the user knows on the web portal login page. ● Enter the text on the box below the Internal Content button. External Content – Click it for opening another URL web page. ● External Content URL – Enter the URL.
Data Collection for Marketing	If enabled, a check box with a description will be shown on the web portal login page. User must tick to get the internet access – Click to ask the user ticking the box for getting the Internet access. Description – Enter a brief description for explaining if a user wants to access the Internet, he/she must agree for data collection made by network supplier.
Enter PIN Description	Enter the existing PIN code.
Submit Button Description	Enter the text to be displayed on the Submit button
Accept Button Description	Enter the text to be displayed on the accept button
Accept Button Color	Select the color of the accept button from the predefined color list, or select Customize Color and enter the RGB value. Click Preview to preview the selected color.
	if you have selected Various Hotspot Login as the portal method.
Welcome Message	Enter the text to be displayed as the welcome message.
Terms and Conditions	Click to enable/disable the function. User must tick to get the internet access – Click to ask the user ticking the box for getting the Internet access.
Description	Enter the text to be displayed in the Terms and Conditions pop-up window.
Content	If enabled, a check box with a description will be shown on the web portal login page. Internal Content – Click it for displaying the message that you want the user knows on the web portal login page. ● Enter the text (maximum 1360 characters) on the box below the Internal Content button. External Content – Click it for opening another URL web page. ● External Content URL – Enter the URL.
Data Collection for Marketing	If enabled, a check box with a description will be shown on the web portal login page.

	User must tick to get the internet access – Click to ask the user ticking the box for getting the Internet access. Description – Enter a brief description for explaining if a user wants to access the Internet, he/she must agree for data collection made by network supplier.
Facebook Login Description	Enter the text to be displayed on the Facebook login button.
Google Login Description	Enter the text to be displayed on the Google login button.
Hint Message for PIN	Enter the text used to suggest users to choose SMS authentication.
Receiving PIN Description	Enter the text to be displayed on the button that the user clicks to receive an SMS PIN.
Receiving PIN via SMS Content	Enter the message to be sent by SMS to inform the user of the PIN. The PIN variable is specified by <PIN> within the message.
Enter PIN Description	Enter message to be displayed in the PIN textbox to prompt the user to enter the PIN.
Submit Button Description	Enter the text to be displayed on the submit PIN button
Submit Button Color	Select the color of the submit button from the predefined color list, or select Customize Color and enter the RGB value. Click Preview to preview the selected color.
Hint Message for RADIUS	Enter the text used to prompt the user to login.
RADIUS Account Description	Enter the text to prompt the user to enter the username.
RADIUS Password Description	Enter the text to prompt the user to enter the password.
Login Button Description	Enter the text to be displayed on the login button.
Login Button Color	Select the color of the login button from the predefined color list, or select Customize Color and enter the RGB value. Click Preview to preview the selected color.
Cancel	Discard current modification.
Previous	Return to previous page.
Save and Next	Save the current settings and get into next page.

If you have selected **Various Hotspot Login** as the portal method and selected **Receive PIN via SMS** as the login method, you will also need to configure (3.2 Login Page Setup) page.

3.2

Login Page Setup

The parameters are explained as follows:

Item	Description
Back Button Description	Enter text for the label of the hyperlink to return to the previous page.
PIN Code Message	Enter text to be displayed as the body text on the page.
Default Country Code	Select the default country code to be displayed using the dropdown menu.
Enter Mobile Number Description	Enter message to be displayed in the mobile number textbox to prompt the user to enter the mobile number.
Send Button Description	Enter the label text of the send button.
Send Button Color	Select the color of the send button from the predefined color list, or select Customize Color and enter the RGB value. Click Preview to preview the selected color.
Send Succeeded Message	Enter text to be displayed to notify the user after the PIN has been sent.
Cancel	Discard current modification.

Previous	Return to previous page.
Save and Next	Save the current settings and get into next page.

Step (4) Whitelist Setting

Configure the whitelist settings. Users are allowed to send and receive traffic that satisfies whitelist settings.

The parameters are explained as follows:

Item	Description
NAT Rules	To prevent web portal settings from conflicting with NAT rules resulting in unexpected behavior, select the NAT rules that are allowed to bypass the web portal. Hosts listed in selected NAT rules can always access the Internet without being intercepted by the web portal.
Dest Domain	Enter up to 30 destination domains that are allowed to be accessed.
Dest IP	Enter up to 30 destination IP addresses that are allowed to be accessed.
Dest Port	Enter up to 30 destination protocols and ports that are allowed through the router.
Source IP	Enter up to 30 source IP addresses that are allowed through the router.
Cancel	Discard current modification.
Previous	Return to previous page.
Save and Next	Save the current settings and get into next page.

Step (5) More Options

Step 5 - More Options

Quota Management

Login Method	Quota Policy Profile	Valid Time	Device Allowed	Bandwidth Limit	Session Limit
Facebook Login	1. Default	0d 5h 0m	Unlimited	Unlimited	Unlimited
Google Login	1. Default	0d 5h 0m	Unlimited	Unlimited	Unlimited
SMS Login	1. Default	0d 5h 0m	Unlimited	Unlimited	Unlimited

Note:

- To modify the quota settings, please go to Hotspot Web Portal >> [Quota Management](#)

Web Portal Options

HTTPS Redirection ☒

Note:

- When an unauthenticated client opening a HTTPS page, redirect will work but certificate errors may be shown.
- Disable this function to redirect only HTTP pages. HTTPS browsing will timeout without redirection and also no certificate errors.

Captive Portal Detection ☐

Note:

- Trigger the unauthenticated client to automatically pop-up the Web Portal page when connects to Wi-Fi.
- This function is not available when using Social Login because the page may not be shown correctly due to the limitation of the OS built-in Captive Portal Detection.

Landing Page After Authentication

Landing Page Type Fixed URL

The parameters are explained as follows:

Item	Description
Quota Management	
Quota Policy Profile	Choose a policy profile to apply to web portal clients.
JSON API	
Enable JSON API	If enabled, information (e.g., string, number, object and so on) will be saved as a text file on the JSON server.
Server URL	Enter the URL of the server which will store the JSON information.
Get JSON and Update user status every	Specify the time period for the JSON server sending the JSON information to other devices automatically.
Update Information	The information sent out by JSON server might include the following types: - NAS-Identifier (router's ID) - MAC Address (routers' MAC address) - All User Number (total number of the users connecting to the router) - Wi-Fi User Number (total number of the wireless users connecting to the router)
Web Portal Options	
HTTPS Redirection	If this option is selected, unauthenticated clients accessing HTTPS

	websites will be redirected to the login page, but the browser may alert the user of certificate errors. If this option is not selected, attempts to access to HTTPS website will time out without redirection.
Captive Portal Detection	If this option is selected, the web portal page is triggered automatically when an unauthenticated client tries to access the Internet. This function is not available when the Login Mode is Social Login , as the web portal page may not be shown correctly due to the limitations of the operating system's built-in Captive Portal Detection.
Landing Page After Authentication	
Landing Page Type	Fixed URL – Specifies the webpage that will be displayed after the user has successfully authenticated. The user will be redirected to the specified URL. This could be used for displaying advertisements to users, such as guests requesting wireless Internet access in a hotel. User Requested URL – The user will be redirected to the URL they initially requested. Bulletin Message – The message configured here will be briefly shown for a few seconds to the user. ● Bulletin Message Type – Select HTML or Image Upload. ● Default – This button is enabled when Bulletin Message is selected. Click to load the default text into the bulletin message textbox.
Force Landing Page Stay Enable	If enabled, the landing page will stay until you close it.
Applied Interfaces	
Subnet	The current Hotspot Web Portal profile will be in effect for the selected subnets.
WLAN 2.4G / 5G	The current Hotspot Web Portal profile will be in effect for the selected WLAN SSIDs.
Cancel	Discard current modification.
Previous	Return to previous page.
Finish	Complete the configuration.

9.4.3.2 Users Information

This page displays information of users accessing the Internet through the web portal.

9.4.3.2.1 User Info

DrayTek / Configuration / Hotspot Web Portal

User Info Database Setup

Select Columns to Filter Users

Profile ☐ Profile 1 ☐ Profile 2 ☐ Profile 3 ☐ Profile 4

Login Method ☐ Skip ☐ Facebook ☐ Google
☐ Pincode ☐ Click ☐ RADIUS
☐ Leave Info

Data Collection ☐ Marketing

Apply

User Table

Active User 0 Online Users / 0 All Users Auto Refresh (per min): off

Index Status Profile User Login Method IP MAC Email Phone Number Expired Time

No data available

Go to page 1 Go

These parameters are explained as follows:

Item	Description
Select Columns to Filter Users	Select the profiles and the login methods to filter the displayed users. Apply - Save the settings.
User Table	Details of users accessing the Internet via Hotspot Web Portal will be displayed.
Active User / All Database	Display the information for active user only or for all users in database.
Auto Refresh	On/off - Refresh current page automatically or not.
Go	Where there are more than one page, Click to open the page with specified number.

9.4.3.2.2 Database Setup

This page allows the user to configure settings for database on USB disk.

The screenshot shows the 'Database Setup' page in the VigorACS3 web portal. The page is titled '2865ac_001DAA41DF78 / Configuration / Hotspot Web Portal'. It has a 'User Info' tab and a 'Database Setup' tab. The 'Database Setup' tab is active. The settings are as follows:

- Enable database:** ☒
- Enable automatic database recovery:** ☒
- Backup database every:** 1 min, 0 hours
- Enable sending user information to syslog:** ☒
- File Path:** No USB Disk Detected
- Database Usage:** N/A
- Clear User Info:** Button
- Notification and Action when Storage Exceeded:**
 - Notification:** Don't send notification
 - Action:** Stop recording user information
- Advanced options:**
 - Database Encryption:** ☐

Note:

- Database encrypting is a irreversible process. Once enable Database Encryption, router will create a new encrypted database, which will not content the data from the non-encrypted database, and not able to change back to non-encrypted.
- Encryption mechanism may affect router performance when writing data.

These parameters are explained as follows:

Item	Description
Enable database	Check the box to record user information on router's database.
Enable automatic database recovery	Check the box to enable the functionality of the database recovery on the USB disk. Backup database every... – Set the interval to backup the database.
Enable sending user information to syslog	Check the box to send user information to syslog.
File Path	If a USB disk has been inserted into the USB port of Vigor router, the file path will be shown in this area.
Database Usage	Display the usage and remaining space on the database. Clear User Info – The user information will be displayed on the page of User Info. You can delete the information by clicking this button.
Notification and Action when Storage Exceeded	
Notification	Don't send notification – Vigor router system will not send any notification to any recipient. Send notification – Vigor router system will send a notification e-mail to specified recipient(s) that selected from Email Notification Object and SMS Notification Object .

	● Email Notification Object ● SMS Notification Object
Action	Stop recording user information – Vigor router system will stop to record the user information onto USB disk. Backup and clean up all user info, and start a new record – Vigor router system will backup all existed information on the USB disk onto the host and clean up the information from USB disk. Later, it will start a new record.
Advanced Options	
Database Encryption	Select to have the router create a new encrypted database. Once this is done, you will not be able to revert to an unencrypted database.
Password	Enter a password for encryption.
Confirm Password	Enter the password again for confirmation.
Save	Save the current settings.

9.4.3.3 Quota Management

The system administrator can specify bandwidth and sessions quota which is only applicable to the web portal clients.

These parameters are explained as follows:

Item	Description
Web Portal Bandwidth and Session Limit	
Enable Bandwidth Limit	Click to enable / disable the function. If enabled, it will override the policy configured in Bandwidth Management >> Bandwidth Limit .
Enable Session Limit	Click to enable / disable the function. If enabled, it will override the policy configured in Bandwidth Management >> Sessions Limit .

Quota Policy Profile	
+Add	Create up to 20 policy profiles.
Delete	Delete the selected policy profile.
Save	Save the current settings.

To create a new policy profile, click **+Add** to create a new profile and display on the table.

Quota Policy Profile

[+Add](#) [Delete](#) Profile Number Limit: 20

Index	Name	Expired Time After First Login	Device Allowed Per Account	Reconnection Time Restriction	Bandwidth Limit	Session Limit
1	Default	0d 5h 0m	Unlimited	Unlimited	Unlimited	Unlimited
☐ 2	level 2	0d 5h 0m	Unlimited	Unlimited	Unlimited	Unlimited

Check the box in front of the new entry and click to open the following page.

Index:

Profile Name:

Account Validity

Expired Time After 1st Login: days hours minutes

Enable Idle Timeout: ☐

Idle Timeout:

Device Control

Devices Allowed per account:

Enable Reconnection Time Restriction: ☐

Time Restriction:

hours mins

Block the same user from reconnecting for the set period

These parameters are explained as follows:


Item	Description
Index	Display the index number of the profile.
Profile Name	Enter a name for a new profile.
Account Validity	
Expired Time After 1st Login	Sets the days, hours, and minutes. After the login has expired, Vigor router will block the client from accessing the network/Internet.
Enable Idle Timeout	If enabled, Vigor router will terminate the network connection if there is no activity from the user after the specified idle time has passed.

Idle Timeout	Enter a time value (unit: minutes).
Device Control	
Devices Allowed per account	Select the maximum number of devices that can be connected to the network using the same account.
Enable Reconnection Time Restriction	Click to enable / disable the function.
Time Restriction	Blocks the account from being used to connect devices to the network in one of two ways: Set Time (At Everyday) – After the login expires, the account cannot be used to connect devices to the network until the set time of day. Set Period (Hours.. min)– After the login expires, the account cannot be used to connect devices to the network for a set period of time.
Bandwidth and Session Limit	
Enable Bandwidth Limit	Click to enable / disable the function.
Download /Upload Limit	Set the maximum upload and download speeds.
Enable Session Limit	Click to enable / disable the function.
Session Limit	Set a maximum session limit for web portal clients.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.3.4 PIN Generator

9.4.3.4.1 PIN Status

This page displays the detailed information for PIN codes generated by PIN Generator.

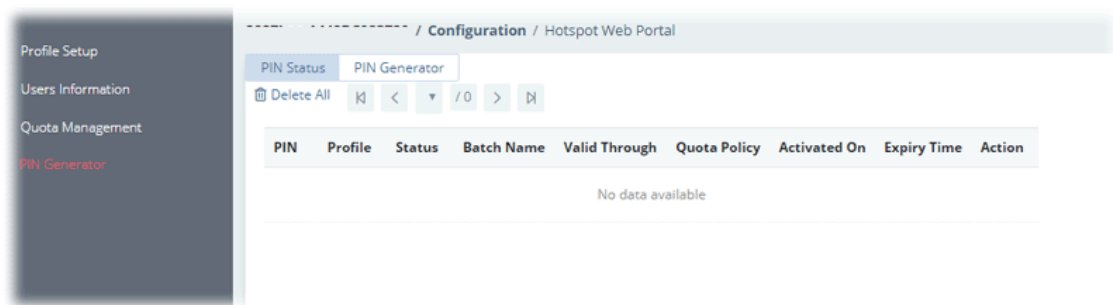

9.4.3.4.2 PIN Generator

The system administrator can generate multiple PIN codes in response to the user's (e.g., enterprise) demand.

The screenshot shows a web interface for a PIN Generator. It has two tabs: 'PIN Status' and 'PIN Generator'. The 'PIN Generator' tab is active. It contains the following fields:

- Profile:** A dropdown menu.
- Batch Name:** A text input field.
- PIN code length:** A dropdown menu.
- PIN Validity Days:** A dropdown menu with '0' selected.
- PIN Validity Hours:** A dropdown menu with '0' selected.
- Quantity:** A text input field with '0'.
- Quota Management Policy:** A dropdown menu.

Below the 'PIN Validity Hours' field, there is a note: "The period of time the PIN will be kept in the database." At the bottom right, there is a green button labeled "Generate".

These parameters are explained as follows:

Item	Description
Profile	Use the drop down menu to specify an index number (from 1 to 4).
Batch Name	Enter a string as a batch name.
PIN code length	Specify the length of PIN code.
PIN Validity Days	Set the days for the period of validity.
PIN Validity Hours	Set the hours for the period of validity.
Quantity	Set the quantity of the PIN code.
Quota Management Policy	Use the drop down list to choose policy profile.
Generate	Click to generate a PIN code as a voucher.

9.4.4 Routing

9.4.4.1 Load Balance/Policy Route

This page lists the configured policies coming from Vigor CPE.

The screenshot shows the 'Configuration / Routing' page. It has a 'Set to Factory Default' link at the top right. Below the header, there is a table with the following columns: Index, Enable, Comment, Protocol, Interface, Src IP, and Dest IP. There is one row with Index 1, Enable Disable, Protocol Any, Interface WAN1, Src IP Any, and Dest IP Any. Below the table, there is a blue note box that says: "Note: The policies in blue are SD-WAN related, and can only be edited via ACS."

These parameters are explained as follows:

Item	Description
Delete	Click to remove the selected routing policy.
Index	Display the index number of the routing policy.
Enable	Display the status (enable / disable) of the routing policy.

Comment	Display the description for the routing policy.
Protocol	Display the protocol used for this policy.
Interface	Display the interface to send packets to once the policy is matched.
Src IP	Display the mode for the source IP.
Dest IP	Display the mode for the destination IP.

To configure the policy, move the mouse cursor to any entry and click to open the setting page.

The screenshot shows a web-based configuration interface for a routing policy. It includes the following elements:

- Index:** A text input field containing the number '1'.
- Enable:** A radio button control.
- Comment:** A text input field.
- Criteria:** A section with four dropdown menus: Protocol (Any), Source IP (Any), Destination IP (Any), and Destination Port (Any).
- Send via If Criteria Matched:** A section with two dropdown menus: Interface Type (WAN) and Interface Address (WAN1, 1-10.3.8.4).
- Buttons:** 'Add', 'Delete', 'Clear', 'Cancel', and 'Save' buttons are located at the bottom of the form.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the routing policy.
Enable	Click to enable / disable the routing policy.
Comment	Enter a brief explanation for the routing policy.
Criteria	
Protocol	Use the drop-down menu to choose a proper protocol for the WAN interface.
Source IP	Select the mode (Any, IP Range, IP Subnet, IP Object or IP Group) of the source IP. Enter the IP address(es), network, mask, or select IP object/group as the source IP based on the source IP mode used.
Destination IP	Select the mode (Any, IP Range, IP Subnet, Domain Name, IP Object, IP Group or Country Object) of the destination IP. Enter the IP address(es), network, mask, domain name, or select an object/group as the destination IP based on the destination IP mode

	used.
Destination Port	Select the mode (Any or Range) for the destination port. Enter the port values as the destination port based on the destination port mode used.
Send via if Criteria Matched	
Interface Type	Select the type of the interface.
Interface	Use the drop down list to choose a WAN or LAN interface or PVC or VPN profile. Packets match with the above criteria will be transferred to the interface chosen here.
Interface Address	Select the WAN interface that has an assigned IP address. Click Add to specify more WAN interfaces.
Interface Mode	It is available if WAN is selected as the Interface. IP Based Load Balance - The same source / destination IP pair will select the same WAN interface as policy. It is the default setting. Session Based Load Balance - All of the WAN interfaces will be used (as out-going WAN) for passing through new sessions to get better transmission speed. Though good speed test result for throughput might be reached; however, some web site may not open smoothly, especially the site need authentication, e.g., FTP.
Gateway IP	Default Gateway - Default Gateway is selected in default. Traffic will be sent to the default gateway address of the specified interface. Specific Gateway - Traffic will be sent to the specified gateway address instead of the default gateway address. It is used only when you want to forward the packets to the desired gateway.
Priority	
Priority	The greater the value is, the lower the priority is. Default value for route policy is "200" which means it has higher priority than the default route.
More Options	
Packet Forwarding Via	When you choose WAN (e.g., WAN1) as the Interface for packet transmission, you have to specify the way the packet forwarded to. Choose Force NAT or Force Routing .
Enable Failover	Click to enable / disable the failover function.
Failover to	If enabled, it will lead the data passing through specific interface (e.g., WAN/LAN) automatically when the selected interface is down.
Failover to Gateway IP	Specific gateway is used only when you want to forward the packets to the desired gateway. Default Gateway - Usually, Default Gateway is selected in default.

	Specific Gateway - Enter a gateway IP address.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.4.2 Static Route IPv4

The router offers IPv4 for you to configure the static route.

Index	Destination IP Address	Mask	Gateway	Interface	Status
1	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
2	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
3	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
4	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
5	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
6	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
7	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
8	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
9	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
10	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
11	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
12	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
13	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
14	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
15	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
16	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
17	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
18	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
19	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
20	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable
21	0.0.0.0	0.0.0.0	0.0.0.0	LAN1	Disable

To configure the profile, move the mouse cursor to any entry and click to open the setting page.

2865ac_001DAA000000 / Configuration / Routing

Static Route IPv4

Index

2

Enable

☐

Destination IP Address

0.0.0.0

Subnet Mask

0.0.0.0

Gateway IP Address

0.0.0.0

Network Interface

LAN1

Clear

Cancel

Save

These parameters are explained as follows:

Item	Description
Index	Display the index number of the static route policy.
Enable	Click to enable or disable the static route policy.
Destination IP Address	Enter an IP address as the destination of such static route.

Subnet Mask	Enter the subnet mask for such static route.
Gateway IP Address	Enter the IP address of the gateway.
Network Interface	Specify an interface for this static route.
Clear	Click to return to factory default setting.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.4.3 Static Route IPv6

The router offers IPv6 for you to configure the static route.

Index	Destination IPv6 Address	Prefix Len	Gateway IPv6 Address	Interface	Status
1	::	0	::	LAN1	Disable
2	::	0	::	LAN1	Disable
3	::	0	::	LAN1	Disable
4	::	0	::	LAN1	Disable
5	::	0	::	LAN1	Disable
6	::	0	::	LAN1	Disable
7	::	0	::	LAN1	Disable
8	::	0	::	LAN1	Disable
9	::	0	::	LAN1	Disable
10	::	0	::	LAN1	Disable
11	::	0	::	LAN1	Disable
12	::	0	::	LAN1	Disable
13	::	0	::	LAN1	Disable
14	::	0	::	LAN1	Disable
15	::	0	::	LAN1	Disable
16	::	0	::	LAN1	Disable
17	::	0	::	LAN1	Disable
18	::	0	::	LAN1	Disable
19	::	0	::	LAN1	Disable
20	::	0	::	LAN1	Disable
21	::	0	::	LAN1	Disable
22	::	0	::	LAN1	Disable
23	::	0	::	LAN1	Disable

To configure the profile, move the mouse cursor to any entry and click to open the setting page.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the static route policy.
Enable	Click to enable or disable the static route policy.

Destination IPv6 Address / Prefix Len	Enter the IP address with the prefix length for this entry.
Gateway IPv6 Address	Enter the gateway address for this entry.
Network Interface	Specify an interface for this static route.
Clear	Click to return to factory default setting.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.4.4 BGP

BGP is a standardized protocol designed to exchange routing and reachability information among autonomous systems (AS) on the Internet.

The screenshot shows the BGP configuration interface. On the left is a sidebar with navigation links: Load Balance/Policy Route, Static Route IPv4, Static Route IPv6, BGP (selected), and OSPF. The main area is titled '2927ac_1449BC30C3F0 / Configuration / Routing'. It contains a 'Basic Settings' section with the following fields:

- Enable Local BGP: A toggle switch.
- Redistribute OSPF routes into BGP: A toggle switch.
- Local AS Number: A text input field with the value '1-4294967295'.
- Hold Time: A text input field with the value '180'.
- Connect Retry Time: A text input field with the value '120'.
- Router ID: A text input field with the value '192.168.1.1'.

At the bottom right of the settings section are 'Cancel' and 'Save' buttons. Below the settings is a table titled 'Static Network' with the following columns: Enable, Index, AS Number, Profile Name, IP Address, MD5 Auth, Status, and 4-Byte As Number. The table contains one row with the following values: [] (checkbox), Disable, 1, (empty), (empty), (empty), None, and false. There are also '+Add' and '-Delete' buttons above and below the table.

These parameters are explained as follows:

Item	Description
Enable Local BGP	Click to enable / disable the BGP function.
Redistribute OSPF routes into BGP	Click to enable / disable the distribution OSPF routes into BGP function.
Local AS Number	Enter the value as local AS nubmer.
Hold Time	Set the time interval (in seconds) to determine the peer is dead when the router is unable to receive any keepalive message from the peer within the time.
Connect Retry Time	If the router fails to connect to neighboring router, it requires a period of time to reconnect.
Router ID	Specify the LAN subnet for the router.

Cancel	Discard current modification.
Save	Save the current settings.
Basic Settings	Display general settings for for local router and neighboring routers. +Add - Add a new neighbor profile. Delete - Remove a selected neighbor profile. Enable - Display the status of the BGP profile. Index - Display the index number of the BGP profile. AS Number - Display the value of AS number. Profile Name - Display the name of the BGP profile. IP Address - Display the IP address of the BGP profile. MD5 Auth - Display the status (enabled / disabled) of MD5 Auth. Status - Display the connection status for local router and neighboring router.
Static Network	Display the neighboring routers for exchanging the routing information with the local router. +Add - Add a new static network profile by giving IP address and subnet mask. Delete - Remove a selected neighbor profile. Index - Display the index number of the BGP profile. IP Address - Display the IP address of the router. Subnet Mask - Display the subnet mask of the router.
Cancel	Discard current modification.
Save	Save the current settings.

To configure the BGP profile with basic settings, move the mouse cursor to any entry and click to open the setting page.

DrayTek / Configuration / Routing

Index	1
Enable	☐
Profile Name	
AS Number	(1~4294967295)
IP Address	IPv4 format (EX: 123.12.1.1)
MD5 Auth	☐
Password	eye
4-Byte As Number	☐
Weight	0 ▼
Prepend	0 ▼

These parameters are explained as follows:

Item	Description
Basic Settings	Index - Display the index number of the profile. Enable - Click to enable / disable the profile. Profile Name - Enter the name of the profile. AS Number - Enter a value for AS number. IP Address - Enter the IP address for the profile. MD5 Auth - Click to enable / disable the MD5 authentication. Password - Enter the password for authentication. 4-Byte As Number - Click to enable / disable the setting.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

To configure the BGP profile for static network, click **+Add** to open the setting page. Or move the mouse cursor to any existed entry and click to open the setting page.

2865ac_001DAA000000 / Configuration / Routing

Index	1
IP Address	IPv4 format (EX: 123.12.1.1)
Subnet Mask	

These parameters are explained as follows:


Item	Description
------	-------------

Static Network	Index – Display the index number of the profile. IP Address – Enter the IP address for a router. Subnet Mask – Specify a subnet mask for the IP address.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.5 NAT

9.4.5.1 Port Redirection

This page lists the configured Port Redirection policies coming from Vigor CPE.

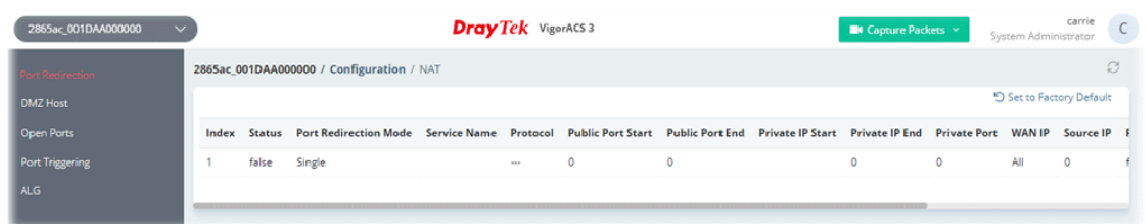

To configure the NAT profile, move the mouse cursor to any entry and click to open the setting page.


These parameters are explained as follows:

Item	Description
Enabled	Click to enable / disable the port redirection profile.
Port Redirection Mode	Two options (Single and Range) are provided here for you to choose. Single / Range – To set a range for the specific service, select Range . Otherwise, select Single .
Service Name	Enter the description of the specific network service.

Protocol	TCP/UDP – Select the transport layer protocol (TCP or UDP).
WAN IP	Select the WAN interface used for port redirection. The default setting is All which means all the incoming data from any port will be redirected to specified range of IP address and port.
Public Port Start / End	Specify which port can be redirected to the specified Private IP and Port of the internal host. If you choose Range as the port redirection mode, you will need to enter the required number on the first box (as the starting port) and the second box (as the ending port).
Source IP	Select the source IP mode. Any – It means any IP address. IP Object – IP Object – Specify an IP object profile. IP Group – IP Group – Specify an IP group profile.
Private IP Start / End	Specify the private IP address of the internal host providing the service. If you choose Range as the port redirection mode, you will see two boxes on this field. Type a complete IP address in the first box (as the starting point). The second one will be assigned automatically later.
Private Port	Specify the private port number of the service offered by the internal host.
Clear	Click to return to factory default setting.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.5.2 DMZ Host

DMZ Host allows a defined internal user to be totally exposed to the Internet, which usually helps some special applications such as Netmeeting or Internet Games etc.

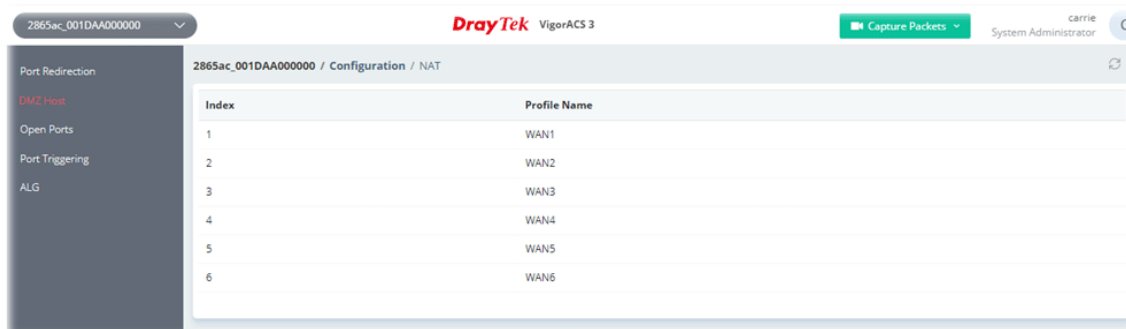

These parameters are explained as follows:

Item	Description
------	-------------

Index	Display the index number of the DMZ host profiles.
Profile Name	Display the interface of the DMZ host profile.

To configure the DMZ host profile:

1. Move the mouse cursor to any entry (1 to 6) and click to open the following page.

2. Click the index number of the profile to open the settings page.

These parameters are explained as follows:

Item	Description
Interface	Display the name of the DMZ host profiles.
Mode	Select a method to enter the IP address. ● Private IP ● None
Private	Enter the private IP address of the DMZ host.
WAN IP	Display the WAN IP alias for this interface.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

3. After finished the configuration, click **Save** to save the changes.

9.4.5.3 Open Ports

This page lists the configured Open Ports policies coming from Vigor CPE. It allows you to open a range of ports for the traffic of special applications.



To configure the open port profile, move the mouse cursor to any entry and click to open the setting page.

Open Ports

Index

1

Enable

☐

Comment

WAN Interface

WAN1

Source IP

Any

IP Object

IP Group

Local IP Address

0.0.0.0

Open Port List

Index	Protocol	Start Port	End Port
1		0	0
2		0	0
3		0	0
4		0	0
5		0	0
6		0	0
7		0	0
8		0	0
9		0	0

Clear

Cancel

Save


These parameters are explained as follows:

Item	Description
Open Ports	
Index	Display the index number of the Open Port profile.
Enable	Click to enable / disable the Open Port profile.
Comment	Enter the description for the Open Port profile.
WAN Interface	Choose a WAN interface that will be used for this entry.
Source IP	Select the source IP mode. Any - It means any IP address. IP Object -

	● IP Object - Specify an IP object profile. IP Group - ● IP Group - Specify an IP group profile.
Local IP Address	Enter the private IP address of the local host.
Open Port List	It displays 1 to 10 open port profiles. Click any one of the index numbers to configure the settings for the selected open port profile.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.5.4 Port Triggering

Port Triggering is a variation of open ports function. This page lists the configured Port Triggering policies coming from Vigor CPE.

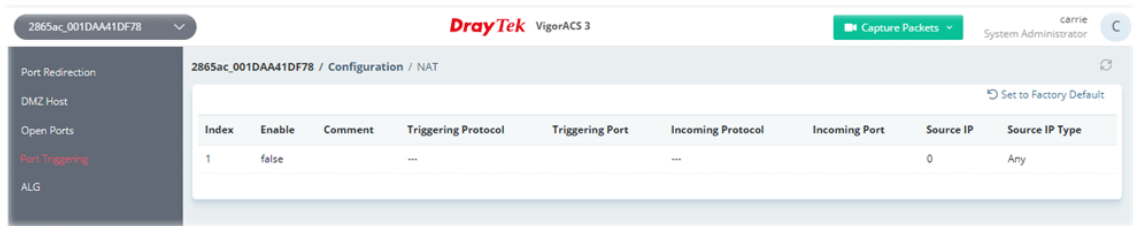

To configure the port triggering profile, move the mouse cursor to any entry and click to open the setting page.

Port Triggering

Enable ☐

Service

Comment

Source IP

Triggering Protocol

Triggering Port

Incoming Protocol

Incoming Port

Note:

- The legal format of Triggering Port and Incoming Port should like this:
123
123,456
123,456,789
123-456,789
123-456,777-789
- The illegal format like this:
123,456-789
123-456-789


These parameters are explained as follows:

Item	Description
------	-------------

Enable	Click to enable / disable the Port Triggering profile.
Service	Choose the service type to apply for this triggering profile.
Comment	Enter the text to memorize the application of this rule.
Source IP	Select the source IP mode. Any – It means any IP address. IP Object ● IP Object – Specify an IP object profile. IP Group ● IP Group – Specify an IP group profile.
Triggering Protocol	Select the protocol (TCP, UDP or TCP/UDP) for such triggering profile.
Incoming Protocol	When the triggering packets received, it is expected the incoming packets will use the selected protocol. Select the protocol (TCP, UDP or TCP/UDP) for the incoming data of such triggering profile.
Incoming Port	Enter the port or port range for the incoming packets.
Clear	Click to return to factory default setting.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.5.5 ALG

There are two methods provided by Vigor router, RTSP (Real Time Streaming Protocol) ALG and SIP (Session Initiation Protocol) ALG, for processing the packets of voice and video.

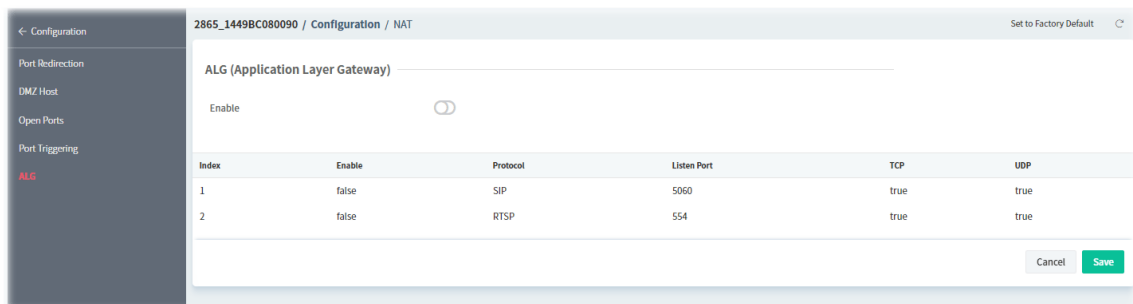

To configure the ALG profile, move the mouse cursor to any entry and click to open the setting page.

These parameters are explained as follows:

Item	Description
Enable	Click to enable / disable the ALG profile.
Protocol	Display the type (SIP, RTSP) of ALG.
Listen Port	Enter a port number for SIP or RTSP protocol.
TCP/UDP	Click to enable/disable the TCP/UDP. If enabled, it will make correspond protocol message packet from TCP/UDP transmit and receive via NAT.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.6 Hardware Acceleration

When the data traffic is heavy and data transmission is getting slowly and slowly, you can configure this page to accelerate the data streaming by hardware itself.

Acceleration:

NAT: ☒

Protocol: ☒ TCP ☒ UDP

IPsec: ☒

Protocol: ☒ TCP ☒ UDP

Exception List: ☒

Index	MAC Address	Type	Description
1	00:00:00:00:00:00		

These parameters are explained as follows:

Item	Description
Acceleration	Disable – The default setting. Enable – The sessions with the heaviest loading and the lower latency traffic will be added into PPA.
NAT	Click to enable / disable NAT setting.
Protocol	There are two types supported by this function, TCP and UDP.
IPsec	Click to enable / disable IPsec setting.
Protocol	There are two types supported by this function, TCP and UDP.
Exception List	If you want to restrict some users/clients from transmitting data through the router by using the hardware acceleration function, switch the toggle to enable the function. Then click the index number to create an exclusion list. Exception List Index: 1 MAC Address: 00:00:00:00:00:00 ARP Table Exception Type: ☐ NAT ☐ IPsec Description: Delete MAC Address – Enter the MAC address of the client. ARP Table – Click to select the client listed on the ARP table. Then, the MAC address of the selected client will be shown on the MAC Address

	field. Exception Type – Select NAT and / or IPsec. Description – Enter a brief explanation for the selected client.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.7 Firewall

9.4.7.1 General Setup

It allows you to enable / disable Data Filter, determine general rule for filtering the incoming and outgoing data.

These parameters are explained as follows:

Item	Description
Filter Setup	
Data Filter	Click to enable / disable the function. If enabled, choose a Start Filter Set.
Data Filter Set Start	Choose a Start Filter Set.
Inbound Policy	
Allow pass inbound fragmented large...	Click to enable / disable the function. Certain games and video streaming service use fragmented UDP packets to transfer data. Enabling this option allows these applications to function properly.

Enable Strict Security Firewall	Click to enable / disable the function. If this option and the Web Content Filter (WCF) are both enabled, web traffic will be blocked if the WCF server fails to respond to lookup requests.
Block routing connections initiated from WAN	
Block IPv4 Routing Packet	For LAN hosts receiving WAN IPv4 addresses using the IP routed subnet, enable this option to prevent WAN hosts from connecting to LAN hosts. This option has no effect on LAN hosts on private LAN subnets.
Block IPv6 Routing Packet	IPv6 does not make use of Network Address Translation (NAT), so all LAN hosts receive public IPv6 IP addresses that are exposed to the WAN. Enable this option to block WAN hosts from connecting to LAN hosts using IPv6.
Save	Save the current settings.

9.4.7.2 Default Rule

This page allows you to choose filtering profiles including QoS, Load-Balance policy, WCF, APP Enforcement, URL Content Filter, for data transmission via Vigor router.

These parameters are explained as follows:

Item	Description
Default Rule	
Default Action	Select Pass or Block for the packets that do not match with the filter

	rules. When the setting is Block, all other fields on the page are disabled because they are not applicable.
Session Control	The current number of sessions is shown before the slash, followed by the maximum number of concurrent sessions allowed, which is configurable.
Quality of Service	Select one of the QoS rules to be applied as firewall rule. For detailed information of setting QoS, please refer to the related section later.
User Management	This setting is only available when Rule-Based is selected in User Management >> General Setup . The default firewall rule will be applied to the selected user or user group.
APP Enforcement	Select an APP Enforcement profile for application blocking, or None to disable APP Enforcement for the Default Rule.
URL Content Filter	Select a URL Content Filter profile to be used, or None to disable URL Content Filter for the Default Rule.
Web Content Filter	Select a Web Content Filter profile to be used, or None to disable Web Content Filter for the Default Rule.
DNS Filter	Select the DNS Filter profile to be used, or None to disable DNS Filter for the Default Rule.
Syslog	Select the items to send and store the records to Syslog.
Advanced Settings	
Codepage	Selecting the appropriate codepage can increase the accuracy of the URL Content Filter. The default value is ANSI 1252 Latin I. If the setting is None, no decoding of URL will be performed.
Window Size	Sets the TCP window size as described in RFC 1323. Valid values are from 0 to 65535.
Session Timeout	Sets the timeout sessions are allowed to idle before they are removed from the system.
Save	Save the current settings.

9.4.7.3 Filter Setup

This page displays the filter rule profile and allows to create new filter rule profile(s).

Set	Comments	Next Filter Set
1	Default Data Filter	None
2		None
3		None
4		None
5		None
6		None
7		None
8		None
9		None
10		None
11		None
12		None

These parameters are explained as follows:

Item	Description
Delete	Click to remove the selected filter rule.
Set	Display the number of filter set. Click the index number to add a new filter rule set.
Comments	Display the comment of the filter rule.
Next Filter Set	Display the name of next filter set. None means no filter set is specified for current filter set.

To configure the filter rule set profile, move the mouse cursor to any set number and click to open the setting page.

Filter Rules

Index

1

Comments

Default Data Filter

Next Filter Set

None

Rule	Active	Comments	Direction	Src IP	Dst IP	Service Type	Action
1	☒	xNetBios -> DNS	LAN/DMZ/RT/VPN->WAN	Any	Any	TCP/UDP	Block Immediately
2	☐		LAN/DMZ/RT/VPN->WAN	Any	Any	Any	Pass Immediately
3	☐		LAN/DMZ/RT/VPN->WAN	Any	Any	Any	Pass Immediately
4	☐		LAN/DMZ/RT/VPN->WAN	Any	Any	Any	Pass Immediately
5	☐		LAN/DMZ/RT/VPN->WAN	Any	Any	Any	Pass Immediately
6	☐		LAN/DMZ/RT/VPN->WAN	Any	Any	Any	Pass Immediately
7	☐		LAN/DMZ/RT/VPN->WAN	Any	Any	Any	Pass Immediately

Clear

CancelSave

These parameters are explained as follows:

Item	Description
Filter Rules	

Index	Display the index number of the filter rule set. Each filter set contains up to 7 rules.
Comments	Enter a comment to identify the filter rule.
Next Filter Set	Select the filter set for the firewall to process after the current filter set
Table	
Rule	Display the index number of the filter rule.
Active	Click to enabled or disabled the filter rule.
Comments	Optional comment entered in the settings page to identify the rule.
Direction	Display the direction of packet.
Src IP	Display the IP address of source /destination.
Dst IP	Display the type and port number of the packet.
Service Type	Display the type and port number of the packet.
Action	Display the packets to be passed /blocked.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

Click any rule in the table to display the filter conditions:

General Settings

Filter Rule: 1

Comments: xNetBios -> DNS

Active: ☒

Filter Conditions

Direction: LAN/DMZ/RT/VPN->WAN

Incoming Interface:

- ☒ LAN1
- ☒ LAN2
- ☒ LAN3
- ☒ LAN4
- ☒ LAN5
- ☒ LAN6
- ☒ LAN7
- ☒ LAN8
- ☒ DMZ
- ☒ IP Routed Subnet
- ☒ VPN

Outgoing Interface:

- ☒ WAN1
- ☒ WAN2
- ☒ WAN3
- ☒ WAN4
- ☒ WAN5
- ☒ WAN6

[Clear Rule](#) [Cancel](#) [Save](#)

After adjusting the filter conditions, click **Save** and return to previous page.

9.4.7.4 DoS Defense

2865Lac_1449BC0D8F00 / Configuration / Firewall

DoS Defense

DoS Defense ☐

White/Black List Option

DoS defense Log

Flood Defense

SYN Flood Defense ☐

SYN Flood Threshold (pkts/sec)

Session Time-Out (sec.)

UDP Flood Defense ☐

UDP Flood Threshold (pkts/sec)

Session Time-Out (sec.)

ICMP Flood Defense ☐


ICMP Flood Threshold (pkts/sec)

Session Time-Out (sec.)

Port Scan Detection

☐


These parameters are explained as follows:

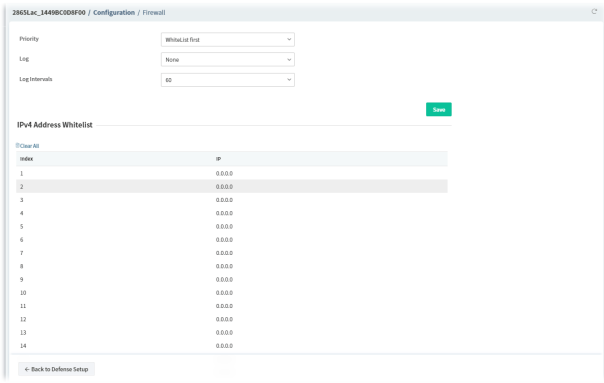Item	Description
DoS Defense	
DoS Defense	Click to enable / disable the DoS Defense.
White/Black List Options	Click to set white or black list. 
DoS defense Log	Click to enable / disable the function of recording DoS defense log onto Syslog.
Flood Defense	
SYN Flood Defense	Click to enable / disable the SYN flood defense. If enabled, SYN Flood Threshold – Set a threshold value. The default values of threshold is 2000 packets per second. Session Time-Out – Set a threshold value. The default value of

	timeout is 10 seconds.
UDP Flood Defense	Click to enable / disable the UDP flood defense. If enabled, ● UDP Flood Threshold – Set a threshold value. The default values of threshold is 2000 packets per second. ● Session Time-Out – Set a threshold value. The default value of timeout is 10 seconds.
ICMP Flood Defense	Click to enable / disable the ICMP flood defense. If enabled, ● ICMP Flood Threshold – Set a threshold value. The default values of threshold is 250 packets per second. ● Session Time-Out – Set a threshold value. The default value of timeout is 10 seconds.
Port Scan Detection	
Port Scan Detection	Click to enable / disable the port scan defense. If enabled, ● Port Scan Threshold – Set a threshold value. The default values of threshold is 2000 packets per second.
Others	
Select All	Click to select and enable all items under Others.
Spoofing Defense	
ARP Spoofing Defense Log	Click to enable / disable the store the ARP log to Syslog.
ARP Spoofing Defense	There are two types for spoofing defense. ● Block ARP replies with inconsistent source MAC address ● Block ARP replies with inconsistent ● Decline VRRP MAC into ARP table
IP Spoofing Defense	There are two types for spoofing defense. ● Block IP packet from WAN with Inconsistent source IP addresses ● Block IP replies from LAN with Inconsistent source IP addresses
Cancel	Discard current modification and keep current configuration.
Clear All	Discard current modification and return to factory default setting.
Save	Save the current settings.

9.4.7.5 APP Enforcement

The APP Enforcement Filter can be used to prevent users from using undesirable or inappropriate network applications such as online chat and peer-to-peer programs. The filter works by detecting and blocking network traffic of applications by means of traffic patterns.

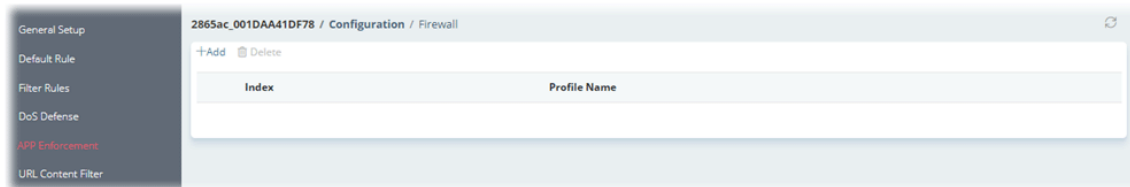


To create a new profile, click **+Add** to open the following page.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the profile.
Profile Name	Display the name of the profile.
Select All	Click to select all of the items on this page.
Clear All	Click to deselect all selected items.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings.

9.4.7.6 URL Content Filter


The URL Content Filter scans URL strings in HTTP requests for predefined keywords to restrict browsing activities.

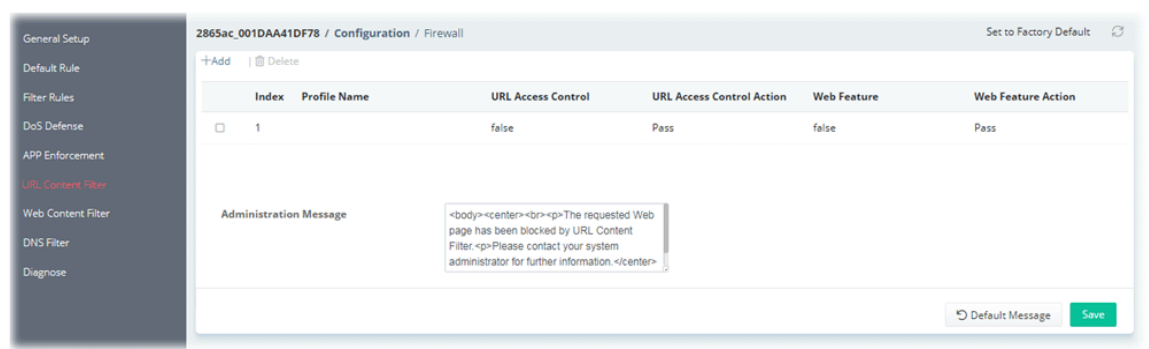

These parameters are explained as follows:

Item	Description
+Add	Click to create a new UCF profile.
Delete	Click to remove the selected UCF profile.
Default Message	Click to reset the administration message to the factory default.
Save	Save the current settings.

To create a new UCF profile, click **+Add** to open the following page.

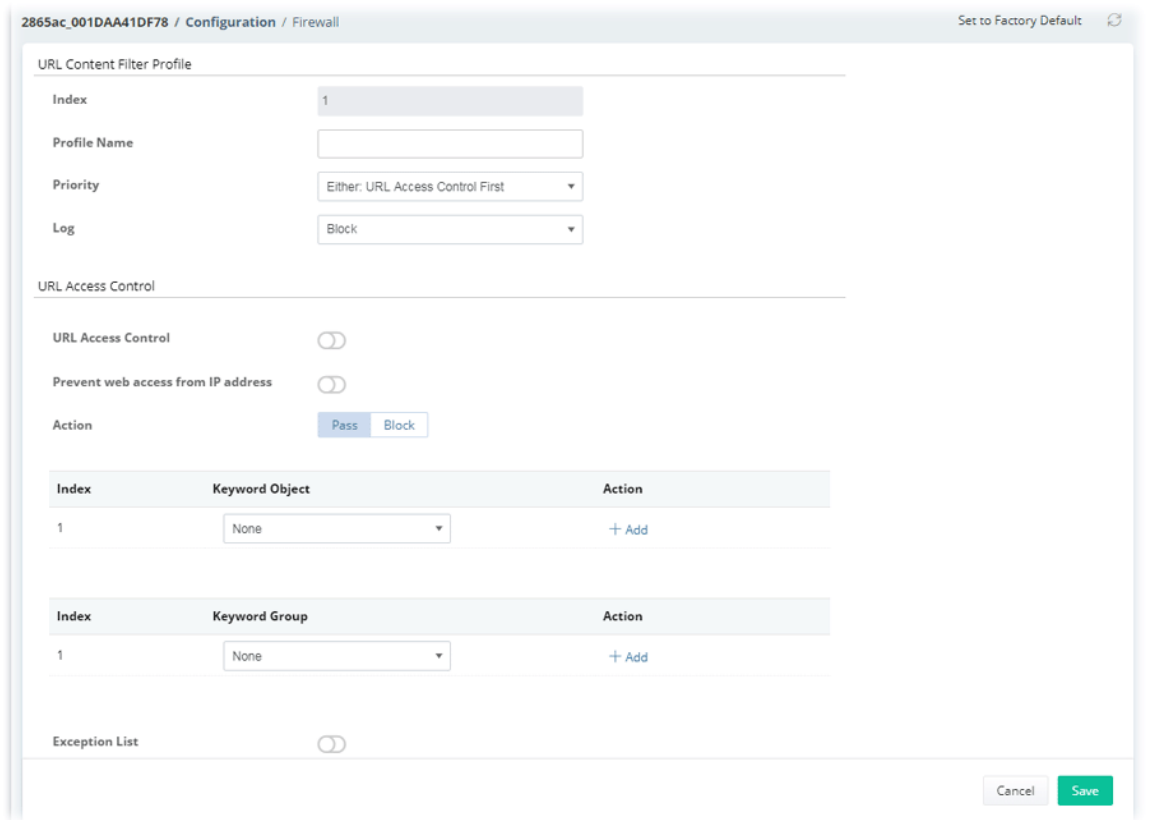


Item	Description
------	-------------

URL Content Filter Profile	
Index	Display the index number of the UCF profile.
Profile Name	Display the name of the UCF profile.
Priority	Select the order of evaluation of URL Access Control and Web Feature.
Log	Select the access attempts (None, Pass, Block or All) to be recorded on Syslog.
URL Access Control	
URL Access Control	Click to enable or disable the URL access control.
Prevent web access from IP Address	Click to enable or disable the function of preventing users from circumventing URL Access Control.
Action	This setting is enabled only when Priority is set to Either: URL Access Control First or Either: Web Feature First. Pass - Allows access to web pages with URLs containing keywords that are in the selected keyword groups or objects. Access to other URLs is blocked. Block - Blocks access to web pages with URLs containing keywords that are in the selected keyword groups or objects. Access to other URLs is allowed.
Keyword Object Table	Index - Display the index number of keyword object profile. Keyword Object - Display the name of the keyword object profile. Action - +Add - Click to add a new entry to specify a keyword object profile.
Keyword Group Table	Index - Display the index number of keyword group profile. Keyword Group - Display the name of the keyword group profile. Action (+Add) - Click to add a new entry to specify a keyword group profile.
Exception List	It is available when URL Access Control is enabled. Index - Display the index number of exception object profile. Exception Keyword Object /Group - Display the name of the exception keyword object/group profile. Action (+Add) - Click to add a new entry to specify an exception keyword object / group profile.
Web Feature	
Web Feature Restriction	Click to enable or disable the web feature restriction function.
Action	Pass - Allows access to web pages with URLs containing keywords that are in the selected keyword groups or objects.

	Block - Blocks access to web pages with URLs containing keywords that are in the selected keyword groups or objects.
File Extension	Choose one of the profiles for passing or blocking the file downloading.
Cookie, Proxy, Upload	Click to enable or disable cookie function. If enabled, it can block cookies from Internet websites.
Proxy	Click to enable or disable proxy function. If enabled, it can block web proxy servers that relay HTTP traffic.
Upload	Click to enable or disable upload function. If enabled, it can block HTTP uploads from the LAN to the Internet.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.7.7 Web Content Filter

Users can also be prevented from browsing certain types of websites by using the Web Content Filter. This filter classifies website domain names into different categories, which can be selectively blocked.

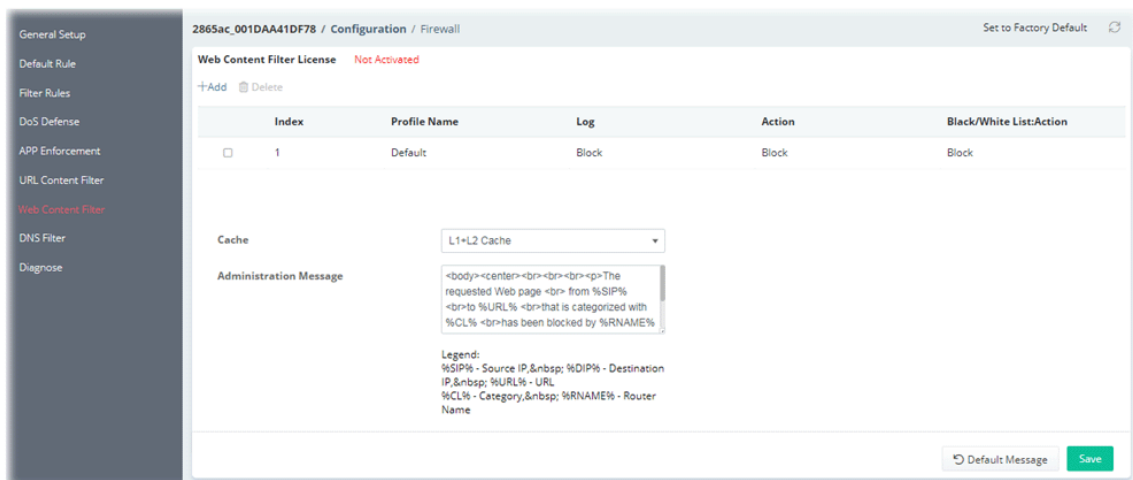

These parameters are explained as follows:

Item	Description
Set to Factory Default	Clear all profile settings.
+Add	Click to create a new WCF profile.
Delete	Click to remove the selected WCF profile.
Index	Display the index number of the WCF profile.
Profile Name	Display the name of the WCF profile.

Log	Display the type (Pass or Block or All) of the log to be recorded.
Action	Display the type (Pass or Block) of the action selected.
Black/White List	Display the action to be taken when a WCF matches keyword group and object selections.
Cache	None – The router verifies every HTTP URL requested by communicating with the WCF server on the Internet. L1 – The router caches the HTTP URLs that have been checked against the WCF server. URLs will be looked up in the L1 cache before reaching out to the WCF server. When the cache is full, the oldest entry will be deleted to accommodate new URLs. L2 – After a URL has been checked and found to pass WCF, the source and destination IPs are cached for about 1 second in the L2 cache. This is to allow a webpage to be loaded without further verifying the same URLs against the L1 cache or the WCF server. L1+L2 Cache – The router will utilize both L1 and L2 caches.
Administration Message	The message to be displayed in the browser when access to a website has been blocked. A custom message can be entered with HTML formatting in the text box.
Default Message	Click to reset the administration message to the factory default.
Save	Save the current settings.

To create a new WCF profile, click **+Add** to open the following page.

2927ac_1449BC30C3F0 / Configuration / Firewall Set to Factory Default

Web Content Filter Profile

Index:

Profile Name:

Syslog:

Action:

White/Black List

Black/White List: ☐

Action:

Index	Keyword Object	Action
1	None	+ Add


Index	Keyword Group	Action
1	None	+ Add

Item	Description
	Web Content Filter Profile

Index	Display the index number of the WCF profile.
Profile Name	Display the name of the WCF profile.
Syslog	Display the type (Pass or Block or All) of the log to be recorded.
Action	Pass – Only passed access attempts will be recorded in Syslog. Block – Only blocked access attempts will be recorded in Syslog.
White/Black List	
Black/White List	Click to enable or disable the function of Black/White List. Keyword objects and groups can be applied to the URL to override WCF category filtering.
Action	Action to take when a URL matches keyword group and object selections. Pass – Allow access to the URL. Block – Disallow access to the URL.
Keyword Object Table	Index – Display the index number of keyword object profile. Keyword Object – Display the name of the keyword object profile. Action – +Add – Click to add a new entry to specify a keyword object profile.
Keyword Group Table	Index – Display the index number of keyword group profile. Keyword Group – Display the name of the keyword group profile. Action (+Add) – Click to add a new entry to specify a keyword group profile.
Selections for Security, Parent Control, Productivity, General Use	
Select/Clear All	Click to select or deselect all items under Category Selection.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.7.8 DNS Filter

DNS Filter blocks or allows traffic to the WAN by intercepting DNS queries, and applying UCF and WCF rules to hostnames.

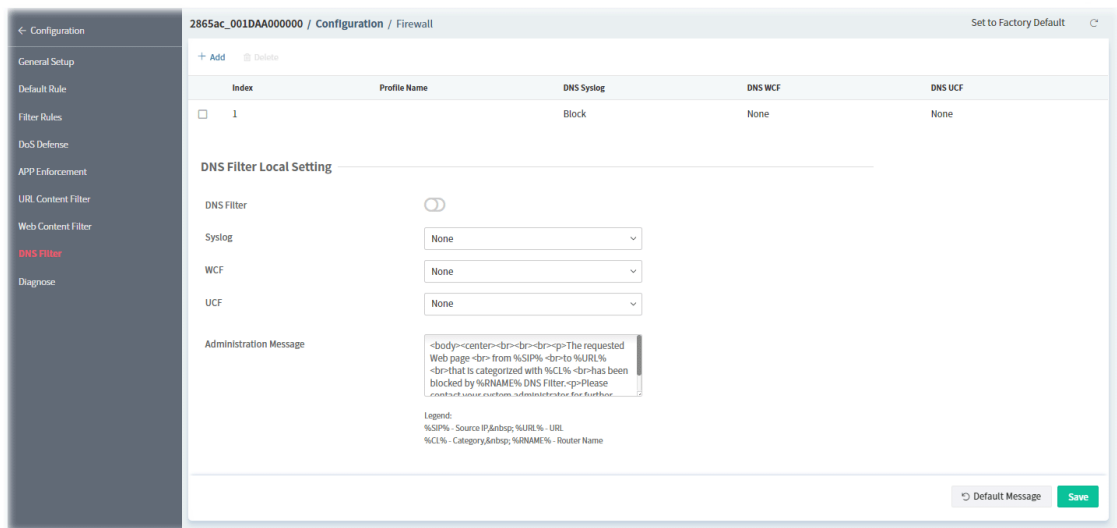

These parameters are explained as follows:

Item	Description
+Add	Click to add a new DNS filter profile.
Delete	Click to remove the selected DNS filter profile.
Index	Display the index number of the DNS filter profile.
Profile Name	Display the name of the DNS filter profile.
DNS Syslog	Display the filtering type (Block, Pass, All or None) of the DNS syslog.
DNS WCF	Display the name of the WCF profile.
DNS UCF	Display the name of the UCF profile.
DNS Filter Local Setting	
DNS Filter	Click to enable / disable the DNS filter function.
Syslog	Select the filtering type (Block, Pass, All or None) of the DNS syslog.
WCF	Select a WCF profile.
UCF	Select a UCF profile.
Administration Message	The message to be displayed in the browser when access to a website has been blocked. A custom message can be entered with HTML formatting in the text box.
Default Message	Click to reset the administration message to the factory default.
Save	Save the current settings.

To create a new DNS profile, click **+Add** to open the following page.

Item	Description
DNS Filter	
Index	Display the index number of the DNS filter profile.
Profile Name	Enter a name of the DNS filter profile.
Syslog	Select the filtering type (Block, Pass, All or None) of the DNS syslog.
WCF	Select a WCF profile.
UCF	Select a UCF profile.
DNS Security Setting	
Block DoT	Select to block the DNS inquiry (plain text) encrypted through TLS (security protocol).
Block DoH	Select to block the DNS inquiry (plain text) encrypted through HTTPS (security protocol).
Default DoH Servers	Check the box to select the service provider(s) for the DoH server.
Customized DoH Server	Check the box to select the service provider(defined in String Object) for the DoH server.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.7.9 Diagnose

The purpose of this function is to test when the router receiving incoming packet, which firewall rule will be applied to that packet.

These parameters are explained as follows:

Item	Description
Firewall FwDiagnose	
Mode	Specify the service type (ICMP, UDP, TCP) of the packet.
Direction	Set the way (from WAN or from LAN) that Vigor router receives the first packet for test.
IP Ver	Select the type of the IP address (IPv4/IPv6).
LAN IP	Enter the IPv4/IPv6 address of the packet's source.
LAN Port	Enter the port number of the packet's source.
LAN MAC	Enter the MAC address of the packet's source.
WAN IP	Enter the IPv4/IPv6 address of the packet's destination.
WAN Port	Enter the IPv4/IPv6 address of the packet's destination.
Analyze	Execute the test and analyze the result.
Reset	Reset the diagnose settings.
Packet & Payload	
Index	Display the index number of the profile.
Enable	Display if the profile is enabled or disabled.
Direction	The first packet of the firewall test will follow the direction specified above. However, the direction for the second packet might be different. Simply choose the direction (from Computer A to B or from the B to A) for the second packet.

Payload Type	Choose Customize, Ping, Trace Route / Customize, DNS, Trace Route / Customize, Http (GET).
Payload Data	It is available when Customize is selected. Simply type 16 HEX characters which represent certain packet (e.g., DNS packet) if you want to set the data transferred with protocol (ICMP/UDP/TCP) which is different to Type setting.
Save	Save the current settings.

Click the index number (1 - 5) to configure detailed settings for Packet & Payload.

DrayTek / Configuration / Firewall

Packet & Payload

Packet: 1

Enable: Enable Disable

Direction: AtoB BtoA

Payload Type: CUSTOMIZE

Payload:

Cancel Save

Item	Description
Packet	Display the index number of the profile.
Enable	Enable - Enable this profile. Disable - Disable this profile.
Direction	Select the direction for the second packet. AtoB BtoA
Payload Type	Select the mode (CUSTOMIZE, Trace Route, DNS Query).
Payload	It is available when Customize is selected. Simply type 16 HEX characters which represent certain packet (e.g., DNS packet) if you want to set the data transferred with protocol (ICMP/UDP/TCP) which is different to Type setting.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.8 User Management

9.4.8.1 General Setup

Global settings for User Management can be configured in this section.


The screenshot shows the 'Configuration / User Management' interface. On the left is a sidebar with 'General Setup' selected. The main area is divided into three sections: 'Mode Selection' with 'Rule-Based' and 'User-Based' tabs; 'Authentication page' with 'Web Authentication' (HTTP, HTTPS), 'Login Page Greeting' (a link), and 'Display IP Enable' (a toggle); and 'Landing page' with an HTML code editor and a 'Set to Factory Default' button. At the bottom are 'Clear', 'Cancel', and 'Save' buttons.

These parameters are explained as follows:

Item	Description
Mode Selection	
Mode	Rule-Based - Router applies filter rules configured in Firewall>>General Setup and Filter Rule . User-Based - Router applies filter rules configured in User Management>>User Profile .
Authentication page	
Web Authentication	Set the Web protocol for the web authentication page. ● HTTP ● HTTPS
Login Page Greeting	Click to be redirected to Configuration>>Admin Account >> Login Page Greeting ,
Display IP Enable	Click to enable or disable the function. If enabled, the IP address of the client will be shown on the tracking window.
Landing page	
Landing Page	HTML code to be shown on the Login Page Greeting.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.8.2 User Profile


This page allows you to create up to 200 user profiles for use with User Management.

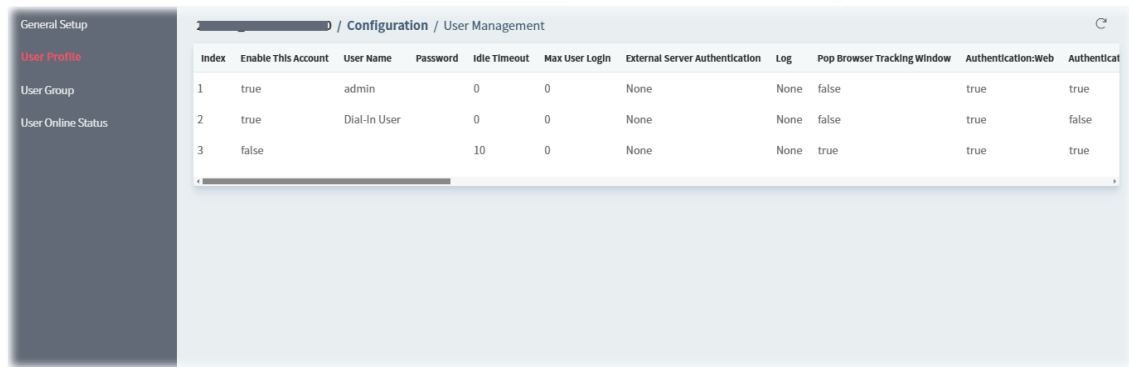

The screenshot shows the 'User Management' configuration page. On the left is a sidebar with 'User Profile' selected. The main area displays a table with the following columns: Index, Enable This Account, User Name, Password, Idle Timeout, Max User Login, External Server Authentication, Log, Pop Browser Tracking Window, Authentication:Web, and Authentication:Telnet. The table contains three rows of data.

Index	Enable This Account	User Name	Password	Idle Timeout	Max User Login	External Server Authentication	Log	Pop Browser Tracking Window	Authentication:Web	Authentication:Telnet
1	true	admin		0	0	None	None	false	true	true
2	true	Dial-In User		0	0	None	None	false	true	false
3	false			10	0	None	None	true	true	true

To configure the user management profile, move the mouse cursor to any entry and click to open the setting page.

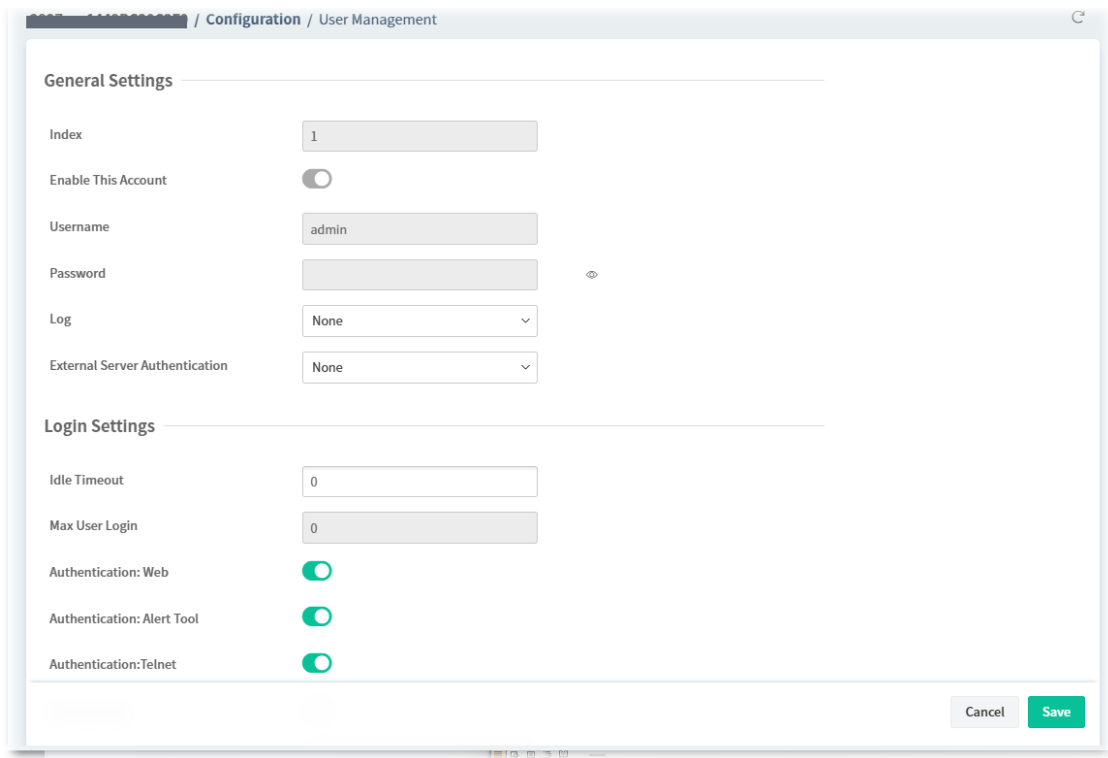

The screenshot shows the 'User Profile' configuration page for index 1. It is divided into two sections: 'General Settings' and 'Login Settings'. The 'General Settings' section includes fields for Index (1), Enable This Account (toggle), Username (admin), Password (masked), Log (None), and External Server Authentication (None). The 'Login Settings' section includes fields for Idle Timeout (0), Max User Login (0), and three authentication toggles: Authentication: Web (checked), Authentication: Alert Tool (checked), and Authentication: Telnet (checked). At the bottom right are 'Cancel' and 'Save' buttons.

These parameters are explained as follows:


Item	Description
General Settings	
Index	Display the index number of the user profile.
Enable This Account	Click to enable or disable this user profile.
Username	Enter the login name of this user profile.
Password	Enter the password of this user profile.
Log	Select which activities (None, Login, Event or All) of the user can be recorded by Syslog.

External Server Authentication	The router will authenticate dial-in users using either a built-in (None) or external service (LDAP, Radius or TACACS+).
Login Settings	
Idle Timeout	If there is no WAN traffic to and from the LAN client for the specified amount of time (in minutes), the WAN session is reset and the user will need to re-authenticate before Internet access is once again allowed.
Max User Login	Enter the maximum number of concurrent logins allowed for this profile.
Authentication:Web	Click to enable or disable the function. If enabled, user will need to authenticate by entering a username and password when attempting to access an external website for the first time. The user will be redirected to the external website after a successful authentication.
Authentication:Alert Tool	Click to enable or disable the function. If enabled, the user can enter the user name and password into the DrayTek Alert Tool. A window with remaining time of connection for such user will be displayed.
Authentication:Telnet	Click to enable or disable the function. If enabled, the user can authenticate by logging in to the router using telnet.
Landing Page	Click to enable or disable the function. If enabled, when a user tries to access into the web user interface of Vigor router series with the user name and password specified in this profile, he/she will be lead into the web page configured in Landing Page field in 6.3.8.1 General Setup.
Auto Logout(minutes)	This account will be forced to logout after a certain time set here.
Pop Browser Tracking Window	Click to enable or disable the function. If enabled, a browser window will pop up showing the session time remaining.
Quota Policy	
Login Permission Schedule 1/2/3/4	Enter four sets of time schedule for your request.
Time Quota Enable	Click to enable or disable the function.
Time Quota:Mins	Specify the amount of time (after a successful authentication). Click + / - to increase / decrease the time quota for this profile.

Data Quota Enable	Click to enable or disable the function.
Data Quota Value	Specify the amount of data (after a successful authentication). Click + / - to increase / decrease the data quota for this profile.
Reset Quota Automatically	
Enable	Click to enable or disable the function.
Default Time Quota(Mins)	Enter value for default time quota.
Default Data Quota(MB)	Enter value for default data quota.
Quota reset	When login permission schedule expired - When the scheduling time is up, the router will reset the quota with user-defined time/data values automatically. At the start time of Schedule - Quota reset schedule - Specify a time schedule index number for this profile.
Internal Services	
Internal RADIUS	Click to enable or disable the function.
Local 802.1x	Click to enable or disable the function.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.8.3 User Group

This page allows you to place multiple user profiles into groups. These groups can be used to set up filter rules in **Firewall>>General Setup**.

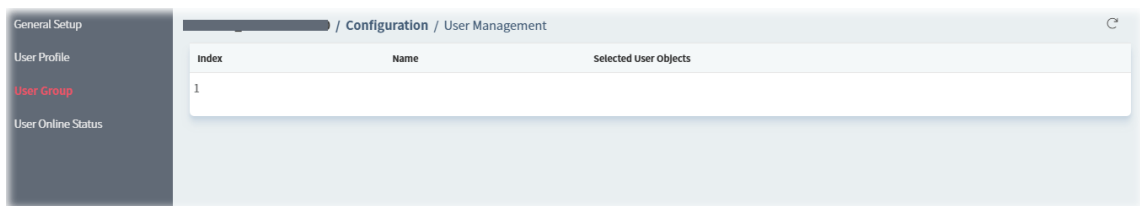

To configure the user group profile, move the mouse cursor to any entry and click to open the setting page.

These parameters are explained as follows:

Item	Description
Name	Enter a name for identifying this user group.
Selected User Objects	Use the drop down menu to select the user object(s).
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.8.4 User Online Status

This page displays the users that are currently logged into the router. The list refreshes periodically to show the most up-to-date information.

Index	User	IP Address	Profile	Last Login Time	Expired Time	Data Quota	Idle Time	Action
1	admin	192.168.1.10	admin	02-10 10:10:06	Unlimited	Unlimited	Unlimited	Block Logout Delete

These parameters are explained as follows:


Item	Description
User	The name of the user that is logged on. Clicking this will bring up the following page which allows setting time and data quotas of the user. For details, refer to the description on the Enable Time Quota and Enable Data Quota items in the User Profile section.
IP Address	IP LAN address of the device that initiated the login.
Profile	Name of the user profile. If the logged-in user is a VPN user, Dial-in User will be displayed. Otherwise it will be the same as User.
Last Login Time	The most recent login time of the user.
Expired Time	The expiration time of the current login session.
Data Quota	Display the quota for data transmission. The remaining data quota of this login session.
Idle Time	Amount of time the session has been idled.

Action	Block – Stops user from accessing the Internet. Unblock –Resumes Internet access of a blocked user. Logout – Terminates the current login session. Delete – Removes the user entry from the User Online Status page.
---------------	--

9.4.9 Object Setting

9.4.9.1 IP Object


For IPs in a range and service ports in a limited range usually will be applied in configuring router's settings, therefore we can define them with **objects** and bind them with **groups** for using conveniently.

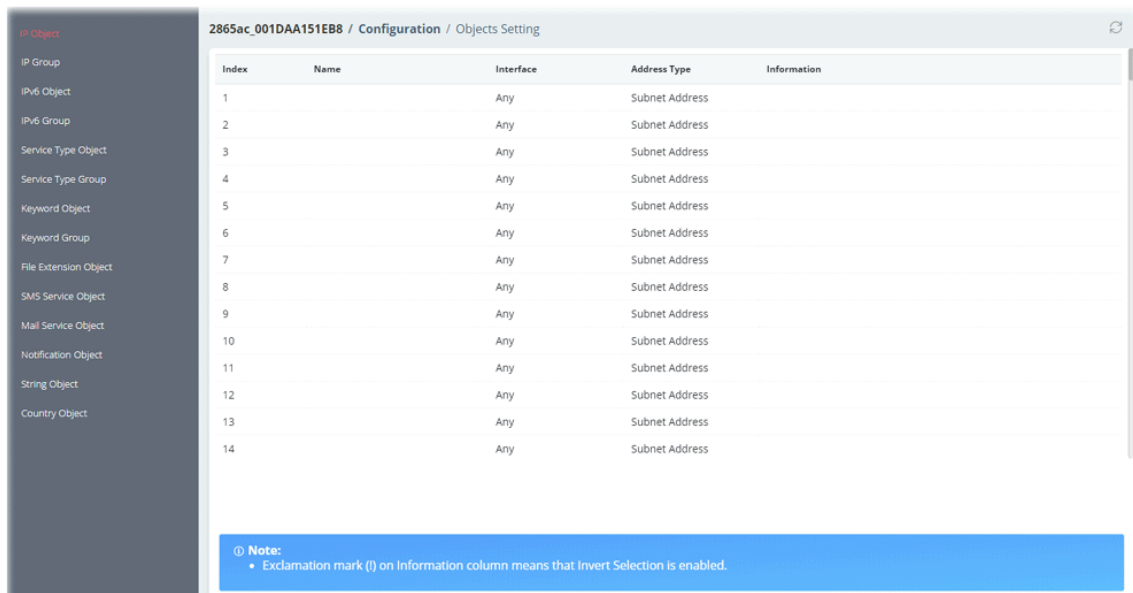

Index	Name	Interface	Address Type	Information
1		Any	Subnet Address	
2		Any	Subnet Address	
3		Any	Subnet Address	
4		Any	Subnet Address	
5		Any	Subnet Address	
6		Any	Subnet Address	
7		Any	Subnet Address	
8		Any	Subnet Address	
9		Any	Subnet Address	
10		Any	Subnet Address	
11		Any	Subnet Address	
12		Any	Subnet Address	
13		Any	Subnet Address	
14		Any	Subnet Address	

Note:
 • Exclamation mark (!) on Information column means that Invert Selection is enabled.

To configure the IP object profile, move the mouse cursor to any entry and click to open the setting page.

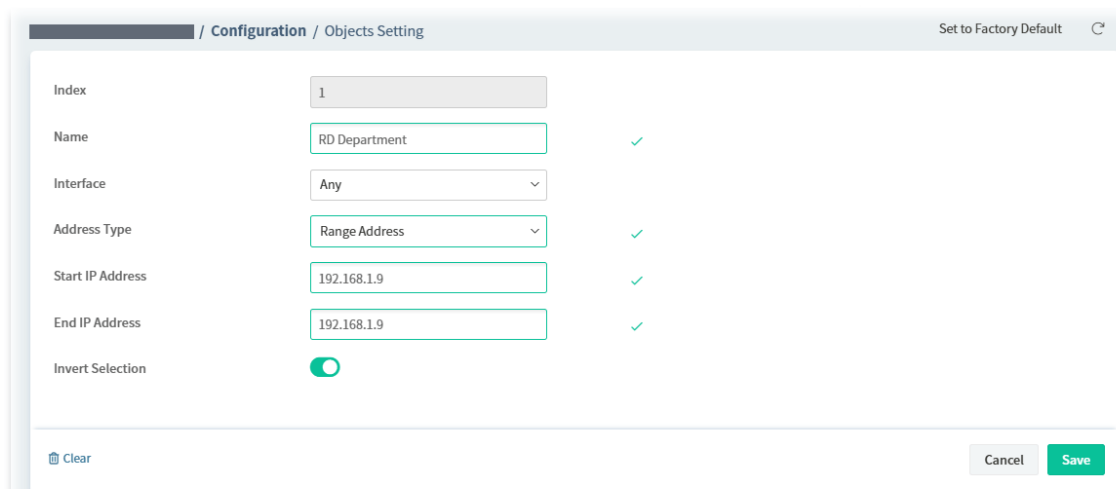

Index	1	
Name	RD Department	✓
Interface	Any	
Address Type	Range Address	✓
Start IP Address	192.168.1.9	✓
End IP Address	192.168.1.9	✓
Invert Selection	☒	

Clear Cancel Save

These parameters are explained as follows:

Item	Description
Index	Display the index number of the IP object profile.
Name	Enter the name of the IP object profile.
Interface	Select the network interface on which the IP address or addresses are to be found.
Address Type	Any Address – Object covers all IP addresses. Mac Address – Object contains a MAC address. ● MAC Address – Enter the MAC address. Range Address – Object covers a range of IP addresses. ● Start IP Address – Enter an IP address as the starting point. ● End IP Address – Enter an IP address as the ending point. Single Address – Object covers one IP address. ● Start IP Address – Enter an IP address as the starting point. Subnet Address – Object covers a range of IP addresses specified in subnet notation. ● Start IP Address – Enter an IP address as the starting point. ● Subnet Mask – Enter the subnet mask.
Invert Selection	Click to enable or disable the function. If enabled, all addresses except the ones entered above will be used.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.2 IP Group

Multiple IP Objects can be placed into an IP Group.

2865ac_001DAA151EB8 / Configuration / Objects Setting			
Index	Name	Interface	Selected IP Objects
1		Any	
2		Any	
3		Any	
4		Any	
5		Any	
6		Any	
7		Any	
8		Any	
9		Any	
10		Any	
11		Any	
12		Any	
13		Any	
14		Any	
15		Any	
16		Any	

To configure the IP group profile, move the mouse cursor to any entry and click to open the setting page.

The screenshot shows a configuration window titled 'Configuration / Objects Setting'. It has a 'Set to Factory Default' link in the top right. The main area contains four input fields: 'Index' with the value '1', 'Name' which is empty, 'Interface' with a dropdown menu showing 'Any', and 'Selected IP Objects' which is empty. At the bottom left is a 'Clear' button with a trash icon. At the bottom right are 'Cancel' and 'Save' buttons.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the IP object profile.
Name	Enter the name of the IP object profile.
Interface	Select WAN, LAN or Any to filter IP objects.
Selected IP Objects	Use the drop down menu to select the IP object(s).
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.3 IPv6 Object

Up to 64 IPv6 Objects can be created.

The screenshot shows a configuration window titled '2865ac_001DAA151EB8 / Configuration / Objects Setting'. On the left is a sidebar with a list of object types: IP Object, IP Group, IPv6 Object (highlighted in red), IPv6 Group, Service Type Object, Service Type Group, Keyword Object, Keyword Group, File Extension Object, SMS Service Object, Mail Service Object, Notification Object, String Object, and Country Object. The main area displays a table with 16 rows of IPv6 objects. The table has columns: Index, Name, Address Type, Information, Match Type, and Prefix Len.

Index	Name	Address Type	Information	Match Type	Prefix Len.
1		Subnet Address	::	--	0
2		Subnet Address	::	--	0
3		Subnet Address	::	--	0
4		Subnet Address	::	--	0
5		Subnet Address	::	--	0
6		Subnet Address	::	--	0
7		Subnet Address	::	--	0
8		Subnet Address	::	--	0
9		Subnet Address	::	--	0
10		Subnet Address	::	--	0
11		Subnet Address	::	--	0
12		Subnet Address	::	--	0
13		Subnet Address	::	--	0
14		Subnet Address	::	--	0
15		Subnet Address	::	--	0
16		Subnet Address	::	--	0

To configure the IPV6 object profile, move the mouse cursor to any entry and click to open the setting page.

/ Configuration / Objects Setting
Set to Factory Default

Index

1

Name

Address Type

Subnet Address

Start IP Address

::

Prefix Length

0

Invert Selection

☐

Clear

Cancel

Save

These parameters are explained as follows:

Item	Description
Index	Display the index number of the IPv6 object profile.
Name	Enter the name of the IPv6 object profile.
Address Type	Any Address – Object covers all IPv6 addresses. Match Type – Specify the match type (128 Bits or Suffix 64 Bits) for the IPv6 address. Mac Address – Object contains a MAC address. Match Type – Specify the match type (128 Bits or Suffix 64 Bits) for the IPv6 address. MAC Address – Enter the MAC address. Range Address – Object covers a range of IPv6 addresses. Match Type – Specify the match type (128 Bits or Suffix 64 Bits) for the IPv6 address. Start IP Address – Enter an IPv6 address as the starting point. End IP Address – Enter an IPv6 address as the ending point. Invert Selection – If enabled, all addresses except the ones entered above will be used. Single Address – Object covers one IPv6 address. Match Type – Specify the match type (128 Bits or Suffix 64 Bits) for the IPv6 address. Start IP Address – Enter an IPv6 address as the starting point. Invert Selection – If enabled, all addresses except the ones entered above will be used. Subnet Address – Object covers a range of IPv6 addresses specified in subnet notation. Start IP Address – Enter an IPv6 address as the starting point. Prefix Length – Enter IPv6 prefix length, if Address type is Subnet

	Address. ● Invert Selection – If enabled, all addresses except the ones entered above will be used.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.4 IPv6 Group

Multiple **IPv6 Objects** can be placed into an **IPv6 Group**.

The screenshot shows the 'Configuration / Objects Setting' page. On the left sidebar, 'IPv6 Group' is selected. The main area displays a table with the following columns: Index, Name, and Selected IPv6 Objects. The table lists 26 entries (Index 1 to 26), all of which are currently empty.

To configure the IPv6 group profile, move the mouse cursor to any entry and click to open the setting page.

The screenshot shows the configuration form for an IPv6 group profile. It includes the following fields and controls:

- Index:** A text input field containing the value '1'.
- Name:** An empty text input field.
- Selected IPv6 Objects:** An empty text input field.
- Buttons:** A 'Clear' button (with a trash icon), a 'Cancel' button, and a 'Save' button (in green).

These parameters are explained as follows:

Item	Description
Index	Display the index number of the IPv6 group profile.
Name	Enter the name of the IPv6 group profile.

Selected IPv6 Object	Use the drop down menu to select the IPv6 object(s).
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.5 Service Type Object

Up to 96 Service Type Objects can be created.

Index	Name	Protocol	Protocol Number	Source Port Option	Source Port From
1		Any	0	=	0
2		Any	0	=	0
3		Any	0	=	0
4		Any	0	=	0
5		Any	0	=	0
6		Any	0	=	0
7		Any	0	=	0
8		Any	0	=	0
9		Any	0	=	0
10		Any	0	=	0
11		Any	0	=	0
12		Any	0	=	0
13		Any	0	=	0
14		Any	0	=	0
15		Any	0	=	0
16		Any	0	=	0


To configure the service type object profile, move the mouse cursor to any entry and click to open the setting page.

These parameters are explained as follows:


Item	Description
Index	Display the index number of the service type object profile.
Name	Enter the name of the service type object profile.
Protocol	Choose a protocol to which this profile applies.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.6 Service Type Group

Multiple **Service Type Objects** can be placed into a **Service Type Group**.

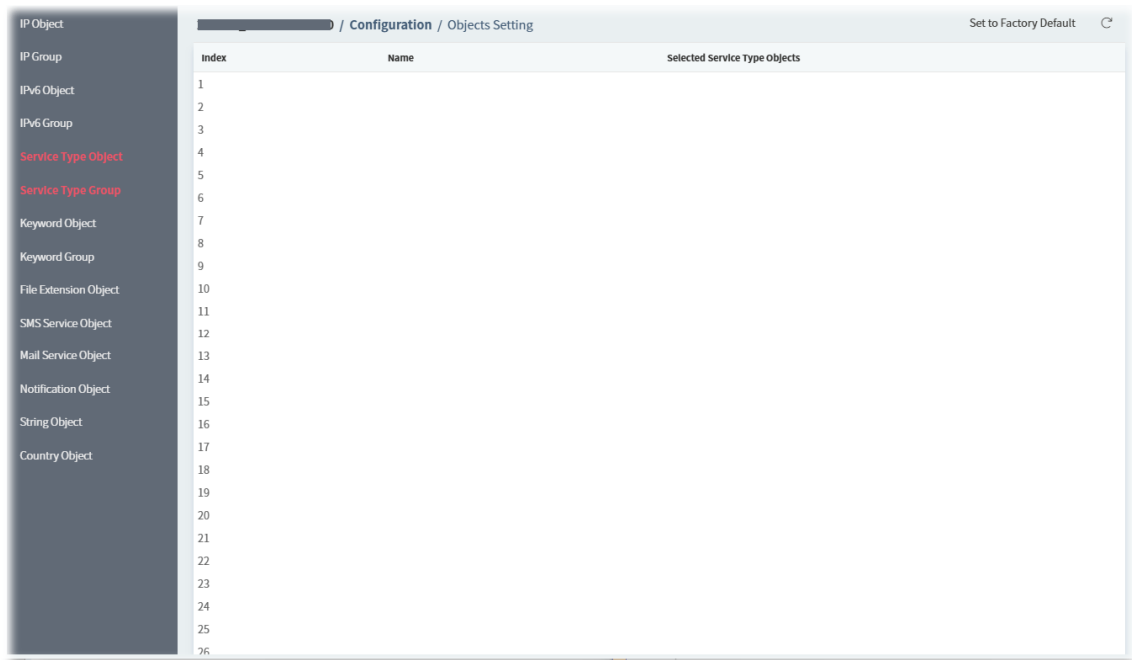

To configure the service type group profile, move the mouse cursor to any entry and click to open the setting page.

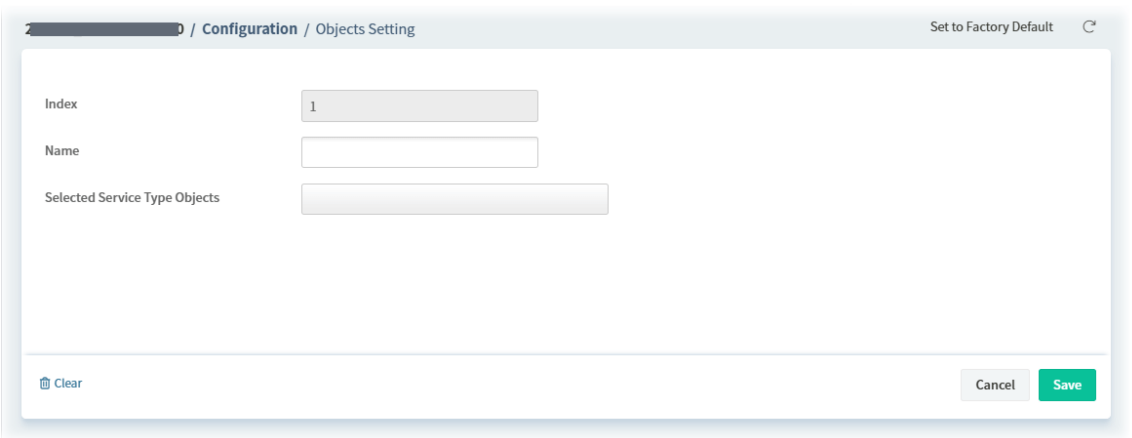


These parameters are explained as follows:


Item	Description
Index	Display the index number of the service type group profile.
Name	Enter the name of the service type group profile.
Selected Service Type Objects	Use the drop down menu to select the service type object(s).
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.7 Keyword Object

200 Keyword Object Profiles can be created for use as blacklists or white lists in **CSM >>URL Content Filter Profile** and **Web Content Filter Profile**.

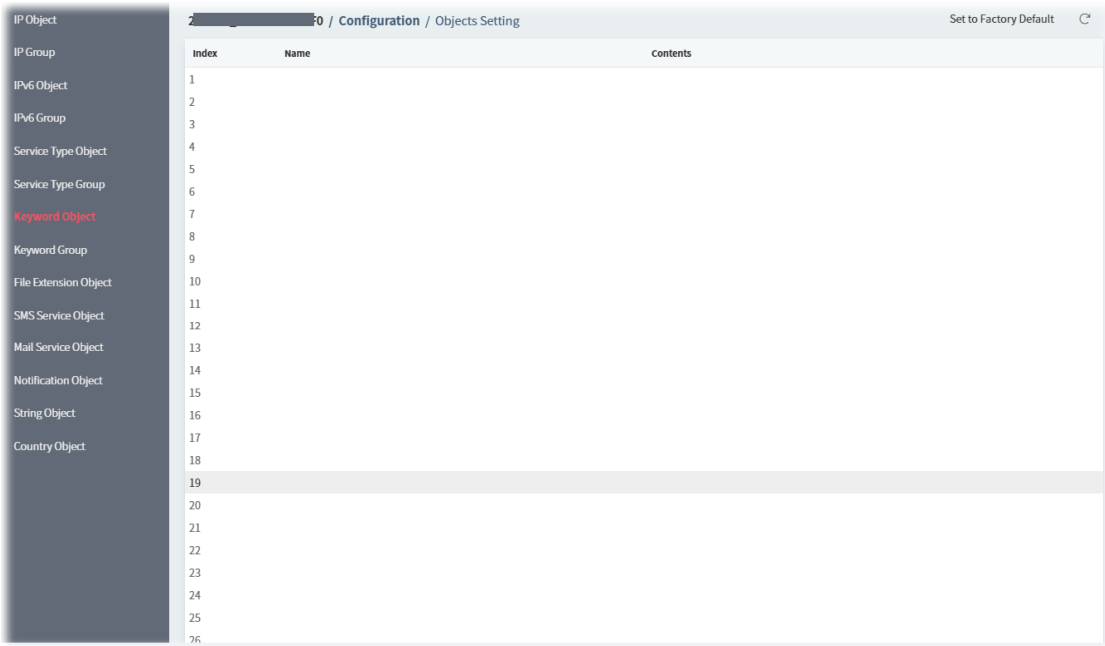

To configure the keyword object profile, move the mouse cursor to any entry and click to open the setting page.

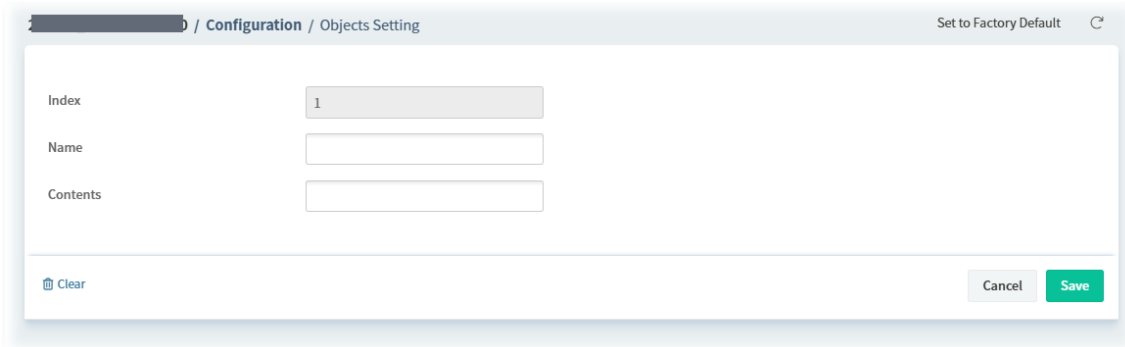


These parameters are explained as follows:

Item	Description
Index	Display the index number of the keyword object profile.
Name	Enter the name of the keyword object profile.
Contents	Enter the keywords to be matched. Up to 3 key phrases, separated by spaces, for a total length of 63 characters can be entered.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.8 Keyword Group

Multiple Keyword Objects can be placed into a Keyword Group.

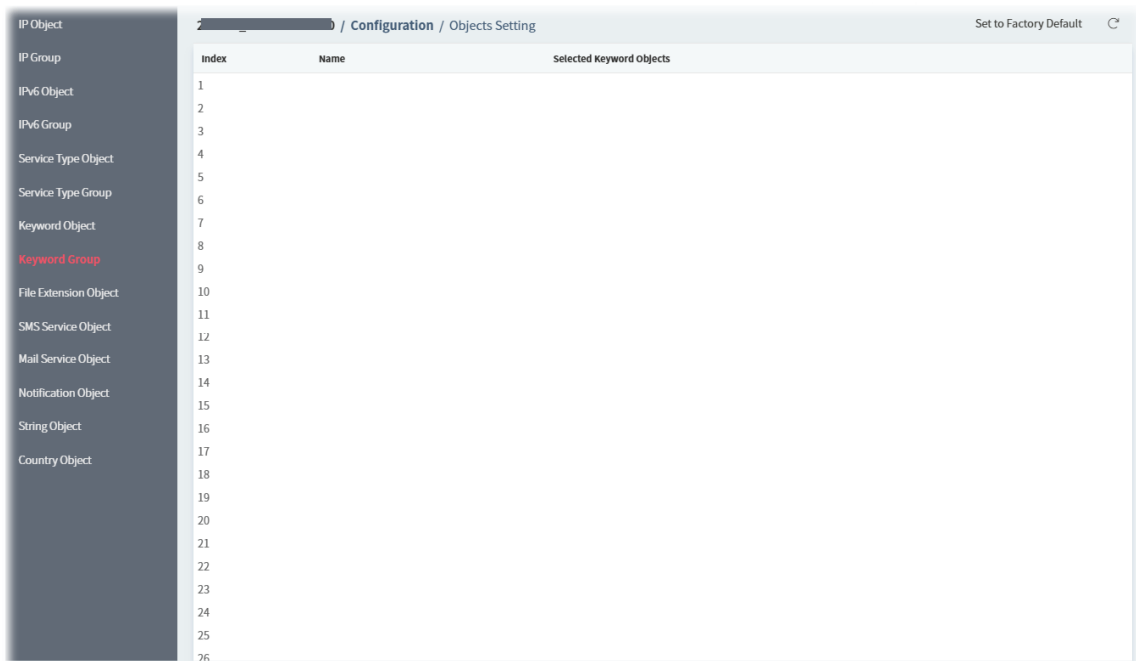


To configure the keyword group profile, move the mouse cursor to any entry and click to open the setting page.

These parameters are explained as follows:


Item	Description
Index	Display the index number of the keyword group profile.
Name	Enter the name of the keyword group profile.
Selected Keyword Objects	Use the drop down menu to select the keyword object(s).
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.9 File Extension Object

Up to 8 File Extension Objects can be set up for use.

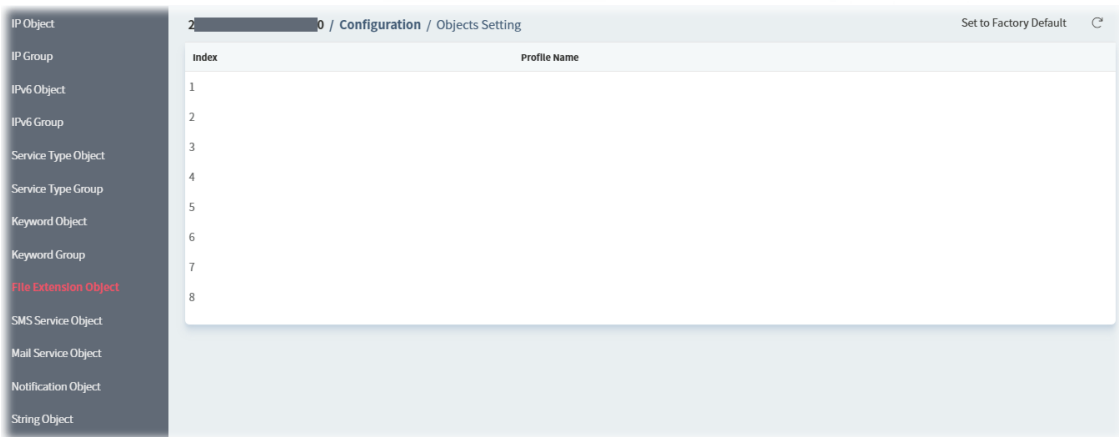

To configure the file extension object profile, move the mouse cursor to any entry and click to open the setting page.

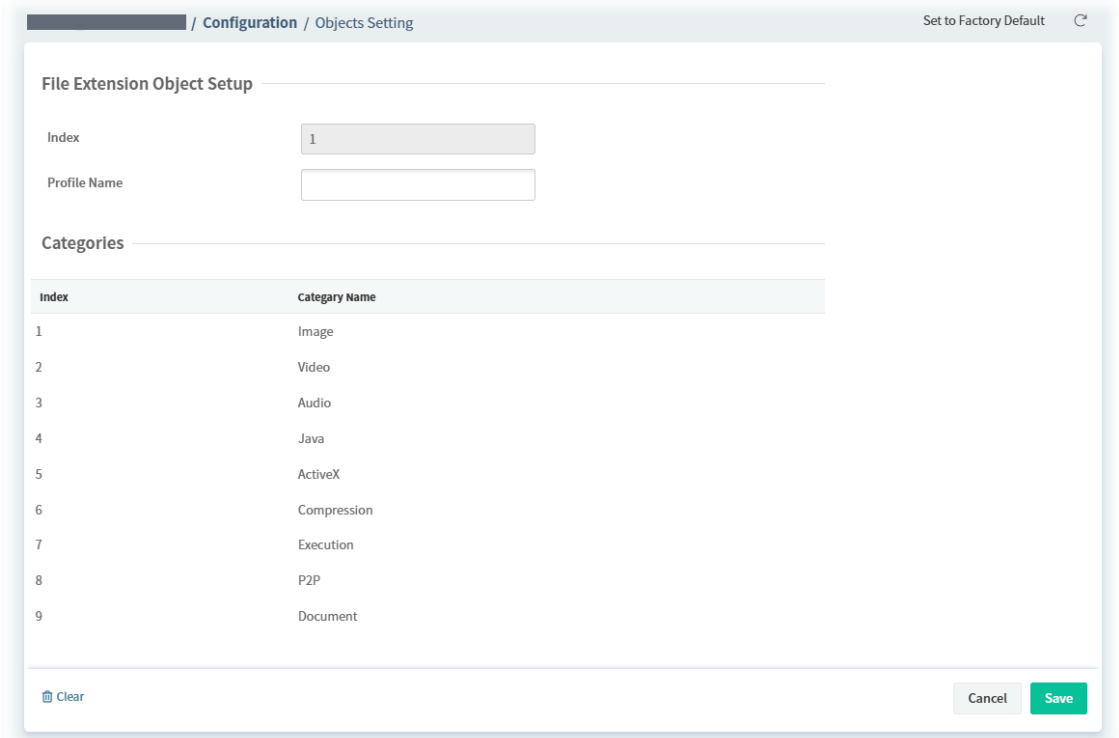


These parameters are explained as follows:

Item	Description
Index	Display the index number of the file extension object profile.
Profile Name	Enter the name of the file extension object profile.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.10 SMS Service Object

Up to 10 SMS Service Objects can be set up for use.

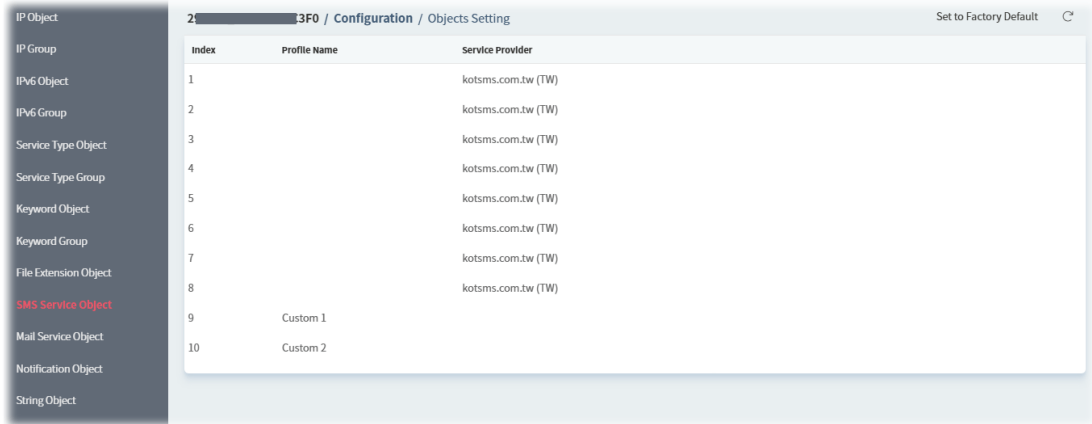

To configure the SMS service object profile, move the mouse cursor to index 1 to index 8 and click to open the setting page.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the SMS service object profile.
Profile Name	Enter the name of the SMS service object profile.
Service Provider	Select a Service Provider from the dropdown list.
Connection Protocol	Select HTTP or HTTPS.
Username	Enter a name to log in to the server.
Password	Enter a password to log in to the server.
Quota	Set the remaining number of text messages allowed to be sent.
Sending Interval	Set the minimum amount of time, in seconds, to wait between sending SMS messages.
Clear	Clear all modifications on this page.

Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

To configure the customized SMS service object profile, move the mouse cursor to index 9 to index 10 and click to open the setting page.

Index: 9

Profile Name: Custom 1

Service Provider:

Exact URL:

Please contact with your SMS provide to get the exact URL String
 eg:bulksms.vsms.net:5567/api/submission/send_sms/2/2.0?
 username=##txtUser##&password=##txtPwd##&msIdn=##txtDest##&message=##txtMsg##

Server Response:

Username:

Password:

Quota: 10

Sending Interval: 3

Note:

- Only one message can be sent during the "Sending Interval" time.
- If the "Sending Interval" was set to 0, there will be no limitation.


Clear Cancel Save

These parameters are explained as follows:

Item	Description
Index	Display the index number of the SMS service object profile.
Profile Name	Display the name of the SMS service object profile.
Service Provider	Enter an identifier for the service provider. Maximum length is 23 characters.
Exact URL	Enter the URL for the SMS service.
Username	Enter a name to log in to the service.
Password	Enter a password to log in to the service.
Quota	Set the remaining number of text messages allowed to be sent.
Sending Interval	Set the minimum amount of time, in seconds, to wait between sending SMS messages.
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.11 Mail Service Object

Up to 10 Mail Service Objects can be set up for use.

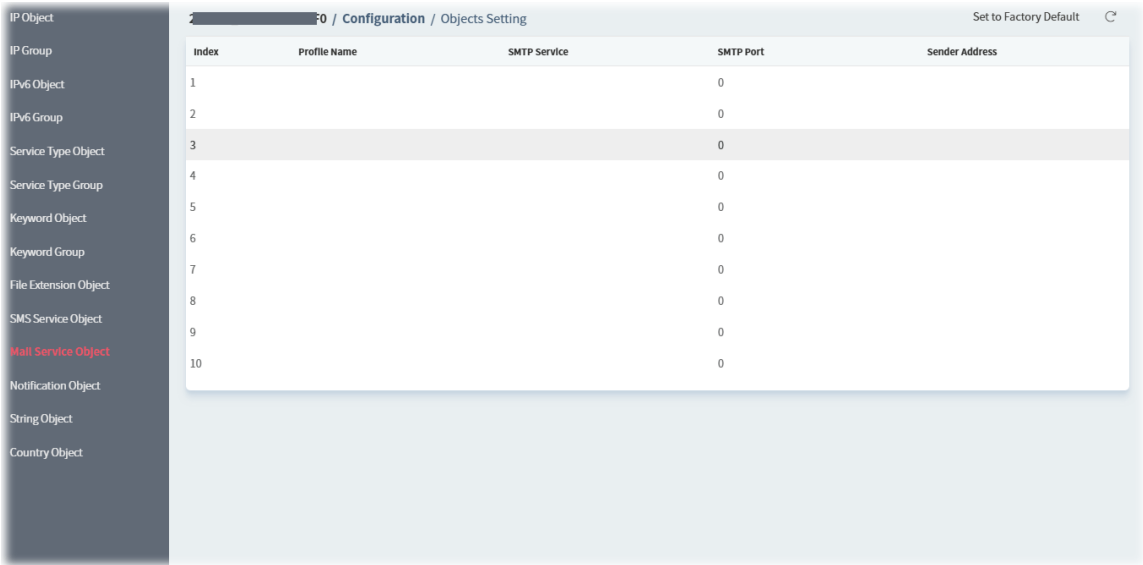

To configure the mail service object profile, move the mouse cursor to any entry and click to open the setting page.

A screenshot of the configuration form for a Mail Service Object. The form includes the following fields: Index (a dropdown menu showing '1'), Profile Name (a text input field), Interface (a dropdown menu showing 'Any'), SMTP Server (a text input field), SMTP Port (a text input field showing '0'), Sender Address (a text input field), Connection Security (a dropdown menu showing 'Plaintext'), Authentication (a toggle switch), Username (a text input field), Password (a text input field with a visibility icon), and Sending Interval (a text input field showing '0'). At the bottom, there is a blue 'Note' box with the following text: 'Only one mail can be sent during the "Sending Interval" time. If the "Sending Interval" was set to 0, there will be no limitation.' Below the note box are 'Clear', 'Cancel', and 'Save' buttons.


These parameters are explained as follows:

Item	Description
Index	Display the index number of the mail service object profile.
Profile Name	Enter the name of the mail service object profile.
SMTP Server	Enter the IP address of the SMTP server.

SMTP Port	Enter the port number of the SMTP server.
Sender Address	Enter the e-mail address of the sender.
Connection Security	Use Plaintext, StartTLS or SSL to communicate with the SMTP server.
Authentication	Click to enable or disable the function. Username – Enter a name for authentication. Password – Enter the password for authentication.
Sending Interval	Specify the minimum amount of time, in seconds, to wait between sending e-mail messages.
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.12 Notification Object

Up to 8 Notification Objects can be set up for use.

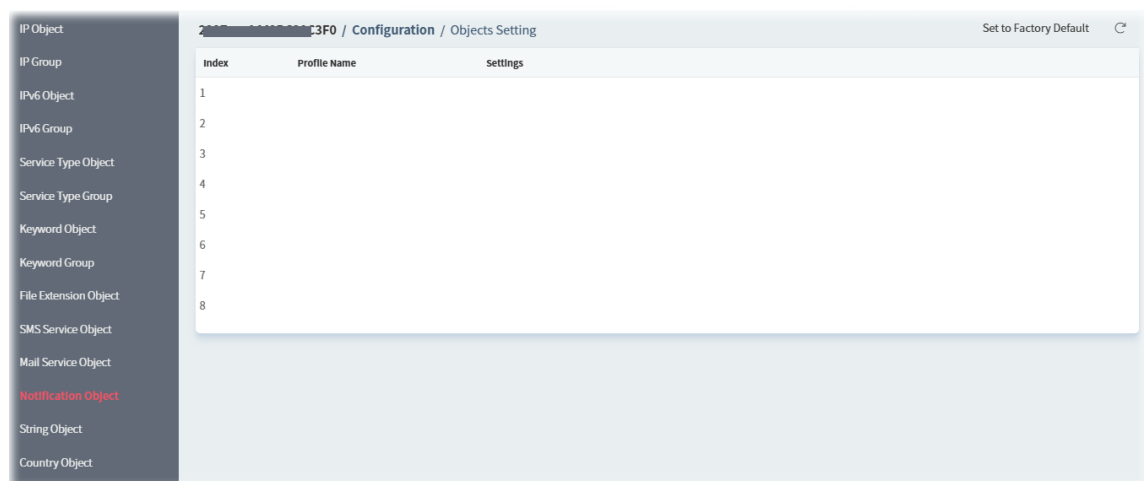

To configure the notification object profile, move the mouse cursor to any entry and click to open the setting page.


Index	1
Profile Name	
WAN	☐ Disconnected ☐ Reconnected
VPN Tunnel	☐ Disconnected ☐ Reconnected
Temperature Alert	☐ USB Out of Range
WAN Budget	☐ LimitReached
Central VPN Management	☐ CPE Offline ☐ CPE Config Backup Fail ☐ CPE Config Restore Fail ☐ CPE Firmware Upgrade Fail ☐ CPE VPN Profile Setup Fail
High Availability	☐ Failover Occurred Config Sync Fail Router Unstable

These parameters are explained as follows:


Item	Description
Index	Display the index number of the notification object profile.
Profile Name	Enter the name of the mail service object profile.
Check boxes	Select the states to be monitored.
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.13 String Object

Set string profiles which will be applied in route policy.

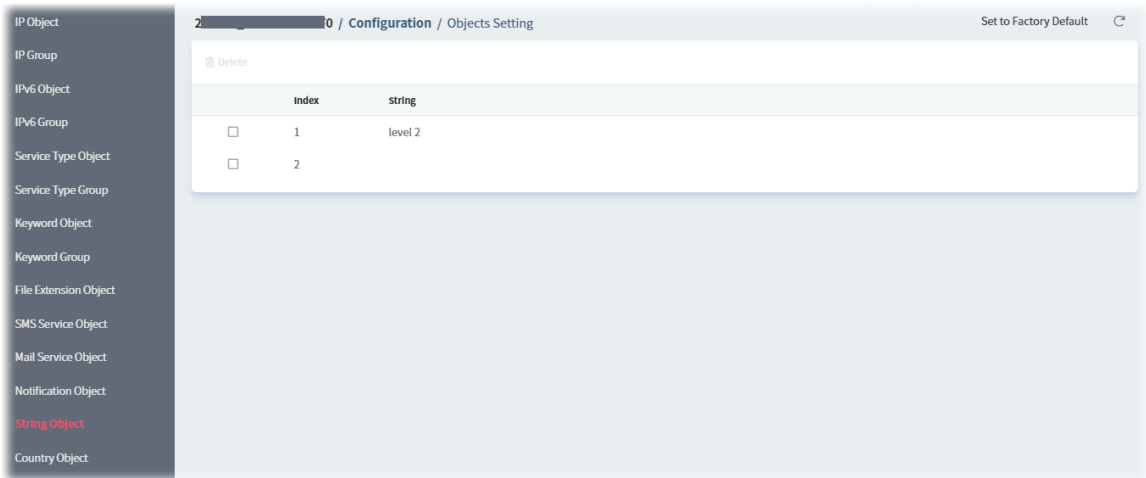

To configure the string object profile, move the mouse cursor to any entry and click to open the setting page.

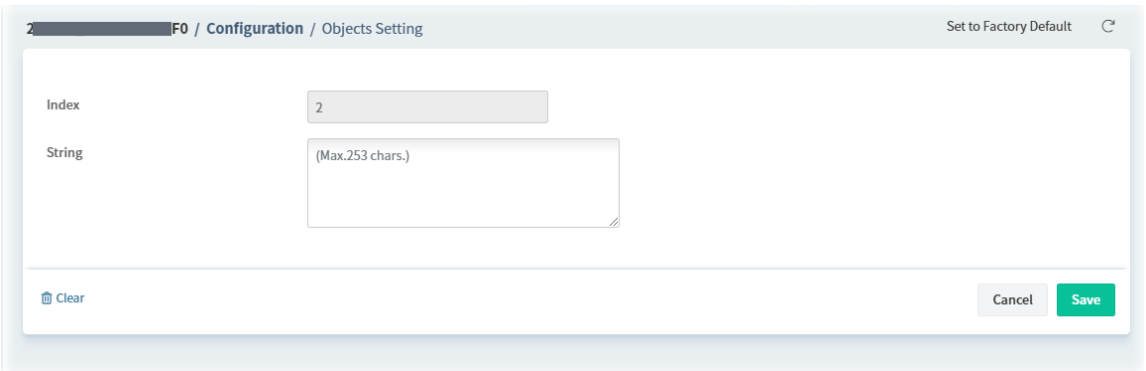


These parameters are explained as follows:

Item	Description
Index	Display the index number of the string object profile.
String	Enter a string.
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.9.14 Country Object

The country object profile can determine which country/countries shall be blocked by the Vigor router's Firewall.

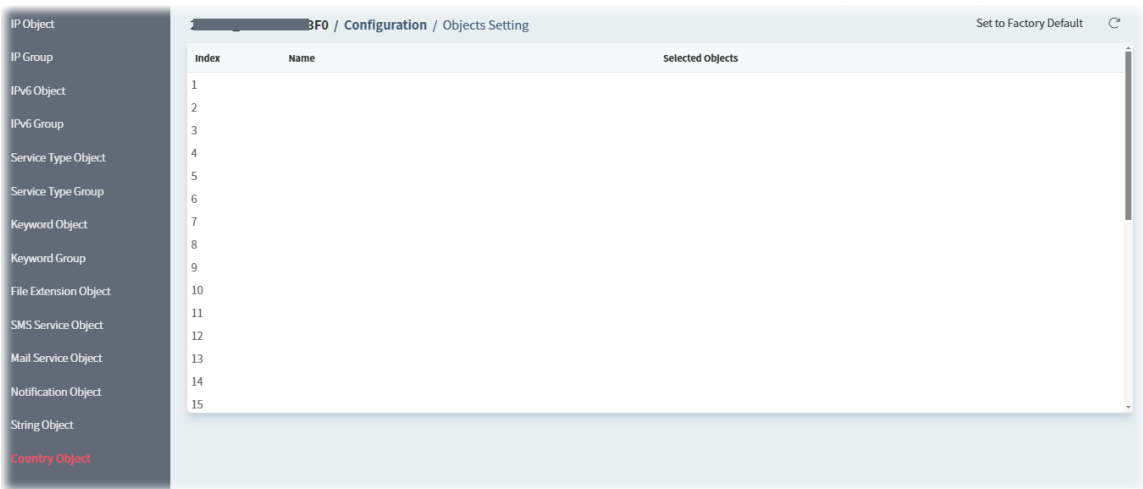

To configure the country object profile, move the mouse cursor to any entry and click to open the setting page.


These parameters are explained as follows:

Item	Description
Index	Display the index number of the country object profile.
Name	Enter the name of the mail country object profile.
Selected Country Objects	Use the drop down menu to select the country object(s).
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.10 QoS

9.4.10.1 Hardware QoS General Setup

Before using Hardware QoS, enable **Hardware Acceleration** first.

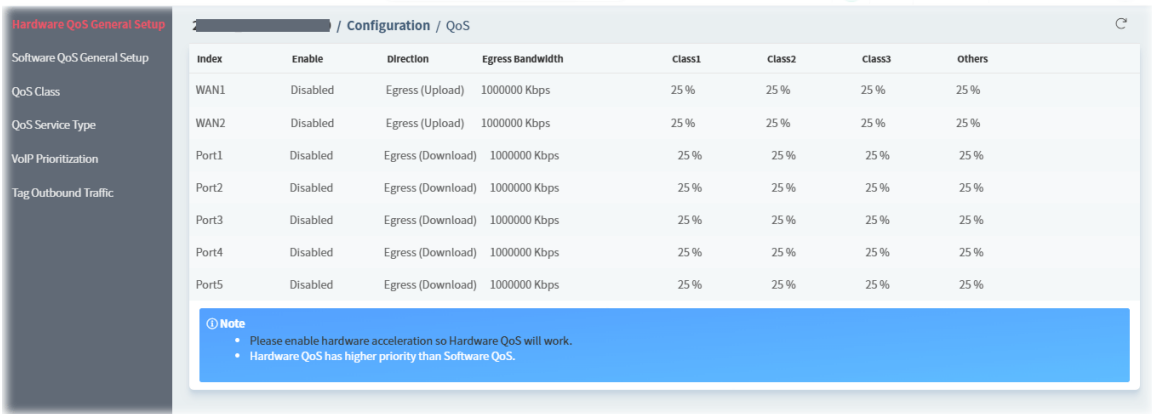


Index	Enable	Direction	Egress Bandwidth	Class1	Class2	Class3	others
WAN1	Disabled	Egress (Upload)	1000000 Kbps	25 %	25 %	25 %	25 %
WAN2	Disabled	Egress (Upload)	1000000 Kbps	25 %	25 %	25 %	25 %
Port1	Disabled	Egress (Download)	1000000 Kbps	25 %	25 %	25 %	25 %
Port2	Disabled	Egress (Download)	1000000 Kbps	25 %	25 %	25 %	25 %
Port3	Disabled	Egress (Download)	1000000 Kbps	25 %	25 %	25 %	25 %
Port4	Disabled	Egress (Download)	1000000 Kbps	25 %	25 %	25 %	25 %
Port5	Disabled	Egress (Download)	1000000 Kbps	25 %	25 %	25 %	25 %

Note

- Please enable hardware acceleration so Hardware QoS will work.
- Hardware QoS has higher priority than Software QoS.

To configure the hardware QoS profile, move the mouse cursor to any entry and click to open the setting page.

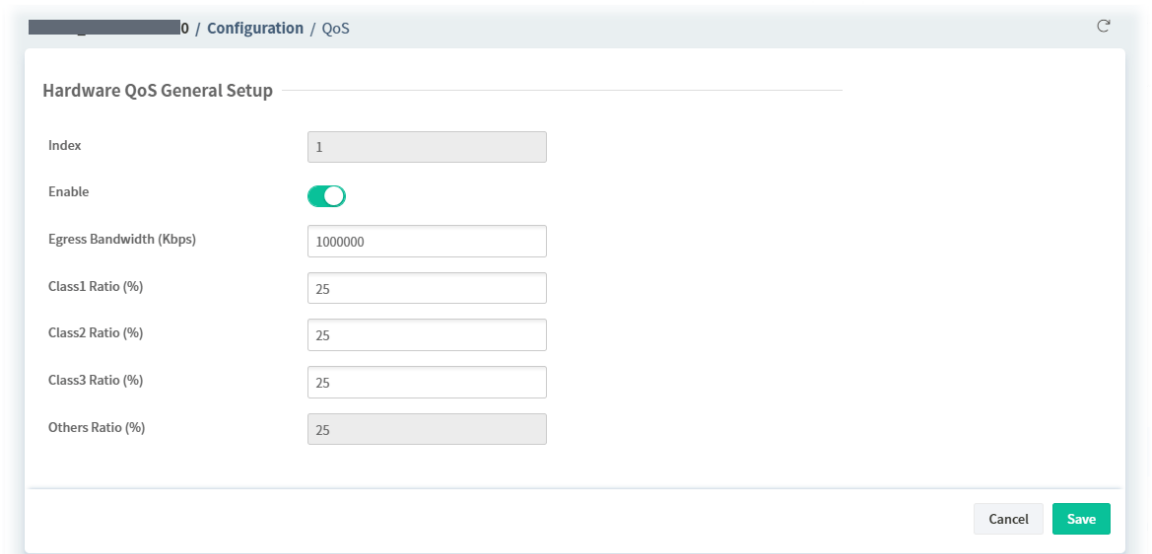

Hardware QoS General Setup

Index: 1

Enable: ☒

Egress Bandwidth (Kbps): 1000000

Class1 Ratio (%): 25

Class2 Ratio (%): 25

Class3 Ratio (%): 25

Others Ratio (%): 25

Cancel Save

These parameters are explained as follows:

Item	Description
Index	Display the index number of the interface.
Enable	Click to enable or disable this QoS policy.
Egress Bandwidth(Kbps)	Set the outbound bandwidth of the WAN/LAN.
Class1 Ratio ~ Class3 Ratio	Set the percentage of bandwidth reserved for each class.
Others Ratio	Set the percentage of bandwidth for others.
Cancel	Discard current modification and return to previous page.

Save	Save the current settings and return to previous page.
-------------	--

9.4.10.2 Software QoS General Setup

Hardware QoS General Setup

Software QoS General Setup

QoS Class

QoS Service Type

VoIP Prioritization

Tag Outbound Traffic

/ Configuration / QoS

Index	Enable	Direction	Ingress Bandwidth	Egress Bandwidth	Class 1	Class 2	Class 3	Others	Enable UDP Bandwidth Control	Status
WAN1	false	BOTH	100000	100000	25 %	25 %	25 %	25 %	false	Status
WAN2	false	BOTH	100000	100000	25 %	25 %	25 %	25 %	false	Status
WAN3	false	BOTH	100000	100000	25 %	25 %	25 %	25 %	false	Status
WAN4	false	BOTH	100000	100000	25 %	25 %	25 %	25 %	false	Status
WAN5	false	BOTH	100000	100000	25 %	25 %	25 %	25 %	false	Status
WAN6	false	BOTH	100000	100000	25 %	25 %	25 %	25 %	false	Status

To configure the QoS WAN profile, move the mouse cursor to any entry and click to open the setting page.

Configuration / QoS	
Interface Settings	
WAN	1
QoS Policy Enable	☐
Direction	BOTH
Inbound Bandwidth (kbps)	100000
Outbound Bandwidth (kbps)	100000
Bandwidth Reserved for each Class	
Class 1 Ratio (%)	25
Class 2 Ratio (%)	25
Class 3 Ratio (%)	25
Others (%)	25
Advanced Settings	
Cancel Save	


These parameters are explained as follows:

Item	Description
Interface Settings	
WAN	Display the index number of the WAN interface.
QoS Policy Enable	Click to enable or disable this QoS policy.
Direction	Use the drop-down list to set the direction of traffic to which QoS is to be applied (Inbound, Outbound, or Both).

Inbound Bandwidth(kbps)	Set the inbound bandwidth of the WAN.
Outbound Bandwidth(kbps)	Set the outbound bandwidth of the WAN.
Bandwidth Reserved for each Class	
Class 1 ~3 Ratio (%)	Set the percentage of bandwidth reserved for each class.
Others (%)	Set the percentage of bandwidth reserved for others.
Advanced Settings	
UDP Bandwidth Control	Click to enable or disable this function. If enabled, the router will restrict the bandwidth available to UDP traffic.
UDP Bandwidth Ratio(%)	Enter a percentage value.
Prioritize Outbound TCP ACK	Click to enable or disable this function. If enabled, the router will give outbound ACK packets priority over other packets to ensure traffic is not slowed down because the remote host is waiting for ACK packets before further traffic will be sent.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.10.3 QoS Class

Configure Class 1 to Class 3 with detailed settings.

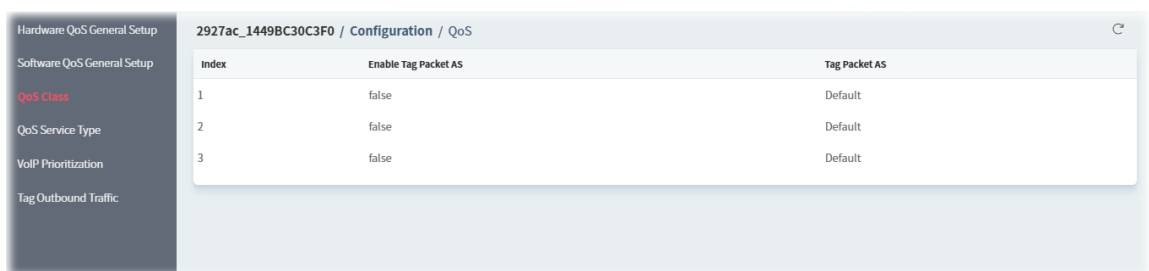

To configure the QoS class profile, move the mouse cursor to any entry and click to open the following page.

2865ac_001DAA000000 / Configuration / QoS

QoS Class

Index	ACT	Local Address Type	Local Start IP	Local End IP	Local Mask	Remote Address Type	Remote Start IP	Remote End IP	Re
1	false	Any	0.0.0.0	255.255.255.255	0.0.0.0	Any	0.0.0.0	255.255.255.255	0.0.0.0
2	true	Any	0.0.0.0	0.0.0.0	0.0.0.0	Any	0.0.0.0	0.0.0.0	0.0.0.0
3	true	Any	0.0.0.0	255.255.255.255	0.0.0.0	Any	0.0.0.0	255.255.255.255	0.0.0.0
4	true	Any	0.0.0.0	255.255.255.255	0.0.0.0	Any	0.0.0.0	255.255.255.255	0.0.0.0
5	false		0.0.0.0	0.0.0.0	0.0.0.0		0.0.0.0	0.0.0.0	0.0.0.0

Cancel Save

Then, click any index number to open the setting page.

/ Configuration / QoS

QoS Class - Class 1 - Rule 1

ACT ☐

IP Version

Local Address Type

Remote Address Type

DiffServ CodePoint [Select DiffServ CodePoint](#)

Service Type

Change to Class


[Clear](#) Cancel Save

These parameters are explained as follows:

Item	Description
ACT	Click to enable or disable this function.
IP Version	Select IPv4 or IPv6.
Local Address Type	Set the remote (WAN) IP address or address range for the rule. Any - The rule covers all IP addresses. Range - The rule covers a range of IP addresses. Local Start IP Address - Enter an IP address as the starting point. Local End IP Address - Enter an IP address as the ending point. Single - The rule covers one IP address. Local Start IP Address - Enter an IP address as the starting point. Subnet - The rule covers a range of IP addresses specified in subnet notation. Local Start IP Address - Enter an IP address as the starting point. Local Mask - Enter the subnet mask for the above IP address. Group and Object - The rules covers a range of IP address specified in

	a group or object profile.
Remote Address Type	Set the remote (WAN) IP address or address range for the rule. Any – The rule covers all IP addresses. Range – The rule covers a range of IP addresses. ● Remote Start IP – Enter an IP address as the starting point. ● Remote End IP – Enter an IP address as the ending point. Single – The rule covers one IP address. ● Remote Start IP – Enter an IP address as the starting point. Subnet – The rule covers a range of IP addresses specified in subnet notation. ● Remote Start IP – Enter an IP address as the starting point. ● Remote Mask – Enter the subnet mask for the above IP address. Group and Object – The rules covers a range of IP address specified in a group or object profile.
DiffServ CodePoint	Select Any or Select DiffServ CodePoint. If DiffServ CodePoint selected, set the precedence of packets to which this rule applies.
Service Type	Choose a service type to which this rule applies.
Change to Class	Specify a class for the QoS class profile.
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.10.4 QoS Service Type

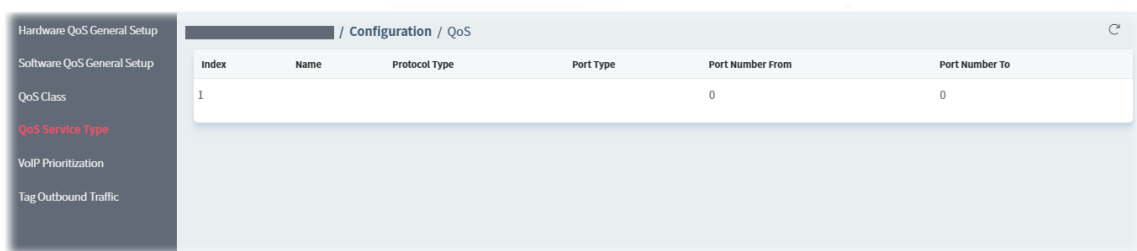

To configure the QoS service type profile, move the mouse cursor to any entry and click to open the following page.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the profile.
Name	Enter a name of this profile.
Service Type	Choose the type (TCP, UDP or TCP/UDP or other) for the new service.
Port Type	Single – Set a port number for this profile. Port Number Start – Enter the starting port number. Range – You have to set the starting port number and the end porting number on the boxes below. Port Number Start – Enter the starting port number. Port Number End – Enter the end porting number.
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.10.5 VoIP Prioritization


These parameters are explained as follows:

Item	Description
------	-------------


Enable the First Priority for VoIP SIP/RTP	Click to enable or disable the function. If enabled, VoIP traffic will be received with the highest priority.
SIP UDP Port	Set a port number to be monitored for SIP traffic.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.
VoIP QoS Status	Display current VoIP QoS status.

9.4.10.6 Tag Outbound Traffic

Tag the outgoing traffic with the DSCP or Precedence value.

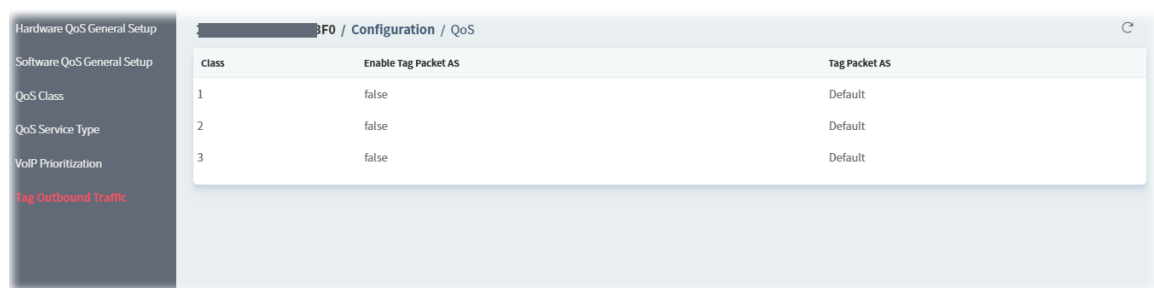

To configure the tag outbound traffic profile, move the mouse cursor to any entry and click to open the following page.

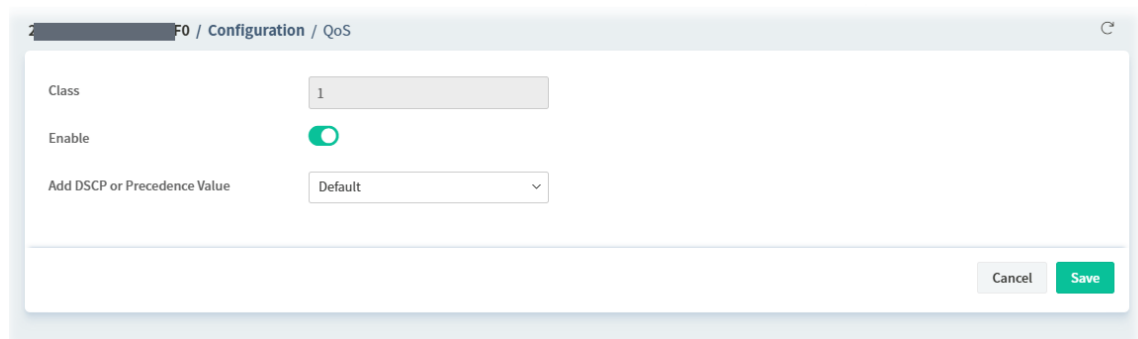

These parameters are explained as follows:

Item	Description
Class	Display the index number of the class.
Enable	Click to enable or disable the profile.
Add DSCP or Precedence Value	Use the drop-down list to choose the value for applying the DSCP or precedence value for each class.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.11 Applications

9.4.11.1 Dynamic DNS

The Vigor router supports a wide range of DDNS providers, such as DynDNS, No-IP.com, DtDNS, and ChangeIP. Please contact the DDNS provider of your choice to set up service before configuring DDNS on the router.

Index	Enable Account	Service Provider	Service Type	Host Name	Domain Name	Login Name	Password	Wildcards	Backup MX	Mail Extender	WAN Interface	Determine WAN IP	Provider Host	Service API
1	false	dyn.com (www.dyn.com)	Dynamic					false	false		WAN1_First	WAN_IP		
2	false	dyn.com (www.dyn.com)	Dynamic					false	false		WAN1_First	WAN_IP		
3	false	dyn.com (www.dyn.com)	Dynamic					false	false		WAN1_First	WAN_IP		
4	false	dyn.com (www.dyn.com)	Dynamic					false	false		WAN1_First	WAN_IP		
5	false	dyn.com (www.dyn.com)	Dynamic					false	false		WAN1_First	WAN_IP		
6	false	dyn.com (www.dyn.com)	Dynamic					false	false		WAN1_First	WAN_IP		

To configure the DDNS profile, move the mouse cursor to any entry (1 to 6) and click to open the following page.

Enable Account: ☒

WAN Interface:

Service Provider:

Service Type:

Host Name:

Domain Name:

Login Name:

Password:

Wildcards: ☐

Backup MX: ☐

Mail Extender:

Determine WAN IP:

Clear Cancel Save

These parameters are explained as follows:

Item	Description
Enable Account	Click to enable or disable the account.
WAN Interface	Select the WAN interface to monitor for IP address changes.
Service Provider	Select the DDNS provider. If your DDNS provider is not listed, select User-Defined and manually configure the profile.
Service Type	Select the service type (Custom, Dynamic, Static) that matches that of your DynDNS account.

Host Name	Enter the IP address or the domain name of the host which provides related service.
Domain Name	Select one domain name.
Login Name	Enter the login name of the DDNS account.
Password	Enter the password of the DDNS account.
Wildcard and Backup MX	The Wildcard and Backup MX (Mail Exchange) features are not supported for all Dynamic DNS providers. You could get more detailed information from their websites.
Mail Extender	If the mail server is defined with another name, please enter the name in this area. Such mail server will be used as backup mail exchange.
Determine WAN IP	There are two methods offered for you to choose: ● WAN IP – The IP address of the router's WAN interface will be used. ● Internet IP – The real public IP address will be used. Select this option if the IP address assigned to the router's WAN interface is not the actual external IP address.
Let's Encrypt certificate	Status – Display the certificate status. Auto Renew – Switch the toggle to enable the function of making the system update the certificate automatically.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.11.2 LAN DNS/DNS Forwarding

LAN DNS allows the network administrator to override standard DNS resolutions for selecting domain addresses. The router will respond to queries on matched domain addresses with custom IP addresses.

Dynamic DNS
LAN DNS / DNS Forwarding
DNS Security
Schedule
External RADIUS
Internal RADIUS
External TACACS+
Active Directory /LDAP
UPnP
IGMP
Wake on LAN/WAN
SMS / Mail Alert Service
Bonjour
High Availability
Local 802.1X General Setup

/ Configuration / Applications

Set to Factory Default

Index	Enable	Profile Name	Domain Name	DNS Server IP Address	Cname
1	false				
2	false				
3	false				
4	false				
5	false				
6	false				
7	false				
8	false				
9	false				
10	false				
11	false				
12	false				
13	false				
14	false				
15	false				
16	false				
17	false				
18	false				
19	false				
20	false				
21	false				
22	false				

To configure the profile, move the mouse cursor to any entry and click to open the following page.

Enable

☒

Profile

Type

DNS Forwarding

Domain Name

DNS Server IP Address

Clear

Cancel

Save

Or

Enable

☒

Profile

Type

LAN DNS

Domain Name

CNAME(Alias Domain Name)

IP Address List

Index	IP Address	Same Subnet Reply	Action
1		☐	+ Add

Clear

Cancel

Save

These parameters are explained as follows:

Item	Description
------	-------------

Enable	Click to enable or disable the profile.
Profile	Enter a name to identify this profile.
Type	Select LAN DNS or DNS Forwarding .
Domain Name	Enter the domain name for the router to look for in DNS queries to intercept and reply to.
DNS Server IP Address	Enter the IP address of the DNS server you want to use for DNS forwarding.
CNAME(Alias Domain Name)	Enter a domain name alias for LAN DNS.
IP Address List	
Index	Display the index number of the IP address.
IP Address	The IP address entered here will be used for mapping with the domain name specified above.
Same Subnet Reply	Click to enable or disable the function. If enabled, the router will only respond to the DNS request which coming from the same subnet of the IP address specified in this entry.
+Add	After entering the IP address, Click to save the setting and create a new entry.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

7.3.11.3 DNS Security

Domain Name System Security Extensions (DNSSEC) protects against DNS-based attacks by authenticating DNS responses from DNS resolvers.

Dynamic DNS
LAN DNS / DNS Forwarding
DNS Security
Schedule
External RADIUS
Internal RADIUS
External TACACS+
Active Directory / LDAP
UPnP
ICMP
Wake on LAN
SMS / Mail Alert Service
Bonjour
High Availability
Local 802.1X General Setup

General Setup

Index	Interface	Enable	Primary DNS	Secondary DNS	Bogus DNS Reply
1	WAN1	false	0.0.0.0	0.0.0.0	Pass
2	WAN2	false	0.0.0.0	0.0.0.0	Pass
3	WAN3	false	0.0.0.0	0.0.0.0	Pass
4	WAN4	false	0.0.0.0	0.0.0.0	Pass
5	WAN5	false	0.0.0.0	0.0.0.0	Pass
6	WAN6	false	0.0.0.0	0.0.0.0	Pass

Domain Diagnosis

Domain

Domain Type

IPv4 IPv6

Interface

WAN1

DNS Server

Diagnose

Domain Name	IP Address	Interface	Verify Result
-------------	------------	-----------	---------------

These parameters are explained as follows:

Item	Description
General Setup	
Index	Display the index number of the WAN interface.
Interface	Display the WAN interface name for which DNS security is to be configured.
Enable	Display if the DNS security is enabled (true) or disabled (false).
Primary DNS	Display the primary DNS server IP address in effect for this WAN.
Secondary DNS	Display the secondary DNS server IP address in effect for this WAN.
Bogus DNS Reply	Display the action to be taken for DNS responses that fail authentication. Pass – Pass DNS result. Drop – Do not pass DNS result.
Domain Diagnosis	
Domain	Enter domain address to be diagnosed.
Domain Type	Select the type of IP address to be looked up. ☐ IPv4 ☐ IPv6
Interface	Select the WAN port to be used for the lookup.
DNS Service	Enter the IPv4 / IPv6 address of the DNS server to be used for the lookup.
Diagnose	Click to begin DNS lookup.

To configure the profile, move the mouse cursor to any index entry and click to open the following page.

The screenshot shows a web interface titled "2865ac_001DAA000000 / Configuration / Applications". The "General Setup" section is active. It contains three main settings:

- Enable:** A toggle switch is turned on (green).
- Interface:** A dropdown menu shows "WAN1".
- Bogus DNS Reply:** A dropdown menu is open, showing three options: "Pass" (selected and highlighted in blue), "Drop", and "Pass".

At the bottom right of the configuration area, there are two buttons: "Cancel" and "Save".

9.4.11.4 Schedule

Time schedules can be created and used with router features that support them, so that those features can be turned on and off automatically at preconfigured times.

LAN DNS / DNS Forwarding	Index	Enable	Comment	Time	Frequency
DNS Security	1	false		00:00 00:00	Sun
Schedule	2	false		00:00 00:00	Sun
External RADIUS	3	false		00:00 00:00	Sun
Internal RADIUS	4	false		00:00 00:00	Sun
External TACACS+	5	false		00:00 00:00	Sun
Active Directory /LDAP	6	false		00:00 00:00	Sun
UPnP	7	false		00:00 00:00	Sun
IGMP	8	false		00:00 00:00	Sun
Wake on LAN	9	false		00:00 00:00	Sun
SMS / Mail Alert Service	10	false		00:00 00:00	Sun
Bonjour	11	false		00:00 00:00	Sun
High Availability	12	false		00:00 00:00	Sun
Local BOD TX General Setup	13	false		00:00 00:00	Sun
	14	false		00:00 00:00	Sun
	15	false		00:00 00:00	Sun

To configure the schedule profile, move the mouse cursor to any entry (1 to 15) and click to open the following page.

Enable

Comment

Start Date (yyyy-mm-dd)

Start Time (hh:mm)

Duration Time (hh:mm)

End Time (hh:mm)

Action

How Often

Weekdays

Note:

Comment can only contain A-Z a-z 0-9 , . { } - _ () ^ \$! ~ ' |

Clear

Cancel

Save

These parameters are explained as follows:

Item	Description
Enable	Click to enable or disable the schedule profile.
Comment	Enter a name to identify this schedule entry.
Start Date	Select the date when the entry comes into effect.

Start Time	Select the time when the schedule is triggered.
Duration Time	Select how long the action lasts when the scheduled is triggered.
End Time	It will be calculated automatically when Start Time and Duration Time are configured well.
Action	Specify the action to take when the schedule is triggered. Force On – The feature with which this schedule is associated will be turned on. Force Down – The feature with which this schedule is associated will be turned off.
How Often	Specify how frequently the schedule is triggered. ● Once – The schedule is triggered once, on the Start Date at the Start Time, for the Duration Time. ● Weekdays – The schedule will be triggered repeatedly, starting on the Start Date at the Start Time, on the selected days of the week, at the Start Time, for the Duration Time. ● Monthly, on date – The router will only execute the action applied such schedule on the date (1 to 28) of a month. ● Cycle duration – Type a number as cycle duration. Then, any action applied such schedule will be executed per several days. For example, "3" is selected as cycle duration. That means, the action applied such schedule will be executed every three days since the date defined on the Start Date.
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.11.5 External RADIUS

Select External RADIUS to configure the router to use an external RADIUS server for user authentication.

LAN DNS / DNS Forwarding
DNS Security
Schedule
External RADIUS
Internal RADIUS
External TACACS+
Active Directory /LDAP
UPnP
IGMP
Wake on LAN/WAN
SMS / Mail Alert Service
Bonjour
High Availability
Local 802.1X General Setup

Primary Server

Enable ☒

Enable Accounting ☐

Comments

RADIUS Request Interval

Primary Server

Secret

Authentication Port

Retry

Secondary Server

Secondary Server

Secret

Authentication Port

[Save](#)

These parameters are explained as follows:

Item	Description
Primary Server	
Enable	Click to enable or disable the server settings.
Enable Accounting	Click to enable or disable the accounting. RADIUS Accounting is a network customer billing mechanism for RADIUS server. If enabled, Vigor router will deliver accounting request (e.g., IP address, traffic from the client) to the specified RADIUS server periodically. Accounting Port – Set the UDP port number (1813 in default) as the accounting port. Disconnect Message Port – Set a UDP port number (3799 in default) for receiving the disconnected-request packets from the AAA server. Note that these packets have been accepted by the RADIUS server before being disconnected by the AAA server. Interim Update Interval – Set a value (10 minutes in default). It indicates the time between each transmittal of an interim update for a specific session.
Comments	Enter a brief description for this profile.
RADIUS Request	Set a timeout value for the router waiting for a response from the

Interval	RADIUS server. If no response, Vigor router will send the authentication request again.
Primary Server	Enter the IP address of RADIUS server.
Secret	The RADIUS server and client share a secret that is used to authenticate the messages sent between them. Both sides must be configured to use the same shared secret.
Authentication Port	Enter the UDP port number that the RADIUS server is using.
Retry	Set the number of attempts to perform reconnection with RADIUS server.
Secondary Server	
Secondary Server	Enter the IP address of RADIUS server.
Secret	The RADIUS server and client share a secret that is used to authenticate the messages sent between them. Both sides must be configured to use the same shared secret.
Authentication Port	Enter the UDP port number that the RADIUS server is using.
Retry	Set the number of attempts to perform reconnection with RADIUS server.
Clear	Clear all modifications on this page.
Save	Save the current settings and return to previous page.

9.4.11.6 Internal RADIUS

The built-in RADIUS client feature enables the router to assist the remote dial-in user or a wireless station and the RADIUS server in performing mutual authentication.

These parameters are explained as follows:

Item	Description
General Setup	
Enable	Click to enable or disable the internal RADIUS server settings.
Authentication Port	Enter the UDP port for authentication messages.
Authentication Method	Specify the way to authenticate the wireless client. - PAP only - PAP/CHAP/MS-CHAP/MS-CHAPv2
Support 802.1X Method	Click to enable or disable the Support 802.1X Method function. - EAP_TTLS/PAP - EAP_TTLS/MSCHAP - EAP_TTLS/MSCHAPv2 - EAP_PEAP/MSCHAPv2
Authentication List	Use the drop down list to choose the use profile.
Synchronize Internal RADIUS user list to Local 802.1X user list	Users can be authenticated by RADIUS server and local 802.1X to get certain network service. It is not necessary to create new user profiles (containing user accounts and user passwords) for RADIUS and local 802.1X respectively. Simply select to update the 802.1X authentication list to match the RADIUS authentication list.

Save	Save the current settings
RADIUS Client Access List	
Client Access Enable	Display the status (true or false) of the client entry. Only clients that meet the criteria configured in the access list are allowed to access the RADIUS server.
Client Access Shared Secret	Display the text string that is known to both the router's RADIUS server and the RADIUS client that is used to authenticate messages sent between them.
Client Access IP Address	Display the base address of the IP block.
Client Access IP Mask	Display the IP mask to configure the size of the IP block.
Client Access IPv6 Address	Display the base address of the IPv6 block.

To configure the profile, move the mouse cursor to any entry (1 to 10) and click to open the following page.

These parameters are explained as follows:

Item	Description
Enable	Click to enable / disable the profile.
Shared Secret	Enter a text string. It is known to both the router's RADIUS server and the RADIUS client that is used to authenticate messages sent between them.
IP Address	Enter the base address of the IP block.
IP Mask	Enter the IP mask to configure the size of the IP block.
IPv6 Address	Enter the base address of the IPv6 block.
IPv6 Length	Enter the prefix length of the IPv6 block.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.11.7 External TACACS+

It means Terminal Access Controller Access-Control System Plus. It works like RADIUS does.

The screenshot shows the 'External TACACS+' configuration page. The left sidebar lists various system settings, with 'External TACACS+' highlighted. The main panel is divided into two sections: 'Primary Server' and 'Secondary Server'. The 'Primary Server' section includes an 'Enable' toggle (currently turned on), a 'Server IP Address' field (0.0.0.0), a 'Destination Port' field (49), a 'Type' dropdown (ASCII), and a 'Shared Secret' text field. The 'Secondary Server' section has identical fields. At the bottom of the panel, there are 'Clear' and 'Save' buttons.

These parameters are explained as follows:

Item	Description
Enable	Click to enable / disable the external TACACS+ server settings.
Server IP Address	Enter the IP address of the TACACS+ server.
Destination Port	Enter a port number used by the TACACS+ server. Port 49 is most common.
Shared Secret	Enter a text string. It is known to both the TACACS+ server and client (the router) that is used to authenticate messages sent between them. Maximum length is 36 characters.
Clear	Clear all modifications on this page.
Save	Save the current settings.

9.4.11.8 Active Directory/LDAP

Lightweight Directory Access Protocol (LDAP) is an industry-standard protocol for maintaining and accessing directory information on a network. When used in conjunction with a Vigor router, LDAP can be used to authenticate VPN connection attempts.


The screenshot shows the 'Active Directory / LDAP' configuration page. On the left is a sidebar with navigation links: LAN DNS / DNS Forwarding, DNS Security, Schedule, External RADIUS, Internal RADIUS, External TACACS+, Active Directory / LDAP (highlighted), UPnP, IGMP, Wake on LAN/WAN, SMS / Mail Alert Service, Bonjour, High Availability, and Local 802.1X General Setup. The main content area is titled 'General Setup' and contains several configuration options: 'Enable' with a green toggle switch, 'Bind Type' with a dropdown menu showing 'Simple Mode', 'Server Address' with a text input field containing 'IPv4 format (EX: 123.12.1.1)', 'Destination Port' with a text input field containing '389', and 'Use SSL' with a grey toggle switch. Below these is a section for 'Active Directory / LDAP Profiles' which includes a table with 6 columns: Index, Name, Common Name Identifier, Distinguished Name, Additional Filter, and Group Distinguished Name. The table has 8 rows, with the first row containing the index '1' and the others being empty. A green 'Save' button is located in the top right corner of the configuration area.

These parameters are explained as follows:

Item	Description
General Setup	
Enable	Click to enable / disable the AD/LDAP function.
Bind Type	Select from one of 3 bind types: ● Simple Mode – Initiate bind operation (authentication) without performing user search. ● Anonymous – Bind anonymously, without supplying the distinguished name (DN) and password, and perform user search. ● Regular Mode – Same as Anonymous mode, except that the DN and password are sent to the server.
Server Address	Enter the network address of the LDAP server.
Destination Port	Enter a network port that the LDAP server listens on. The default ports are 389 for unsecured connections and 636 for LDAPS (LDAP over SSL) connections.
Use SSL	Click to enable or disable SSL. If enabled, the router will use Secure Sockets Layer (SSL) for LDAP traffic.

Regular DN	Enter the LDAP Distinguished Name for authentication if Bind Type is set to Regular Mode .
Regular Password	Enter the LDAP Password for authentication if Bind Type is set to Regular Mode .
Save	Save the current settings.
Active Directory / LDAP Profiles	
Index	Display the index number of the profile. Up to 8 LDAP profiles can be configured.
Name	Display the user-defined name that identifies this entry.
Distinguished Name	Display the distinguished name (DN) configured in the profile.

To configure the profile, move the mouse cursor to any entry (1 to 8) and click to open the following page.

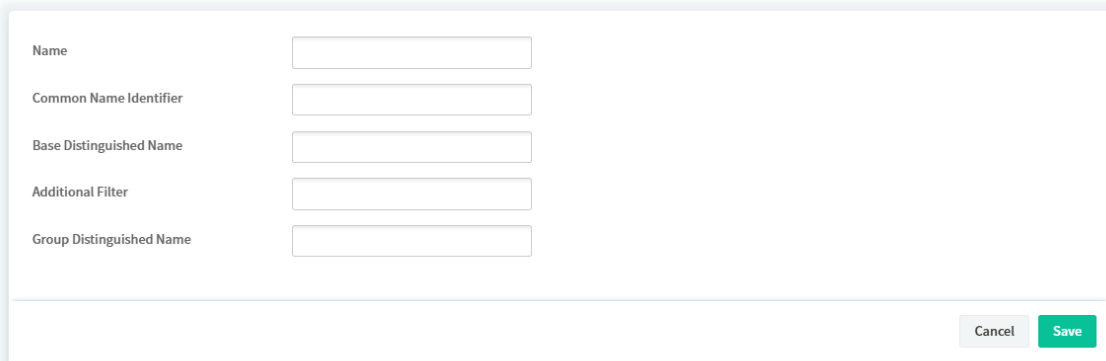

The screenshot shows a configuration window with the following fields:

- Name:
- Common Name Identifier:
- Base Distinguished Name:
- Additional Filter:
- Group Distinguished Name:

Buttons: Cancel Save

These parameters are explained as follows:

Item	Description
Name	Enter a name that identifies this profile.
Common Name Identifier	Enter a common name attribute, which is typically "cn" in most LDAP configurations.
Base Distinguished Name	Enter a starting point of user search in the LDAP directory, for example, dc=draytek,dc=com.
Additional Filter	Additional filter to be applied to the search request to identify eligible users. For example, – "OpenLDAP: (gidNumber=500)"
Group Distinguished Name	The base DN of the tree in the LDAP directory that contains groups, for example, ou=groups,dc=draytek,dc=com.
Cancel	Discard current modification and return to previous page.

Save	Save the current settings and return to previous page.
-------------	--

9.4.11.9 UPnP

The Vigor supports UPnP (Universal Plug and Play), which is a suite of network protocols that simplifies network configuration.

These parameters are explained as follows:

Item	Description
Enable UPnP Service	Click to enable or disable the UPnP function.
WAN Interface	Select the WAN port on which ports will be opened in response to UPnP commands.
Enable Connection Control Service	Click to enable or disable the connection control service.
Enable Connection Status Service	Click to enable or disable the connection status service.
Clear	Clear all modifications on this page.
Save	Save the current settings.

9.4.11.10 IGMP

Internet Group Management Protocol (IGMP) is an IPv4 communication protocol for establishing multicast group memberships.

These parameters are explained as follows:

Item	Description
IGMP Proxy	Click to enable or disable the IGMP proxy settings.
Interface	Select an interface for packets passing through.
IGMP version	At present, two versions (v2 and v3) are supported by Vigor router. Choose the correct version based on the IPTV service you subscribe. Or choose Auto.
General Query Interval (seconds)	Set a suitable time (unit: second) as the query interval to limit the frequency of query sent by Vigor router.
Add PPP header	Click to enable or disable the function. If you have no idea to enable or disable, simply contact your ISP providers.
Enable IGMP syslog	Click to enable or disable the function. If enabled, the router will store the IGMP status onto Syslog.
Enable IGMP Snooping	If enabled, the following option shall be configured. Enable IGMP Fast Leave - If enabled, multicast for a group is immediately terminated when the last host in that group sends a "leave" message.
Save	Save the current settings.
Working group	
Group ID	Display the ID port of the multicast group, which is within the IP range reserved for IGMP, 224.0.0.0 through 239.255.255.254.

P1-PX	Display the LAN ports that have IGMP hosts joined to this multicast group.
--------------	--

9.4.11.11 Wake on LAN / WAN

If you wish to be able to select the IP address of the Wake-on-LAN client, its MAC address must first be bound to a static IP address using the Bind IP to MAC function.

These parameters are explained as follows:

Item	Description
Wake on LAN	
Wake by	To wake up the binded IP, MAC Address - Enter the correct MAC address of the host in MAC Address boxes.
MAC Address	Enter any one of the MAC addresses of the bound PCs.
Wake Up	Click to wake up the selected device.
Result	Display the result of WOL execution.
Wake on WAN	
Enable Wake on WAN	Click to enable or disable the function.
Wake on WAN Type	Set the path for the boot packet (sent by a mobile phone) to deliver to the remote device. Any WAN IP - Any WAN IP can be used as a path for waking the remote device. Access List - Enter the WAN IP address with the subnet mask. Later,

	use your mobile phone (installing an APP for sending the boot packets first) to connect to the Vigor router network. The boot packets will be transferred to the remote device via any WAN IP or the IP listed on Access List.
Save	Save the current settings.

9.4.11.12 SMS/Mail Alert Service

The function of SMS (Short Message Service)/Mail Alert is that Vigor router sends a message to user's mobile or e-mail box through specified service provider to assist the user knowing the real-time abnormal situations.

The screenshot shows the configuration page for SMS and Mail Alerts. On the left is a sidebar menu with options like Dynamic DNS, LAN DNS / DNS Forwarding, DNS Security, Schedule, External RADIUS, Internal RADIUS, External TACACS+, Active Directory /LDAP, UPnP, ICMP, Wake on LAN, **SMS / Mail Alert Service**, Bonjour, High Availability, and Local 802.1X General Setup. The main area is divided into two sections: SMS Alert and Mail Alert, each with a 'Set to Factory Default' link.

SMS Alert Table:

Index	SMS Enable	SMS Provider	SMS Recipient Number	SMS Notify Profile	SMS Schedule1	SMS Schedule2
1	false	1-Local number		1-		
2	false	1-Local number		1-		
3	false	1-Local number		1-		
4	false	1-Local number		1-		
5	false	1-Local number		1-		
6	false	1-Local number		1-		
7	false	1-Local number		1-		
8	false	1-Local number		1-		
9	false	1-Local number		1-		
10	false	1-Local number		1-		

Note: All the SMS Alert profiles share the same "Sending Interval" setting if they use the same SMS Provider.

Mail Alert Table:

Index	Mail Enable	Mail Service	Mail Address	Mail Notify Profile	Mail Schedule1	Mail Schedule2
1	false	1-Mail_Notify		1-		
2	false	1-Mail_Notify		1-		
3	false	1-Mail_Notify		1-		
4	false	1-Mail_Notify		1-		
5	false	1-Mail_Notify		1-		
6	false	1-Mail_Notify		1-		
7	false	1-Mail_Notify		1-		
8	false	1-Mail_Notify		1-		
9	false	1-Mail_Notify		1-		

These parameters are explained as follows:

Item	Description
SMS Alert	It allows you to specify SMS provider, who will get the SMS, what the content is and when the SMS will be sent.
Mail Alert	It allows you to specify Mail Server profile, who will get the notification e-mail, what the content is and when the message will be sent.

To configure the SMS alert profile, move the mouse cursor to any entry (1 to 10) and click to open the following page.

These parameters are explained as follows:

Item	Description
Enable	Click to enable or disable the SMS alert profile.
SMS Provider	Use the drop down list to choose SMS service provider.
Recipient Number	Enter the phone number of the one who will receive the SMS.
Notify Profile	Use the drop down list to choose a message profile. The recipient will get the content stated in the message profile.
Schedule 1 / 2	Enter the schedule number that the SMS will be sent out.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

To configure the mail alert profile, move the mouse cursor to any entry (1 to 10) and click to open the following page.


These parameters are explained as follows:

Item	Description
Enable	Click to enable or disable the mail alert profile.
Mail Service	Use the drop down list to choose mail service object.
Mail Address	Enter the e-mail address of the one who will receive the notification message.
Notify Profile	Use the drop down list to choose a message profile. The recipient will

	get the content stated in the message profile.
Schedule 1 / 2	Enter the schedule number (0~15) that the notification will be sent out.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.11.13 Bonjour

Bonjour is a service discovery protocol which is a built-in service in Mac OS X; for Windows or Linux platform, there is correspondent software to enable this function for free.

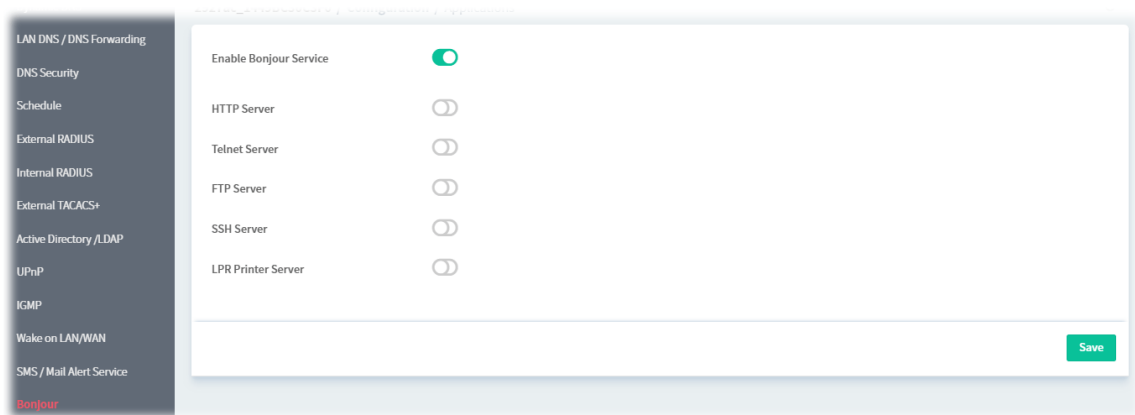

These parameters are explained as follows:

Item	Description
Enable Bonjour Service	Click to enable or disable the Bonjour service. With bonjour service enabled, Vigor router can share the service (e.g., HTTP service, Telnet service, FTP service, SSH service, LRP Printer server and etc.) to the LAN clients.
Save	Save the current settings and return to previous page.

9.4.11.14 High Availability

The High Availability (HA) feature of the router provides redundancy of network resources, and reduces downtime in case of component failure.

The screenshot shows the 'High Availability' configuration page. On the left is a sidebar with navigation links: Dynamic DNS, LAN DNS / DNS Forwarding, DNS Security, Schedule, External RADIUS, Internal RADIUS, External TACACS+, Active Directory / LDAP, UPnP, ICMP, Wake on LAN, SMS / Mail Alert Service, Bonjour, High Availability (selected), and Local B22.1X General Setup. The main content area is titled 'High Availability' and contains the following settings:

- Enable High Availability:** A toggle switch currently set to 'Off'.
- Redundancy Method:** A dropdown menu set to 'Active-Standby'.
- General Setup:**
 - Group ID:** A text input field containing '1'.
 - Priority ID:** A text input field containing '10'.
 - Authentication Key:** A text input field containing 'draytek'.
 - Protocol:** A dropdown menu set to 'IPv4'.
 - Management Interface:** A dropdown menu set to 'LAN1'.
 - Update DDNS:** A toggle switch currently set to 'Off'.
 - Syslog:** A toggle switch currently set to 'Off'.
- Config Sync:**
 - Enable Config Sync (Max. Sync to 10 routers):** A toggle switch currently set to 'Off'.
 - Day:** A dropdown menu set to '0'.
 - Hour:** A dropdown menu set to '0'.
 - Minute:** A dropdown menu set to '15'.
- WAN Settings:** A toggle switch currently set to 'On'.

A green 'Save' button is located at the bottom right of the configuration area.

These parameters are explained as follows:

Item	Description
Enable High Availability	Click to enable or disable the HA function.
Redundancy Method	Select the redundancy method (Hot-Standby or Active-Standby) for high availability.
General Setup	
Group ID	Enter a value (1~255). Each router must be specified with one group ID. Different routers with the same ID value will be categorized into the same group.
Priority ID	Enter a value (1~30). Different routers must be configured with different IDs.
Authentication Key	Enter an authentication key up to 31 characters long.
Protocol	Select the IP protocol (IPv4 or IPv6) to be used for DARP.
Management Interface	Select the interface to be used for DARP negotiation between routers.
Update DDNS	Click to enable or disable the function. If enabled, the router will update the DDNS server for the secondary device when the primary router fails.
Syslog	Click to enable or disable the function. If enabled, the router will record required information on Syslog.
Config Sync	

Enable Config Sync	Click to enable or disable the Config Sync function.
Day / Hour / Minute	The primary router will synchronize its configuration with secondary routers at every specified time interval.
WAN Settings	Click to enable or disable the WAN settings. WAN settings will be excluded when executing configuration synchronization.
Enable Config Inherit	Click to enable or disable the function. The configuration inherits will be executed only when the device (router) plays the role of the master device. Once another device with the priority ID higher than this device is ready to take over the management as the master device, after acting as the primary master for a while, this device will sync the configuration to all members in the same group and return to the role of the backup device (secondary master). Config Inherit... for () minute - Enter a value.
Time Sync	
Enable Time Sync	Click to enable or disable the function. Day / Hour / Minute - The primary router will synchronize its configuration with secondary routers at every specified time interval.
IPv4	Set IPv4 virtual IP for each LAN interface.
IPv6	Set IPv6 virtual IP for each LAN interface.
Save	Save the current settings and return to previous page.

To configure the IPv4 profile, move the mouse cursor to any entry and click to open the following page.

To configure the IPv6 profile, move the mouse cursor to any entry and click to open the following page.

9.4.11.15 Local 802.1X General Setup

It allows you to configure general settings for Local 802.1X server built in Vigor router.

LAN DNS / DNS Forwarding

DNS Security

Schedule

External RADIUS

Internal RADIUS

External TACACS+

Active Directory / LDAP

UPnP

IGMP

Wake on LAN/WAN

SMS / Mail Alert Service

Bonjour

High Availability

Local 802.1X General Setup

Enable ☒

EAP_TTLS/PAP ☐

EAP_TTLS/MSCHAP ☐

EAP_TTLS/MSCHAPv2 ☐

EAP_PEAP/MSCHAPv2 ☐

Authentication List

Sync User Profile Setting to Internal Radius ☐

Note:

- 1. Only the user profiles which is enabled in [User Management >> User Profile](#) will be listed here.

Save

These parameters are explained as follows:


Item	Description
Enable	Click to enable or disable the function.
EAP_TTLS/PAP	Click to enable or disable the EAP_TTLS/PAP server certificate.
EAP_TTLS/MSCHAP	Click to enable or disable the EAP_TTLS/MSCHAP server certificate.
EAP_TTLS/MSCHAPv2	Click to enable or disable the EAP_TTLS/MSCHAPv2 server certificate.
EAP_PEAP/MSCHAPv2	Click to enable or disable the EAP_PEAP/MSCHAPv2 server certificate.
Authentication List	Select user profiles.
Sync User Profile Settings to Internal Radius	Click to enable or disable the function. It will enable/disable setting for both Internal RADIUS and Local 802.1X synchronize for all of the user profiles.
Save	Save the current settings.

9.4.12 VPN

A Virtual Private Network (VPN) is the extension of a private network that encompasses links across shared or public networks like the Internet. In short, by VPN technology, you can send data between two computers across a shared or public network in a manner that emulates the properties of a point-to-point private link.


9.4.12.1 VPN Wizard


This page displays the VPN status related to the specified device.

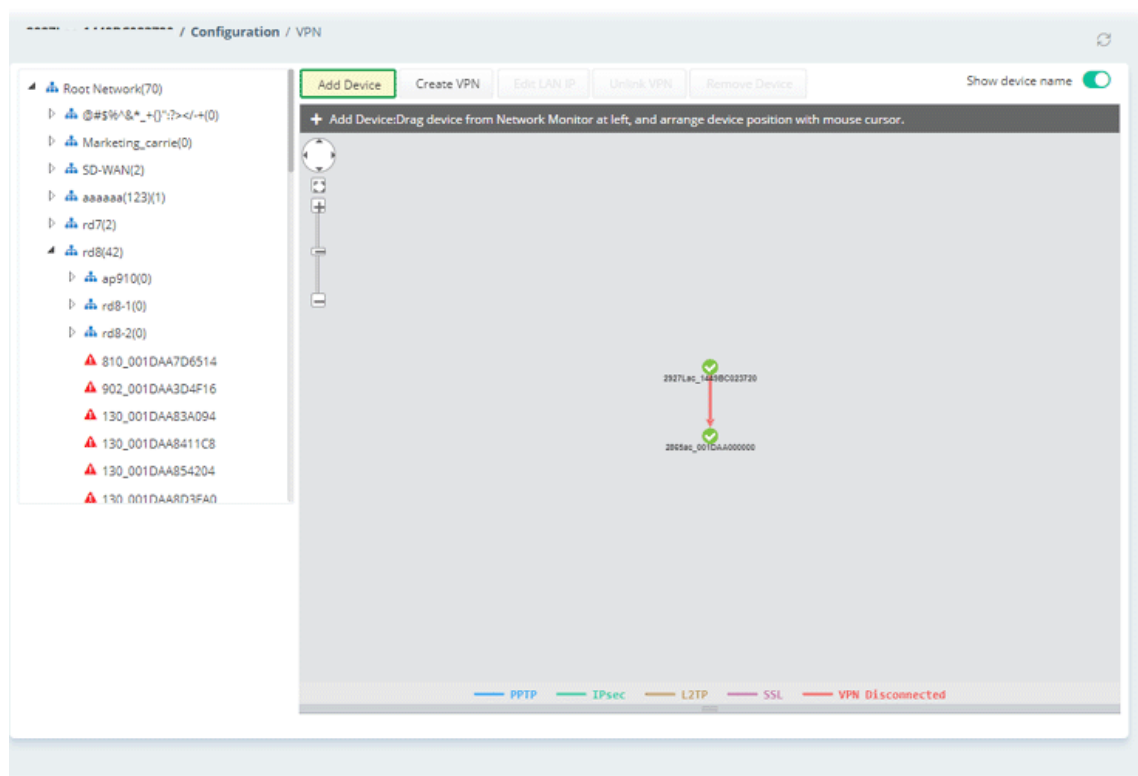

These parameters are explained as follows:

Item	Description
Add Device	Click this button to add a device for building VPN connection. If you do not click this button first, you can not drag any device from Network view.
Create VPN	To build a quick VPN connection with PPTP/IPsec/L2TP/SSL/customized settings , simply click this button and choose one of the wizards for establishing VPN. Then, drag and drop one device to another. Here we take PPTP Wizard as an example.

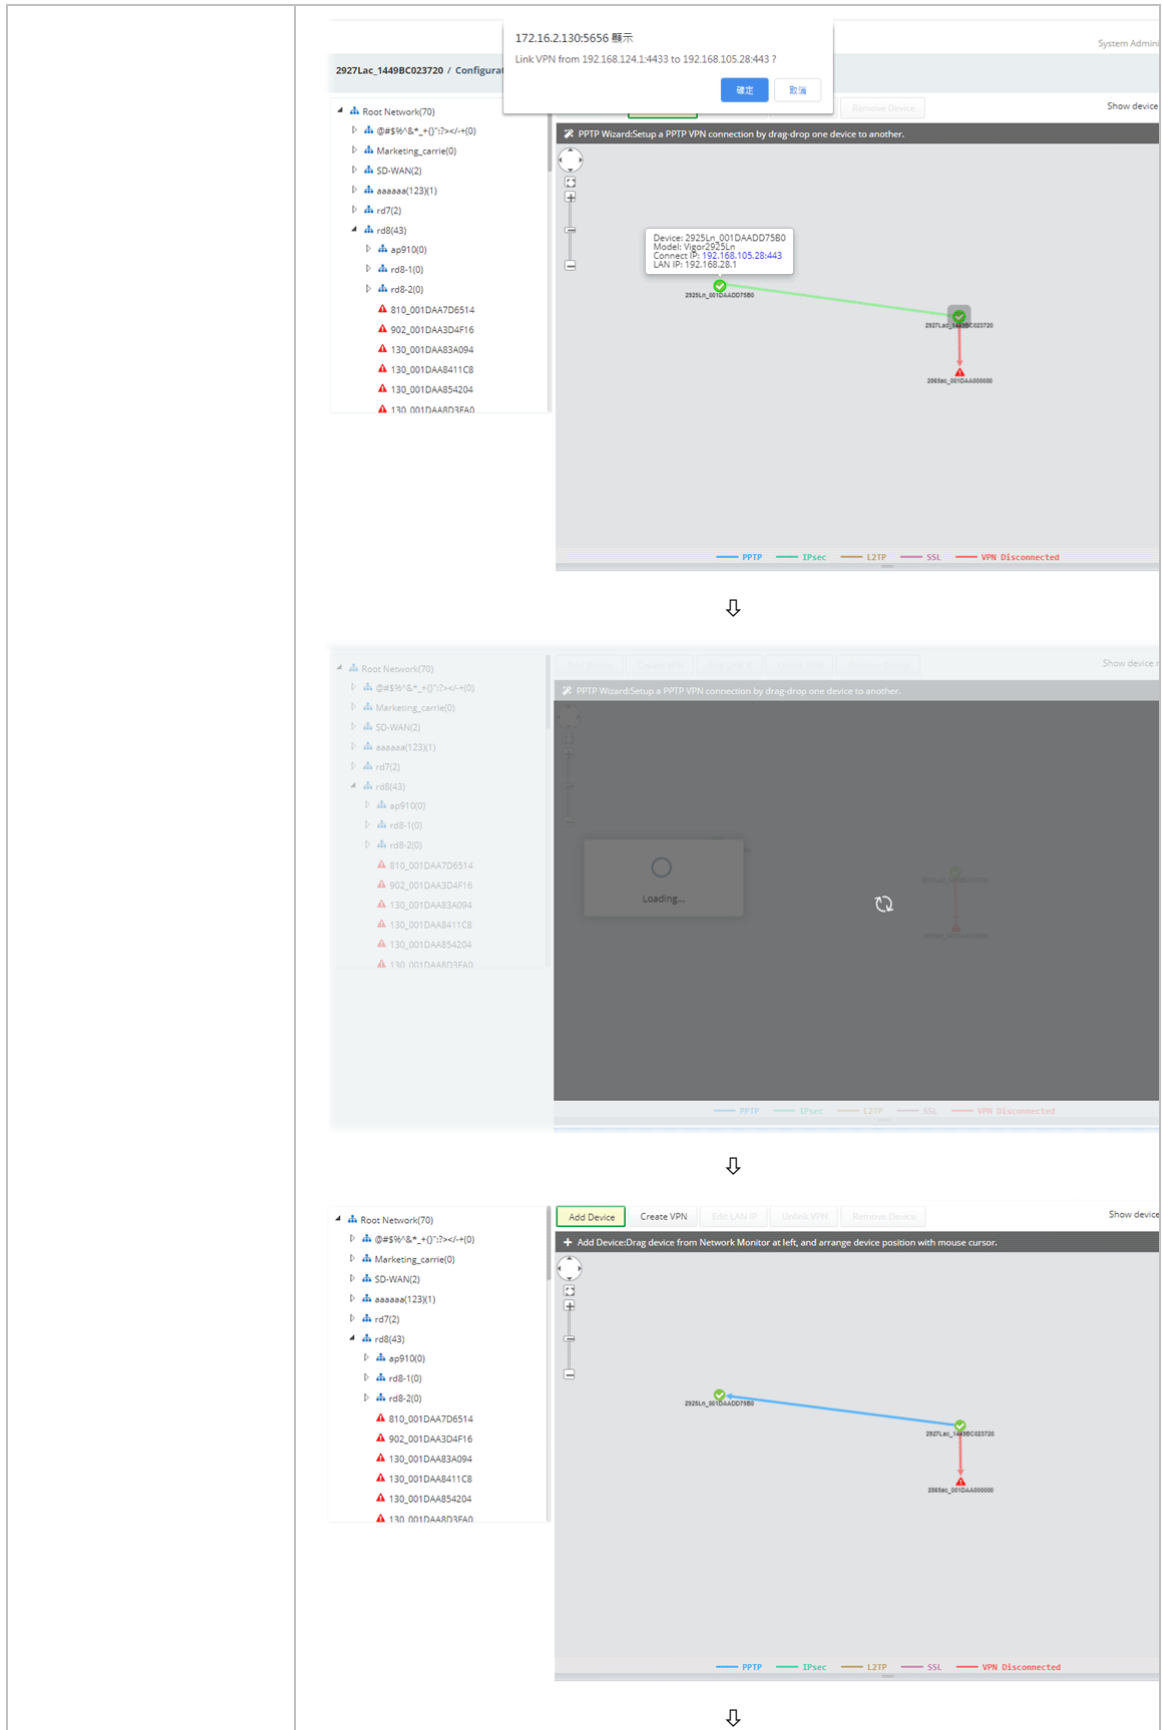

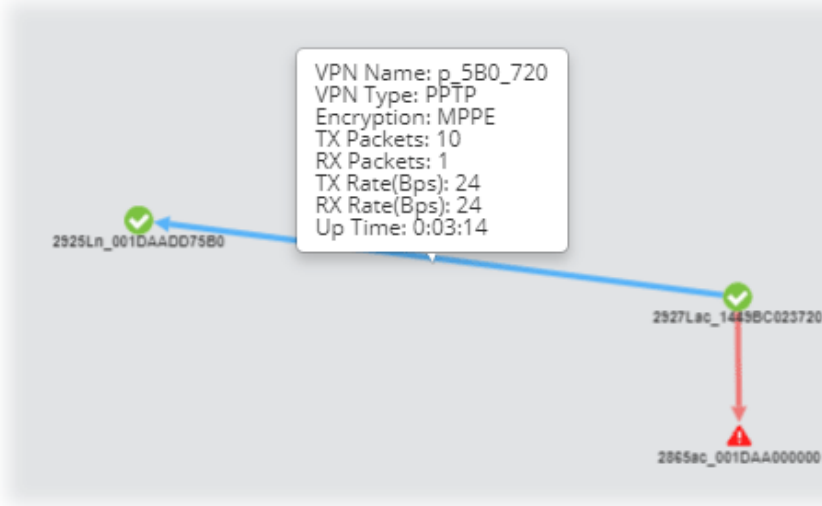	
Edit LAN IP	If there is LAN IP segment conflict in VPN connection, please select that device and click this button to change LAN IP setting.
Unlink VPN	To disconnect a VPN connection, Click this button and move the mouse cursor to the VPN connection that you want to disconnect.
Remove Device	Click to remove the selected device without VPN connection.
Show device name	Click to display / hide the name of the device.

9.4.12.2 Remote Access Control

The Vigor router supports several protocols for VPNs, all of which can be enabled or disabled independently of one another.

Remote Access Control
PPP General Setup
SSL General Setup
IPsec General Setup
IPsec Peer Identity
VPN Matcher
OpenVPN
WireGuard
Remote Dial-In User
LAN to LAN
Connection Management

Remote Access Control Setup

PPTP VPN Service Enable ☐
IPsec VPN Service Enable ☐
L2TP VPN Service Enable ☐
SSL VPN Service Enable ☐
OpenVPN Service Enable ☐
WireGuard VPN Service Enable ☐

Note:

- To allow VPN pass-through to a separate VPN server on the LAN, disable any services above that use the same protocol and ensure that NAT [Open Ports](#) or [Port Redirection](#) is also configured.
- Disable unused VPN services, enable [Brute Force Protection](#), and [Block Unknown IP Access](#) to the used VPN services to reduce Cyberattacks.

Save

Bind to WAN

WAN	PPTP VPN Service	IPsec VPN Service	L2TP VPN Service	SSL VPN Service	OpenVPN Service	WireGuard Service
	☐	☐	☐	☐	☐	☐

Save

These parameters are explained as follows:

Item	Description
PPTP VPN Service Enable	Click to enable or disable the service. If enabled, this VPN is easy to set up, has low overhead, and moderately secure.
IPsec VPN Service Enable	Click to enable or disable the service.
L2TP VPN Service Enable	Click to enable or disable the service.
SSL VPN Service Enable	Click to enable or disable the service.
OpenVPN Service Enable	Click to enable or disable the service. If enabled, this VPN offers a convenient way for users to build VPN between local end and remote end.
Enable WireGuard VPN Service	WireGuard is a secure, fast, and modern open-source VPN Protocol. This type of VPN connection is made by exchanging public keys and intends to be considerably more performant than OpenVPN.
Save	Save the current settings
Bind to WAN	
Bind to WAN	Select the WAN interfaces to accept PPTP VPN, IPsec VPN, L2TP VPN, inbound SSL VPN, OpenVPN and WireGuard connections.
Save	Save the current settings

9.4.12.3 PPP General Setup

This page allows configuration of Point-to-Point Protocol (PPP) used by PPTP and L2TP VPN connections.

Subnet	Start IP Addr	IP Pool Counts
LAN1	192.168.1.200	50
LAN2	192.168.2.200	50
LAN3	192.168.3.200	50
LAN4	192.168.4.200	50
LAN5	192.168.5.200	50
LAN6	192.168.6.200	50

These parameters are explained as follows:

Item	Description
Dial-In PPP Authentication	PAP Only - Authenticate dial-in users using the PAP protocol only. PAP/CHAP/MS-CHAP/MS-CHAPv2 - Attempt to authenticate dial-in users using various CHAP protocols, and if the remote VPN client fails to authenticate, fall back to PAP.
Dial-In PPP Encryption (MPPE)	Specifies if PPP encryption (MPPE) is to be used for dial-in VPN connections. Optional MPPE - MPPE is optional. If the VPN client supports MPPE, PPP data will be encrypted. Require MPPE (40/128bits) - Require PPP encryption for dial-in VPN connections. Both 40- and 128-bit encryption schemes are allowed. The remote dial-in user will use 40-bit to perform encryption prior to using 128-bit for encryption. In other words, if 128-bit MPPE encryption method is not available, then 40-bit encryption scheme will be applied to encrypt the data. Maximum MPPE - Require 128-bit PPP encryption for all dial-in VPN connections.
Mutual Authentication (PAP)	Specifies if mutual authentication is to be used. Some VPN peers (e.g., certain Cisco routers) require bi-directional authentication used for providing stronger security.

	When mutual authentication is enabled, Username and Password fields should also be populated using values from the VPN peer. The maximum lengths of these fields are 23 and 19 characters, respectively. Click to enable or disable the function.
IP Address Assignment for Dial-In Users when DHCP is disabled	LAN1 – When the router's DHCP server is disabled, the router will assign IP addresses to dial-in VPN users starting with the IP address specified in Start IP Address. The total number of dial-in VPN IP addresses to be given out is specified in IP Pool Counts. LAN2 ~ LAN8 and DMZ will be available if it is enabled. Refer to LAN>>General Setup for enabling the LAN interface.
PPP Authentication Methods	The credentials to be used for PPP authentication will be obtained from the selected sources, in the following order: Remote Dial-in User – The usernames and passwords in VPN and Remote Access >> Remote Dial-in User section will be used. RADIUS – An external RADIUS server is to be used for authentication. Please be sure to set up the RADIUS server in Applications >> RADIUS/TACACS+ section. AD/LDAP – An Active Directory/LDAP server is to be used for authentication. Please be sure to configure AD and LDAP settings in Applications >> Active Directory/LDAP. TACACS+ – A TACACS+ server is to be used for authentication. Please be sure to set up the RADIUS server in Applications >> RADIUS/TACACS+ section.
PPTP LDAP Profile	Configured LDAP profiles will be listed under such item. Simply check the one you want to enable the PPP authentication by LDAP server profiles. However, if there is no profile listed, simply click the link of LDAP Profile link to create/add some new LDAP profiles you want.
While using Radius or LDAP Authentication	When the dial-in VPN user is authenticated using credentials from the Remote Dial-in User section, an IP address from the LAN specified in the user profile will be assigned. When the user is authenticated using credentials from other sources (RADIUS, AD, TACACS+), the assigned IP address will be drawn from the address pool of the LAN specified here.
VPN TCP maximum segment size (MSS)	Set the maximum segment size (MSS) for different VPN types. Please specify the MSS values for each type to avoid packets cut by MTU during the data transmission period via the IPsec VPN connection.
Save	Save the current settings.

9.4.12.4 SSL General Setup

SSL VPN (Secure Sockets Layer virtual private network) is a form of VPN that encrypts traffic using SSL, which is the same technology used on secured websites. Because of SSL's prominence as an encryption protocol on the Internet, most networks have few restrictions on SSL traffic, and as a result SSL VPN is more likely to work when other VPN technologies experience difficulties due to obstacles such as firewalls and Network Address Translation (NAT).

WAN Name	WAN Bind
WAN1	☒
WAN2	☒
WAN3	☒
WAN4	☒
WAN5	☒
WAN6	☒

Port: 443

Server Certificate Default Certificate

Note:
• Server Certificate follow the Default Certificate now. Default Certificate can be configured at Certificate >> Local Services List.

Save

These parameters are explained as follows:

Item	Description
WAN	Select the WAN interfaces to accept inbound SSL VPN connections.
Port	The port to be used for SSL VPN server. The default setting is 443.
Save	Save the current settings.

9.4.12.5 IPsec General Setup

There are two phases of IPsec.

Phase 1: negotiation of IKE parameters including encryption, hash, Diffie-Hellman parameter values, and lifetime to protect the following IKE exchange, authentication of both peers using either a Pre-Shared Key or Digital Signature (x.509). The peer that starts the negotiation proposes all its policies to the remote peer and then remote peer tries to find a highest-priority match with its policies. Eventually to set up a secure tunnel for IKE Phase 2.

Phase 2: negotiation IPsec security methods including Authentication Header (AH) or Encapsulating Security Payload (ESP) for the following IKE exchange and mutual examination of the secure tunnel establishment.


These parameters are explained as follows:

Item	Description
IKE Authentication Method	
Certificate	X.509 certificates can be used for IKE authentication. To set up certificates on the router, go to the Certificate Management section.
Preferred Local ID	Specify the preferred local ID information (Alternative Subject Name First or Subject Name First) for IPsec authentication while the client is using the general setting (without a specific Peer IP or ID in the VPN profile).
General Pre-Shared Key	Define the PSK key for general authentication.
XAuth User Pre-Shared Key	Define the PSK key for IPsec XAuth authentication.
Security Method	Available methods include Basic, Medium and High. Each method offers different encryption, HMAC and DH Group. Basic – Authentication Header (AH) means data will be authenticated, but not be encrypted. By default, this option is active. Medium – When this option is selected, the Authentication Header (AH) protocol can be used to provide authentication to IPsec traffic. High – When this option is selected, the Encapsulating Security Payload (ESP) protocol can be used to provide authentication and encryption to IPsec traffic. Three encryption standards are supported for ESP: DES, 3DES and AES, in ascending order of security.
AH Enable	It is available when Basic is selected as the security method.
VPN TCP maximum	Set the maximum segment size (MSS) for different VPN types.

segment size (MSS)	Please specify the MSS values for each type to avoid packets cut by MTU during the data transmission period via the IPsec VPN connection.
Save	Save the current settings.

9.4.12.6 IPsec Peer Identity

This screen allows creating profiles of subject alternative names (SANs) and distinguished names/subject names that can be used for IPsec peer authentication in LAN-to-LAN or remote user dial-in VPN connections.

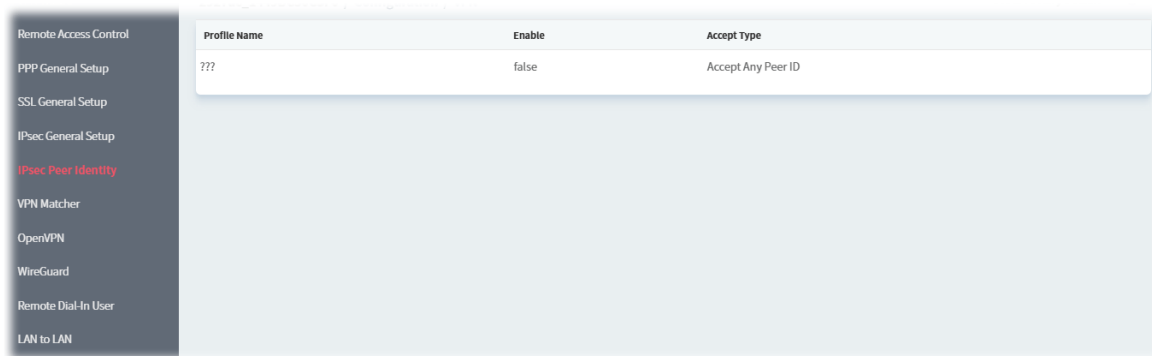

To configure the IPsec Peer Identity profile, move the mouse cursor to any entry and click to open the following page.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the profile.

Profile Name	A name that allows you to identify this profile.
Enable	Click to enable or disable the profile.
Accept Type	The router accepts the type and value of the specified subject alternative name as valid authentication. Supported subject alternative types are IP Address , Domain Name and E-Mail .
Accept Subject Name	When this option is selected, the router performs peer authentication by matching the values of the different subject name fields. These fields include Country (C) , State (ST) , Location (L) , Organization (O) , Organization Unit (OU) , Common Name (CN) , and Email (E) .
Cancel	Discard current modification and return to previous page.
Save	Save the current settings.

9.4.12.7 VPN Matcher

The VPN Matcher server can help two Draytek routers behind NAT establish a secure VPN tunnel for data transmission between each other.

These parameters are explained as follows:

Item	Description
VPN Matcher	
Enable	Click to enable or disable the function of VPN Matcher Setup.
WAN Interface	The WAN interface to be used for dialing out to establish the VPN connection. WANx First –The Router first attempts to establish the VPN tunnel using this WAN interface. When that is unsuccessful, it will attempt to

	use other WAN interfaces. WANx Only –The Router will establish the VPN tunnel using this WAN interface only.
Server IP / Server Port	The IP address of the DrayTek VPN Matcher server is defined as "vpn-matcher.draytek.com" with the port number "31503".
Router List Key	Enter the authentication key for finding a Vigor router with the same group of this device from the VPN matcher server. Then set a VPN link between Vigor routers on both ends via VPN wizard.
STUN Server	Detect - Click to check if the NAT used by Vigor router is core NAT or not. If not, no VPN can be established.
Group Device List	
Get List	After entering the Authkey above, click to get available Vigor router which is within the same group as this device.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings.

9.4.12.8 OpenVPN

9.4.12.8.1 OpenVPN Server Setup

OpenVPN requires the use of certificates. Certificates generated by the third party can be imported to your host and ready for use by Vigor router.

These parameters are explained as follows:

Item	Description
General Setup	
Enable UDP	Click to enable or disable UDP protocol for OpenVPN connections. If

	enabled, please UDP Port - Enter the UDP port number.
Enable TCP	Click to enable or disable the TCP protocol for OpenVPN connections. If enabled, please TCP Port - Enter the TCP port number.
Cipher Algorithm	Select the desired cipher algorithm.
HMAC Algorithm	Select the desired HMAC hash algorithm. It is used to validate the data integrity and authenticity of the VPN data.
Certificate Authentication	Click to enable or disable the settings. If enabled, the router can validate that the client certificate was issued by a trusted CA.
Certificates Setup	
Certificate Source	Select a source for the certificate to be used for OpenVPN. Router generated certificates - Router-generated certificates that will be used for OpenVPN. ● GENERATE - Click to generate a certificate. ● Delete all certificates - Click to remove all certificates generated by the router. Uploading certificates to Router - Third-party certificates will be used for OpenVPN. ● Trust CA - Use the dropdown list to select a trusted CA certificate that has already been uploaded to the router. To upload Trusted CA certificates to the router, click the Trust CA label and you will be taken to the Certificate Management >> Trusted CA Certificate page to perform the operation. ● Server Certificate - Use the dropdown list to select a server certificate that has already been uploaded to the router. To upload server certificates to the router, click the Server Certificate label and you will be taken to the Certificate Management >> Local Certificate page to perform the operation.
Save	Save the current settings.

9.4.12.8.2 Client Config

Create and export the configuration required for a remote OpenVPN client to connect to the router.

The screenshot shows the 'Client Config' section of the OpenVPN Server Setup. It includes a sidebar with navigation links like 'Remote Access Control', 'PPP General Setup', 'SSL General Setup', 'IPsec General Setup', 'IPsec Peer Identity', 'VPN Matcher', 'OpenVPN', 'WinGuard', 'Remote Dial-In User', 'LAN to LAN', and 'Connection Management'. The main area contains the following fields and options:

- Remote Server:** Three tabs: IP, Domain, and VPN Matcher.
- Transport Protocol:** A dropdown menu.
- Auto Dial-Out:** Enable/Disable toggle.
- Set VPN as Default Gateway:** Enable/Disable toggle.
- Cache password for auto reconnect:** Enable/Disable toggle.
- File Name:** Text input field with '.ovpn' as the default value.
- Client cert:** Text input field with '.crt' as the default value.
- Client key:** Text input field with '.key' as the default value.
- Export:** A green button to export the configuration.

A blue note box at the bottom states:

- Please make sure the Client cert and the Client key are located in the same folder with .ovpn file.
- Please make sure that WAN can be used as OpenVPN server.
- Cache password for auto reconnect.
- Enabled: Cache password in virtual memory for re-authentication to keep VPN always connected.
- Disabled: Type password manually when re-authentication is needed. VPN may disconnect during re-authentication.

These parameters are explained as follows:

Item	Description
Client Config	
Remote Server	There are three types of the remote server. IP – Use the numeric IP address as the server address. Domain – Use the domain as the server address. VPN Matcher – Use the VPN matcher as the server.
IP	If IP is selected as the remote server, enter the IP address of the server.
Domain	If Domain is selected as the remote server, enter the domain name of the server.
Transport Protocol	Select UDP or TCP for the protocol to be used by the OpenVPN client to connect to the router.
Auto Dial-Out	Enable – If selected, the remote client can auto-dial to this Vigor router to build an OpenVPN tunnel. Disable – Select to disable the function.
Set VPN as Default Gateway	Enable – If selected, the Vigor router will be treated as a "default" gateway for OpenVPN clients. The OpenVPN client will redirect all the traffic to the Vigor router via the OpenVPN tunnel. Disable – Select to disable the function.
Cache password for auto reconnect	Enable – OpenVPN will reconnect per hour. While reconnecting, the password is required. If the function is enabled, the password for OpenVPN connection will be kept and used by the Vigor system for reconnection every time. Disable – Select to disable the function.

File Name	Enter the filename of the configuration file to be downloaded from the router.
Client cert	Enter the filename of the client certificate obtained from 3rd party provider.
Client key	Enter the filename of the private key obtained from the 3rd party provider.
Export	Click to download the settings on this page as a file.

9.4.12.9 WireGuard


WireGuard is a secure, fast, simple, and modern open-source VPN Protocol. By using state-of-the-art cryptography, WireGuard can build a VPN by exchanging private and public keys between VPN servers (e.g., Vigor router) and VPN clients (e.g., WireGuard VPN Client).

These parameters are explained as follows:


Item	Description
Private Key	Display the private key generated. Generate a Key Pair - Generate keys for the VPN server.
Public Key	It is required to be configured in the WireGuard VPN client router. After clicking Generate a Key Pair, the public key and a QR code representing the public key will be shown on this page
IP Address	Enter an IP address. Vigor router's LAN IP can be used as the WireGuard interface IP.
Listen Port	Enter a port number for WireGuard VPN server. The default number is 51820.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings

9.4.12.10 Remote Dial-In User

The system administrator can manage remote access by maintaining a table of remote user profiles, so that users can be authenticated via VPN connection.

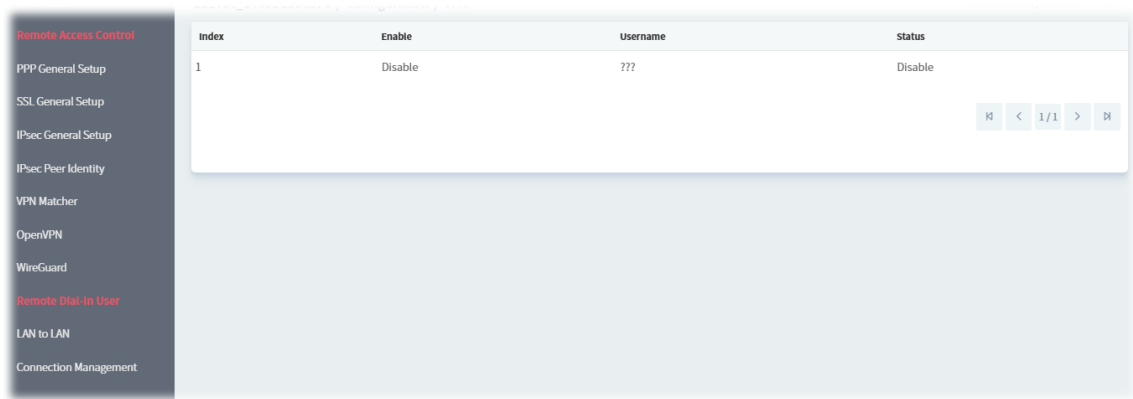

To configure the remote dial-in user profile, move the mouse cursor to any entry and click to open the following page.

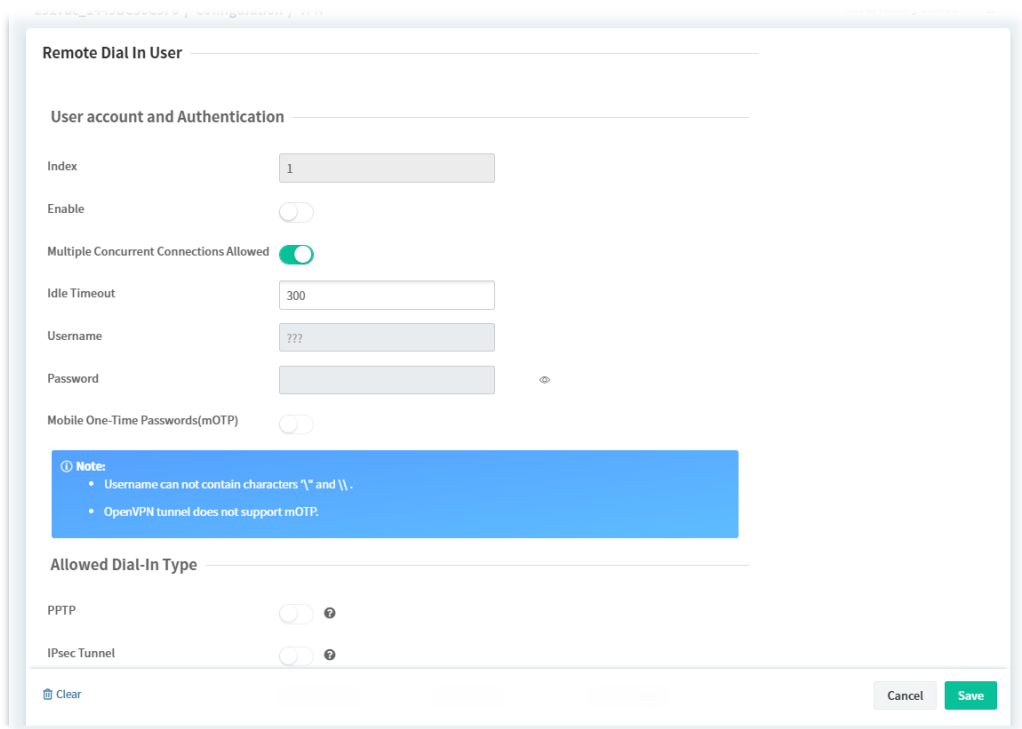

These parameters are explained as follows:


Item	Description
User account and Authentication	
Index	Display the index number of the user account profile.
Enable	Click to enable or disable the user account profile.
Idle Timeout	Set the allowed idle time before the router disconnects the VPN connection.
Username	Set a username used for PPTP, L2TP or SSL Tunnel dial-in type

Password	Set a password used for PPTP, L2TP or SSL Tunnel dial-in type
Mobile One-Time Passwords (mOTP)	Click to enable or disable one-time passwords (Mobile-OTP). If enabled, please PIN Code – Enter the code for authentication (e.g, 1234). Secret – Enter the 32 digit-secret number generated by mOTP in the mobile phone (e.g., e759bb6f0e94c7ab4fe6).
Allowed Dial-In type	
PPTP / IPsec Tunnel / L2TP / L2TP with IPsec Policy / SSL Tunnel / OpenVPN Tunnel	Click to enable (select) or disable (deselect) the PPTP / IPsec Tunnel / L2TP / L2TP with IPsec Policy / SSL Tunnel / OpenVPN Tunnel protocol.
Specify Remote Node	Click to enable or disable the function. The IP address of the remote VPN client (Remote Client IP) or the Peer ID (used in IKE aggressive mode) can be optionally specified. Remote Client IP – Enter the IP address for remote client. Or Peer ID – Enter the string for peer ID.
Netbios Naming Packet	It is available when Specify Remote Node is disabled. Specifies whether to allow NetBIOS naming packets to traverse through the VPN tunnel. ● Pass – Click it to have an inquiry for data transmission between the hosts located on both sides of VPN Tunnel while connecting. ● Block – When there is conflict occurred between the hosts on both sides of VPN Tunnel in connecting, such function can block data transmission of Netbios Naming Packet inside the tunnel.
Multicast via VPN	It is available when Specify Remote Node is disabled. Specifies whether to allow multicast packets to traverse through the VPN tunnel. ● Pass – Click this button to let multicast packets pass through the router. ● Block – This is default setting. Click this button to let multicast packets be blocked by the router.
Subnet	
Subnet	Select an interface.
Assign Static IP	Click to enable or disable the function. IP Address – Enter a static IP address.
Digital Signature(X.509)	It is available when Specify Remote Node is disabled. Click to enable or disable the authentication using X.509 Peer IDs. If

	enabled, please Digital Signature(X.509) Index - Select an X.509 profile.
IKE Authentication Method	
Enable Pre-Shared Key	It is available when Specify Remote Node is enabled. Click to enable or disable the function. If enabled, please Pre-Shared Key - Enter an IKE PSK.
Digital Signature(X.509)	Click to enable or disable the authentication using X.509 Peer IDs. If enabled, please Digital Signature(X.509) Index - Select an X.509 profile.
IPsec Security Method	
Medium(AH)	Click to enable or disable the function that data will be authenticated, but not be encrypted.
High(ESP)	The payload (data) will be encrypted and authenticated.
Local ID (optional)	Click to enable or disable the setting. Specify a local ID to be used when establishing a LAN-to-LAN VPN connection using IKE aggressive mode.
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.12.11 LAN to LAN

To create a LAN to LAN connection for the selected CPE, choose **LAN to LAN**. You can create up to 32 profiles for a CPE.

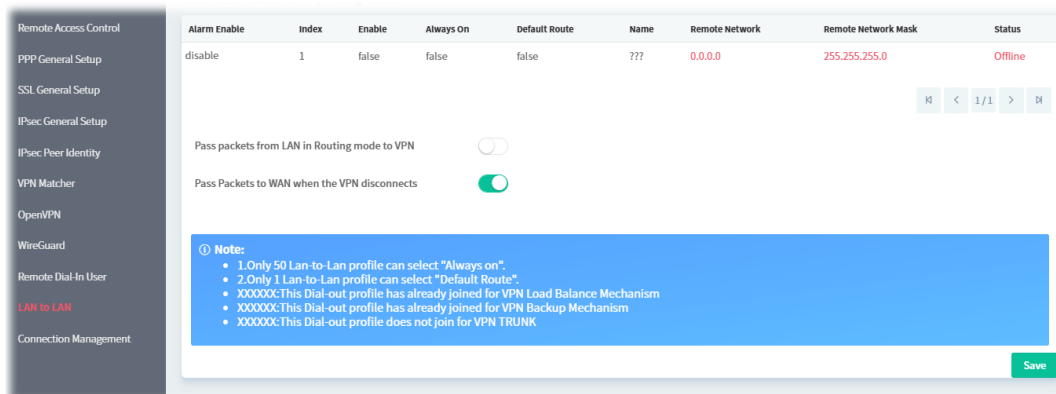

To create a new LAN to LAN profile, click the bottom one entry. To configure the LAN to LAN profile, move the mouse cursor to any entry and click to open the following page.

These parameters are explained as follows:

Item	Description
Common Settings	
Index	Display the index number of the profile.
Enable this profile	Click to enable or disable this profile.
Enable ACS Alarm	Click to enable or disable the function.
Profile Name	Enter the name of the profile.
Call Direction	Specify the allowed call direction of this LAN-to-LAN profile. ● Both ● Dial-Out ● Dial-In ● GRE Tunnel
Dial-Out Through	Select the WAN connection for connections made using this profile. This setting is useful for dial-out only.
Always On	Click to enable or disable the function to maintain an always on dial-out connection. However, if disabled, Idle Timeout – Set a value if Always On is disabled. The router will close connection if no activity is observed in the VPN connection for this many seconds.
Quality Monitoring /Keep Alive	Click to enable or disable the function.


Netbios Naming Packet	Specifies whether to allow NetBIOS naming packets to traverse through the VPN tunnel. ● Pass – Click it to have an inquiry for data transmission between the hosts located on both sides of VPN Tunnel while connecting. ● Block – When there is conflict occurred between the hosts on both sides of VPN Tunnel in connecting, such function can block data transmission of Netbios Naming Packet inside the tunnel.
Multicast via VPN	Specifies whether to allow multicast packets to traverse through the VPN tunnel. ● Pass – Click this button to let multicast packets pass through the router. ● Block – This is default setting. Click this button to let multicast packets be blocked by the router.
Dial-Out Settings	
VPN Server	Select the VPN protocol to be used.
IPsec Tunnel Type	Select IKEv1 or IKEv2.
Server IP/Host Name	Enter an IP address or DNS host name of remote VPN host.
Dial-Out Schedule Profile	Connect and disconnect according to schedule profiles. Up to four schedule profiles can be specified.
IKE Phase 1 Settings	
Mode	Select IKE phase 1 mode. Main mode is more secure than Aggressive mode since more exchanges are done in a secure channel to set up the IPsec session. ● Main Mode ● Aggressive Mode
Authentication	Select PSK (IKE Pre-shared key) or X509 (X.509 digital signature).
Pre-Shared Key	It is available when PSK is selected as Authentication. Enter the PSK.
Local ID	Enter a string.
Proposal Encryption	Select an proposal encryption mode.
Proposal ECDH Group	Select an proposal ECDH group (e.g., G14).
Proposal Authentication	Select SHA256 or SHA1 .
IKE Phase 2 Settings	
Security Protocol	Select the dial-out protocol.

	● ESP(High) ● AH(Medium)								
Proposal Encryption	Select an proposal encryption mode.								
Proposal Authentication	Select All , SHA256 , SHA1 or None .								
IKE Advanced Settings									
Phase 1 Key Lifetime	For security reason, the lifetime of key should be defined. The default value is 28800 seconds.								
Phase 2 Key Lifetime	For security reason, the lifetime of key should be defined. The default value is 3600 seconds.								
Phase 2 Network ID	In Aggressive mode, Local ID is on behalf of the IP address while identity authenticating with remote VPN server. The length of the ID is limited to 47 characters.								
Enable Perfect Forward Secret	Click to enable or disable the function. If enabled, the IKE Phase 1 key will be reused to avoid the computation complexity in phase 2.								
Ping to Keep Alive	Click to enable or disable the transmission of PING packets to a specified IP address. PING Target IP – Enter the IP address of the remote host that located at the other-end of the VPN tunnel.								
TCP/IP Network Settings									
Local Network IP / Mask	Display the local network IP and mask for TCP / IP configuration. You can modify the settings if required.								
Remote Network IP / Mask	Add a static route to direct all traffic destined to this Remote Network IP Address/Remote Network Mask through the VPN connection.								
More Remote Subnet	Add a static route to direct all traffic destined to more Remote Network IP Addresses/ Remote Network Masks through the VPN connection. More Remote Subnet <table><thead><tr><th>Index</th><th>Network IP</th><th>Netmask</th><th>Action</th></tr></thead><tbody><tr><td>1</td><td> </td><td> 0.0.0.0 / 0 </td><td> + Add </td></tr></tbody></table> Enter the IP address and the mask address. Click +Add to save the settings and create a new entry.	Index	Network IP	Netmask	Action	1		0.0.0.0 / 0	+ Add
Index	Network IP	Netmask	Action						
1		0.0.0.0 / 0	+ Add						
Mode	If the remote network only allows one IP address for the local network, select NAT; otherwise, select Routing. ● Routing ● NAT								

RIP via VPN	Specifies the direction of Routing Information Protocol (RIP) packets.																
Translate Local Network	It is available when Routing is selected as Mode. Click to enable or disable the function. This is usually used when you find there are several subnets behind the remote VPN router. If enabled, the function of Change Default Route to this VPN tunnel will be disabled. And please configure the following options. Type - There are two types (Translate Whole Subnet, Translate Specific IP) for you to choose. For Translate Whole Subnet; ● Local Subnet - Select the LAN whose IP addresses are to be translated. ● Translated IP - Specify an IP address. ● More Local Subnet - Add more subnets. More Local Subnet <table><thead><tr><th>Index</th><th>Translated To</th><th>Local Network</th><th>Action</th></tr></thead><tbody><tr><td>1</td><td> </td><td>LAN1 ▼</td><td>+ Add</td></tr></tbody></table> For Translate Specific IP, ● Virtual IP Mapping - Specify the local IP address and the mapping virtual IP address. Virtual IP Mapping <table><thead><tr><th>Index</th><th>Local IP</th><th>Virtual IP</th><th>Action</th></tr></thead><tbody><tr><td>1</td><td> </td><td> </td><td>+ Add</td></tr></tbody></table>	Index	Translated To	Local Network	Action	1		LAN1 ▼	+ Add	Index	Local IP	Virtual IP	Action	1			+ Add
Index	Translated To	Local Network	Action														
1		LAN1 ▼	+ Add														
Index	Local IP	Virtual IP	Action														
1			+ Add														
Change Default Route to this VPN	Click to enable or disable this option . Select this option to direct all traffic that is not LAN-bound to this VPN tunnel.																
Clear	Clear all modifications on this page.																
Cancel	Discard current modification and return to previous page.																
Save	Save the current settings and return to previous page.																

9.4.12.12 Connection Management


You can initiate outbound LAN-to-LAN VPN sessions, and view and disconnect all current LAN-to-LAN and dial-up VPN sessions.

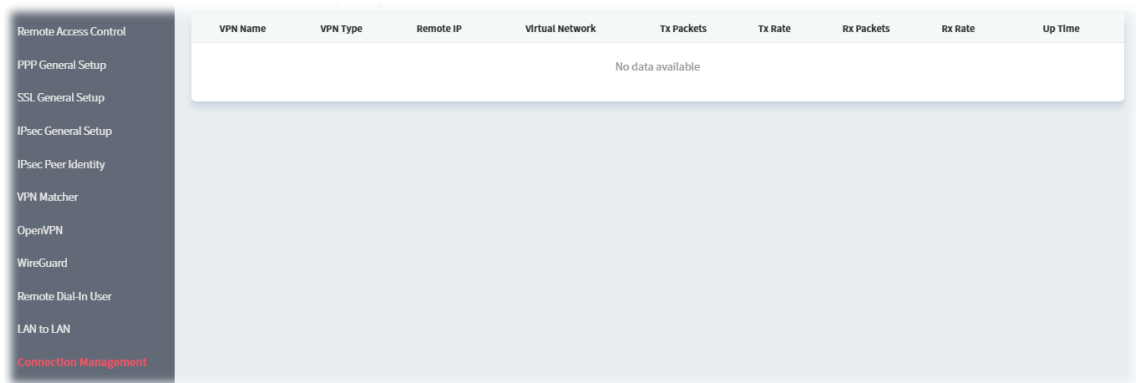

9.4.13 Mesh

9.4.13.1 Mesh Setup

Vigor router is treated as a mesh root. You can search and specify mesh nodes as members under current mesh group.

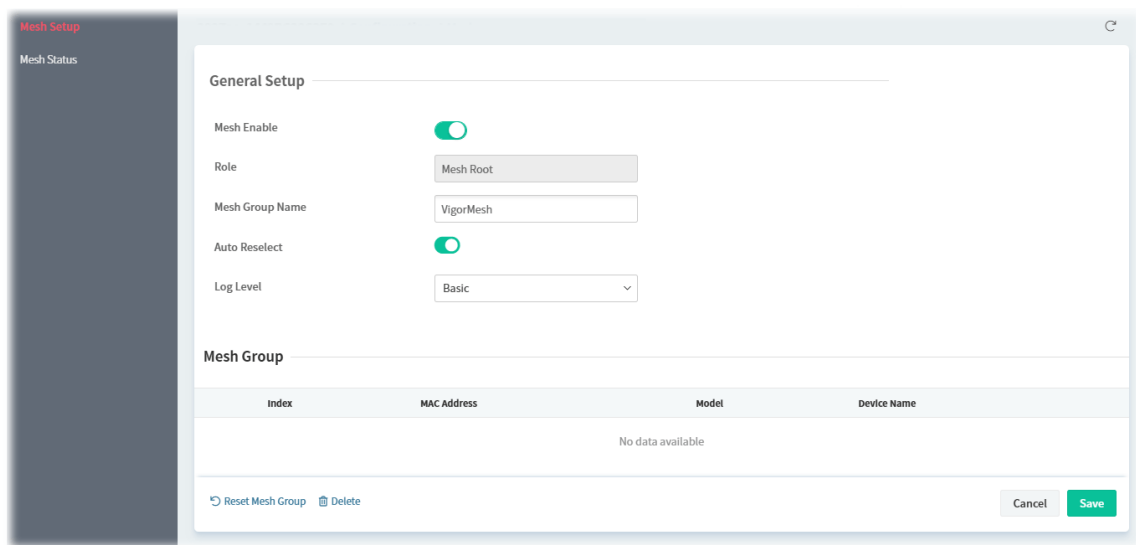


These parameters are explained as follows:

Item	Description
General Setup	
Mesh Enable	Click to enable or disable the mesh network function.
Role	Display the role of the router. For Vigor router, it is always Mesh Root.
Mesh Group Name	Display the name of the current mesh group.
Auto Reselect	Click to enable or disable the function. It is selected in default. To perform the auto reselect, make sure the


	process for CFG Sync and CFG Check for mesh nodes are successful. If enabled, after changing the environment of mesh network (e.g., offline, disconnection), the root device will perform auto reselect to reconstruct the mesh network.
Log Level	Choose Basic or Detailed .
Mesh Group	
Index, MAC Address, Model, Device Name	Basic information including MAC address, model and device name of the members in this Mesh Group will be shown in this area.
Reset Mesh Group	Click it to clear the Mesh Group information. All mesh nodes in the group will become isolated.
Cancel	Discard current modification.
Save	Save the current settings

9.4.13.2 Add Mesh Node


Before a Mesh Node is connected, it is unable to check the device status from Mesh Root. This page can help to discover all Mesh devices around and offer the Link Status and Operation Mode of each Mesh device.

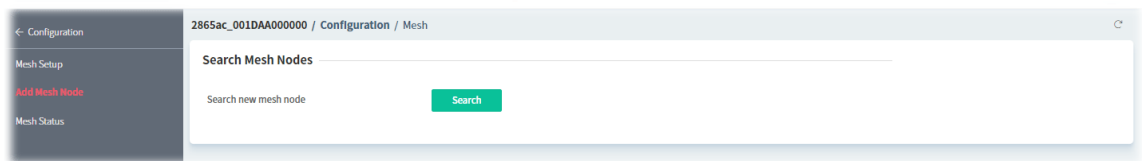


1. Click **Search**. The system will search new mesh node around.

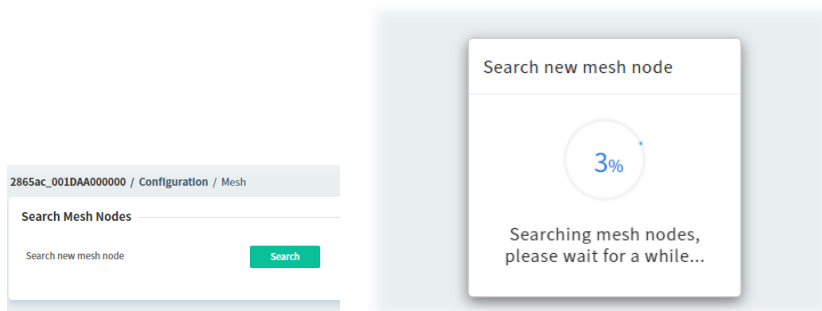


2. Available mesh nodes will be listed on this page.

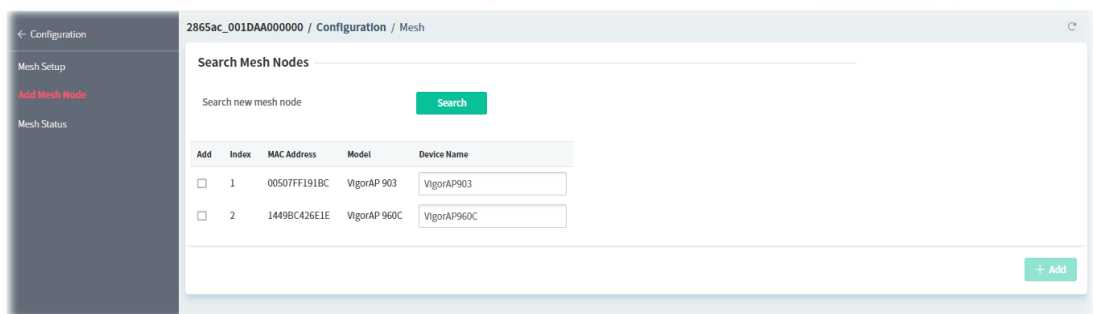


3. Select the device(s) you want to group under this mesh group and click **+Add**.

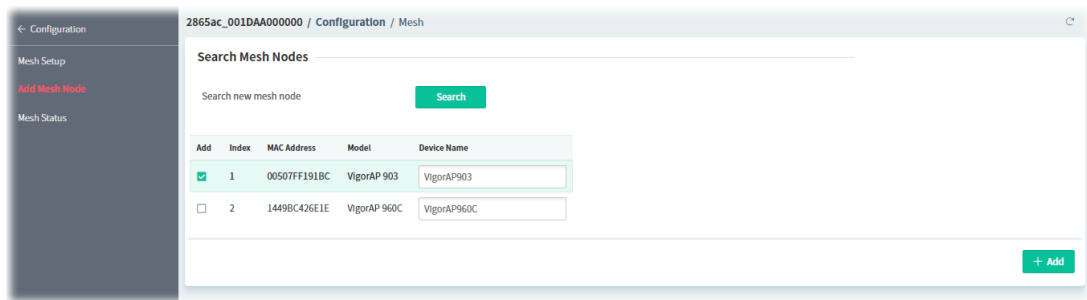

- Wait for a moment.




- Open **Configuration>>Mesh Setup**. The new mesh node will be added.

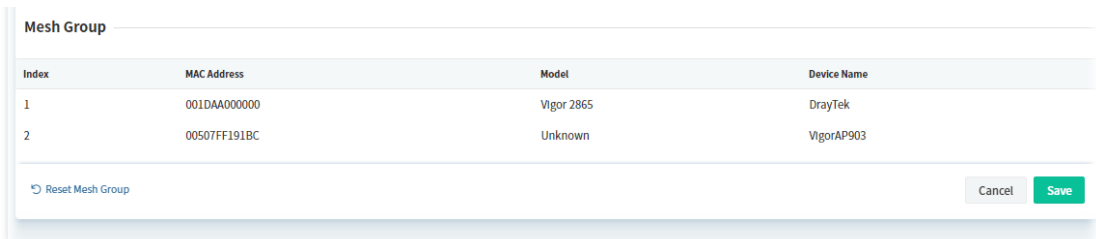

9.4.13.3 Mesh Status

This page shows the mesh status.

One Mesh Group can contain up to 8 devices. A Device with hop 0 is one special Ethernet Backhaul. It means this node will use Ethernet cable to join the mesh group while others use the wireless link.

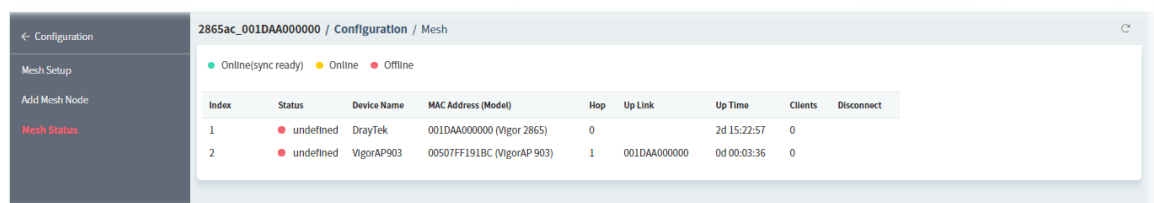

9.4.14 Wireless LAN

9.4.14.1 General

This page lets you configure the most basic settings of your wireless network, including the SSIDs, WLAN channels and bandwidth control.

2927ac_1449BC30C3F0 / Configuration / Wireless LAN

General Setup

Wireless LAN Enable ☒

Mode: Mixed(11b+11g+11n)

Channel: Channel 6, 2437MHz

Cancel Save

Index	Schedule	SSID
1	0	
2	0	
3	0	
4	0	

Note:

- Channel setting should not be changed while Wireless 2.4G WAN mode is in use.
- Isolate Member: Prevent the clients associated with this SSID from accessing each other.
- Isolate VPN: Block the wireless clients from accessing the VPN network and prevent wireless traffic being sent to VPN connections.
- Only the action "Force Down" in the Schedule Profile will be applied to WLAN, other actions will be ignored.
- When the router is in High Availability Hot Standby method and it's the Secondary Router, the wireless function will be disabled.

These parameters are explained as follows:

Item	Description
General Setup	
Wireless LAN Enable	Click to enable or disable the wireless LAN function.
Mode	Select the 802.11 mode allowed on the band.
Channel	Allows you to specify a particular wireless channel to use.
Cancel	Discard current modification.
Save	Save the current settings.
Index	Display the index number of the WLAN profile.
Schedule	Display the number of the schedule profile.

To configure the schedule profile, move the mouse cursor to any entry (1 to 4) and click to open the following page.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the schedule profile applied to the SSID.
Schedule	Select a name of the schedule profile.
SSID	Select a number of SSID.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.14.2 SSID

Set Service Set Identification (SSID), which shows up as the AP identifier.

Index	Enable	Hide SSID	SSID	Isolate Member	Isolate VPN
1	true	false	DrayTek-30C3F0	false	false
2	false	false	DrayTek_Guest	false	false
3	false	false		false	false
4	false	false		false	false

Note:

- Isolate Member: Prevent the clients associated with this SSID from accessing each other.
- Isolate VPN: Block the wireless clients from accessing the VPN network and prevent wireless traffic being sent to VPN connections.

To configure the SSID profile, move the mouse cursor to any entry (1 to 4) and click to open the following page.

2865ac_001DAA000000 / Configuration / Wireless LAN

General Setup

Index:

Hide SSID: ☒

SSID:

Advance Setup

Isolate Member: ☒


Isolate VPN: ☒

These parameters are explained as follows:

Item	Description
General Setup	
Index	Display the index number of SSIDs. There are four SSIDs.
Hide SSID	Click to enable or disable the SSID settings.
SSID	Enter or display the name of SSID.
Advance Setup	
Isolate Member	Click to enable or disable the function. If enabled, the router disallows communication between wireless clients (stations) on the same SSID.
Isolate VPN	Click to enable or disable the function. If enabled, the router blocks wireless clients (stations) from accessing VPN clients.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.14.3 Security

Every router has a default wireless password (PSK) which is provided on a label attached to the bottom of the router. For extra security, you can set your own wireless password

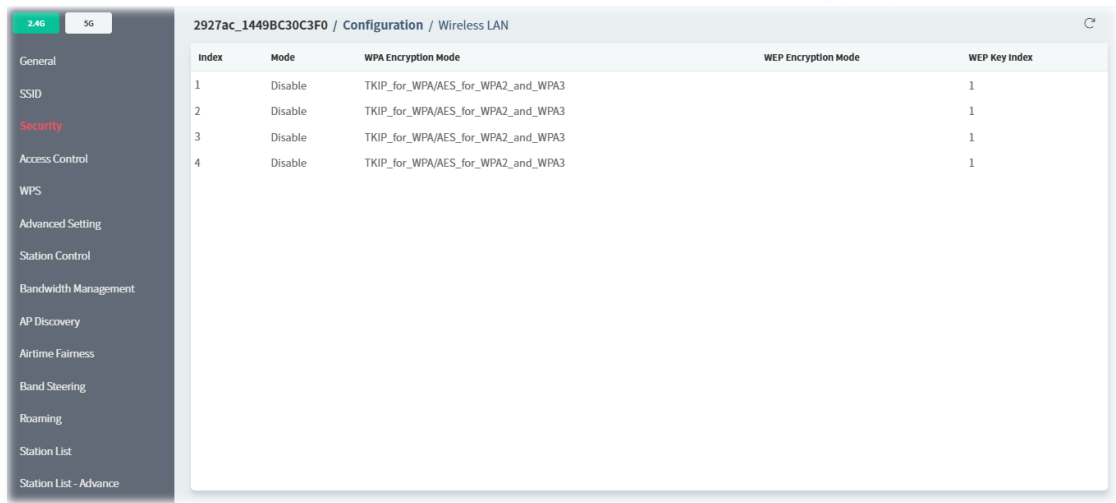

To configure security settings, move the mouse cursor to any entry (1 to 4) and click to open the following page.

These parameters are explained as follows:

Item	Description
General Setup	
Index	Display the index number of SSID1 to SSID4.
Mode	Disable - Encryption mechanism is disabled. WEP or WEP/802.1x_Only - Allows only connections from WEP clients. WPA/802.1x_Only or WPA2/802.1x_Only or Mixed(WPA+WPA2/802.1x_Only) , WPA/PSK or WPA2/PSK or Mixed(WPA+WPA2)/PSK , WPA3/SAE , Mixed(WPA2+WPA3)/SAE - Allows only connections from WPA clients.

WEP or WEP/802.1x_Only	
WEP Encryption Mode	Select 64-bit or 128-bit.
WEP Key Index	Select an index number to configure the WEP setting.
WEP Key	Enter the encryption key.
WPA/802.1x_Only or WPA2/802.1x_Only or Mixed(WPA+WPA2/802.1x_Only), WPA/PSK or WPA2/PSK or Mixed(WPA+WPA2)/PSK, WPA3/SAE, Mixed(WPA2+WPA3)/SAE	
WPA Encryption Mode	Display the encryption mode used for WPA.
WPA Pre-shared Key	Enter 8~63 ASCII characters.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.14.4 Access Control

In the Access Control web page, users may configure the **white/black** list modes used by each SSID and the MAC addresses applied to their lists.


These parameters are explained as follows:

Item	Description
General Setup	
SSID 1 Enable ~ SSID 4	Click to enable or disable the MAC filter.

Enable	
SSID 1 Policy ~ SSID 4 Policy	White List – Only allow wireless clients whose MAC addresses are listed in the MAC Address Filter list. Black List – Only allow wireless clients whose MAC addresses are not listed in the MAC Address Filter list.
Clear	Clear all modifications on this page.
Cancel	Discard current modification.
Save	Save the current settings.
MAC Address Filter List	
Index	Display the index number of entry.
MAC Address	Enter the MAC address of wireless client.
Attribute	Select to isolate the wireless client from LAN.
SSID1 ~ SSID4	Select the SSIDs to which the above MAC address filter will be applied.
Action	+Add – After entering MAC address and select SSIDs, click +Add to save the settings and create an additional setting entry.

9.4.14.5 WPS

It provides an easy way to connect wireless to wireless access points and routers with WPA or WPA2 encryption.

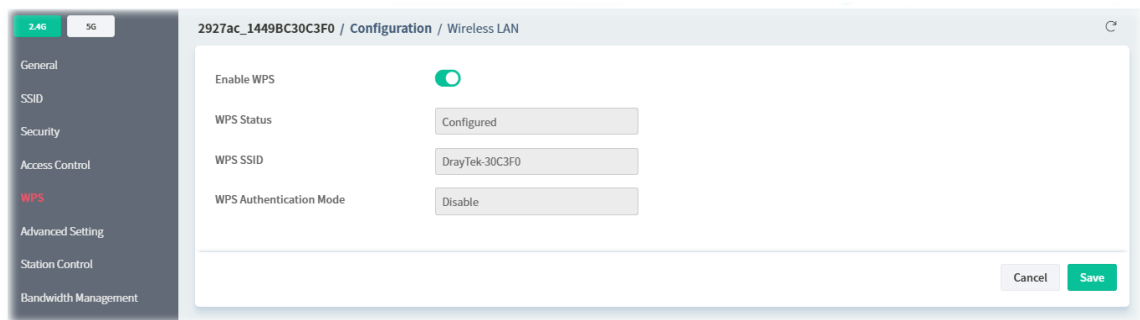

These parameters are explained as follows:

Item	Description
Enable WPS	Click to enable or disable the WPS function.
WPS Status	Display system information related to WPS. The message "Configured" means that the wireless security (encryption) function of the router is properly configured and functioning properly.
WPS SSID	Display the name of SSID1. WPS is supported on SSID1 only.
WPS Authentication Mode	Display the current authentication mode of the router.
Cancel	Discard current modification and return to previous page.

Save	Save the current settings and return to previous page.
-------------	--

9.4.14.6 Advanced Setting

This page allows you to configure advanced settings such as operation mode, channel bandwidth, guard interval, and aggregation MSDU for wireless data transmission.

The screenshot shows the 'Advanced Setting' page for the 'Wireless LAN' configuration. The left sidebar lists various settings categories, with 'Advanced Setting' highlighted. The main area displays the following settings:

- Operation Mode:** Mixed_Mode (dropdown)
- Channel Bandwidth:** 20/40 (dropdown)
- Guard Interval:** auto (dropdown)
- Aggregation MSDU(A-MSDU):** Enabled (toggle)
- Long Preamble:** Disabled (toggle)
- Packet-OVERDRIVE™ TX Burst:** Disabled (toggle)
- Antenna:** 2T2R (dropdown)
- Tx Power:** 100% (dropdown)
- WMM Capable:** Enabled (toggle)
- APSD Capable:** Disabled (toggle)
- Rate Adaptation Algorithm:** New (dropdown)
- Fragment Length:** 2346 (text input, range 256 - 2346 bytes)
- RTS Threshold:** 2347 (text input, range 1 - 2347 bytes)

At the bottom right, there are 'Cancel' and 'Save' buttons.


These parameters are explained as follows:

Item	Description
Operation Mode	Mixed_Mode - The router can transmit data using all protocols supported by 802.11a/b/g and 802.11n standards. However, all wireless transmissions will be slowed down when any 802.11g or 802.11b wireless client is connected. Green_Field - Select this mode to achieve the highest throughput. This mode supports data transmission between 802.11n systems only.
Channel Bandwidth	20 MHz - Vigor Router will utilize 20 MHz channels for data transmission and reception between the AP and wireless stations. 40 MHz - Vigor Router will utilize 40 MHz channels for data transmission and reception between the AP and wireless stations. 20/40 MHz - Vigor Router will utilize either 20 MHz or 40 MHz for data transmission and reception depending on the number of nearby wireless APs.
Guard Interval	If you choose auto as guard interval, the router will choose short guard interval (which increases wireless performance) or long guard interval for data transmit depending on the station capability.
Aggregation MSDU	Click to enable or disable the function.


	If enabled, it will combine frames of different sizes to improve performance at the MAC layer for clients from certain manufacturers.
Long Preamble	Click to enable or disable the function. This option determines the length of the sync field in an 802.11 packet.
TX Burst	Click to enable or disable the function. If enabled, this feature can enhance the performance in data transmission about 40%*.
Antenna	Vigor router can be attached with two antennas to have good data transmission via wireless connection. However, if you have only one antenna attached, please choose ITIR.
TX Power	Sets the power percentage of the access point's transmission signal. The greater the TX Power value, the higher intensity of the signal will be.
WMM Capable	Click to enable or disable the function. It provides basic Quality of Service (QoS) by prioritizing traffic based on four access categories defined in the IEEE 802.11e standard.
APSD Capable	Click to enable or disable the function. It allows access points to buffer traffic before transmitting it to wireless devices, thus allowing wireless devices to enter into power saving mode which reduces power consumption.
Rate Adaptation Algorithm	Wireless transmission rate is adapted dynamically. Usually, performance of "new" algorithm is better than "old".
Fragment Length	Set the Fragment threshold. You are advised to leave the default value, 2346.
RTS Threshold	Minimize the collision (unit is bytes) between hidden stations to improve wireless performance.
Country Code	Vigor router broadcasts country codes according to the 802.11d standard. Click Reference to get detailed information.
Isolate 2.4GHz and 5GHz bands	Click to enable or disable the function. If enabled, the wireless client using 2.4GHz band is unable to connect to the wireless client with 5GHz band, and vice versa.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.14.7 Station Control

Station Control is used to specify the duration that the wireless client can connect to the Vigor router. If this function is disabled, wireless clients can connect to the router as long as the router is powered on and the wireless feature is enabled.

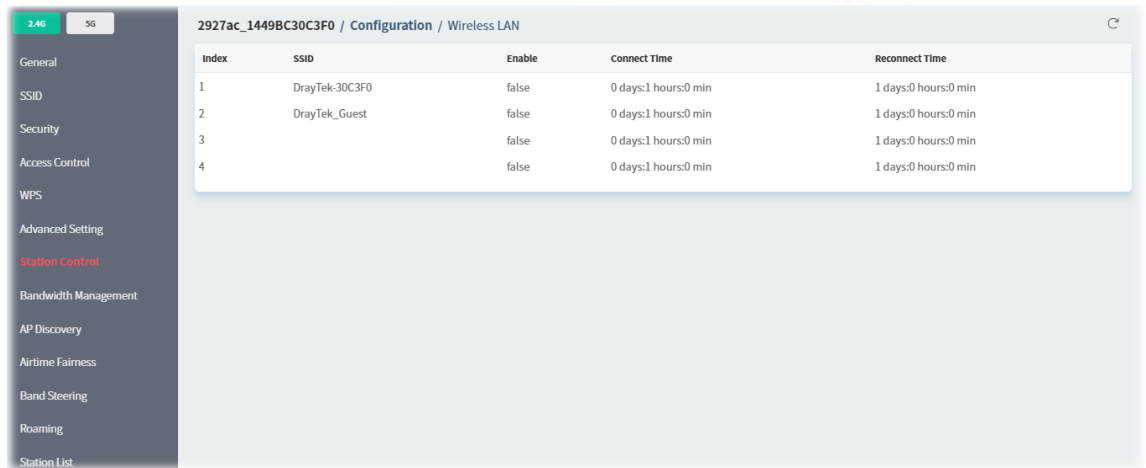

To configure the station control settings, move the mouse cursor to any entry (1 to 4) and click to open the following page.

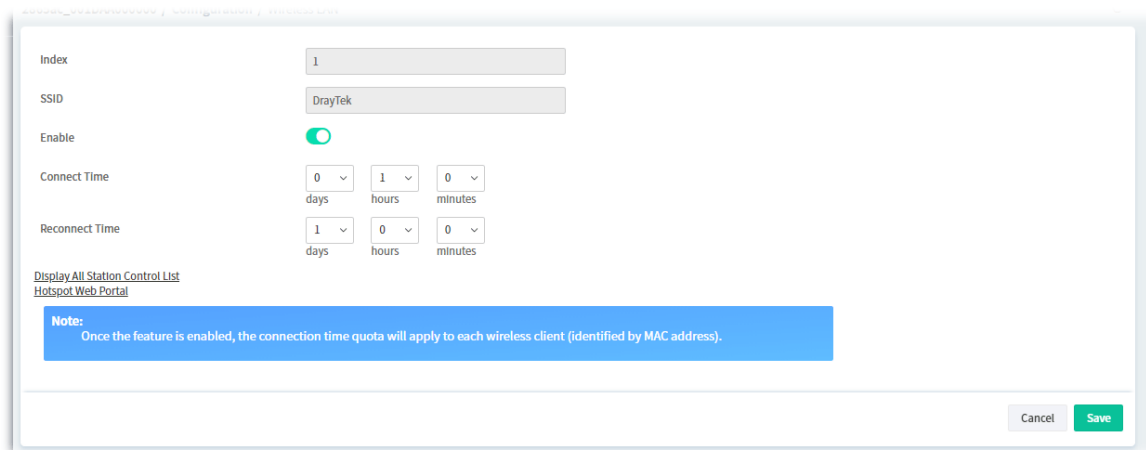


These parameters are explained as follows:


Item	Description
Index	Display the index number of SSID profile.
SSID	Display the name of the SSID.
Enable	Click to enable or disable the station control function for this SSID.
Connect Time / Reconnect Time	Enter the time in days, hours and minutes. In the Connection Time dropdown box, select the maximum amount of time that a wireless client is allowed to connect within the period of time selected in the Reconnection Time dropdown box.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.14.8 Bandwidth Management

The downstream or upstream from FTP, HTTP or some P2P applications will occupy large of bandwidth and affect the applications for other programs. Please use Bandwidth Management to make the bandwidth usage more efficient.

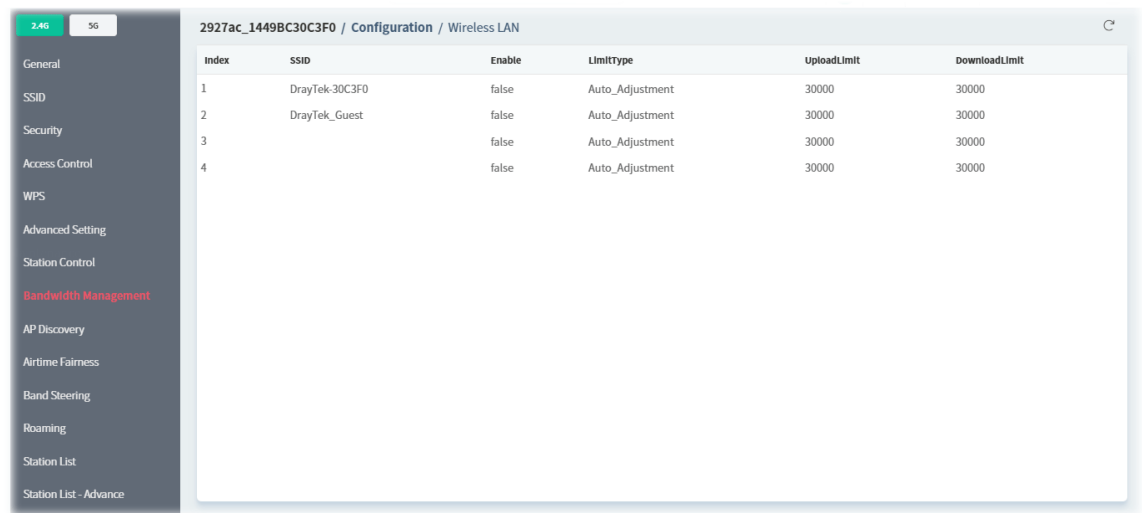

To configure the bandwidth management settings, move the mouse cursor to any entry (1 to 4) and click to open the following page.

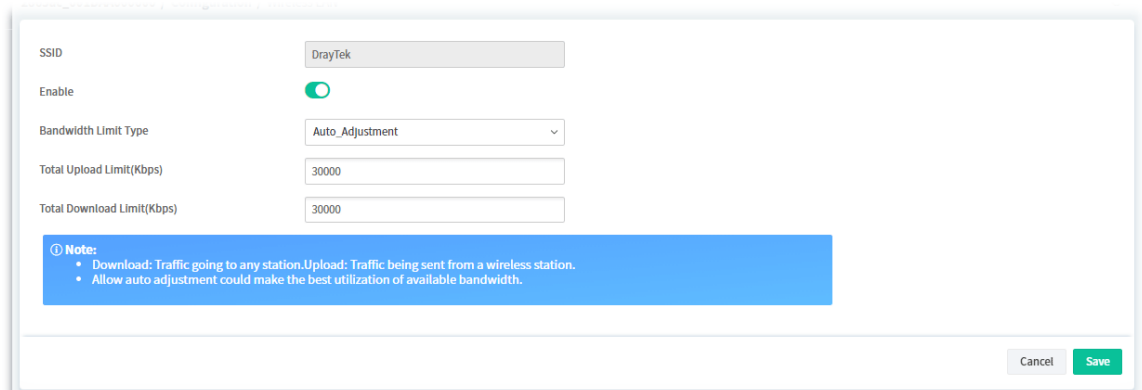

These parameters are explained as follows:

Item	Description
SSID	Display the specific SSID name.
Enable	Click to enable or disable the function.
Bandwidth Limit Type	Auto_Adjustment - Bandwidth limit is determined by the system automatically. Total Upload - Enter a value to define the maximum data traffic (uploading) for all of the wireless clients connecting to this router. Total Download - Enter a value to define the maximum data client(stations) connecting to this router. Per_Station_Limit - Bandwidth limit is determined according to the

	limitation of the wireless client. ● Upload Limit(Kbps) - Enter a value to define the maximum data traffic (uploading) for each wireless client connecting to this router. ● Download Limit(Kbps)- Enter a value to define the maximum data traffic (downloading) for each wireless client connecting to this router.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.14.9 AP Discovery

Vigor router can scan all regulatory channels to find working APs in the neighborhood.



2927ac_1449BC30C3F0 / Configuration / Wireless LAN

Index	BSSID	Channel	RSSI	SSID	Authentication
No data available					

Statistics

AP number v.s. Channel

1.0
0.8
0.6
0.4
0.2
0.0

1 2 3 4 5 6 7 8 9 10 11 12 13


Scan

Note:

- During the scanning process (~5 seconds), no station is allowed to connect with the router.
- AP Discovery can only support up to 32 APs displayed on the screen.

9.4.14.10 Airtime Fairness

Airtime fairness is essential in wireless networks that must support critical enterprise applications.

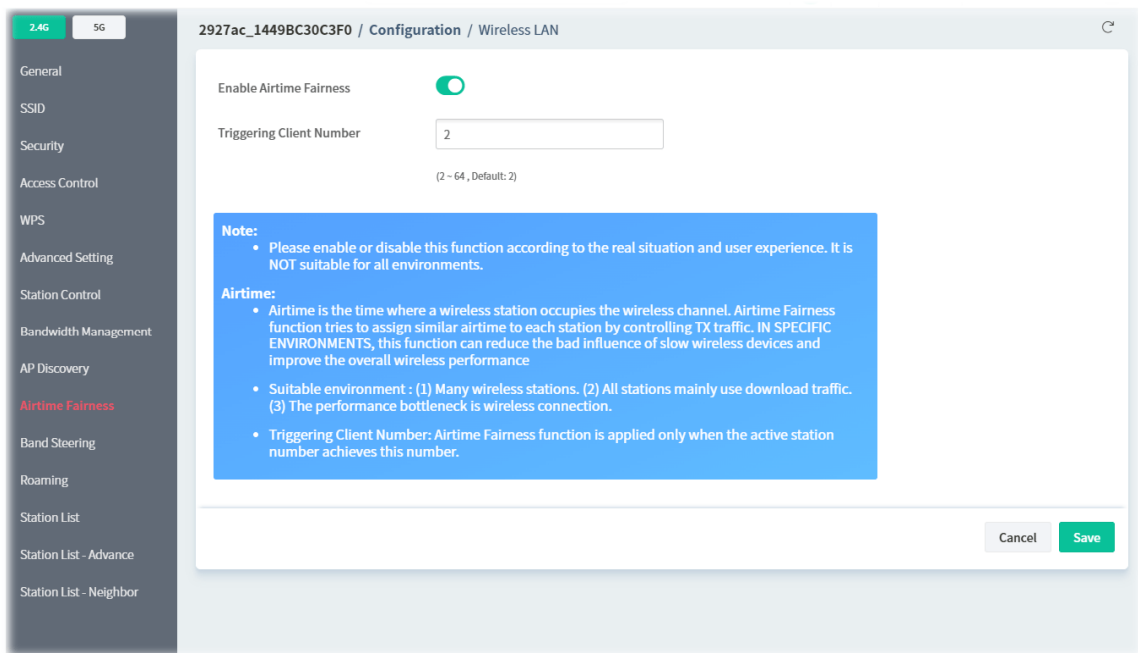


These parameters are explained as follows:

Item	Description
Enable Airtime Fairness	Click to enable or disable the airtime fairness.
Triggering Client Number	Airtime Fairness function is applied only when there are at least this many active wireless stations.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.14.11 Band Steering (for 2.4G only)

Band Steering detects if the wireless clients are capable of 5GHz operation, and steers them to that frequency. It helps to keep the 2.4 GHz band clear for legacy clients, and improves users' experience by reducing 2.4 GHz channel utilization.

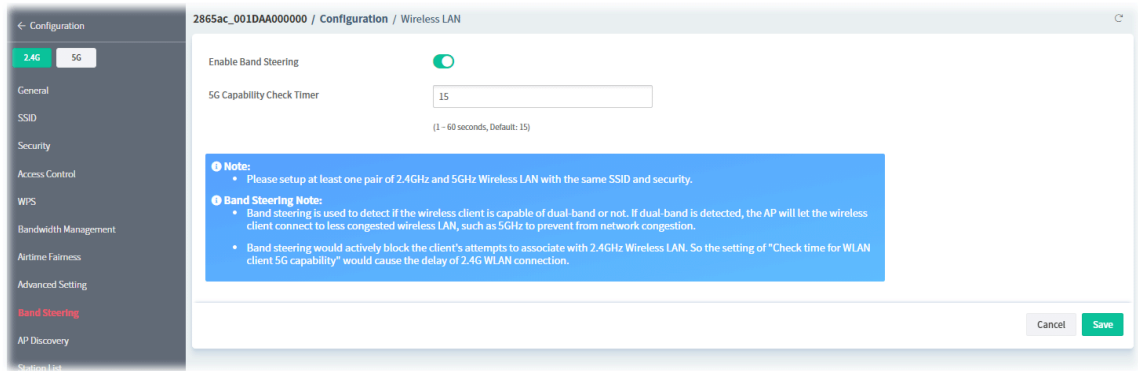

These parameters are explained as follows:

Item	Description
Enable Band	Click to enable to disable the Band Steering function.

Steering	
5G Capability Check Timer	Set a check time value. When a wireless client attempts to connect, the router will block attempts to connect to the 2.4 GHz band for the specified period of time (default is 30 seconds), which hopefully will entice the client to connect to the 5 GHz band. If the client fails to connect to the 5 GHz band within the specified interval, it will then be able to connect to the 2.4 GHz band.
Cancel	Discard current modification.
Save	Save the current settings.
Add	Click to add a new entry to Access Control.

9.4.14.12 Roaming

Wi-Fi roaming allows wireless stations to switch connections between access points within an area to achieve better coverage and signal quality.


These parameters are explained as follows:

Item	Description
Roaming Type	● Disable RSSI Requirement – The Vigor router does not pay attention to the RSSI level of wireless stations. Selecting this option means the Vigor router will not interfere with the roaming behavior of wireless stations. ● Strictly Minimum RSSI ● Minimum RSSI
Strictly Minimum RSSI	The Vigor router will immediately disconnect the wireless station if its RSSI falls below the configured value.

	Specify a value as a threshold.
Minimum RSSI	The Vigor router will disconnect wireless clients whose RSSI falls below the minimum threshold only if there is also a neighboring wireless host (router or AP) that has an RSSI value (defined in the field of With Adjacent AP RSSI over) higher than a certain threshold. In order for this option to work, other wireless hosts connected to the same LAN subnet need to support the exchange of RSSI information with peer wireless hosts via Ethernet. Specify a value as a threshold.
Adjacent AP RSSI over	Specify a value as a threshold.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.14.13 Station List

Station List provides an overview of all currently connected wireless clients and their status.

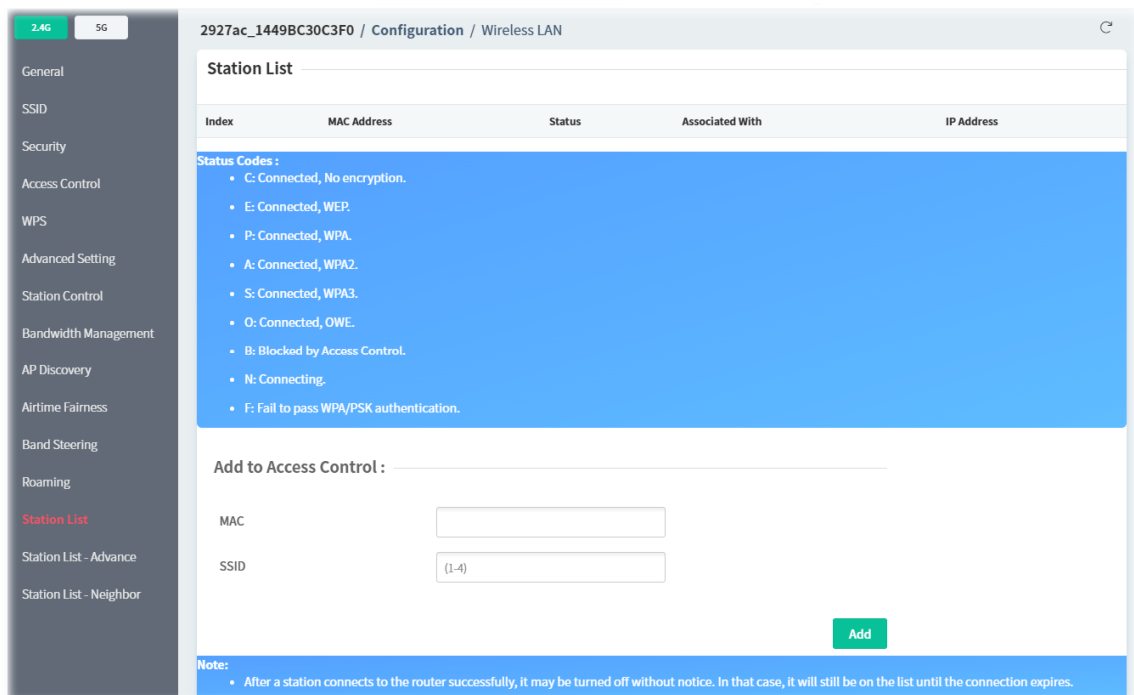

These parameters are explained as follows:

Item	Description
Station List	Display wireless stations connected to the Vigor router.
Add to Access Control	MAC – Enter the MAC address. SSID – Specify the number of SSID.
Add	Click to add a new entry to Access Control.

9.4.14.14 Station List - Advance

Display wireless stations connected to the Vigor router with more detailed information.

2927ac_1449BC30C3F0 / Configuration / Wireless LAN

Index	MAC Address	AID	RSSI	Rate	BW	PSM	WMM	PhMd	MCS
No data available									

Add to Access Control : _____

MAC

SSID

Add

Note:

- After a station connects to the router successfully, it may be turned off without notice. In that case, it will still be on the list until the connection expires.

9.4.14.15 Station List - Neighbor

This page displays the nearby wireless stations connected to other access points that are detected by the Vigor router.

2927ac_1449BC30C3F0 / Configuration / Wireless LAN

Index	MAC Address	Vendor	RSSI	Approx Distance	SSID	Visit Time
No data available						

Add to Access Control : _____

MAC

SSID

Add

Note:

- 1. Approx. Distance is calculated by actual signal strength of device detected. Inaccuracy might occur based on barrier encountered.
- 2. Due to the differences in signal strength for different devices, the calculated value of approximate distance also might be different.
- 3. Trademarks and brand names are the properties of their respective owners.

These parameters are explained as follows:

Item	Description
Station List	Display wireless stations connected to the Vigor router.
Add to Access Control	MAC - Enter the MAC address. SSID - Specify the number of SSID.

9.4.15 Bandwidth Management

9.4.15.1 Sessions Limit

When LAN clients share a common public IP address by means of Network Address Translation (NAT), the router must track NAT sessions so that traffic to and from the WAN can reach the intended destinations. There is a finite number of sessions that can be tracked by the router. By setting session limits will ensure that the router does not run out of resources.

The screenshot shows the 'Sessions Limit' configuration page. On the left is a sidebar with 'Sessions Limit' selected. The main area is divided into two sections: IPv4 and IPv6. Each section has an 'Enable' toggle (currently on), a 'Default Max Sessions' input field (set to 100), and a 'Limitation List' table. The IPv4 table has one entry with Index 1, Start IP 0.0.0.0, End IP 0.0.0.0, and Max Sessions 0. Below the table is a 'Clear All' link. The IPv6 table has one entry with Index 1 and Max Sessions 0, also with a 'Clear All' link. At the bottom is an 'Administration Message' field with a preview of the message: 'You have reached the maximum number of permitted Internet sessions.~p~Please close one or more applications to allow further Internet access.~p~Contact your system administrator for further information.~p~ Reset to default'. 'Cancel' and 'Save' buttons are at the bottom right.

These parameters are explained as follows:

Item	Description
IPv4 / IPv6	
Enable	Click to enable or disable the sessions limit function.
Default Max Sessions	The default maximum number of sessions allowed per LAN client, unless overridden by specifying a different number in the Limitation List.
Limitation List	Display specific limitation entries.
Clear All	Clear all modifications on this page.
Administration Message	
Administration Message	Enter a message to be displayed in a web browser on the LAN client when the maximum number of NAT sessions has been reached.
Time Schedule	
Schedule 1 ~ 4	Specify up to 4 time schedule entries to enable or disable the WAN. Specify up to 4 time schedule entries to apply the sessions limit management.
Cancel	Discard current modification.

Save	Save the current settings.
-------------	----------------------------

9.4.15.2 Bandwidth Limit

Bandwidth Limit ensures LAN clients get their fair share of network bandwidth by placing restrictions on upstream and downstream network speeds.


These parameters are explained as follows:

Item	Description
IPv4 / IPv6	
Enable	Click to enable or disable the bandwidth limit function. IP Routed Subnet – It is available for IPv4 only.
Default TX Limit Per User	Set default upstream speed limit for each LAN client.
Default RX Limit Per User	Set default downstream speed limit for each LAN client.
Limitation List	Display specific limitation entries. To add a new profile, click the last index number to open the setting page. IPv4 Bandwidth Limitation List Add Entry By IP Range IP Object IP Group None IP Object None Each or Shared Each Shared TX Limit 0 Mbps RX Limit 0 Mbps Clear

	After finishing the settings, click Save. A new profile will be added and displayed on the limitation list. Limitation List <table><thead><tr><th>Index</th><th>Start IP</th><th>End IP</th><th>TX</th></tr></thead><tbody><tr><td>1</td><td>192.168.1.55</td><td>192.168.1.65</td><td>100</td></tr><tr><td>2</td><td>None</td><td>None</td><td>0</td></tr></tbody></table> Clear All	Index	Start IP	End IP	TX	1	192.168.1.55	192.168.1.65	100	2	None	None	0
Index	Start IP	End IP	TX										
1	192.168.1.55	192.168.1.65	100										
2	None	None	0										
Clear All	Clear all profiles in the limitation list.												
Allow user to use more bandwidth than the assigned...	Click to enable or disable this function. If enabled, it lets the router automatically adjust the upstream and downstream limits based on available bandwidth.												
Smart Bandwidth Limit	Click to enable or disable this function. If enabled, it restricts the bandwidth of LAN clients that are not in the limitation list when the network sessions exceed a predefined threshold.												
Apply the below limit to users not in ...	Enter the number of sessions that a LAN client is allowed to have before Smart Bandwidth Limit activates.												
TX Limit	Upstream speed limit for each LAN client. Unit can be either Kbps or Mbps.												
RX Limit	Downstream speed limit for each LAN client. Unit can be either Kbps or Mbps.												
Time Schedule													
Schedule 1 ~ 4	Specify up to 4 time schedule entries to apply the bandwidth limit management.												
Cancel	Discard current modification.												
Save	Save the current settings.												

9.4.15.3 APP QoS

APP QoS allows QoS to be applied to select protocols and applications. Protocols and applications fall into two categories: Traceable and Untraceable.

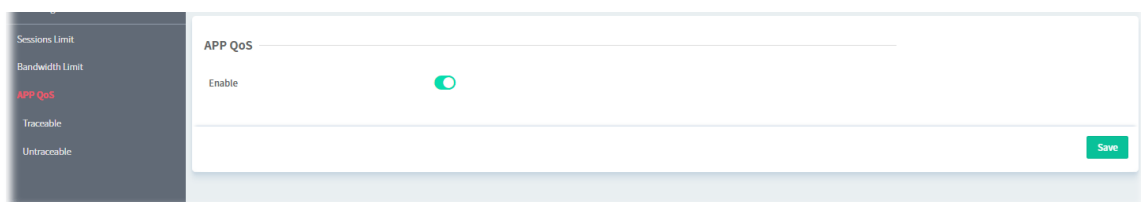

Click the **Enable** button to enable or disable the APP QoS function. Then click **Save** to save the settings.

Traceable

Traceable applications are those whose traffic can be 100% traced, and can be assigned a specific QoS class.

Sessions Limit
Bandwidth Limit
APP QoS
Traceable
Untraceable

Index	Type Name
1	Instant Message
2	VoIP
3	Protocol
4	Tunneling
5	Stream
6	Remote Control
7	Web HD
8	Game
9	Apple Services
10	Google Services
11	Amazon Services
12	E-Life

Note:

- Please remember to adjust Inbound/Outbound bandwidth of your network in "Quality of Service".
- This will help QoS to work more efficient.

Click the index number (e.g., #1) of type to get the following page. Each type will bring different setting page. Here we take #1 Instant Message as an example.

Sessions Limit
Bandwidth Limit
APP QoS
Traceable
Untraceable

Index: 1
Type Name: Instant Message

Select All Clear All

Apply to all

App Name	Enable	Version	Action
Facebook/Instagram	☒		QoS Class 1 (High)
LINE	☐	5.23.0.2134	QoS Class 1 (High)
LinkedIn	☐		QoS Class 1 (High)
Signal	☐	1.26.2	QoS Class 1 (High)
Stack	☐	4.0.0	QoS Class 1 (High)
Snapchat	☐	10.79.5.0	QoS Class 1 (High)
Telegram	☐	1.7.10	QoS Class 1 (High)
WhatsApp	☐	0.3.2848	QoS Class 1 (High)

Cancel Save

These parameters are explained as follows:

Item	Description
Enable	Click to enable or disable the bandwidth limit function.
Action	Select a QoS class to be applied to the application.
Cancel	Discard current modification.
Save	Save the current settings.

Untraceable

Untraceable applications, on the other hand, are detected when they attempt to establish connections to remote hosts, and all traffic between the remote hosts and the local network will be placed under QoS, within the same QoS class.

Sessions Limit
Bandwidth Limit
APP QoS
Tracesable
Untracesable

Action

QoS Class 1 (High)

Index	Type Name
1	Instant Message
2	VoIP
3	P2P
4	Protocol
5	Tunneling
6	Stream
7	Remote Control
8	Web HD

Note:
Please remember to adjust Inbound/Outbound bandwidth of your network in "Quality of Service".
This will help QoS to work more efficient.

Save

Click the index number (e.g., #1) of type to get the following page. Each type will bring different setting page. Here we take #1 Instant Message as an example.

Sessions Limit
Bandwidth Limit
APP QoS
Tracesable
Untracesable

Index

1

Type Name

Instant Message

Select All

Clear All

App Name	Enable	Version
AIM Login	☐	8
AllWW	☐	2008
Ares	☐	2.0.9
BaiduHi	☐	37378
Fetion	☐	2010
GaduGadu Protocol	☐	
ICQ	☐	7
ISpQ	☐	8.0.60
KC	☐	2008
PalTalk	☐	9
PocoCall	☐	2007
Qnext	☐	3.0.1
Tencent QQ	☐	2012/2009 beta3

Cancel
Save

These parameters are explained as follows:

Item	Description
Enable	Click to enable or disable the bandwidth limit function.
Cancel	Discard current modification.
Save	Save the current settings.

9.4.16 USB Applications

9.4.16.1 General Settings

This page allows you to configure the file sharing feature of the Vigor router, where USB mass storage devices such as thumb drives and hard drives can be made accessible to LAN clients.

General Settings

2927ac_1449BC30C3F0 / Configuration / USB Application

Simultaneous FTP Connections: 5

Default Charset: English

SMB File Sharing Service: ☐

Workgroup Name: WORKGROUP

Host Name: Vigor

Printer Server: ☐

Note:

- If character set is set to "English", only English long file name is supported.
- Multi-session FTP download will be banned by Router FTP server. If your FTP client has a multi-connection mechanism, such as FileZilla, you should limit client connections to 1 to improve performance.
- A workgroup name must be different from the hostname. The workgroup name can have up to 15 characters and the host name can have up to 15 characters. Names cannot contain any of the following: . : * < > * + = / | ?


Save

These parameters are explained as follows:

Item	Description
Simultaneous FTP Connections	Enter the maximum number of simultaneous FTP sessions allowed.
Default Charset	Select the character set for file and directory names.
SMB File Sharing Service	Click to enable / disable the function.
Access Mode	LAN Only – Only users on the LAN can connect access the shared USB disk. LAN and WAN – Both LAN and WAN users can access SMB server of the router.
Workgroup Name	Enter the workgroup name. Maximum allowed length is 15 characters.
Host Name	Enter the NetBIOS hostname for the router. Maximum allowed length is 23 characters.
Printer Server	Click to enable / disable the function. If enabled, the Vigor router can act as a print server for printers connected the USB.
Save	Save the current settings.

9.4.16.2 User Management

This page allows you to set up profiles for FTP/SMB users.

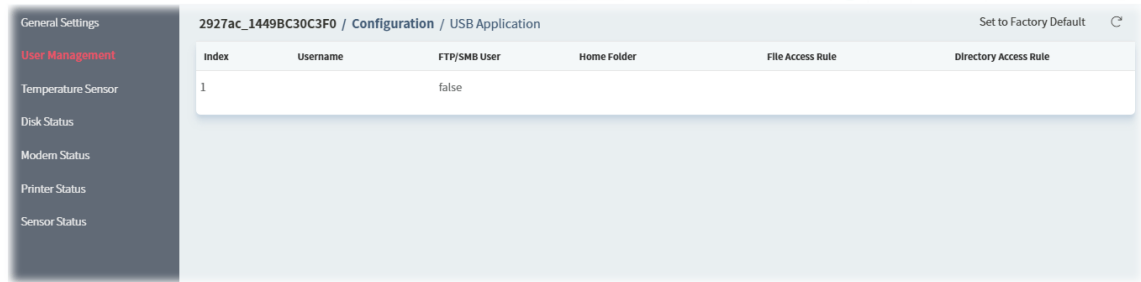

To configure the user management settings, move the mouse cursor to any entry and click to open the following page.

A screenshot of a web interface for configuring a USB application. The header shows '2865ac_001DAA000000 / Configuration / USB Application' and a 'Set to Factory Default' link. A yellow warning banner at the top says 'No USB disk Connected ! Please insert the disk.' Below this are input fields for Index (set to 1), FTP/SMB User (a toggle switch), Username (with a 'Max. 11 characters allowed' hint), Password (with a 'Max. 11 characters allowed' hint and a toggle for visibility), Confirm Password (with a toggle for visibility), Home Folder, and Create New Home Folder (with a '+ Create' button). A blue note box states: 'Note: The folder name can only contain the following characters: A-Z a-z 0-9 \$ % ' _ - ~ ! () and space.' Below the inputs is an 'Access Rule' section with checkboxes for File (Read, Write, Delete) and Directory (List, Create). At the bottom are 'Clear', 'Cancel', and 'Save' buttons.

These parameters are explained as follows:

Item	Description
Index	Display the index number of USB application profile.
FTP/SMB User	Click to enable / disable the function. If enabled, this profile (account) for FTP service and / or SMB service will be activated.
Username	Enter the username for this user profile.
Password	Enter the password for this user profile.
Confirm Password	Enter the password again to confirm.
Home Folder	Enter the folder which will be the root folder for FTP and SMB sessions established using the credentials of this user profile.

Create New Home Folder	Enter a name as a new folder name. +Create – Click to create a new folder.
Access Rule	
Access Rule	File – Check the items (Read, Write and Delete) for such profile. Directory – Check the items (List, Create and Remove) for such profile.
Clear	Clear all modifications on this page.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.16.3 Temperature Sensor

This page displays the status information for the USB disk connecting to Vigor router.


The screenshot shows the 'Temperature Sensor' configuration page. On the left is a sidebar with navigation links: General Settings, User Management, Temperature Sensor (highlighted), Disk Status, Modem Status, Printer Status, and Sensor Status. The main content area has a header '2927ac_1449BC30C3F0 / Configuration / USB Application'. Below the header are five configuration items: 'Temperature Calibration' with a text input field containing '0'; 'Temperature Unit' with two radio buttons, 'Celsius (°C)' (selected) and 'Fahrenheit (°F)'; 'Enable Syslog Alarm' with a toggle switch currently turned off; 'Upper Temperature Limit' with a text input field containing '30'; and 'Lower Temperature Limit' with a text input field containing '18'. A green 'Save' button is located at the bottom right of the configuration area.

These parameters are explained as follows:

Item	Description
Temperature Calibration	Enter the difference between the actual temperature and the temperature as reported by the thermometer.
Temperature Unit	Select the temperature scale to be used.
Enable Syslog Alarm	Select to enable recording of the temperature in Syslog.
Upper /Lower Temperature Limit	Enter the upper and lower temperature limits. If the temperature falls outside of this range, an alert will be sent.
Save	Save the current settings and return to previous page.

9.4.16.4 Disk Status


This page displays the status information for the USB disk connecting to Vigor router.

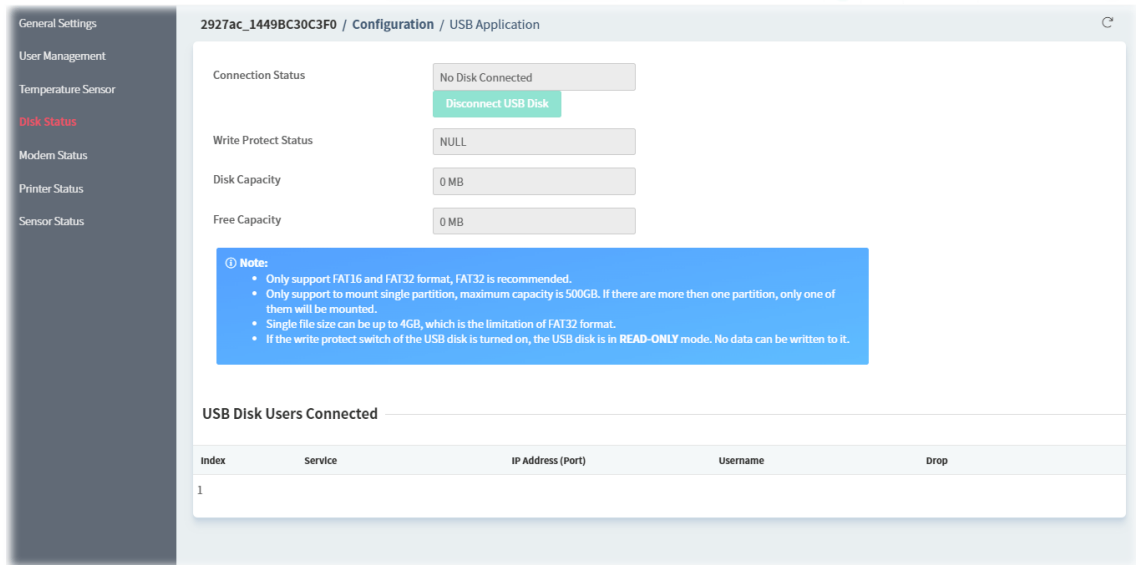

These parameters are explained as follows:

Item	Description
Connection Status	Display if the USB is connected or disconnected. Disconnect USB Disk – If connected, click to disconnect USB disk with the router.
Write Protect Status	Display the total capacity of the USB storage disk.
Disk Capacity	Display the disk capacity.
Free Capacity	Display the free space on the USB storage disk.
USB Disk Users Connected	Display the clients that are connected to the SMB/FTP server.

9.4.16.4 Modem Status

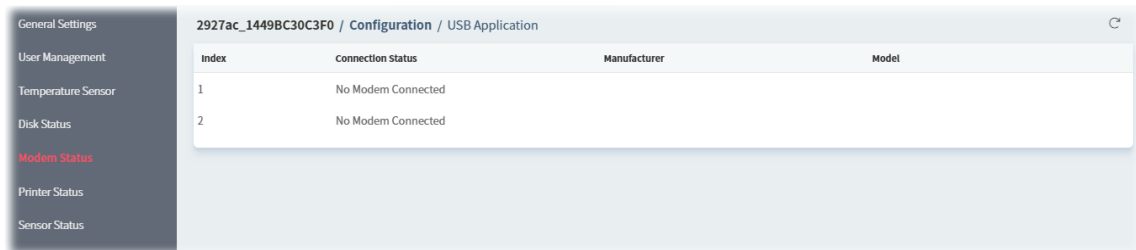

Click the index number to open the following for viewing detailed information for parameter settings.

2927ac_1449bc30c3f0

Configuration / USB Application

Index

2

Connection Status

Manufacturer

Model

Revision

Serial Number

IMSI

Signal Quality (CINR)

RSSI Signal

Hardware

SIMPIN

Link Speed

Cancel

9.4.16.5 Printer Status

This page displays current status for the USB printer connecting to Vigor router managed by VigorACS 3.

General Settings

User Management

Temperature Sensor

Disk Status

Modem Status

Printer Status

Sensor Status

2927ac_1449bc30c3f0

Configuration / USB Application

Connection Status

No Printer Connected

Manufacturer

No Printer

Model

No Printer

Serial Number

No Printer

Printer Queue

Index	User	Files Name	Status
1	No Printer	No Printer	No Printer
2	No Printer	No Printer	No Printer
3	No Printer	No Printer	No Printer
4	No Printer	No Printer	No Printer

9.4.16.6 Sensor Status

This page displays current status for the USB thermometer connecting to Vigor router managed by VigorACS 3.

General Settings

User Management

Temperature Sensor

Disk Status

Modem Status

Printer Status

Sensor Status

2927ac_1449bc30c3f0

Configuration / USB Application

Connection Status

No Temper Connected

Manufacturer

no tmper

Product

no tmper

9.4.17 System

9.4.17.1 Maintenance

This page can be used for backup configuration for specified CPE, restoring configuration for specified CPE, making firmware upgrade for CPE, and even reboot the specified CPE via VigorACS 3.

The screenshot shows the 'Configuration / System' page in the VigorACS3 interface. The left sidebar contains a 'Maintenance' menu with options like Time Settings, NetFlow, Admin Account, Admin Local User, SNMP Settings, Management, TR069 Settings, Webhook, SysLog Settings, Mail Alert, Internal Service User List, and Panel Control. The main content area is divided into two sections: 'Configuration Backup' and 'Firmware Upgrade'. The 'Configuration Backup' section has buttons for 'Backup', 'Restore Config' (with sub-options 'Last Config', 'Local File', 'Shared Folder'), 'Restore Now', and 'Download Config' (with a 'Download' button). The 'Firmware Upgrade' section has input fields for 'Model Name' (Vigor2927ac), 'Modem Firmware Version' (No DSL), and 'Firmware Version' (r5952_eb0dc82250_beta). It also has a 'Choose a Firmware File From' section with 'Local File' and 'Shared Folder' options, a 'Browse' button, and a 'Protocol Options' section with 'TR069', 'HTTP', and 'HTTPS' buttons. A green 'Upgrade Now' button is at the bottom.

These parameters are explained as follows:

Item	Description
Configuration Backup	
Backup Config	Backup – Click to backup the configuration from CPE to VigorACS server.
Restore Config	Select the type of configuration file. ● Last Config ● Local File ● Shared Folder Restore Now – Click to initiate restoration of configuration immediately.
Download Config	Download – Click to download the latest configuration backup file from VigorACS server.
Firmware Upgrade	
Model Name	Display the model name of the CPE.
Modem Firmware	Display the modem version of the CPE.

Version	No DSL – It indicates the selected CPE is non-DSL device.
Firmware Version	Display the firmware version used by the CPE.
Choose a Firmware File From	Local File – Select a firmware from the host by clicking Browse . Shared Folder – Select a firmware from the database by click Browse .
Protocol Options	Select TR069, HTTP, or HTTPS.
Upgrade Now	Click to upgrade the firmware immediately.
Device Reboot	
Restart the device	Reboot Now – Click to reboot the router immediately.
Auto Reboot Time Schedule	
Schedule Profile	Select up to 4 user-configured schedules to reboot the router on a scheduled basis.
OK	Save the settings.
Reset	
Reset to factory default	Reset Now – Click to reset the router with factory default setting immediately.
Save	Save the current settings.

9.4.17.2 Time Settings

This page allows you to configure settings related to the system date and time.

The screenshot displays the 'Time Settings' page in the VigorACS3 web interface. The left sidebar contains a navigation menu with options like Maintenance, Time Settings (highlighted), NetFlow, Admin Account, Admin Local User, SNMP Settings, Management, TR069 Settings, Webhook, SysLog Settings, Mail Alert, Internal Service User List, and Panel Control. The main content area is titled '2927ac_1449BC30C3F0 / Configuration / System'. It features several configuration fields: 'Current System Time' (2025-02-17T08:36:47), 'Local Time Zone' (+00:00), 'Time Setup' (Use Browser Time and Use Internet Time tabs), 'Primary Server' (pool.ntp.org), 'Secondary Server' (empty), 'Priority' (Auto dropdown), 'Time Zone' ((GMT) Greenwich Mean Time : Dublin dropdown), 'Daylight Savings' (toggle switch), 'Daylight Saving Type' (Default, By Date, By Weekday tabs), 'Start' (Yearly on March last Sun), 'End' (Yearly on October last Sun), 'Automatically Update Interval' (30 mins dropdown), and 'Send NTP Request Through' (Auto dropdown). A 'Save' button is located at the bottom right.

These parameters are explained as follows:

Item	Description
Current System	Display the current time obtained from the time server.

Time	
Local Time Zone	Display the time zone where the router is located.
Time Setup	Use_Browser_Time - Click to let the router set its system time using the time reported by the web browser. Use_Internet_Time - Click to let the browser set its system time by retrieving time information from the specified network time server using the Network Time Protocol (NTP).
Primary Server	Enter the address of the time server (primary).
Secondary Server	Enter the address of the time server (secondary).
Priority	Select Auto or IPv6 First as the priority.
Time Zone	Select the time zone where the router is located.
Daylight Savings	Click to enable or disable the Daylight Saving Time (DST) if it is applicable to your location.
Daylight Savings Type	Default - Uses the default DST schedule for the time zone. By Date - Select this option if DST starts and ends on fixed dates. By Weekday - Select this option if DST starts and ends on certain days of the week.
Start	It is available when By Date is selected as Daylight Saving Type. Use the drop down list to select month, day and hour settings as the starting point.
End	It is available when By Date is selected as Daylight Saving Type. Use the drop down list to select month, day and hour settings as the ending point.
Automatically Update Interval	Select the time interval at which the router updates the system time.
Send NTP Request Through	Select a WAN interface to send NTP request for time synchronization.
Save	Save the current settings.

9.4.17.3 NetFlow

This page allows you to set the IP address, port number, versions and timeout for collecting packet information monitored by NetFlow feature.

These parameters are explained as follows:

Item	Description
Enable	Click to enable or disable the NetFlow function.
Collector ip	Enter the IP address of a server (e.g., VigorConnect) which can be used as the flow collector.
Collector port	Enter the port number of the server.
Version	The router supports three versions (v5, v9 and IPFIX) of NetFlow feature.
Active timeout	Range from 60 to 1800 seconds. Default is 300 (seconds). Set the time interval of activity that marks a flow active. The data flow information will be collected continuously until the active timeout.
Inactive timeout	Range from 15 to 1800 seconds. Set the time interval of inactivity that marks a flow inactive. The collected data information will be exported after the inactive time interval.
Save	Save the current settings.

9.4.17.4 Admin Account

This page allows you to set or change the administrator password.

The screenshot shows the configuration page for the Admin Account and User Account. The Admin Account section has a password field, a note that the password can contain only a-z A-Z 0-9, ;, : , * < > + = | ? @ # ^ ! () \$ % &, and a toggle for enabling 'admin' account login to Web UI from the Internet. The User Account section has a toggle for enabling the user account and a password field with a note that the password can contain a-z A-Z 0-9, ;, : , * < > + = | ? @ # ^ ! () and that the password can't be all asterisks(*). For example, '*' or '****' is illegal, but '123*' or '*45' is OK. The Login Greetings section is partially visible at the bottom.


These parameters are explained as follows:

Item	Description
Admin Account	
Admin Password	Enter the new password.
Enable admin account login to..	Click to enable or disable the function. If enabled, it allows the administrator to log in from the Internet. This option is enabled when Administrator Local Account is enabled (see below).
Use only advanced authentication..	Click to enable or disable the function. If enabled, Advanced Authentication – Advanced authentication method can offer a more secure network connection. Select to require mOTP or 2-step authentication when logging in from the WAN. Mobile one-Time Password (mOTP) – Enter the PIN Code and Secret settings for getting one-time passwords. 2-Step Authentication – Select the SMS and/or Mail profiles and the destination SMS number and/or email address for transmitting the password.
User Account	
Enable User Account	Click to enable or disable the function. If enabled, other users are allowed to administer the router.
User Password	Enter a string as the password for the user account.
Login Greetings	

Login Page Logo	Default – Choose it to use the default image. Blank – Choose it to discard the logo image. Upload a file – Choose it to specify an image as the logo.
Enable Login Greetings	Click to enable or disable the function.
Logo Image Upload	It is available when Upload a file is selected as Login Page Logo. Browse – Click to select an image file. +Upload – Click to upload the selected image file to VigorACS.
Title	Enter a brief description (e.g., Welcome to DrayTek) which will be shown on the heading of the login dialog.
Message	Enter words or sentences here. It will be displayed for bulletin message. In addition, it can be displayed on the login dialog at the bottom.
Cancel	Discard current modification.
Save	Save the current settings.


9.4.17.5 Admin Local User

Usually, the system administrator has the highest privilege to modify the settings on the web user interface of the Vigor router. However, in some cases, it might be necessary to have other users in LAN to access into the web user interface of Vigor router.

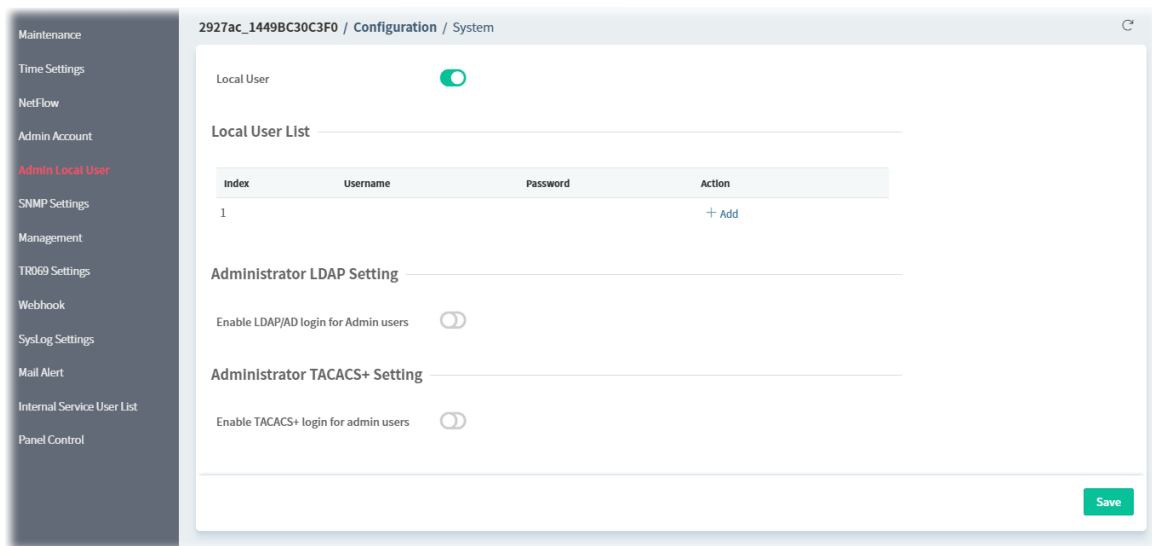

These parameters are explained as follows:

Item	Description
Local User	Click to enable or disable the local user setting.
Local User List	Index – Display the index number of local user profile. User Name – Display the name of the local user profile.

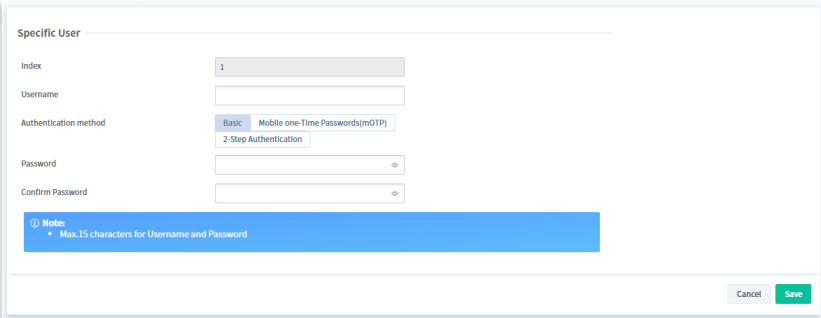	Password – Display the password of the local user profile. Action +Add – Click to create a new user profile.  ● Index – Display the index number of the profile. ● Username – Enter the name of the user profile. ● Authentication method – Choose Basic, mOTP or 2-Step Authentication. ● If Basic is selected – Enter the password. ● If Mobile one-Time Password (mOTP) is selected– Enter the PIN Code and Secret settings for getting one-time passwords. ● If 2-Step Authentication is selected– Select the SMS and/or Mail profiles and the destination SMS number and/or email address for transmitting the password.
Administrator LDAP Setting	
Enable LDAP/AD login for Admin users	Click to enable or disable the LDAP/AD login profile.
Administrator TACACS+ Setting	
Enable TACACS+ login for admin users	Click to enable or disable the function. If it is enabled, any user can access into the web user interface of Vigor router through the TACACS+ server authentication.
Enable Fallback to Local Authentication	If it is enabled, the administrator can use other login methods for authentication once the TACACS+ server has no response.
Save	Save the current settings.

9.4.17.6 SNMP Settings

This page allows you to configure settings for SNMP and SNMPv3 services.

These parameters are explained as follows:

Item	Description
Enable SNMP Agent / Enable SNMPV1 Agent / Enable SNMPV2C Agent	Click to enable or disable the SNMP function.
Get Community	Enter the Get Community string. The default setting is public.
Set Community	Enter the Set Community string. The default setting is private.
Trap Community	Enter the Trap Community string. The default setting is public.
Trap Timeout	The default setting is 10 seconds.
Manager Host IP (IPv4)	
Index #:IP	Enter the IPv4 address of hosts that are allowed to issue SNMP commands.
Index #: Subnet Mask	Select a subnet mask for IP address configured above.
Manager Host IP (IPv6)	
Index #: IP	Enter the IPv6 address of hosts that are allowed to issue SNMP commands.

Index #: Prefix Length	Enter the fixed value for prefix length.
Notification Host IP (IPv4)	
Index #: IP	Enter the IPv4 address of hosts that are allowed to be sent SNMP traps.
Notification Host IP (IPv6)	
Index #: IPv6 Address	Enter the IPv6 address of hosts that are allowed to be sent SNMP traps.
SNMPV3 Agent	
Enable SNMPV3 Agent	Click to enable or disable the SNMPv3 function.
USM User	Enter the username to be used for authentication
Auth Algorithm	Select one of the hashing methods to be used with the authentication algorithm.
Auth Password	Enter a password for authentication.
Privacy Algorithm	Select an encryption method as the privacy algorithm.
Privacy Password	Enter a password for privacy.
Save	Save the current settings.

9.4.17.7 Management

This page allows you to manage the settings for Internet/LAN Access Control, Access List from Internet, Management Port Setup, TLS/SSL Encryption Setup, CVM Access Control and Device Management.

2927ac_1449BC30C3F0 / Configuration / System

Router Name: DrayTek

Default:Disable Auto-Logout: ☒

Enable Validation Code in Internet/LAN Access: ☐

Note:

- IE8 and the below version do NOT support DrayOS CAPTCHA auth code.

Internet Access Control

Allow management from the Internet: ☒

Domain name allowed:

- ☒ FTP Server
- ☒ HTTP Server
- ☐ Enforce HTTPS Access
- ☒ HTTPS Server
- ☒ Telnet Server
- ☒ TR069 Server
- ☒ SSH Server
- ☐ SNMP Server

Save

These parameters are explained as follows:

Item	Description
Router Name	Enter the router name as provided by ISP.
Default:Disable Auto-Logout	Click to enable or disable the function. If enabled, the auto-logout function for web user interface will be disabled
Enable Validation Code in Internet/LAN Access	Click to enable or disable the function. If enabled, Vigor router will require users to enter a validation code as shown in an image when they log in.
Internet Access Control	
Allow management from the Internet	Click to enable or disable the function. If enabled, it allows system administrators to login from the Internet, and then select the specific services that are allowed to be remotely administered.
Domain name allowed	Enter a domain name. This setting is only available if DNS filtering is enabled, applying DNS filter profile in firewall rules, or enabling DNS Filter Local Setting.
Disable PING from the Internet	Click to enable or disable the function. If enabled, it will reject all PING packets from the Internet. For increased security, this setting is enabled by default.
Apply to Interface	Allow the user to access the router via the selected WAN interfaces.
LAN Access Control	

Allow management from LAN	Click to enable or disable the function. If enabled, it allows system administrators to login from LAN interface. There are several servers provided by the system which allow you to manage the router from LAN interface. Check the box(es) to specify.
Apply to Subnet	Click to enable or disable the LAN interface. If enabled, the selected interface can be used for accessing into web user interface of Vigor router. IP Object Enable - Click to enable or disable the IP object setting. Index in IP Object - Enter the index number of the IP object profile. Related IP address will appear automatically.
LoopBack Interface	
Enable LoopBack Interface	Click to enable the function of Loopback Interface. LAN#- Select a LAN subnet as the Loopback Interface.
IPv6 Management Setup	
Allow management from the Internet	Click to enable the function. Select the servers that system administrators are allowed to manage from the Internet.
Disable PING from the Internet	Click to reject all PING packets from the Internet. For increased security, this setting is enabled by default.
IPv6 Address Security Option	
Enable Random Interface Identifiers...	Click to enable or disable the function. If enabled, the IPv6 address will be generated randomly but not using LAN/WAN MAC to prevent the attack from the hacker.
Access List from the Internet	
Apply Access List to PING	Click to enable or disable the function. Access List #: IP Object - Enter the index number of the IP object profile. Related IP address will appear automatically.
IPv6 Access List	
Apply Access List to PING	Click to enable or disable the function. Access List #: IPv6 Object - Enter the index number of the IP object profile. Related IP address will appear automatically.
Management Port Setup	
Management Port Setup	User Define Ports - Specify user-defined port numbers for the Telnet, HTTP, HTTPS, FTP, TR-069 and SSH servers. Default Ports - Use standard port numbers for the Telnet and HTTP servers.
Brute Force Protection	

Enable brute force login protection	Click to enable or disable the function. If enabled, any client trying to access into Internet via Vigor router will be asked for passing through user authentication.
Maximum login failure	Specify the maximum number of failed login attempts before further login is blocked.
Penalty period	Set the lockout time after maximum number of login attempts has been exceeded. The user will be unable to attempt to log in until the specified time has passed.
Blocked IP List	
Table	Display, in a new browser window, IP addresses that are currently blocked from logging into the router.
TLS/SSL Encryption Setup	
TLS 1.3, 1.2, 1.1, 1.0 Enable, SSL 3.0 Enable	Check the box to enable SSL 3.0/1.0/1.1/1.2 encryption protocols.
CVM Access Control	
Type	Click General Settings or IPsec VPN Settings to configure the basic settings for CVM mechanism. General Settings – ● Enable CVM Port – Click to enable or disable the function. ● CVM Port – Check the box to enable Central VPN Management port setting. ● Enable CVM SSL Port – Click to enable or disable the function. ● CVM SSL Port – Check the box to enable Central VPN Management SSL port setting. ● CVM WAN Interface – For Vigor router can manage only the client from WAN interface, you have to specify which interface will be used for such function. If you choose MANUALLY, you have to specify WAN IP address. ● CVM WAN IP – Specify WAN IP address. ● Username – Enter a username which will be used by any CPE trying to connect to Vigor router. ● Password – Enter the password for the user. ● Polling Interval (sec.) – Enter the time value (unit is second). The range is from 60 ~ 86400. IPsec VPN Settings – Central VPN management is operated through IPsec VPN connection. ● IPsec Mode – Choose Aggressive or Main as the IPsec Mode.

	● Security Method – Choose one of the following methods (AH or ESP) for the security of data transmission. For example, choose AH to specify the IPsec protocol for the Authentication Header protocol. The data will be authenticated but not be encrypted. ● Encryption Type – Choose one of the selections as the encryption type. ● Local Subnet – Select LAN1 or Manually. ● CVM LAN IP / Mask – Enter the IP address and subnet mask of local host.
AP Management	
Enable AP Management	Click to enable or disable the access point management function.
Device Management	
Device Management	Click to enable or disable the device management function.
Respond to external device	Click to enable or disable the function. If enabled, the router will function as a slave device.
Save	Save the current settings.

9.4.17.8 TR069 Settings

CPE device supports the TR-069 standard for remote management by VigorACS.

These parameters are explained as follows:

Item	Description
------	-------------

Primary	
Tr069 Enable	Click to enable or disable the TR-069 functionality.
HTTP compression Enable	Click to enable or disable the HTTP compression function.
ACS Server On	Choose the interface for connecting the router to the Auto Configuration Server.
URL	Enter the URL for connecting to the ACS. Acquire URL from DHCP option 43 – Select to acquire the ACS URL from DHCP option 43.
Username	Enter the username required to connect to the ACS server.
Password	Enter the password required to connect to the ACS server.
STUN Settings	
Enable STUN	Click to enable or disable the function.
Server Address	Enter the IP address of the STUN server.
Server Port	Enter the port number of the STUN server.
Maximum Keep Alive Period	Enter the maximum interval between keep-alive messages that the CPE client sends to the ACS server.
Minimum Keep Alive Period	Enter the minimum interval between keep-alive messages that the CPE client sends to the ACS server.
XMPP Settings	
Enable	Click to enable or disable the XMPP settings.
Use SSL/TLS	Click to enable or disable the SSL/TLS encryption protocols.
Client Settings	
Protocol	Select Https if the connection is encrypted; otherwise select Http.
Client URL	Display the URL of the client.
Port	In the event of port conflicts, change the port number of the CPE.
Username	Enter the username that the VigorACS will use to connect to the CPE.
Password	Enter the password that the VigorACS will use to connect to the CPE.
Periodic Inform Settings	
Enable Periodic Inform	Click to enable or disable the function. If enabled, the CPE Client will periodically connect to the ACS Server to update its connection parameters at intervals specified in the Interval Time field.
Inform Interval	Set interval time or schedule time for the router to send notification to

(sec.)	CPE.
Advanced	
Disable TR069 configuration change from CPE UI	Click to enable or disable the function.
Apply Settings to APs	
Enable	Click to enable or disable the function.
AP Password	Enter the password of the VigorAP that you want to apply Vigor router's TR-069 settings
Apply Specific STUN Settings to APs	Click to enable or disable the function of applying specific STUN settings to AP. If enabled, Enable AP STUN - Click to enable or disable the STUN server settings. Server Address - Enter the IP address of the STUN server. Server Port - Enter the port number of the STUN server. Maximum Keep Alive Period - Enter the maximum interval between keep-alive messages that the CPE client sends to the ACS server. Minimum Keep Alive Period - Enter the minimum interval between keep-alive messages that the CPE client sends to the ACS server.
CPE Notification Settings	
Enable	Click to enable or disable the function. If enabled, select the notification item(s) by clicking it. Vigor router will send the utilization status to VigorACS. ● Web Login ● Web Configuration ● High Availability ● SSH Login ● SSH Command
Bandwidth Utilization	Enable - Click to enable or disable this function. To administrator, this feature is useful to monitor the bandwidth utilization of CPE(s). When the bandwidth used is over the threshold level (percentage defined in medium and high fields), a notification will be sent to VigorACS. After a long time observation, the administrator can determine if it is necessary to increase the bandwidth setting for that CPE or not. The default is disabled. Time Period - Choose the time interval (15 mins, 30 mins, 1hour, 3 hours, or 6 hours) for CPE to send a notification of bandwidth utilization to VigorACS.

	● Enable / WAN – Choose the WAN interface by clicking Enable for applying the bandwidth utilization notification mechanism. ● Threshold Level – Set the percentage of bandwidth in transmission and receiving data as threshold values for CPE to detect bandwidth utilization. ● Line Speed – Set the transmission rate and receiving rate for specified WAN interface.
Save	Save the current settings.

9.4.17.9 Webhook

Vigor router will send a report (webhook message) including WAN up, down, CPU usage, memory usage and etc. to a monitoring server periodically.

These parameters are explained as follows:

Item	Description
Enable	Click to enable or disable the Webhook function.
Monitoring Server URL	Enter the URL of a server.
Report Period (minutes)	Define the interval time for each report to be sent.
Save	Save the current settings.

9.4.17.10 SysLog Settings

SysLog function is provided for users to monitor router.

These parameters are explained as follows:

Item	Description
Enable	Click to enable or disable the Syslog function.
Syslog Save to	Select Syslog Server and / or USB Disk.
Maximum Syslog folder space	Set a space (unit GB/MB) to store event logs.
When Syslog folder is full	Overwrite oldest logs - If selected, the action of overwriting the oldest logs will be executed. Stop logging - If selected, the action of stopping logging will be executed.
Router Name	Display the name for this router.
Primary / Secondary Syslog Server	Server IP Address / Hostname - Enter the IP address of the Syslog server. Destination Port - Enter a port for the Syslog protocol.
Mail Syslog	Click to enable or disable the function. If enabled, it will record the mail event on Syslog.
Collect Syslog About	Select the type of log to send the corresponding message to syslog.
Save	Save the current settings.

9.4.17.11 Mail Alert

This page allows to configure settings for Mail alert.

The screenshot shows the 'Mail Alert' configuration page in the VigorACS3 interface. The left sidebar contains a menu with options: Maintenance, Time Settings, NetFlow, Admin Account, Admin Local User, SNMP Settings, Management, TR069 Settings, Webhook, SysLog Settings, Mail Alert (highlighted in red), Internal Service User List, and Panel Control. The main content area is titled '2927ac_1449BC30C3F0 / Configuration / System'. It features a toggle switch for 'Enable' (currently on), a 'Send A Test E-Mail' button, and several input fields: 'Interface' (set to 'Any'), 'SMTP Server', 'SMTP Port' (set to '25'), 'Mail To', 'Sender Address', and 'Connection Security' (set to 'Plaintext'). A blue note box contains the following text: 'Note: • StartTLS: Accept using plain text if the StartTLS connection fails. • Force StartTLS: Stop if the StartTLS connection fails.' Below this, there is an 'Authentication' toggle switch (currently off), 'Username' and 'User Password' input fields, and checkboxes for 'Enable E-Mail Alert' (DoS Attack, APPE, VPN Log, and Debug Log). At the bottom, there are 'Clear' and 'Save' buttons.

These parameters are explained as follows:

Item	Description
Enable	Click to enable or disable the mail alert function. Send Test E-Mail - Make a simple test for the e-mail address specified in this page.
Interface	Specify an interface.
SMTP Server	Enter an IP address of the SMTP server.
SMTP Port	Enter the port number of the SMTP server.
Mail To	Specify a mail address for receiving the mail.
Sender Address	Specify a mail address for sending mails out.
Connection Security	Select a method (Plaintext, SSL, StartTLS or Force StartTLS) to ensure the connection security. SSL means to use port 465 for SMTP server for some e-mail server uses https as the transmission method. ● Accept using plain text if StartTLS connection failed. ● Force StartTLS. Stop if StartTLS connection failed.
Authentication	Click to enable or disable the function. If enabled, the authentication will be activated while using an e-mail application.
Username	Enter the user name for authentication.

User Password	Enter the password for authentication.
Enable E-Mail Alert	Select the item(s) to send the alert message to the e-mail box while the router detecting the item(s) you specify here.
Save	Save the current settings.

9.4.17.12 Internal Service User List

This page allows you to turn on or turn off security authentication service (offered by internal RADIUS and/or Local 802.1X) for each user profile without accessing into the User Management configuration page.

These parameters are explained as follows:

Item	Description
Username	Display the name of the existed user profile.
Internal Services RADIUS	Click to enable (turn on) or disable (turn off) the security authentication service offered by the internal RADIUS server for the user profile.
Internal Services Local802.1X	Click to enable (turn on) or disable (turn off) the security authentication service offered by the Local 802.1X server for the user profile.
Apply	Save the current settings.

9.4.17.13 Panel Control

This page allows you to customize the behavior of the LEDs, buttons, WLAN, USB and LAN ports on the front panel.

← Configuration

Maintenance:
Time Settings
Admin Account
Admin Local User
SNMP Settings
Management
TR069 Settings
SysLog Settings
Mail Alert
Internal Service User List
Panel Control

2865ac_001DAA000000 / Configuration / System

LED

Enable LED

Enable Sleep Mode

Turn off LED after (Minutes)

1

Button

Wireless

Factory Reset

Note:
Enable the Sleep Mode will make the functions of "Wireless Button" and "Factory Reset Button" on the front panel as below:

LED Status	LED On	LED Off
Wireless Button	Wireless On/Off/WPS	Turn LED On*
Factory Reset Button	Press 1 second: Turn LED off immediately* Press till the ACT light flashing: Reset router	

*Still functional even the buttons are disabled.

USB

Index	Enable	Status
1		No Device
2		No Device

Cancel Save

These parameters are explained as follows:

Item	Description
LED	
Enable LED	Click to enable or disable the LEDs to function according to the configured settings.
Enable Sleep Mode	Click to enable (turn on) or disable (turn off) the LEDs after the specified number of minutes has elapsed.
Turn off LED after (Minutes)	Enter a number.
Button	
Wireless	Click to enable or disable the ability of the Wireless button to control WLAN and WPS functions.
Factory Reset	Click to enable or disable the reset function of the factory reset button.
USB	
Enable	Click to enable or disable the USB port.
LAN Port	
Enable	Click to enable or disable the LAN port.
Status	Display the status of the USB port.
Speed	Display the negotiated speed of the LAN port.


Cancel	Discard current modification.
Save	Save the current settings.

9.4.18 Switch

9.4.18.1 Status



It displays information, including Group, Switch name, IP address, model, System Up Time, Port in Use, Clients, and Firmware Version of VigorSwitch **connected to Vigor** router.

Switch Status

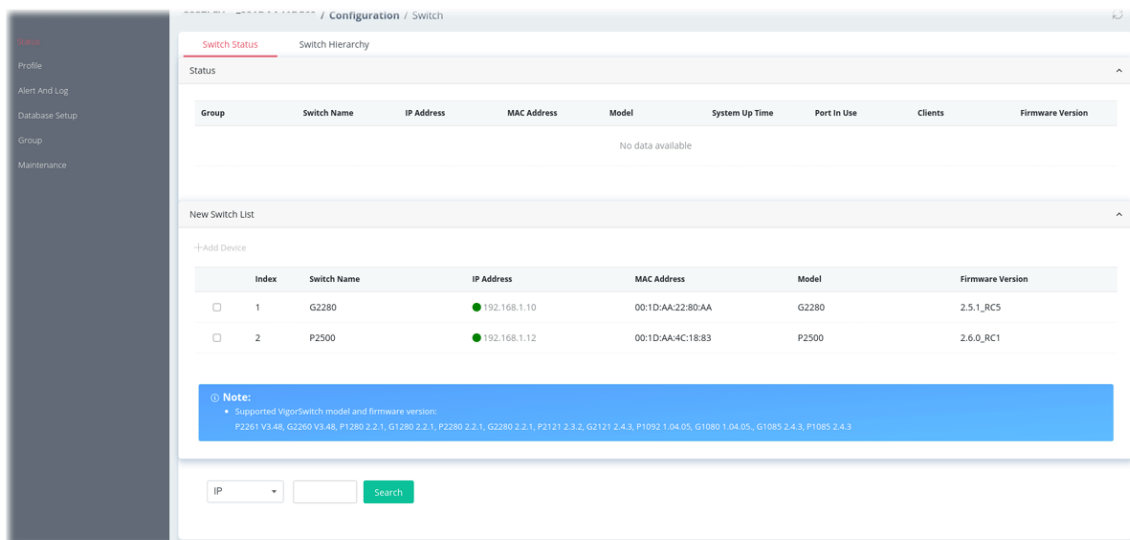


These parameters are explained as follows:

Item	Description
Status	Display the switch which is managed by Vigor router. Group – Display the name link of the group. You can click the link to modify the group settings if required. Switch Name – Display the name link of VigorSwitch. You can click the name link to access into the switch profile. IP Address – Display the IP address of VigorSwitch. MAC Address – Display the MAC address of VigorSwitch. Model – Display the model name of VigorSwitch. System Up Time – Display the time accumulated since this VigorSwitch is powered up. Port in Use – Display how many devices connected to VigorSwitch. Clients – Display the number of LAN ports used in VigorSwitch. Firmware Version – Display the firmware version that VigorSwitch current used.
New Switch List	The one under New Switch List is allowed to be managed under

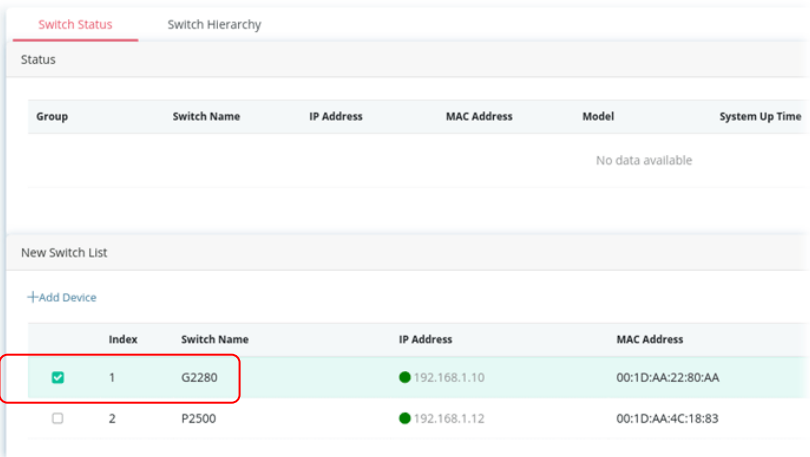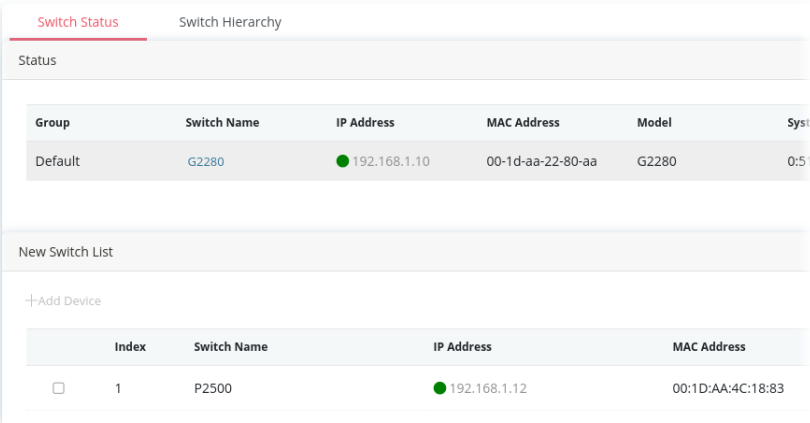	current used group. +Add Device – Make the selected VigorSwitch to be managed by Vigor router and be shown under Status.  Select a switch from New Switch List and click +Add Device. Then, the selected switch will be moved and displayed under Status.  Check box – Click to select the device. Index – Display the index number of Vigor Switch. Switch – Display the name of the device. IP Address – Display the IP address of the device. MAC Address – Display the MAC address of the device. Model – Display the model name of VigorSwitch. Firmware Version – Display the firmware version that VigorSwitch current used.
Search	Click to search Vigor switch.


Switch Hierarchy

This page displays the hierarchy of VigorSwitch(es) managed under Vigor router.

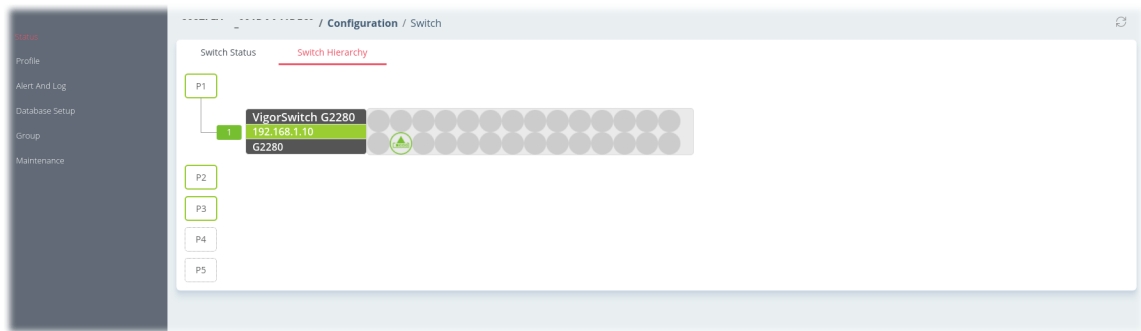

9.4.18.2 Profile

This page will show general information, such as name, group, IP address, MAC address, model and password of VigorSwitch only when it connects to Vigor router. By clicking the index number link, a profile setting page for that switch will be shown. Note that each profile represents one VigorSwitch.

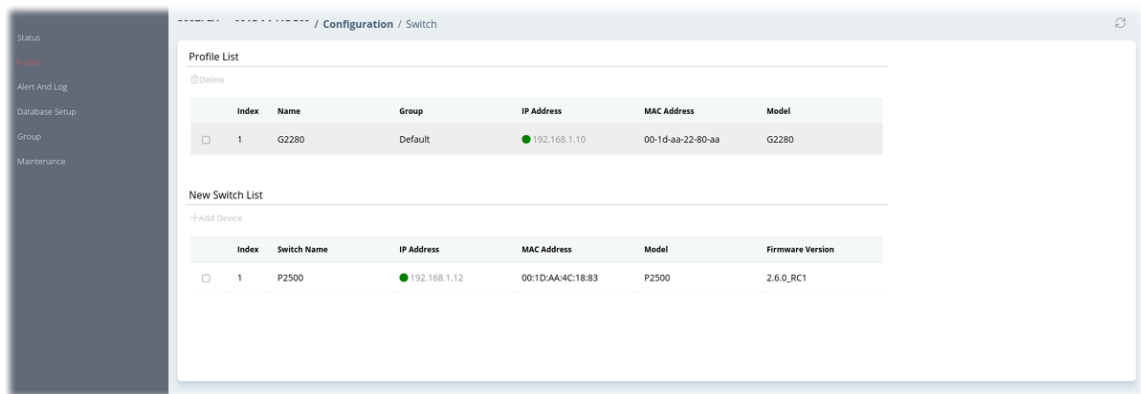

These parameters are explained as follows:

Item	Description
Profile List	
Delete	Click to remove the selected entry from the profile list.
Check box	Click to select the device.
Index	Display the index number of the switch profile.
Name	Display the name of the switch profile.
Group	Display the group name of VigorSwitch(es).
IP Address	Display the IP address of VigorSwitch.
MAC Address	Display the MAC address of VigorSwitch.
Model	Display the model name of VigorSwitch.
New Switch List	
+Add Device	Make the selected VigorSwitch to be managed by Vigor router and be shown under Profile List.
Index	Display the index number of the switch device.

Switch Name	Display the name of the switch.
IP Address	Display the IP address of VigorSwitch.
MAC Address	Display the MAC address of VigorSwitch.
Model	Display the model name of VigorSwitch.
Firmware Version	Display the firmware version that VigorSwitch current used.

To edit profile for the selected switch:

1. Selecting one device from the Profile List. Click on the entry to open the following page.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the switch profile.
Switch Name	Enter a name for the Switch. The purpose of name is used for identification. It is useful when there are many VigorSwitch (same modes) devices connecting to Vigor router.
Comment	Enter the text in such field if additional explanation for the switch is required.
Trap Community Name	Enter the text in such field as trap community.
Enable Copy configuration	Click to enable or disable the function.
Copy configuration from	Check the box to copy configuration from other device. Use the drop down list to choose the one you need. Note, if there is only one VigorSwitch connected and managed by Vigor router, then such field is unavailable.
Login Password	Display the original login password for the VigorSwitch.

IP Address	Display the dynamic IP address (of the connected switch) assigned by Vigor router.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings.
Send to Device	Transfers the configuration change (e.g, login password, switch name, etc.) to the VigorSwitch immediately.

- After finished the settings, click **VLAN** tab to open following page.

Blank page due to LAN>>VLAN not configured previously:

Setting page with LAN>>VLAN configured previously:

- Click **Save** to save VLAN configuration. Then, click **Port** tab to access the following page:

Port	Description	Port Control	Schedule	Ingress Rate (Kbps)	Egress Rate (Kbps)
*		Enable Port		☐	☐
1		Enable Port		☐	☐
2		Enable Port		☐	☐
3	Uplink	Enable Port		☐	☐
4		Enable Port		☐	☐
5		Disable Port		☐	☐
6		By Schedule		☐	☐
7		Enable Port		☐	☐
8		Enable Port		☐	☐
9		Enable Port		☐	☐
10		Enable Port		☐	☐

Set Port to Factory Default

Cancel Save Send to Device

These parameters are explained as follows:

Item	Description
Description	If required, enter a brief description to explain the device connected to VigorSwitch via the LAN port.
Port Control	Disable Port – The port (e.g., Port 3 in this case) which is used to connect VigorSwitch and Vigor router will not be shutdown by Vigor router. Other LAN ports of VigorSwitch allow to connect to any LAN device. When it is checked, after clicking Save, the network connection between that device and VigorSwitch will be terminated. By Schedule – Two schedule profiles can be specified here to force Vigor router executing specific action to VigorSwitch.
Ingress Rate	Check the box for entering the ingress rate for the selected VigorSwitch. After clicking Save , the value modified in this page will be written to VigorSwitch and enabled.
Egress Rate	Check the box for entering the egress rate for the selected VigorSwitch. After clicking Save , the value modified in this page will be written to VigorSwitch and enabled.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings.
Send to Device	Transfers the configuration change (e.g., login password, switch name, etc.) to the VigorSwitch immediately.

- Click **Save** to save the changes and then click **Send to Device**. Settings will be sent to VigorSwitch immediately.


9.4.18.3 Alert And Log

Alert and Log is helpful for the user to understand the abnormal situation occurred in VigorSwitch quickly.

Alert Setup

This page is used to define the name of alert, level of alert (in color), and determine to record the data in the database, or send a notification message to the user based on the level.


These parameters are explained as follows:

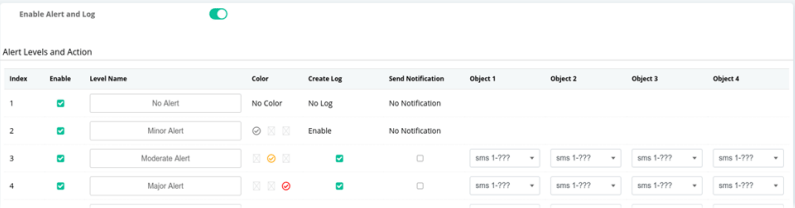Item	Description
Enable Alert and Log	Click to enable or disable the function. 
Alert Levels and Action	
Index	Display the index number of alert profile.
Enable	Check it to enable this feature.
Level Name	Define names for representing the severity of alert event. The default names for index 1 to index 4 will be shown on each setting box. Index 5 to index 8 are reserved for user-defined.
Color	Define the color for each level of alert. However, the color of index 1 is No color and unable to be changed.
Create Log	Check the box to create log of alert. Such log will be seen on Alert Logs page. Note that No Log for index 1; and log for index 2 is enabled in default.

Send Notification	If it is checked, Vigor router's system will send notification to specified phone number via SMS.
Object 1 ~ 4	Select the SMS object which will get the SMS from Vigor router. Up to 4 objects can be selected at one time.
Save	Save the current settings.

Switch and Port Setup

This page defines enabling switch alert and/or port alert for each switch.

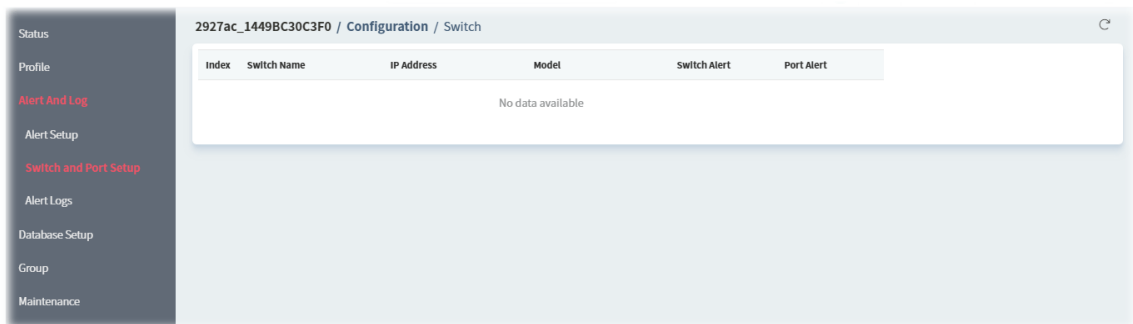

These parameters are explained as follows:

Item	Description
Index	Display the index number of the alert profile for switch(es).
Switch Name	Display the name of the switch.
IP Address	Display the IP address of the switch.
Model	Display the model name of the switch.
Switch Alert	Display the switch alert status.
Port Alert	Display the port alert status.

To configure the switch alert settings, move the mouse cursor to any entry and click to open the setting page.

Index: 1

Switch Name: G2280

IP Address: 192.168.1.10

Model: G2280

Switch Alert:

Port Alert:

Cold Start: 4-Major Alert

Warm Start: 4-Major Alert

Disconnect: 4-Major Alert

Reconnect: 2-Minor Alert

Port	Description	Device Disconnects	Device Reconnects	Schedule On/Off	Shutdown En/Dis
1		1-No Alert	1-No Alert	1-No Alert	1-No Alert
2		1-No Alert	1-No Alert	1-No Alert	1-No Alert


[Set to Factory Default](#)

These parameters are explained as follows:

Item	Description
Index	Display the index number of the alert profile for switch(es).
Switch Name	Display the name of the switch.
IP Address	Display the IP address of the switch.
Model	Display the model name of the switch.
Switch Alert	Enable – Click to enable the switch alert function. Cold Start, Warm Start, Disconnect, Reconnect – When VigorSwitch encounters the alert events, alert mechanism will perform corresponding actions based on the severity level of the incident encountered. Specify the severity level (Minor, Major, or No) for each incident. Disable – Click to disable the switch alert function.
Port Alert	Enable – Click to enable the port alert function. Available Ethernet ports for the selected VigorSwitch (e.g., G2280 in this case) will be shown on this page. Each port can be configured with different alert level for different alert event. Disable – Click to disable the port alert function.
Port Alert table	Port – Available Ethernet ports for the selected VigorSwitch (e.g., G2280 in this case) will be shown on this table. Each port can be configured with different alert level for different alert event.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

Alert Logs

The system administrator can get the information by filtering the collective information based on the conditions specified in this page.

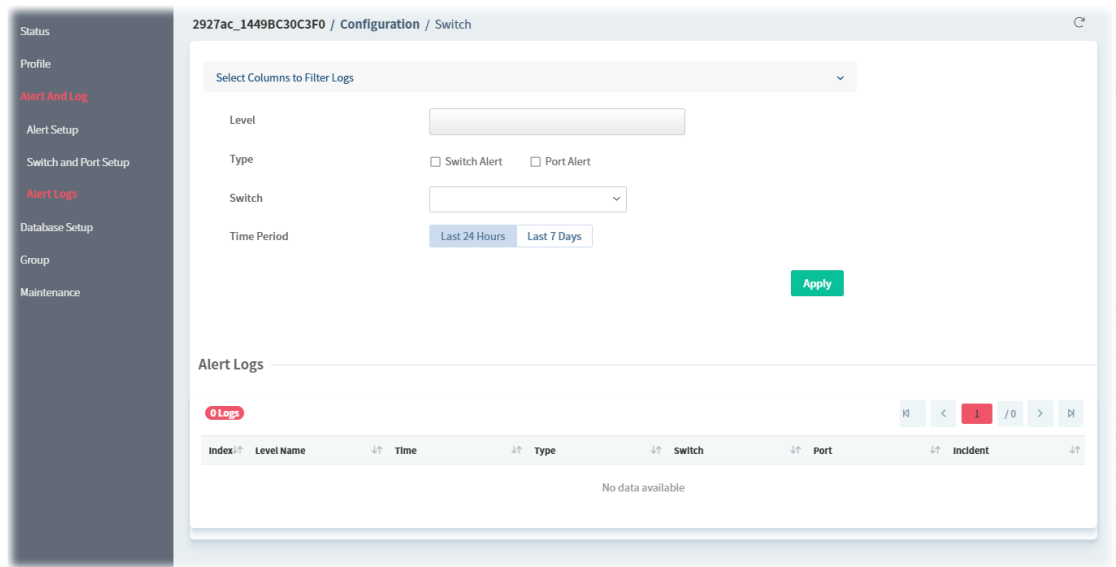

These parameters are explained as follows:

Item	Description
Select Columns to Filter Logs	Level – The alert can be divided into several levels, Minor Alert, Moderate Alert and Major Alert. Check the one(s) you want to check in Alert Logs list. Type – Select the type (switch / port) of the log to be displayed in Alert Logs list. Switch – Switch(es) connecting to Vigor router will be shown in this area. Select the one you need. Time Period – Select Last 24 Hours or Last 7 Days as time period. Apply – Click to save the configuration. Log related to the items selected above will be shown in Alert Logs list.
Alert Logs	This area displays logs (level name, time, type, switch, port, and incident) related to VigorSwitch managed by Vigor router.

9.4.18.4 Database Setup


The database of the switch can be used to record alert logs and traffic history. This page is used to determine if it is necessary for the user information to be recorded in the database of the switch.

These parameters are explained as follows:

Item	Description
Enable Database to Record alert logs and traffic history	Click to enable or disable the function. If enabled, it will make the database (in USB disk) record the alert logs and traffic history.
File Path	Display the file path for storing the logs.
Database Usage	Display the used capacity.
Notification	Send notification – A notification will be sent out when there is no capacity for storage in USB. ● Email Notification Object – Choose an email notification object profile. ● SMS Notification Object – Choose a SMS notification object profile. Don't send notification – No notification will be sent out when there is no capacity for storage in USB.
Action	Choose an action. Backup and clean up all user info, and start a new record – Only the newest events will be recorded by the system. Stop recording user information – When the capacity of log is full, the system will stop recording.
Save	Save the current settings.

9.4.18.5 Group

Different switches can be classified into different group(s). There are ten switch groups available for configuration.

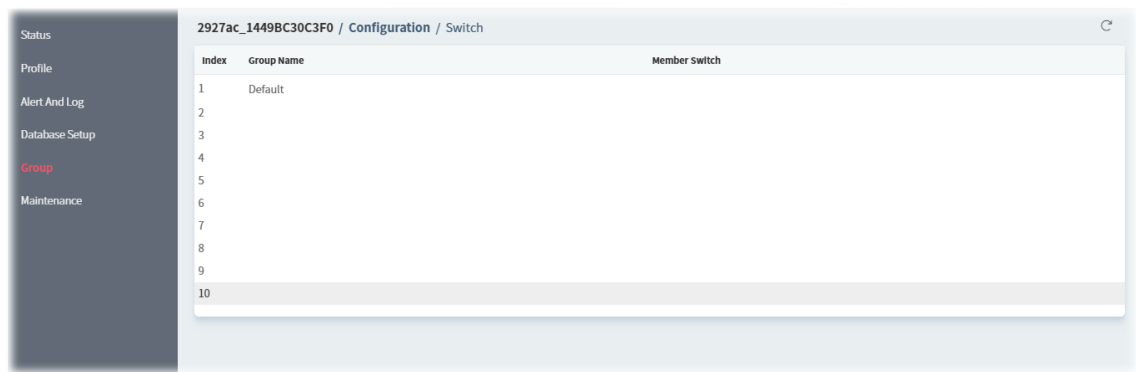


To configure the group settings, move the mouse cursor to any entry and click to open the following page.

These parameters are explained as follows:

Item	Description
Index	Display the index number of the profile.
Profile Name	Enter a name as the group name.
Enable Group Password	Click to enable or disable the group password.
Group Password	Enter a password that the system administrator can use to access into the managed VigorSwitch connecting to Vigor router.
Member Switch	Choose the switches you want to group.
Cancel	Discard current modification and return to previous page.
Save	Save the current settings and return to previous page.

9.4.18.6 Maintenance


This page is able to execute configuration backup, restore, reboot or reset the VigorSwitch devices remotely.

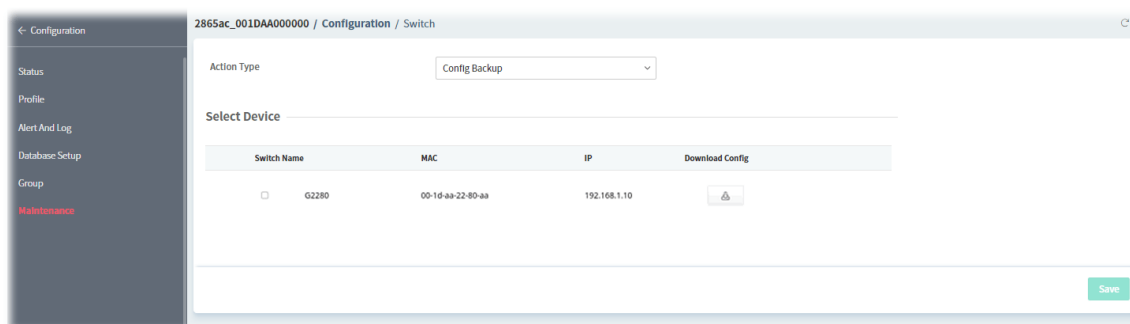

These parameters are explained as follows:


Item	Description
Action type	Four actions including configuration backup, configuration restore, remote reboot and factory reset are offered by Vigor router to perform on VigorSwitch. Config Backup - Perform the configuration backup. Config Restore - Perform the configuration restoration. ● Restore Config From - Select Local File or Shared Folder. ● File/Path - Click Browse to locate a file. Remote Reboot - Reboot the VigorSwitch devices remotely. Factory Reset - Reset the VigorSwitch devices with factory default settings.
Select Device	
Switch Name	Display the name of the switch.
MAC	Display the MAC address of the switch.
IP	Display the IP address of the switch.
Download Config	Click to download the configuration file and store on the host.
Save	Save the current settings.

9.5 Advanced

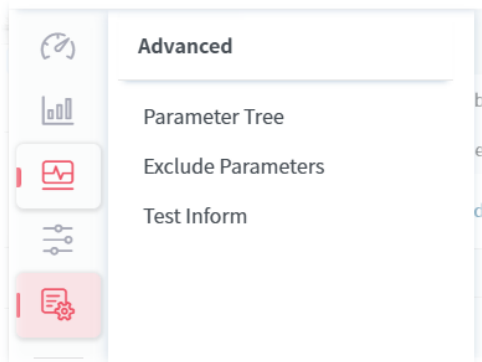

9.5.1 Parameter Tree

All control parameters of the selected CPE will be presented on this page with a tree view that is convenient for the administrator/user to view and select.

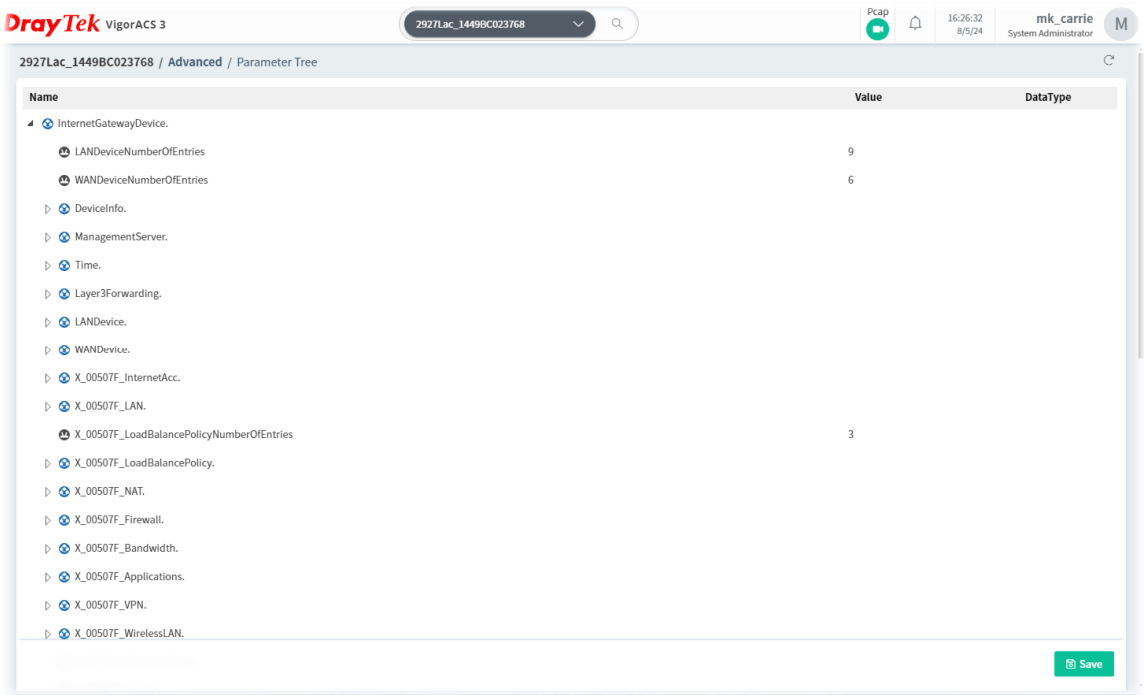


These parameters are explained as follows:

Item	Description
Name	Lists the name of the parameter.
Value	Display the setting value (true/false, numbers, selections and etc.) of the selected parameter. Sometime, It might be null.
DataType	It means the data type (e.g., string, boolean or unsignedInt) of the parameter. However, the corresponding information will be displayed in this field

	only if the parameter allowed to be written.
Copy	Copy the selected parameter with the value. The copied parameter can be added onto the XML template downloaded from Provisioning>>Global Parameters . After that, the completed XML template can be saved as a sampling profile which will be selected and applied to Provisioning>>Global Parameters .
Save	Save the change.

9.5.2 Exclude Parameter

The firmware version of the managed CPE might be different from the data stored on VigorACS database. Therefore VigorACS will compare the available parameters of the selected CPE with the one stored in the VigorACS database automatically. When some of the parameters not supported by the CPE, those parameters will be listed on this page.

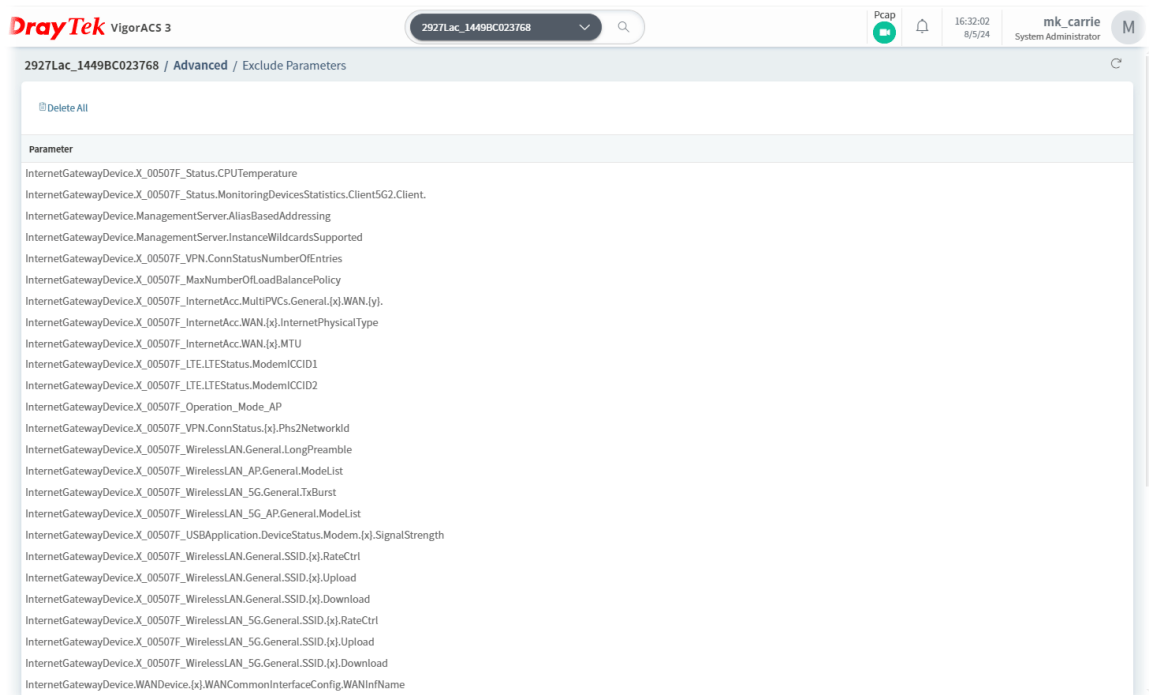


These parameters are explained as follows:

Item	Description
Delete All	Click to remove all parameters listed in this page.

9.5.3 Test Inform

To test the bidirectional connection between the selected CPE and the VigorACS server, click on **Scan Test**.

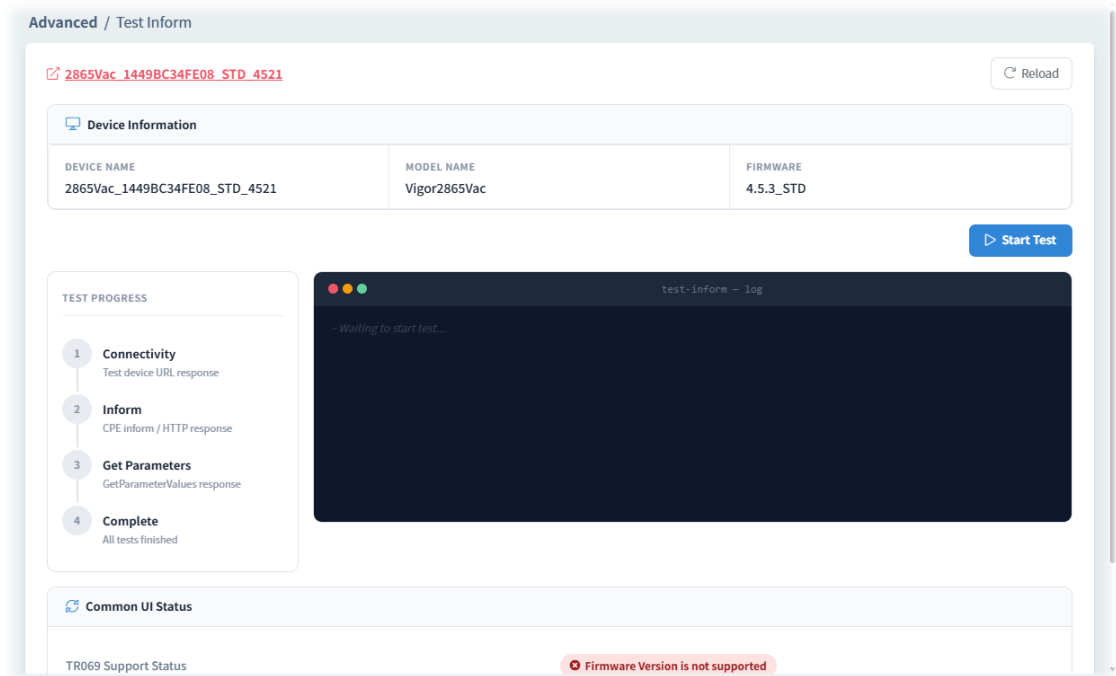

Later the test result will be shown below.

